3VA5215-6EF36-0AA0

Data sheet



circuit breaker 3VA5 UL frame 250 breaking capacity class H 65kA @ 480 V 3-pole, line protection TM240, ATAM, In=150A overload protection Ir=120A ...150A short-circuit protection li=5...10 x In cable connection on both sides

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
product designation / according to UL file	HFAS
design of the product	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the load switch / according to UL 489 / High-Intensity- Discharge circuit breaker (HID Type)	No
design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type)	No
design of the overcurrent release	TM240
protection function of the overcurrent release	LI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	750 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	30 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	9.97 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	8 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 000
electrical endurance (operating cycles) / at 480 V	8 000
electrical endurance (operating cycles) / at 600 V	4 000
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	without
product function	
 communication function 	No
other measurement function	No
Net Weight	2.26 kg
Current	
marking / according to UL 489 / 100%-rated breaker	No
operational current	
• at 40 °C	150 A
• at 45 °C	146 A
● at 50 °C	141 A
● at 55 °C	137 A
• at 60 °C	132 A
● at 65 °C	128 A

Switching capacity according to IEC 6947 withing capacity class of the circuit breaking **al 240 V** **al 415 V** **al 690 V** **al 415 V** **al 4	● at 70 °C	123 A
working capacity case of the circuit breaker masurum abort-cont current treaking capacity (cu) • at 24 0 V • at 41 5 V • at 42 0 V • at 41 5 V • at 48 0 V		
maximum abort-forust current breaking capacity (icu) * at 20 V * at 415 V *		Н
earl 415 V		
# 415 V		100 kA
e at 880 V 100 kA 70 kA 1415 V 2014 KA 1415 V 100 kA 1415 V 100 kA 1415 V 100 kA 1415 V 100 kA 100 kA 1415 V 100 kA 100 k		
and 1240 V and 145 V and 1690 V 10 VA short-formul current making capacity (tern) and 1240 V and 145 V and 1690 V 15 VA design of short-circuit protection for earth-formul current making capacity (tern) and 154 VA and 1690 V 17 VA design of short-circuit protection For earth-fining prover values in DC networks, see the 3VA modeter case circuit breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; l		
and 1240 V and 145 V and 1690 V 10 VA short-formul current making capacity (tern) and 1240 V and 145 V and 1690 V 15 VA design of short-circuit protection for earth-formul current making capacity (tern) and 154 VA and 1690 V 17 VA design of short-circuit protection For earth-fining prover values in DC networks, see the 3VA modeter case circuit breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; link to be found under Service & Support in the last breaker device manual; l	operating short-circuit current breaking capacity (lcs)	
* at 890 V short-cruit current making capacity (Icm) * at 240 V * at 415 V * at 890 V * at 890 V * design of short-circuit protection * For switching power values in DC networks, see the 3VA molded case circuit breaking capacity according to UL 499 current breaking capacity * at 240 V * at 420 V * at 420 V * at 420 V * at 420 V * at 640 V		100 kA
short-circuit current making capacity (tcm) • at 240 V • at 415 V • at 450 V • at 415 V • at 450 V • at 450 V design of short-circuit protection For switching power values in DC networks, see the 3VA moided case circuit breaker device manual; link to be found under Service & Support in the last chapter switching capacity according to UL 439 current breaking capacity • at 240 V • at 480 V • at 480 V • at 600 V 25 kA Adjustable parameters adjustable response value setting current (ir) / of the L-trip / with 12t characteristic • minimum • maximum adjustable response value delay time (tr) / for L-tripping / with 12t characteristic • minimum • maximum adjustable response value setting current (iii) / for I-tripping • minimum • maximum adjustable setting current (iii) / for I-tripping • minimum • maximum • maximum adjustable carrent (mkl) / for N-tripping • minimum • maximum • minimum • min	• at 415 V	70 kA
e at 240 V e at 415 V e at 415 V e at 690 V design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter Switching capacity according to UL 439 current threaking capacity e at 240 V e at 480 V e at 800 V	• at 690 V	10 kA
at 415 V at 690 V design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter switching capacity according to UL 489 current breaking capacity at 240 V at 800 V at 800 V at 800 V believed to be setting current (in) of the L-trip / with 12t characteristic adjustable response value setting current (in) of the L-trip / with 12t characteristic adjustable response value delay time (in) for I-tripping / with 12t characteristic adjustable response value setting current (iii) for I-tripping / with 12t characteristic adjustable response value setting current (iii) for I-tripping adjustable caponse value setting current (iii) for I-tripping adjustable current response value unrent (iii) for I-tripping adjustable setting current (iiii) for I-tripping adjustable current response value current (iii) for I-tripping adjustable current response value current (iii) for I-tripping adjustable current response value current of the current-dependent overload release and product function of yournding protection No Machanical Design product component audiocator audiocator terminal stranded width audiocator audiocator terminal stranded width fing application audiocator terminal on both sides aurangement of electrical connectors / for main current circuit application audiocator terminal on both sides auxiliary circuit aurangement of electrical connectors / for main current circuit aurangement of electrical connectors / for main current circuit aurangement of electrical connectors / for main current circuit aurangement of electrical connectors / for main current circuit aurangement of electrical connectors / for main current circuit aurangement of electrical connectors / for main current circuit	short-circuit current making capacity (Icm)	
e at 690 V design of short-circuit protection beaver device manual, link to be found under Service & Support in the last character threaking capacity seconding to UL 499 current breaking capacity at 240 V at 850 V at 650 V Adjustable parameters adjustable response value setting current (ir) of the L-trip / with 2t characteristic minimum maximum 120 A afjustable response value delay time (it) / for L-tripping / with 12t characteristic minimum maximum 1 s maximum 750 A adjustable response value setting current (ii) / for I-tripping / with 12t characteristic minimum maximum 1 s adjustable response value setting current (ii) / for I-tripping / with 12t characteristic minimum maximum 750 A adjustable response value setting current (ii) / for I-tripping minimum O A adjustable response value setting current (iii) / for I-tripping minimum O A adjustable current (inN) / for N-tripping minimum O A adjustable current response value current / of the current dependent overload release product function / grounding protection No Mischanical Design product component undervoltage release voltage trigger No voltage trigg	• at 240 V	220 kA
design of short-circuit protection For extricting power values in DC networks, see the 3VA molded case circuit breaking capacity according to UL 489 current breaking capacity at 249 V at 249 V at 880 V at 600 V 25 kA Adjustable parameters adjustable response value setting current (ity / of the L-trip / with 12t characteristic minimum maximum 120 A maximum 13 S maximum 14 S maximum 15 S Maximum 16 S Maximum 17 S Maximum 18 S Maximum 19 S Maximum 10 S Max	• at 415 V	154 kA
breaker device manual; link to be found under Service & Support in the last chapter Switching capacity according to UL 489 current breaking capacity	• at 690 V	17 kA
Current breaking capacity at 240 V at 480 V at 600 V 25 kA Adjustable parameters adjustable response value setting current (ir) / of the L-trip / with 12t characteristic mainimum maximum maxim	design of short-circuit protection	breaker device manual; link to be found under Service & Support in the last
current breaking capacity at 240 V at 480 V at 480 V at 480 V be 18 65 kA 25 kA Adjustable response value setting current (ir) / of the L-trip / with 12t characteristic minimum maximum maximum 120 A final disublable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum 1 s maximum No Maximatical current (inN) / for N-tripping minimum maximum No No Mo Mo Mo Mo Mo Mo Mo Mo	Switching capacity according to UL 489	
at 240 V at 800 V 25 kA Adjustable response value setting current (in) / for the L-trip / with 12t characteristic minimum maximum 150 A adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum 150 A adjustable response value setting current (iii) / for I-tripping / with 12t characteristic minimum maximum 15 S minimum maximum 1500 A adjustable setting current (iii) / for I-tripping minimum maximum 00 A maximum 00 A maximum 00 A adjustable setting current (in) / for N-tripping minimum 00 A adjustable current response value current / of the current-dependent overload release product function / grounding protection No Mechanical Design product component undercottage release voltage frigger No voltage frigger No height [in] 7.28 in height No height [in] 7.28 in height No connectable conductor cross-sections / of the round conductor terminal / stranded width [in] No depth 15 mm depth 17 in (a AWG - 350 kcmill) Connections maximum arrangement of electrical connectors / for main current circuit bype of electrical connectors / for main current circuit pype of connections from a Auxiliary defection from main current circuit pype of connection / for main current circuit pype of connections from a Auxiliary defection from main current circuit pype of connection / for main current circuit pype of conn		
at 480 V 25 kA Adjustable parameters adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic minimum maximum maximum maximum maximum 150 A adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum 1 s maximum 1 s adjustable response value setting current (Ii) / for I-tripping / with 12t characteristic minimum maximum 1 s adjustable response value setting current (Ii) / for I-tripping minimum 750 A maximum 0 A adjustable setting current (InN) / for N-tripping minimum 0 A adjustable setting current (InN) / for N-tripping minimum 0 A adjustable current response value current / of the current-dependent overload release product function / grounding protection No Machanical Design product component undervoltage release No voltage trigger No voltage trigger No height [in] 1, 28 in height No height [in] 4, 13 in Vype of connectable conductor cross-sections / of the round conductor terminal / stranded width [in] 3, 27 in depth [in] 3, 27 in depth [in] 3, 27 in depth [in] marnagement of electrical connectors / for main current circuit product extension / optional / motor drive Product extension / optional / motor drive Ves		100 kA
Adjustable parameters adjustable response value setting current (ir/ / of the L-trip / with 2t characteristic minimum maximum 150 A adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum m		65 kA
adjustable response value setting current (Ir) / of the L-trip / with 12 theracteristic minimum		
adjustable response value setting current (Ir) / of the L-trip / with 12 theracteristic minimum	Adjustable parameters	
adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum maximum madjustable response value setting current (li) / for I-tripping minimum madjustable setting current (lnN) / for N-tripping minimum madjustable setting current response value current / of the current maximum madjustable setting current response value current / of the current madjustable current response value current / of the current madjustable current response value current / of the current madjustable current response value current / of the current madjustable current response value current / of the current madjustable current response value current / of the current madjustable current response value current / of the current madjustable current response value current / of the current mumber of connectable conductor cross-sections / of the round maximum mumber of contacts / for main current circuit mumber of contacts / for auxiliary contacts product extension / optional / motor drive 1 s 1 s 1 s 1 s 1 s 1 s 1 s 1	adjustable response value setting current (Ir) / of the L-trip / with	
adjustable response value delay time (tr) / for L-tripping / with 12t characteristic winnimum maximum 1 s adjustable response value setting current (ii) / for I-tripping minimum maximum 1 500 A adjustable setting current (InN) / for N-tripping minimum Maximum	• minimum	120 A
characteristic minimum maximum adjustable response value setting current (ii) / for I-tripping minimum maximum maximu	maximum	150 A
maximum adjustable response value setting current (ii) / for I-tripping • minimum		
adjustable response value setting current (III) / for I-tripping	• minimum	1 s
 minimum maximum adjustable setting current (InN) / for N-tripping minimum 0 A maximum 0 A adjustable current response value current / of the current-dependent overload release product function / grounding protection No Mechanical Design product component undervoltage release voltage trigger voltage trigger inj indicator height [in] 7.28 in height [in] tish mm width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width 105 mm depth [in] 3.27 in depth [in] depth [in] 3.27 in depth [in] in 3.27 in depth [in] 	• maximum	1 s
maximum 1500 A adjustable setting current (InN) / for N-tripping minimum 0 A adjustable current response value current / of the current-dependent overload release product function / grounding protection No Mechanical Design product component undervoltage release No voltage trigger No voltage trigger No height [In] 7.28 in height In] 7.28 in height In] 7.28 in height In] 8.4 in		
adjustable setting current (InN) / for N-tripping		
minimum maximum maxim		1 500 A
maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection No Mechanical Design product component undervoltage release No voltage trigger No height [in] height [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width [in] 105 mm depth [in] 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connectors / for main current circuit circular conductor terminal on both sides Accessories product extension / optional / motor drive Yes		
adjustable current response value current / of the current- dependent overload release product function / grounding protection Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height 185 mm width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Yes		
dependent overload release product function / grounding protection Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height height height itype of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth in] depth belight bel		
product function / grounding protection No Mechanical Design product component • undervoltage release No • voltage trigger No • trip indicator No height [in] 7.28 in height [in] 4.13 in type of connectable conductor cross-sections / of the round conductor terminal / stranded width [in] 1.27 in (6 AWG - 350 kcmil) depth [in] 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes		105 150 A
Mechanical Design product component • undervoltage release • voltage trigger • No • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth [in] 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connection / for main current circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes	·	No
product component • undervoltage release • voltage trigger • No • trip indicator No height [in]		
• undervoltage release • voltage trigger • trip indicator No height [in] 7.28 in height width [in] 4.13 in type of connectable conductor cross-sections / of the round conductor terminal / stranded width in) depth [in] 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Ves		
• voltage trigger • trip indicator No height [in] 7.28 in height inleght width [in] 4.13 in type of connectable conductor cross-sections / of the round conductor terminal / stranded width inleght		No
in trip indicator height [in] height [in] height	-	No
height 185 mm width [in] 4.13 in type of connectable conductor cross-sections / of the round conductor terminal / stranded 1 x (6 AWG - 350 kcmil) width 105 mm depth [in] 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit Front connection type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes		No
width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width type of connectable conductor cross-sections / of the round conductor terminal / stranded width 105 mm depth [in] 3.27 in depth 83 mm Connections arrangement of electrical connectors / for main current circuit front connection circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes	· · · · · · · · · · · · · · · · · · ·	7.28 in
type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive 1 x (6 AWG - 350 kcmil)		185 mm
type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth 83 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive 1 x (6 AWG - 350 kcmil)	width [in]	4.13 in
depth 83 mm Connections arrangement of electrical connectors / for main current circuit Front connection type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Yes		1 x (6 AWG - 350 kcmil)
depth 83 mm Connections arrangement of electrical connectors / for main current circuit Front connection type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Yes	width	105 mm
arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Yes	depth [in]	3.27 in
arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Front connection circular conductor terminal on both sides 0 Accessories Yes		83 mm
type of electrical connection / for main current circuit circular conductor terminal on both sides Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes	Connections	
Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Yes	arrangement of electrical connectors / for main current circuit	Front connection
number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes	• •	circular conductor terminal on both sides
Accessories product extension / optional / motor drive Yes	Auxiliary circuit	
product extension / optional / motor drive Yes	number of CO contacts / for auxiliary contacts	0
	Accessories	
Environmental conditions		Yes
	Environmental conditions	

protection class IP / on the front	IP40
ambient temperature	
 during operation / minimum 	-25 °C
during operation / maximum	70 °C
 during storage / minimum 	-40 °C
 during storage / maximum 	80 °C
Certificates	
reference code / according to IEC 81346-2	Q
General Product Approval	



Confirmation





Miscellaneous



EMC Declaration of Conformity

Marine / Shipping

other









<u>Miscellaneous</u>

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5215-6EF36-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA5215-6EF36-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5215-6EF36-0AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications

http://www.siemens.com/specifications

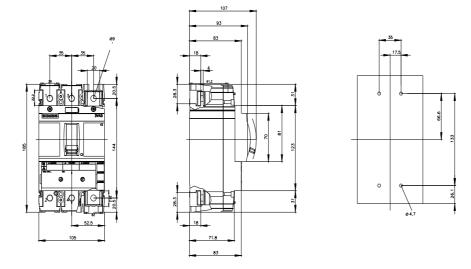



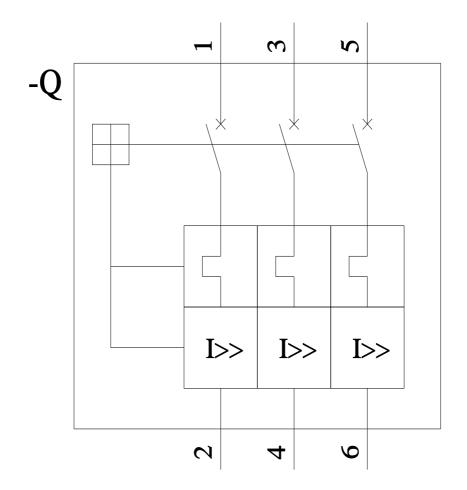

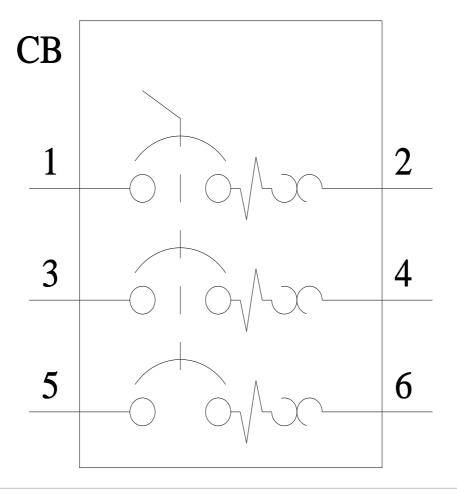

last modified: 7/15/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA52156EF360AA0