3VA5340-7EC31-1AA0

Data sheet



CIRCUIT BREAKER 3VA5 UL FRAME 400 BREAKING CAPACITY CLASS C 100kA @ 480 V 3POLE, LINE PROTECTION TM230, FTAM, In=400A OVERLOAD PROTECTION IR=400A FIXED SHORT CIRCUIT PROTECTION II=5...10 X IN UL489 SB (NAVAL), 50 DEG CEL. W/O CONNECTION

Model			
product brand name	SENTRON		
product designation	Molded-case circuit breaker		
product designation / according to UL file	CJAM		
design of the product	System protection		
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes		
design of the load switch / according to UL 489 / High-Intensity- Discharge circuit breaker (HID Type)	No		
design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type)	No		
design of the overcurrent release	TM230		
protection function of the overcurrent release	Ц		
number of poles	3		
General technical data			
power loss [W] / maximum	92 W		
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	30.73 W		
mechanical service life (operating cycles) / typical	20 000		
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000		
electrical endurance (operating cycles) / at AC-1 / at 690 V	3 000		
electrical endurance (operating cycles) / at 480 V	6 000		
electrical endurance (operating cycles) / at 600 V	3 000		
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No		
product function			
 communication function 	No		
 other measurement function 	No		
Net Weight	5.2 kg		
Current			
marking / according to UL 489 / 100%-rated breaker	No		
operational current			
• at 40 °C	400 A		
● at 45 °C	392 A		
● at 50 °C	384 A		
● at 55 °C	375 A		
• at 60 °C	367 A		
• at 65 °C	359 A		
● at 70 °C	351 A		
Switching capacity according to IEC 60947			
switching capacity class of the circuit breaker	С		
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit		

current breaking capacity at 240 V at 480 V at 600 V djustable parameters adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic minimum maximum adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum adjustable response value setting current (Ii) / for I-tripping / with 12t characteristic minimum maximum adjustable response value setting current (Ii) / for I-tripping minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger trip indicator	200 kA 100 kA 35 kA 400 A 400 A
at 240 V at 480 V at 600 V djustable parameters adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic minimum maximum adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum adjustable response value setting current (Ii) / for I-tripping minimum maximum adjustable response value setting current (Ii) / for I-tripping minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	100 kA 35 kA 400 A
at 480 V at 600 V djustable parameters adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic minimum maximum adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum maximum adjustable response value setting current (Ii) / for I-tripping minimum maximum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection adjustable current response value current / of the current-dependent overload release product component undervoltage release voltage trigger	100 kA 35 kA 400 A
adjustable parameters adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic minimum maximum adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum maximum adjustable response value setting current (Ii) / for I-tripping minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable setting current response value current / of the current-dependent overload release product function / grounding protection adjustable component undervoltage release voltage trigger	35 kA 400 A
adjustable parameters adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum adjustable response value delay time (tr) / for L-tripping / with I2t characteristic • minimum • maximum adjustable response value setting current (Ii) / for I-tripping • minimum • maximum adjustable setting current (InN) / for N-tripping • minimum • maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component • undervoltage release • voltage trigger	400 A
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum adjustable response value delay time (tr) / for L-tripping / with I2t characteristic • minimum • maximum adjustable response value setting current (Ii) / for I-tripping • minimum • maximum adjustable setting current (InN) / for N-tripping • minimum • maximum adjustable setting current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component • undervoltage release • voltage trigger	
12t characteristic minimum maximum adjustable response value delay time (tr) / for L-tripping / with 12t characteristic minimum maximum maximum adjustable response value setting current (li) / for I-tripping minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection echanical Design product component undervoltage release voltage trigger	
maximum adjustable response value delay time (tr) / for L-tripping / with I2t characteristic minimum maximum adjustable response value setting current (li) / for I-tripping minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic • minimum • maximum adjustable response value setting current (li) / for I-tripping • minimum • maximum adjustable setting current (InN) / for N-tripping • minimum • maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component • undervoltage release • voltage trigger	400 A
characteristic	
maximum adjustable response value setting current (li) / for I-tripping minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	
adjustable response value setting current (Ii) / for I-tripping	1 s
minimum maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	1s
maximum adjustable setting current (InN) / for N-tripping minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	
adjustable setting current (InN) / for N-tripping • minimum • maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component • undervoltage release • voltage trigger	2 000 A
minimum maximum adjustable current response value current / of the current-dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	4 000 A
maximum adjustable current response value current / of the current- dependent overload release product function / grounding protection lechanical Design product component undervoltage release voltage trigger	
adjustable current response value current / of the current- dependent overload release product function / grounding protection lechanical Design product component	0 A
dependent overload release product function / grounding protection lechanical Design product component	0 A
product component undervoltage release voltage trigger	400 400 A
product component • undervoltage release • voltage trigger	No
undervoltage releasevoltage trigger	
voltage trigger	
	No
trip indicator	No
• trip indicator	No
height [in]	9.76 in
height	248 mm
width [in]	5.43 in
width	138 mm
depth [in]	4.33 in
depth	110 mm
onnections	
arrangement of electrical connectors / for main current circuit	Without connection
type of electrical connection / for main current circuit	Without
uxiliary circuit	
number of CO contacts / for auxiliary contacts	0
ccessories	
product extension / optional / motor drive	Yes
nvironmental conditions	
protection class IP / on the front	IP40
ambient temperature	
during operation / minimum	-25 °C
during operation / maximum	70 °C
during storage / minimum	-40 °C
during storage / maximum	80 °C
ertificates	
certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB	
General Product Approval	Yes
	Yes









EMC	Declaration of Conformity	Marine / Shipping	other
LIVIC	Deciaration of Comornity	marine / Shipping	Other









other

Miscellaneous

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA5340-7EC31-1AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5340-7EC31-1AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications

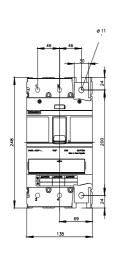


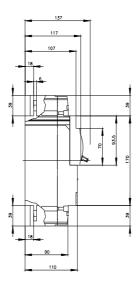





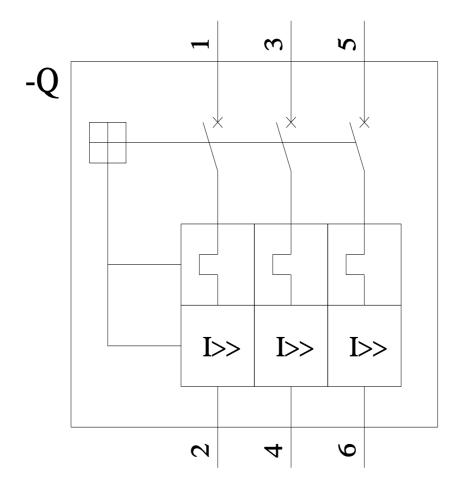

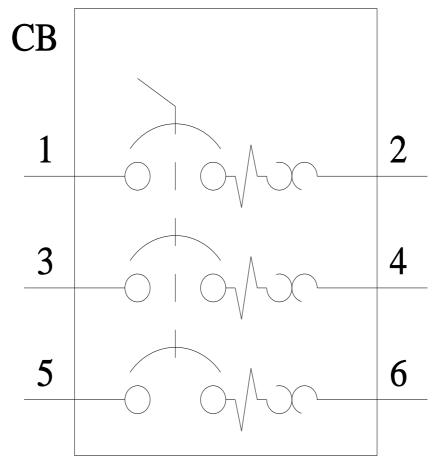

last modified: 6/16/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA53407EC311AA0