SIEMENS

Data sheet



Circuit breaker 3VA6 UL frame 250 breaking capacity class H 65kA @ 480 V 3-pole, Line protection ETU830, LIG, In=250A overload protection, 100% rated Ir=100A ...250A Short-circuit protection Ii=1.5...10 x In Ground-fault protection Ig=0.2... 1 x In, tg=0.05-0.8s nut keeper kit on both sides

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
product designation / according to UL file	HFAE
design of the product	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the overcurrent release	ETU830
protection function of the overcurrent release	LIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	42 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	14 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	12 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	8 400
electrical endurance (operating cycles) / at 480 V	12 000
electrical endurance (operating cycles) / at 600 V	8 400
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L-conductor
product function	
 communication function 	Yes
other measurement function	Yes
Net Weight	2.445 kg
Current	
marking / according to UL 489 / 100%-rated breaker	Yes
operational current	
• at 40 °C	250 A
• at 45 °C	250 A
• at 50 °C	250 A
• at 55 °C	238 A
• at 60 °C	225 A
• at 65 °C	213 A
• at 70 °C	200 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	н
maximum short-circuit current breaking capacity (Icu)	

• at 240 V	110 kA
• at 415 V	85 kA
• at 690 V	3 kA
operating short-circuit current breaking capacity (lcs)	
● at 240 V	110 kA
● at 415 V	85 kA
● at 690 V	3 kA
short-circuit current making capacity (Icm)	
● at 240 V	242 kA
● at 415 V	187 kA
● at 690 V	4.5 kA
Switching capacity according to UL 489	
current breaking capacity	
● at 240 V	100 kA
● at 480 V	65 kA
● at 600 Y/347 V	22 kA
● at 600 V	22 kA
Adjustable parameters	
adjustable response value setting current (Ir) / of the L-trip / with l2t characteristic	
• minimum	100 A
• maximum	250 A
adjustable current response value current / for G-tripping / with standard characteristic	
• initial value	50 A
full-scale value	250 A
adjustable current response value current / of instantaneous	
short-circuit trip unit	
• minimum	375 A
maximum	2 500 A
product function / grounding protection	Yes
total break time / for G-tripping / with standard characteristic	
total break time / for G-tripping / with standard characteristic • initial value	0.05 s
	0.05 s 0.8 s
• initial value	
initial value full-scale value Mechanical Design product component	
initial value full-scale value Mechanical Design	
initial value full-scale value Mechanical Design product component	0.8 s
initial value full-scale value Mechanical Design product component undervoltage release	0.8 s No
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger	No No
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator	No No No
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in]	0.8 s No No No No 7.8 in
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height	0.8 s No No No 7.8 in 198 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in]	0.8 s No No No 7.8 in 198 mm 4.13 in
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in]	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of connectable conductor cross-sections / for flat-bar	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connectable conductor cross-sections / for flat-bar	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature during operation / minimum	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm 0 Yes IP40 -25 °C
initial value full-scale value Mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	0.8 s No No No 7.8 in 198 mm 4.13 in 105 mm 3.39 in 86 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8.5 mm

during storage / maximum
 80 °C
 Certificates
 reference code / according to IEC 81346-2
 certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB
 General Product Approval



Confirmation





Miscellaneous



Declaration of Conformity

Marine / Shipping

other

Dangerous Good







Confirmation

Miscellaneous

Transport Information

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6225-6KM32-2AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA6225-6KM32-2AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA6225-6KM32-2AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications

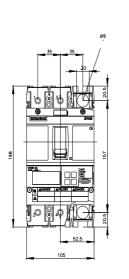


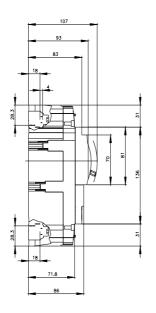





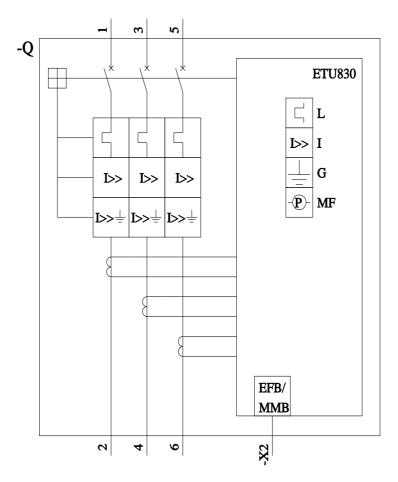

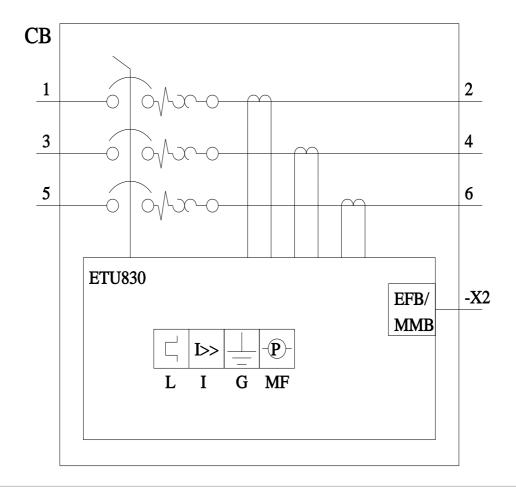

last modified: 8/14/2023 🖸



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA62256KM322AA0