

Article No.: 6SL3220-2YC32-1UP0

Client order no. : Order no. : Offer no. : Remarks :

	Rated data			
lr	put			
	Number of phases	3 AC		
	Line voltage	200 240 V +10 %	% -20 %	
	Line frequency	47 63 Hz		
	Rated voltage	200V IEC	240V NEC	
	Rated current (LO)	76.00 A	76.00 A	
	Rated current (HO)	64.00 A	64.00 A	
o	utput			
	Number of phases	3 AC		
	Rated voltage	200V IEC	240V NEC 1)	
	Rated power (LO)	22.00 kW	30.00 hp	
	Rated power (HO)	18.50 kW	25.00 hp	
	Rated current (LO)	80.00 A	80.00 A	
	Rated current (HO)	68.00 A	68.00 A	
	Rated current (IN)	82.00 A		
	Max. output current	108.00 A		
Pi	ulse frequency	4 kHz		
Output frequency for vector control		0 200 Hz		
0	utput frequency for V/f control	0 550 Hz		
Overload capability				
	Low Overload (LO)			

Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)

Communication

150% x base load current IH for 60 s within a 600 s cycle time

General tech. specifications		
Power factor λ	0.90 0.95	
Offset factor $\cos\phi$	0.99	
Efficiency η	0.97	
Sound pressure level (1m)	70 dB	
Power loss 3)	0.937 kW	
Filter class (integrated)	Unfiltered	
EMC category (with accessories)	without	
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7- 1500F)	

Communication



Item no. : Consignment no. : Project :

Inputs / outputs			
Standard digital inputs			
Number	6		
Switching level: 0 → 1	11 V		
Switching level: $1 \rightarrow 0$	5 V		
Max. inrush current	15 mA		
Fail-safe digital inputs			
Number	1		
Digital outputs			
Number as relay changeover contact	2		
Output (resistive load)	DC 30 V, 5.0 A		
Number as transistor	0		
Analog / digital inputs			
Number	2 (Differential input)		
Resolution	10 bit		
Switching threshold as digital input			
0 → 1	4 V		
1 → 0	1.6 V		
Amalan autouta			
Analog outputs			
Number	1 (Non-isolated output)		

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5~^\circ\text{C}$

Closed-loop control techniques		
V/f linear / square-law / parameterizable	Yes	
V/f with flux current control (FCC)	Yes	
V/f ECO linear / square-law	Yes	
Sensorless vector control	Yes	
Vector control, with sensor	No	
Encoderless torque control	No	
Torque control, with encoder	No	

PROFIBUS DP




Article No.: 6SL3220-2YC32-1UP0

Ambient	conditions			
Standard board coating type	Class 3C2, according to IEC 60721-3-3: 2002			
Cooling	Air cooling using an integrated fan			
Cooling air requirement	0.083 m ³ /s (2.931 ft ³ /s)			
Installation altitude	1,000 m (3,280.84 ft)			
Ambient temperature				
Operation	-20 45 °C (-4 113 °F)			
Transport	-40 70 °C (-40 158 °F)			
Storage	-25 55 °C (-13 131 °F)			
Relative humidity				
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible			
Connections				
Signal cable				
Conductor cross-section	0.15 1.50 mm ² (AWG 24 AWG 16)			
Line side				
Version	screw-type terminal			
Conductor cross-section	25.00 70.00 mm ² (AWG 6 AWG 3/0)			
Motor end				
Version	Screw-type terminals			
Conductor cross-section	25.00 70.00 mm ² (AWG 6 AWG 3/0)			
DC link (for braking resistor)				
PE connection	Screw-type terminals			
Max. motor cable length				
Shielded	200 m (656.17 ft)			
Unshielded	300 m (984.25 ft)			

Mechanical data			
Degree of protection	IP20 / UL open type		
Frame size	FSE		
Net weight	16.6 kg (36.60 lb)		
Dimensions			
Width	275 mm (10.83 in)		
Height	551 mm (21.69 in)		
Depth	248 mm (9.76 in)		
Cton	. dd -		
Standards			
Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH		
CE marking	EMC Directive 2004/108/EC, Low- Voltage Directive 2006/95/EC		
Converter losses to IEC61800-9-2*			

IE2

57.9 %

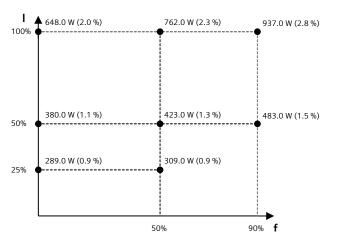

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Efficiency class

Comparison with the reference converter (90% / 100%)

 $^{^{1)}}$ The output current and HP ratings are valid for the voltage range 220V-240V

³⁾Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.



Article No.: 6SL3220-2YC32-1UP0

	Operator pane	el: Basic Operator Panel (BOP-2)
	Screen	
Display design	LCD, monochrome	Ambient temperature
	Mechanical data	Operation
	Mechanical data	Storage
Degree of protection	IP55 / UL type 12	Transport
Net weight	0.140 kg (0.31 lb)	Hallsport
Dimensions		Relative humidity at 25
Width	70.00 mm (2.76 in)	Max. operation
Height	106.85 mm (4.21 in)	
Depth	19.60 mm (0.77 in)	Certificate of suitability

	<u> </u>		
Ambient conditions			
Ambient temperature			
Operation	0 50 °C (32 122 °F)		
Storage	-40 70 °C (-40 158 °F)		
Transport	-40 70 °C (-40 158 °F)		
Relative humidity at 25°C during			
Max. operation	95 %		
Approvals			
Certificate of suitability	CE, cULus, EAC, KCC, RCM		



Output voltage

Output current

Article No.: 6SL3220-2YC32-1UP0

		I/O Exten	sion Module
	Inpi	uts / outputs	
 	Digital inputs	, ошфиц	Dimensio
_	Number of digital inputs 1)	2	Width
	Conductor cross-section	0.5 1.5 mm² (AWG 21 AWG 16) Alternatively 2 x 0.5 mm²	Height Depth
	Input voltage (0→1)	11 V	Берит
	Input voltage (1→0)	5 V	¹⁾ DI 6: digit 250 mA)
	Input voltage, max.	30 V	²⁾ The max. varies bet
D	Pigital outputs		³⁾ 2 analog i be option
	Number of digital outputs	4	⁴⁾ Switchabl
	Conductor cross-section	1.5 mm² (AWG 16)	
	Output current 2)	2 A	
A	analog inputs		
	Number of analog inputs 3)	2	
	Conductor cross-section	0.5 1.5 mm² (AWG 21 AWG 16) alternatively 2*0.5 mm²	
	Current	0 20 mA	
A	nalog outputs		
	Number of analog outputs	2	
	Type of analog outputs 4)	Non-isolated output	
	Conductor cross-section	0.5 1.5 mm ² (AWG 21 AWG 16)	

Alternatively 2 x 0.5 mm²

0 ... 10 V

0 ... 20 mA

	Mechanical data		
71 mm (2.80 in)			
117 mm (4.61 in)			
27 mm (1.06 in)			
	117 mm (4.61 in)		

¹⁾DI 6: digital input; DI 7: P or M switch; DI COM: Input for Control Unit interface (24 V out, max. 250 mA)

⁴⁾Switchable between voltage (0 ... 10 V) and current (0 ... 20 mA) using a parameter

 $^{^{2)}} The \ max$, current depends on the temperature and the size of the connected converted. It varies between 2 A and 3 A at 30 V DC.

 $^{^{3)}2}$ analog inputs for the connection of Pt1000/Ni1000 temperature sensors. One of which can be optionally used as analog input.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

6SL32202YC321UP0