

SVS Eco valve plug CI-9.4mm screw terminal

2-pol. + FE, max. 0,5mm², 4 -6mm, LED+VDR 24V

Art.No.: 7000-30205-0000000

Weight: 0.02

Country of origin: HU

Model designation: MSVSE-RB1X-M12 SVS Eco LED

Form CI (9.4 mm)

24 V AC/DC $\pm 15\%$

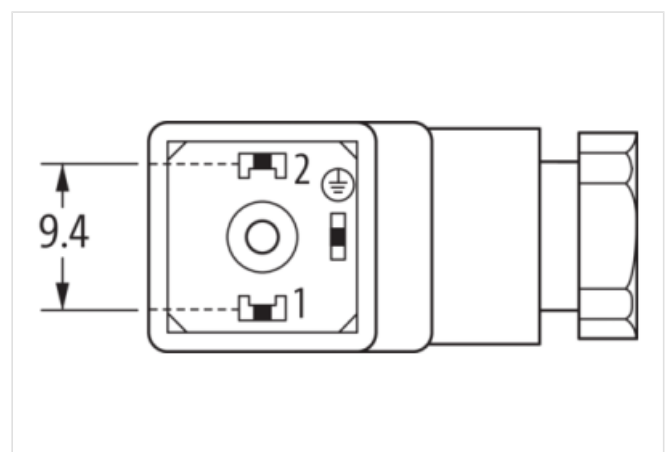
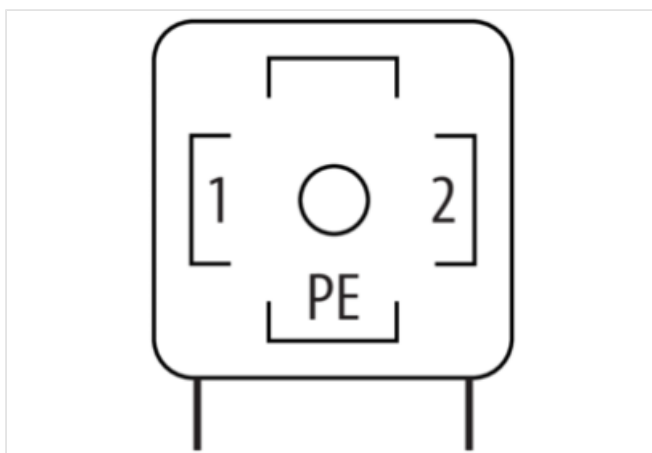
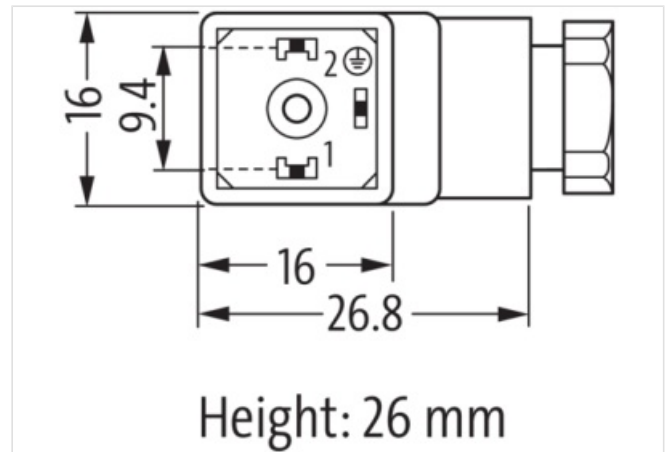
LED and VDR

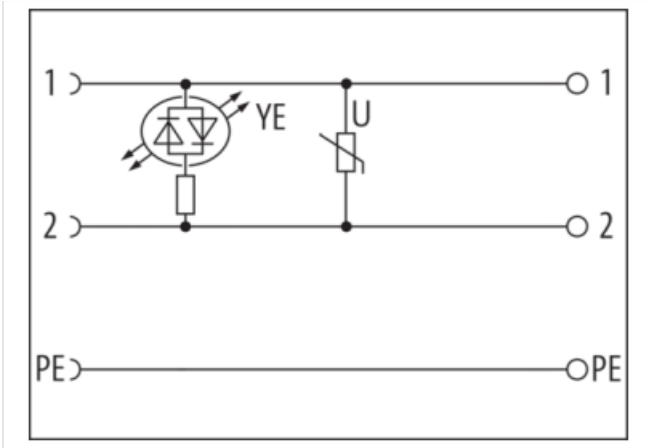
metric

Field wireable (screw terminals)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**



Product may differ from Image



Side 1	
Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-30205-0000000
EAN	4048879186964
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	20.4 V
Operating voltage AC max.	26.4 V
Operating voltage DC	24 V
Operating voltage DC min.	20.4 V
Operating voltage DC max.	26.4 V
Current operating per contact max.	1.5 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section min.	0.34
Connection cross section max.	0.5
Installation Connection	
Tightening torque	0.4 Nm
Tightening torque tolerance	± 0.1 Nm
Tightening torque clamping screw	0.2 Nm
Mounting set	M12 x 1.5
Installation Pin assignment	
No. of poles	PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor
Mechanical data Material data	
Material housing	PA

Color housing	opaque
---------------	--------

Material gasket	NBR
-----------------	-----

Mechanical data | Mounting data

fastening screw	M3
-----------------	----

Clamping range min.	4 mm
---------------------	------

Clamping range max.	6 mm
---------------------	------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	90 °C
----------------------------	-------

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	-----------------------------------------------------------------------------------------------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murrelektronik:](#)

[7000-30205-0000000](#)