


- Models available up to 690 VAC
 - Automatic or Manual Reset
 - Delay-on-Make Timer
 - LED Indicators for Fault Conditions
 - Last Fault Memory
- SCREWDRIVER ADJUSTMENT FOR:
- Time Delay
 - Voltage
 - Mode of Operation
- PROTECTS 3-PHASE EQUIPMENT AGAINST:
- Under Voltage
 - Over Voltage
 - Phase Loss
 - Phase Reversal
 - Phase Unbalance
 - Phase Shift
 - Frequency Shift

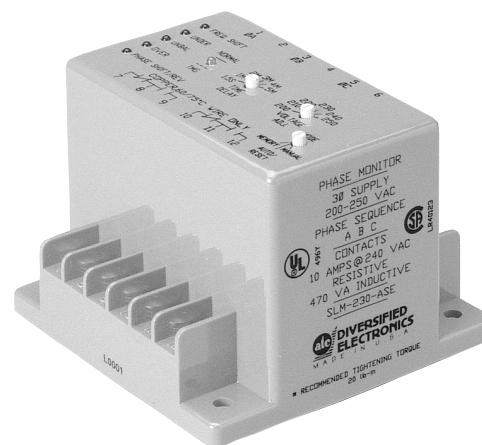


Microprocessor Based 3-Phase Monitor


SPECIFICATIONS

VOLTAGE TRIP POINTS	Drop-Out	±10% of Setting		
	Pick-Up	± 7% of Setting		
FREQUENCY TRIP POINTS	Drop-Out	±4% of 60 Hz (380 V, 50 Hz)		
	Pick-Up	±3% of 60 Hz (380 V, 50 Hz)		
UNBALANCE TRIP POINTS	Drop-Out	7%		
	Pick-Up	5%		
RESET	Automatic; Manual; Automatic with Memory*			
PHASE SEQUENCE	ABC (Will Not Operate CBA)			
OUTPUT RATING	DPDT, 360 VA Inductive; 1/2 hp 3 A Resistive @ 600 VAC SLM (120, 230) ASE - DPDT, 470 VA 10A Resistive@240VAC			
TERMINATIONS	#8-32 Screw Terminals			
INDICATORS LED*	Designation	Color	State	Condition
*Automatic with Memory MODE: The last fault is indicated and remains on when conditions return to normal. The indicator extinguishes only with reset or when new fault condition occurs.	Time Delay	Green	Flashing	Timing Output Energized
	Under Voltage	Red	ON	Fault
	Over Voltage	Red	ON	Fault
	Phase Sequence, Shift	Red	ON	Fault
	Frequency Shift	Red	ON	Fault
	Unbalance	Red	ON	Fault
	Operate			
	Sampling	2 SEC		
	Reset Delay (Sampling Delay) + (1.5 seconds to 5 minute Delay) Adjustable in one (1) minute increments			
	Release			
	Under Voltage	1.5 SEC, (approx.)		
	Over Voltage	1.5 SEC, (approx.)		
	Frequency Shift	1.5 SEC, (approx.)		
	Unbalance	2.0 SEC, (approx.)		
	*Phase Loss/Shift	1.0 SEC, (approx.)		
TEMPERATURE RATING	Operate	32° to +131°F (0° to +55°C)		
	Storage	-49° to 185°F (-45° to +85°C)		
POWER REQUIRED	7 VA Typical			
TRANSIENT PROTECTION	2500 Volts for 10 ms			
ENCLOSURE	Lexan Surface Mounted			
WEIGHT	22 oz.			

DIMENSIONS (INCHES)

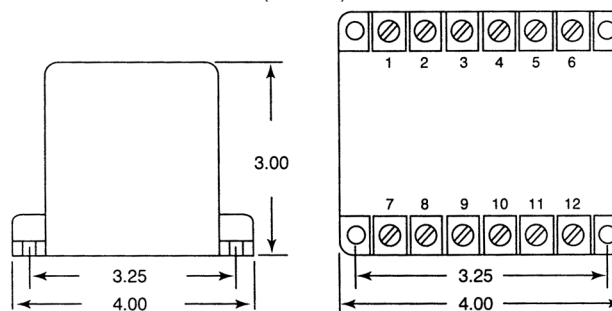

WIRING



MODEL NUMBER	NOMINAL PHASE-TO-PHASE VOLTAGE SET POINTS	MAXIMUM VOLTAGE
SLM-120-ASE	105, 110, 115, 120, 125, 130	143 VAC
SLM-230-ASE	200, 210, 220, 230, 240, 250	275 VAC
SLM-380-ASE	350, 365, 380, 390, 400, 415	457 VAC
SLM-440-ASE	440, 450, 460, 470, 480, 490	540 VAC
SLM-575-ASE	525, 550, 575, 600	690 VAC

*Automatic with Memory MODE: The last fault is indicated and remains on when conditions return to normal.

The indicator extinguishes only with reset or when new fault condition occurs.

The SLM Series is UL Listed under UL File Number E55826.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ATC Diversified Electronics:](#)

[SLM-380-ASE](#) [SLM-230-ASE](#) [SLM-575-ASE](#) [SLM-440-ASE](#) [SLM-120-ASE](#)