

**SERIES:** CFM-50B | **DESCRIPTION:** DC AXIAL FAN**FEATURES**

- dual ball bearing
- 50 x 50 mm frame
- multiple speed options
- PWM/tachometer wires available

**MODEL**

|                   | input voltage |             | input current <sup>1</sup> |         | input power <sup>1</sup> |         | rated speed <sup>1</sup> | airflow <sup>2</sup> | static pressure <sup>3</sup> | noise <sup>4</sup> |
|-------------------|---------------|-------------|----------------------------|---------|--------------------------|---------|--------------------------|----------------------|------------------------------|--------------------|
|                   | rated [Vdc]   | range [Vdc] | min [A]                    | max [A] | min [W]                  | max [W] | typ [RPM±10%]            | [CFM]                | [inch H <sub>2</sub> O]      | typ [dBA]          |
| CFM-5010B-135-215 | 12            | 10.8~13.2   | 0.04                       | 0.06    | 0.48                     | 0.72    | 3,500 <sup>5</sup>       | 7.52                 | 0.05                         | 21.5               |
| CFM-5010B-155-313 | 12            | 10.8~13.2   | 0.13                       | 0.20    | 1.56                     | 2.40    | 5,500 <sup>5</sup>       | 11.82                | 0.13                         | 31.3               |
| CFM-5010B-170-361 | 12            | 10.8~13.2   | 0.15                       | 0.23    | 1.80                     | 2.76    | 6,500                    | 13.97                | 0.18                         | 34.5               |
| CFM-5020B-130-235 | 12            | 10.8~13.2   | 0.03                       | 0.05    | 0.36                     | 0.60    | 3,000 <sup>5</sup>       | 8.09                 | 0.06                         | 23.5               |
| CFM-5020B-145-323 | 12            | 10.8~13.2   | 0.08                       | 0.12    | 0.96                     | 1.44    | 4,500 <sup>5</sup>       | 12.14                | 0.13                         | 32.3               |
| CFM-5020B-160-385 | 12            | 10.8~13.2   | 0.13                       | 0.20    | 1.56                     | 2.40    | 6,000                    | 16.18                | 0.24                         | 38.5               |
| CFM-5020B-230-217 | 24            | 21.6~26.4   | 0.03                       | 0.05    | 0.72                     | 1.20    | 3,000 <sup>5</sup>       | 9.09                 | 0.06                         | 21.7               |
| CFM-5020B-245-306 | 24            | 21.6~26.4   | 0.04                       | 0.06    | 0.96                     | 1.44    | 4,500 <sup>5</sup>       | 13.64                | 0.14                         | 30.6               |
| CFM-5020B-260-367 | 24            | 21.6~26.4   | 0.07                       | 0.11    | 1.68                     | 2.64    | 6,000                    | 18.23                | 0.26                         | 36.7               |
| CFM-5020B-275-416 | 24            | 21.6~26.4   | 0.11                       | 0.17    | 2.64                     | 4.08    | 7,500                    | 22.78                | 0.41                         | 41.6               |

Notes:

1. At rated voltage, after 3 minutes.
2. At rated voltage, room temperature, 65% humidity, 0 inch H<sub>2</sub>O static pressure.
3. At rated voltage, 0 CFM airflow.
4. Measured in an anechoic chamber as per ISO3745/GB4214-84 at rated voltage, with background noise 20±2 dBA at 1 m from the fan intake.
5. Typical rated speed is measured as RPM±600 at rated voltage.
6. All specifications are measured at 25°C, 65% relative humidity unless otherwise specified.

**PART NUMBER KEY****CFM - 5010B - 135 - 215 - XX - CXX**

Base Number

Fan Signals

"blank" = no signals

20 = tachometer signal

22 = tachometer signal / PWM control signal

Reserved for Custom  
Configurations

INPUT

| parameter                            | conditions/description | min  | typ  | max  | units |
|--------------------------------------|------------------------|------|------|------|-------|
| operating input voltage <sup>7</sup> | 12 Vdc input models    | 10.8 | 12   | 13.2 | Vdc   |
|                                      | 24 Vdc input models    | 21.6 | 24   | 26.4 | Vdc   |
| starting voltage                     | 12 Vdc input models    |      | 7.0  |      | Vdc   |
|                                      | 24 Vdc input models    |      | 14.0 |      | Vdc   |

Note: 7. See Model section on page 1 for specific input voltage ranges.

PERFORMANCE<sup>8</sup>

| parameter       | conditions/description                             | min   | typ | max   | units                 |
|-----------------|----------------------------------------------------|-------|-----|-------|-----------------------|
| rated speed     | at rated voltage, 25°C, after 3 minutes            | 3,000 |     | 7,500 | RPM                   |
| air flow        | at 0 inch H <sub>2</sub> O, see performance curves | 7.52  |     | 22.78 | CFM                   |
| static pressure | at 0 CFM, see performance curves                   | 0.05  |     | 0.41  | inch H <sub>2</sub> O |
| noise           | at 1 m, rated speed                                | 21.5  |     | 41.6  | dBA                   |

Note: 8. See Model section on page 1 for specific values.

PROTECTIONS / FEATURES<sup>9</sup>

| parameter           | conditions/description                                        | min | typ | max | units |
|---------------------|---------------------------------------------------------------|-----|-----|-----|-------|
| auto restart        | not available on CFM-5020B-130-235 & CFM-5020B-145-323 models |     |     |     |       |
| polarity protection | not available on CFM-5020B-160-385 model                      |     |     |     |       |
| tachometer signal   | available on “20” and “22” models                             |     |     |     |       |
| PWM control signal  | available on “22” models                                      |     |     |     |       |

Notes: 9. See Application Notes for details.

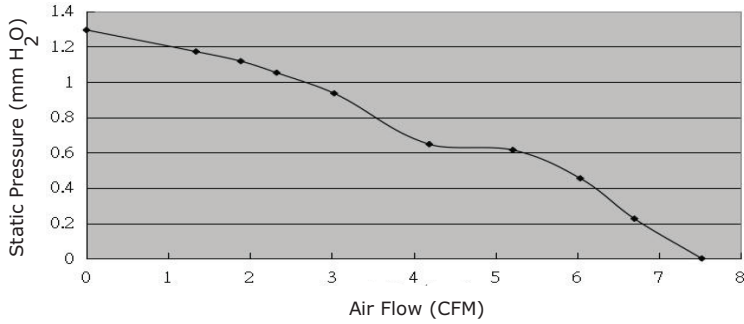
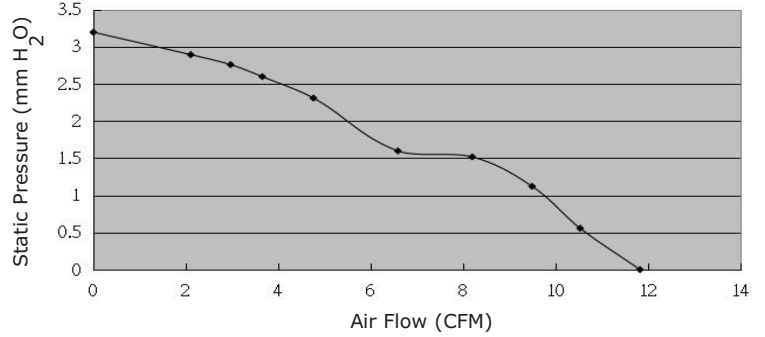
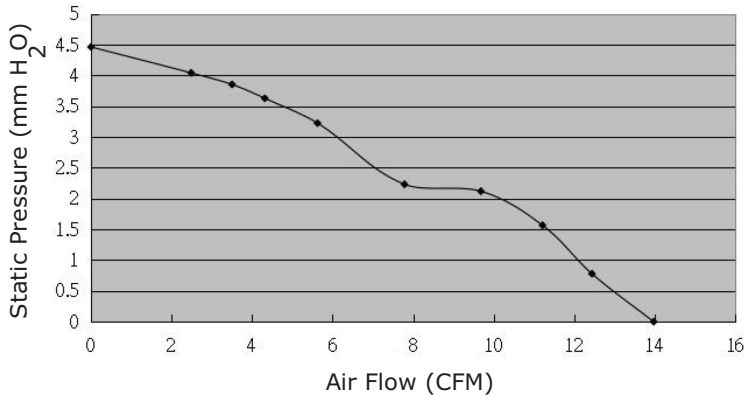
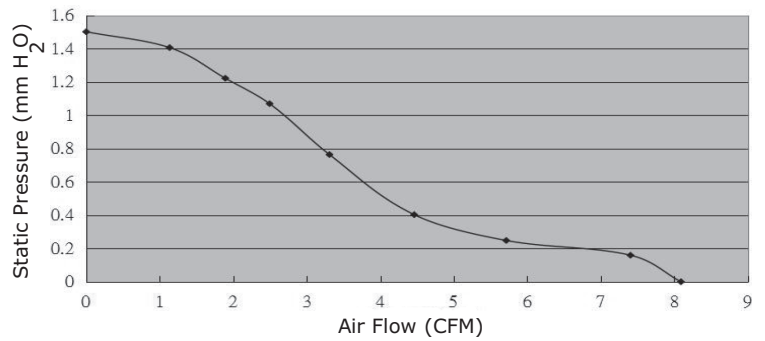
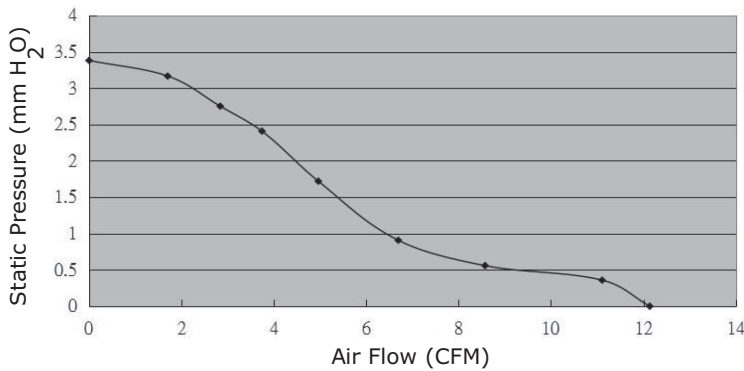
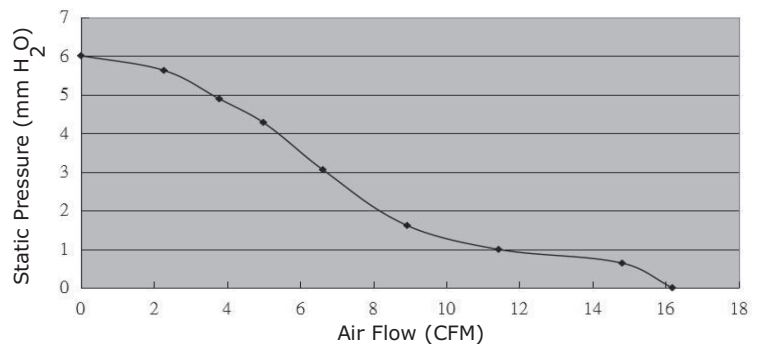
SAFETY & COMPLIANCE

| parameter             | conditions/description                                            | min | typ    | max | units |
|-----------------------|-------------------------------------------------------------------|-----|--------|-----|-------|
| insulation resistance | at 500 Vdc between frame and positive terminal                    | 10  |        |     | MΩ    |
| dielectric strength   | at 500 Vac, 60 Hz, 1 minute between housing and positive terminal |     |        | 5   | mA    |
| safety approvals      | UL/cUL 507, TUV (EN/IEC 62368-1:2020+A11)                         |     |        |     |       |
| EMI/EMC               | EN 55032:2015, EN 55035:2017                                      |     |        |     |       |
| life expectancy       | at 40°C, 65% RH, 90% confidence level                             |     | 70,000 |     | hours |
| RoHS                  | yes                                                               |     |        |     |       |





ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature |                        | -10 |     | 70  | °C    |
| storage temperature   |                        | -40 |     | 75  | °C    |
| operating humidity    | non-condensing         | 35  |     | 85  | %     |
| storage humidity      | non-condensing         | 35  |     | 85  | %     |

## PERFORMANCE CURVES

**CFM-5010B-135-215****CFM-5010B-155-313****CFM-5010B-170-361****CFM-5020B-130-235****CFM-5020B-145-323****CFM-5020B-160-385**

## PERFORMANCE CURVES (CONTINUED)

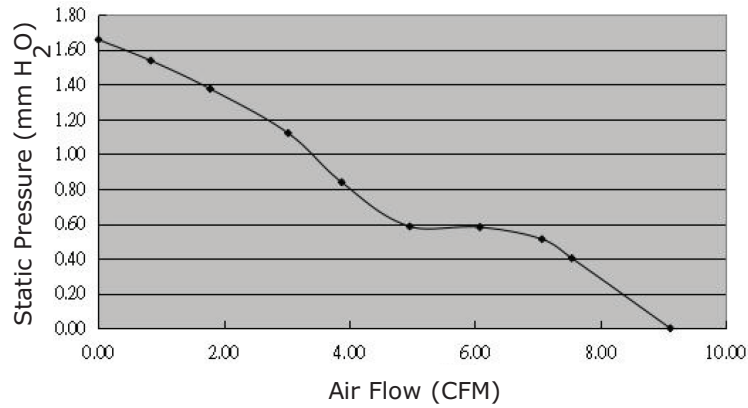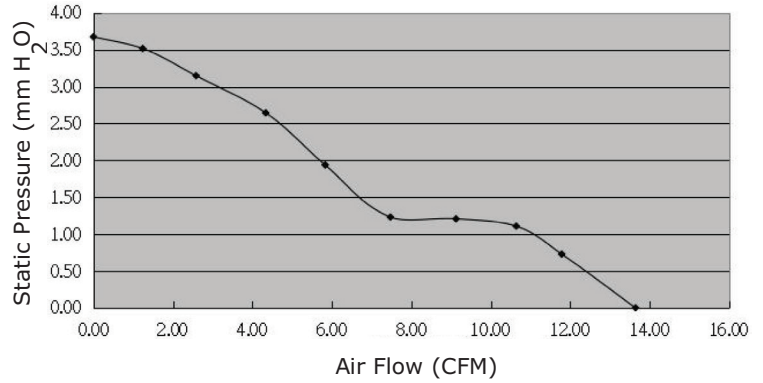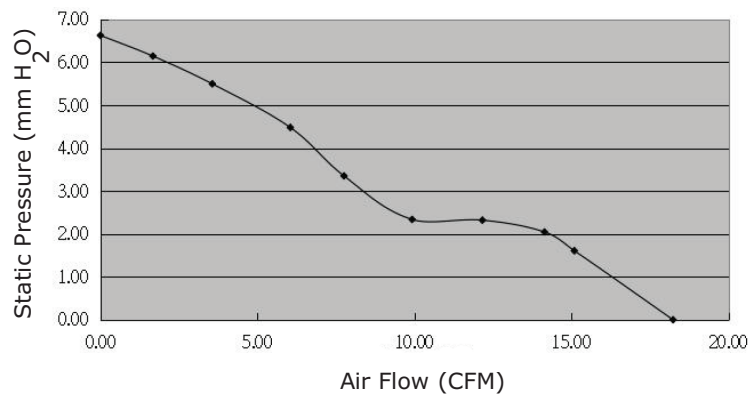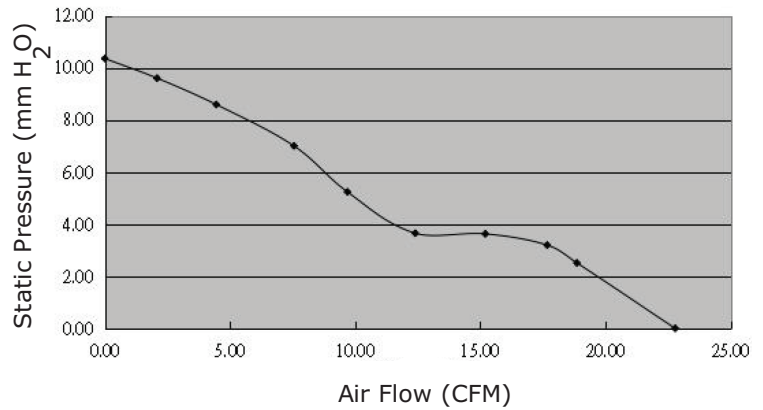**CFM-5020B-230-217****CFM-5020B-245-306****CFM-5020B-260-367****CFM-5020B-275-416**

MECHANICAL

| parameter             | conditions/description                           | min  | typ | max  | units |
|-----------------------|--------------------------------------------------|------|-----|------|-------|
| motor                 | 4 pole DC brushless                              |      |     |      |       |
| bearing system        | dual ball bearing                                |      |     |      |       |
| direction of rotation | counter-clockwise viewed from front of fan blade |      |     |      |       |
| dimensions            | CFM-5010B models: 50 x 50 x 10.5                 |      |     |      | mm    |
|                       | CFM-5020B, 12 Vdc input models: 50 x 50 x 20     |      |     |      | mm    |
|                       | CFM-5020B, 24 Vdc input models: 50 x 50 x 19.8   |      |     |      | mm    |
| material              | PBT (UL94V-0)                                    |      |     |      |       |
| weight                | CFM-5010B models: weight varies by model         | 18.0 |     | 21.5 | g     |
|                       | CFM-5020B models: weight varies by model         | 28.5 |     | 30.2 | g     |


MECHANICAL DRAWING

units: mm

2 wire versions (+Vin & -Vin): UL 1061, 26 AWG  
3 wire versions (+Vin, -Vin, & tach): UL 1061, 26 AWG  
4 wire versions (+Vin, -Vin, tach, & PWM): UL 1061, 26 AWG

| MOUNTING SCREW (Pan Head) |      |                  |            |
|---------------------------|------|------------------|------------|
| Screw Type                | Size | Standard         | Torque     |
| Machine Screw             | M3   | JIS B1111-1974   | 7.5 kgf-cm |
| Self-tapping Screw        | M4   | JIS B1122 Type 2 | 7.5 kgf-cm |

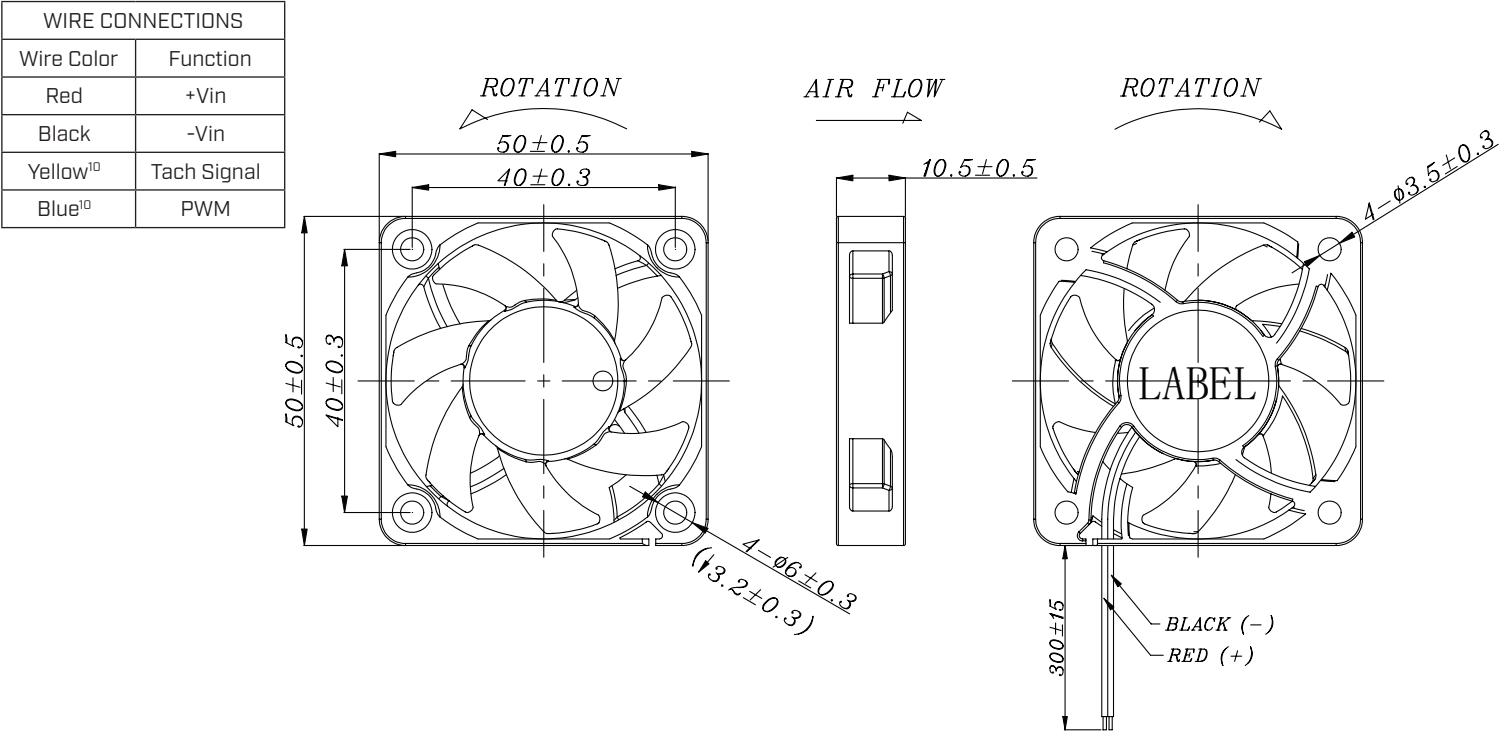CFM-5010B



Notes: 10. Wires only present on versions with output signals.


## MECHANICAL DRAWING (CONTINUED)

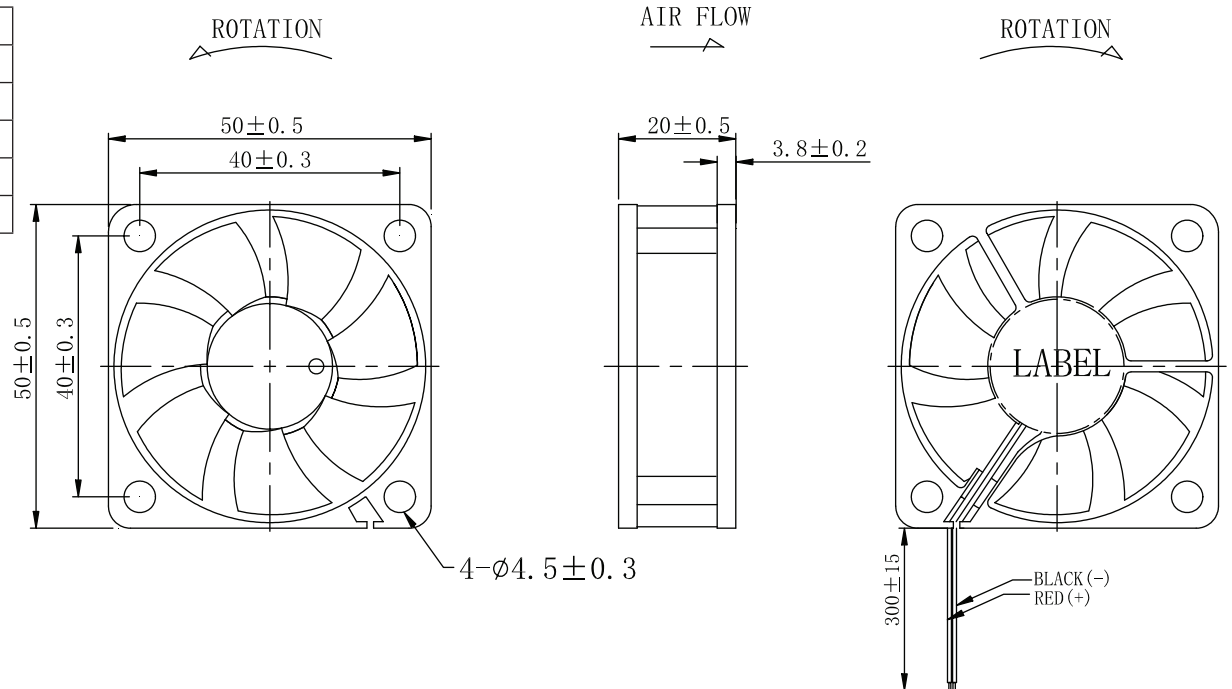units: mm

2 wire versions (+Vin & -Vin): UL 1007, 26 AWG  
 3 wire versions (+Vin, -Vin, & tach): UL 1007, 26 AWG  
 4 wire versions (+Vin, -Vin, tach, & PWM): UL 1061, 26 AWG


### CFM-5020B, 12 VDC MODELS

| WIRE CONNECTIONS     |             |
|----------------------|-------------|
| Wire Color           | Function    |
| Red                  | +Vin        |
| Black                | -Vin        |
| Yellow <sup>10</sup> | Tach Signal |
| Blue <sup>10</sup>   | PWM         |



### CFM-5020B, 24 VDC MODELS
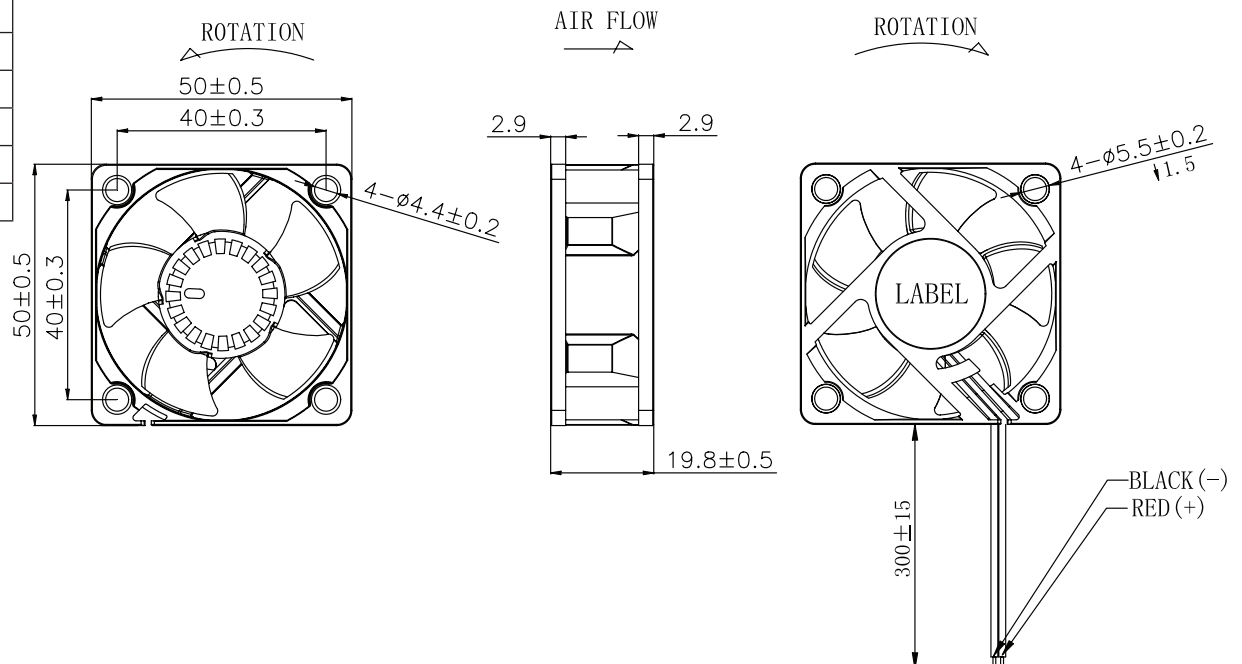
| WIRE CONNECTIONS     |             |
|----------------------|-------------|
| Wire Color           | Function    |
| Red                  | +Vin        |
| Black                | -Vin        |
| Yellow <sup>10</sup> | Tach Signal |
| Blue <sup>10</sup>   | PWM         |



Notes: 10. Wires only present on versions with output signals.

## APPLICATION NOTES

### Auto Restart Protection

When the fan motor is locked by an external force, the device will temporarily turn off electrical power to the motor and restart automatically when the locked rotor condition is released.

### Polarity Protection

Able to withstand 10 minutes of reverse polarity connection between the positive and negative wires without causing damage.


### Tachometer Signal (Yellow Wire)

The tachometer signal is for detecting the rotational speed of the fan motor. The output will be a square wave when fan is operating and  $V_{FG}$  or  $V_{CE}$  depending on the locked rotor position when fan motor is locked (See Figures 1~2 below).

Figure 1: Tachometer Output Circuit



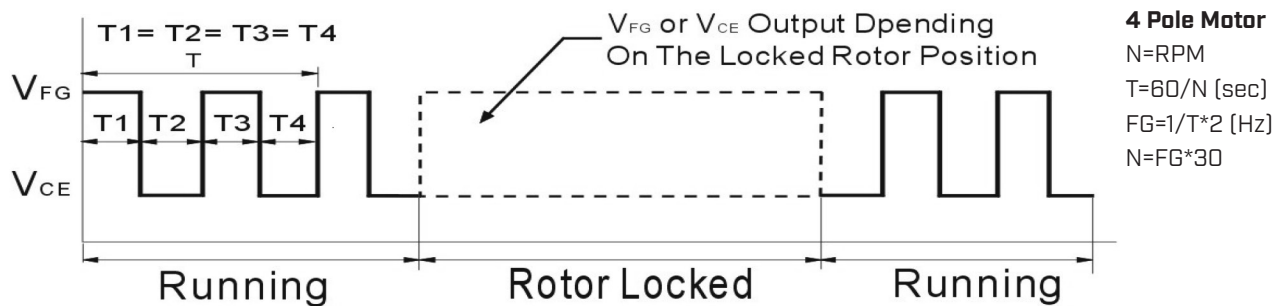Figure 2: Tachometer Output Waveform



APPLICATION NOTES (CONTINUED)

PWM Signal (Blue Wire)

This wire is for speed control of the fan motor using a PWM input signal from the customer circuit (See Figure 3 below).

Figure 3: PWM Input Signal



| Model                | PWM Frequency Range [kHz] | PWM VIH [V] | PWM VIL [V] |
|----------------------|---------------------------|-------------|-------------|
| CFM-5010B-135-215-22 | 8~55                      | 2.3~10      | 0~0.7       |
| CFM-5010B-155-313-22 | 0.3~45                    | 2~6         | 0~0.6       |
| CFM-5010B-170-361-22 | 0.3~45                    | 2~6         | 0~0.6       |
| CFM-5020B-130-235-22 | 0.3~45                    | 1.7~6       | 0~0.7       |
| CFM-5020B-145-323-22 | 0.3~45                    | 1.7~6       | 0~0.7       |
| CFM-5020B-160-385-22 | 0.3~45                    | 1.7~6       | 0~0.7       |
| CFM-5020B-230-217-22 | 0.6~55                    | 2.3~10      | 0~0.7       |
| CFM-5020B-245-306-22 | 0.6~55                    | 2.3~10      | 0~0.7       |
| CFM-5020B-260-367-22 | 0.6~55                    | 2.3~10      | 0~0.7       |
| CFM-5020B-275-416-22 | 0.6~55                    | 2.3~10      | 0~0.7       |

REVISION HISTORY

| rev. | description                       | date       |
|------|-----------------------------------|------------|
| 1.0  | initial release                   | 10/18/2021 |
| 1.01 | added PWM signal versions         | 05/19/2022 |
| 1.02 | logo, datasheet style update      | 08/12/2022 |
| 1.03 | added new models                  | 01/26/2024 |
| 1.04 | CUI Devices rebranded to Same Sky | 09/12/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**sameskydevices.com**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Same Sky:](#)

[CFM-5020B-130-235](#) [CFM-5020B-130-235-20](#) [CFM-5020B-145-323](#) [CFM-5020B-145-323-20](#) [CFM-5020B-160-385](#)  
[CFM-5020B-160-385-20](#) [CFM-5020B-130-235-22](#) [CFM-5020B-145-323-22](#) [CFM-5020B-160-385-22](#) [CFM-5020B-275-](#)  
[416](#) [CFM-5020B-245-306](#) [CFM-5020B-275-416-20](#) [CFM-5020B-230-217-20](#) [CFM-5020B-245-306-22](#) [CFM-5010B-](#)  
[155-313-20](#) [CFM-5020B-275-416-22](#) [CFM-5010B-155-313](#) [CFM-5010B-170-361-22](#) [CFM-5020B-260-367-20](#) [CFM-](#)  
[5020B-230-217-22](#) [CFM-5010B-135-215-22](#) [CFM-5010B-170-361](#) [CFM-5020B-230-217](#) [CFM-5010B-135-215](#) [CFM-](#)  
[5020B-260-367-22](#) [CFM-5010B-135-215-20](#) [CFM-5010B-155-313-22](#) [CFM-5010B-170-361-20](#) [CFM-5020B-260-367](#)  
[CFM-5020B-245-306-20](#)