

# STANDARD KEYBOARD

## 104/105-Key Keyboard

### FKB4726 SERIES



#### ■ FEATURES

- PC99 compatible (PS/2 connector)
- Windows®95 keyboard function
- Excellent operation
  - Sharp tactile feedback
  - Curved keyswitch panel
  - Full-travel 3.8 mm (0.039 in.) keystroke, 55 g operating force (2.112 oz.), 20 g (0.704 oz.) tactile response
- High quality and reliability

#### ■ MAIN APPLICATIONS

- Desktop type personal computer
- Workstation

#### ■ DESCRIPTION

- With enclosure and interface cable
- Light gray color keys and enclosure

# FKB4726 SERIES

## ■ SPECIFICATIONS

| Item        |                       | Specification   |
|-------------|-----------------------|---|
|             |                       | FKB4726 Series  |
| Mechanical  | Number of Keys        | (1) U.S. : 104 keys<br>(2) Europe : 105 keys                              |
|             | Key Switch Type       | Membrane switch   |
|             | Keytop                | Rectangular cylindrical, Curved sculptured                                |
|             | Operating Force       | 55 gf $\pm$ 25 gf (1.936 $\pm$ 0.88oz.)                                   |
|             | Stroke                | 3.8 mm $\pm$ 0.5 mm (0.149 in. $\pm$ 0.019 in.)                           |
|             | Tactile               | 20 gf typ.(0.704oz.), Sharp   |
|             | Operating Life        | 30 M operations min.  |
|             | Tilt                  | 2 levels  |
| Electrical  | Power Supply          | +5 V $\pm$ 0.25 V DC, 100 mA max.   |
|             | Interface             | Serial transmission (clock synchronous type)<br>PS/2 compatible           |
|             | Interlock             | F-key rollover  |
|             | Connector             | Mini-DIN 6 pin  |
| Environment | Operating Temperature | +10 to 50°C   |
|             | Storage Temperature   | -10 to 60°C   |
|             | Humidity              | 90% RH max. at +40°C max. inversely proportional change to 50% RH at 60°C |

Discontinued


# FKB4726 SERIES

## ■ PART NUMBERS

| Parts Number | Number of Keys | Key Arrangement | Connector               | Notes             |
|--------------|----------------|-----------------|-------------------------|-------------------|
| FKB4726-601  | 104            | U.S.            | PS/2, 6-pin<br>Mini-DIN | PC99 No logo      |
| FKB4726-651  | 104            | U.S.            |                         | PC99 Fujitsu logo |
| FKB4726-602  | 105            | U.K.            |                         | PC99 No logo      |
| FKB4726-603  |                | German          |                         |                   |
| FKB4726-604  |                | French          |                         |                   |
| FKB4726-605  |                | Italian         |                         |                   |
| FKB4726-606  |                | Spanish         |                         |                   |
| FKB4726-607  |                | Swedish         |                         |                   |
| FKB4726-608  |                | Swiss           |                         |                   |


## ■ CONNECTOR PIN ASSIGNMENT

Mini-DIN 6 pin




| Pin number | Signal name |
|------------|-------------|
| 1          | Data        |
| 2          | —           |
| 3          | GND (SG)    |
| 4          | +5 V        |
| 5          | Clock       |
| 6          | —           |
| SHELL      | GND (FG)    |

## ■ OPERATING FORCE AND TRAVEL CHARACTERISTICS

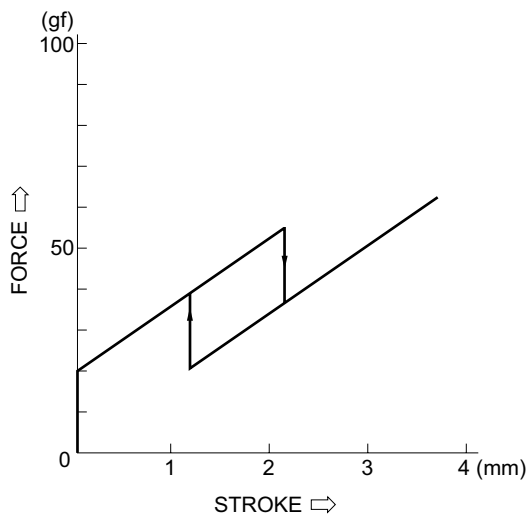


# FKB4726 SERIES

## DIMENSIONS

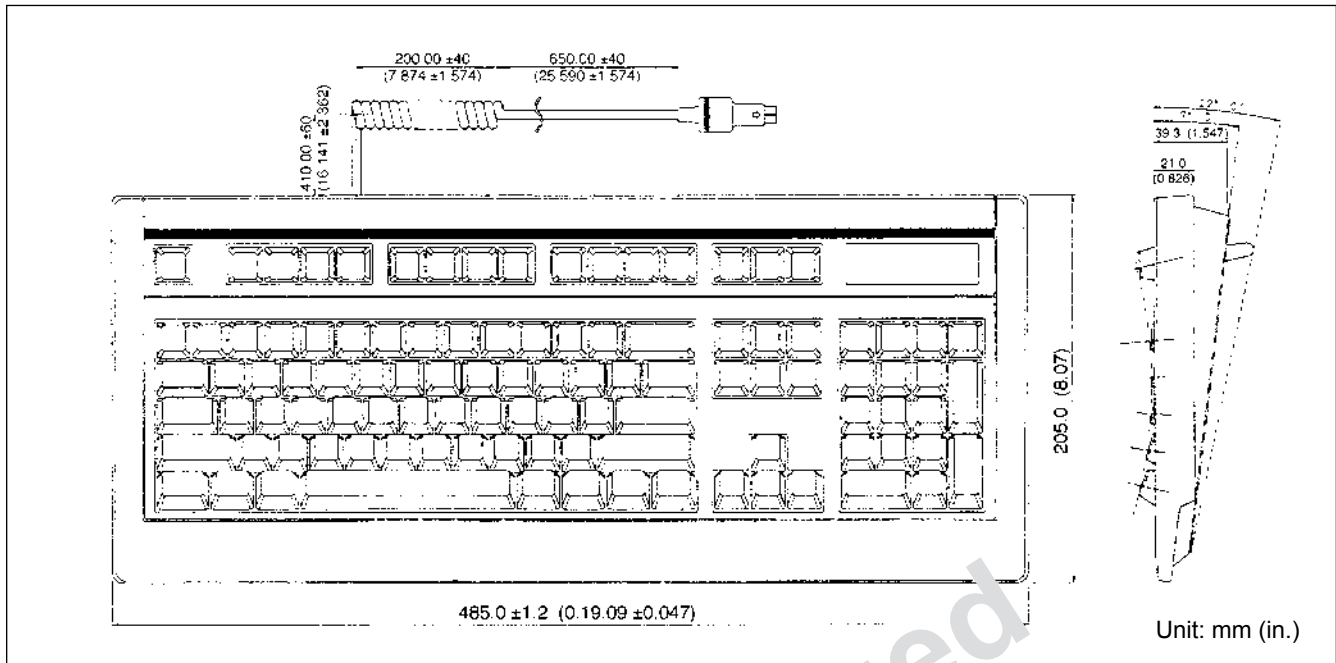


## KEY LAYOUT

U.S.

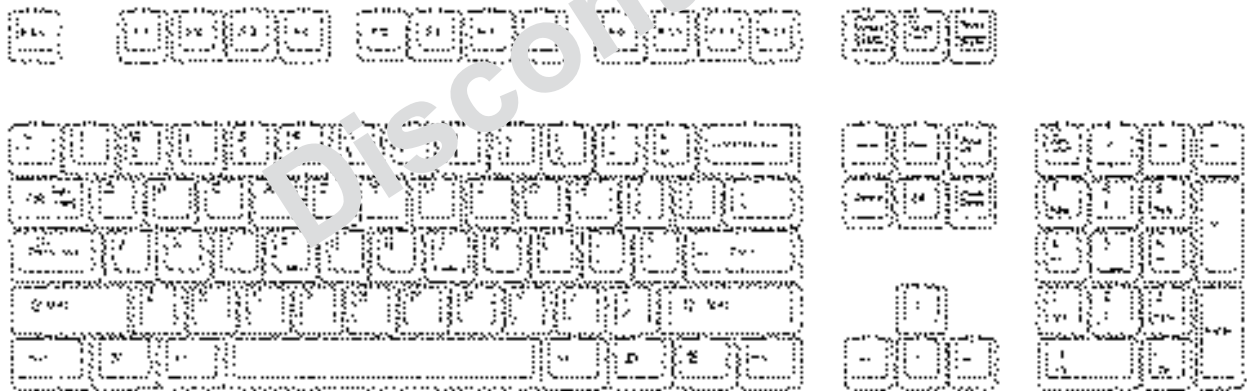


U.K.

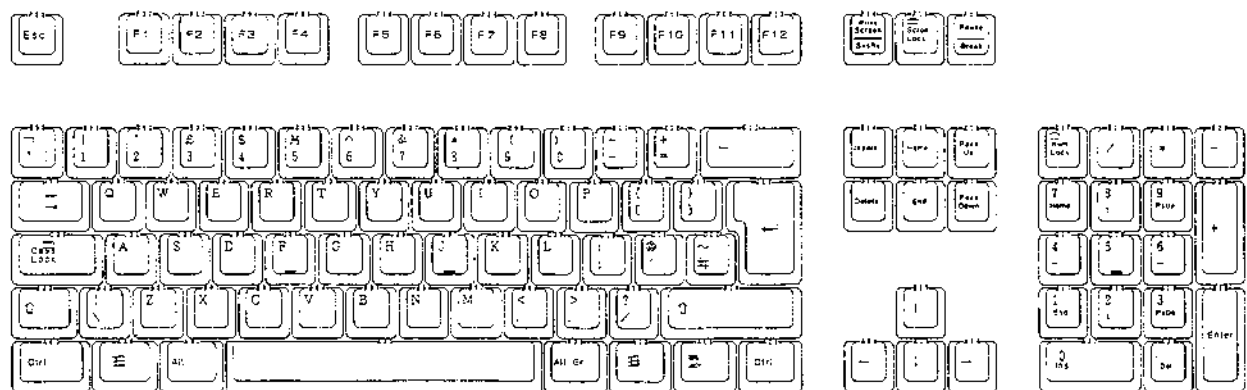


# FKB4726 SERIES


## German

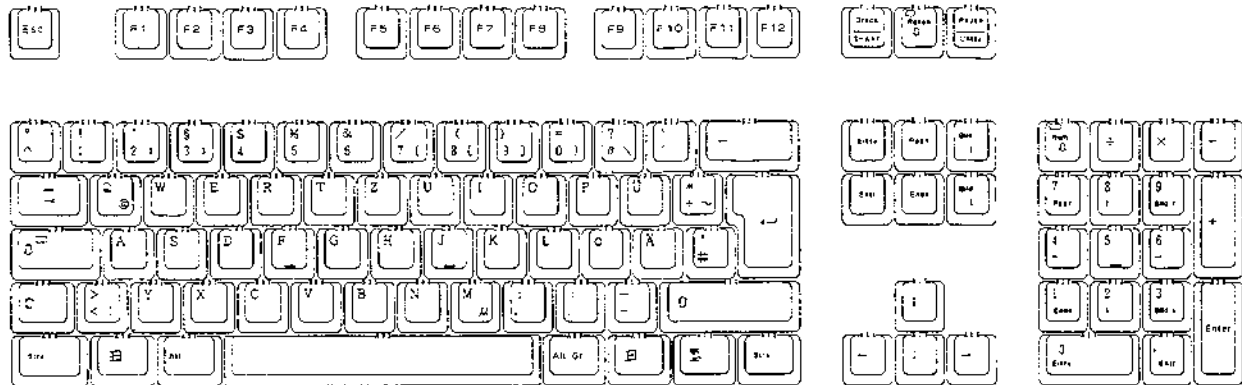

French

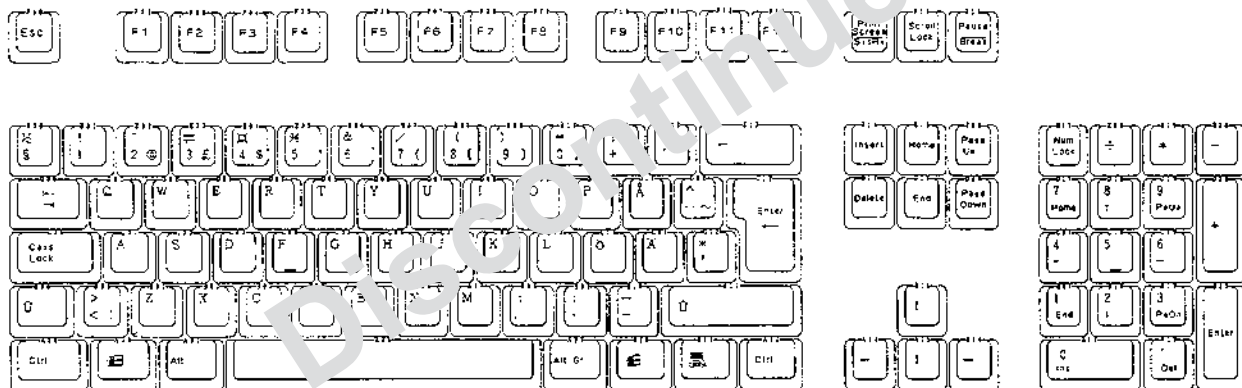


Italian

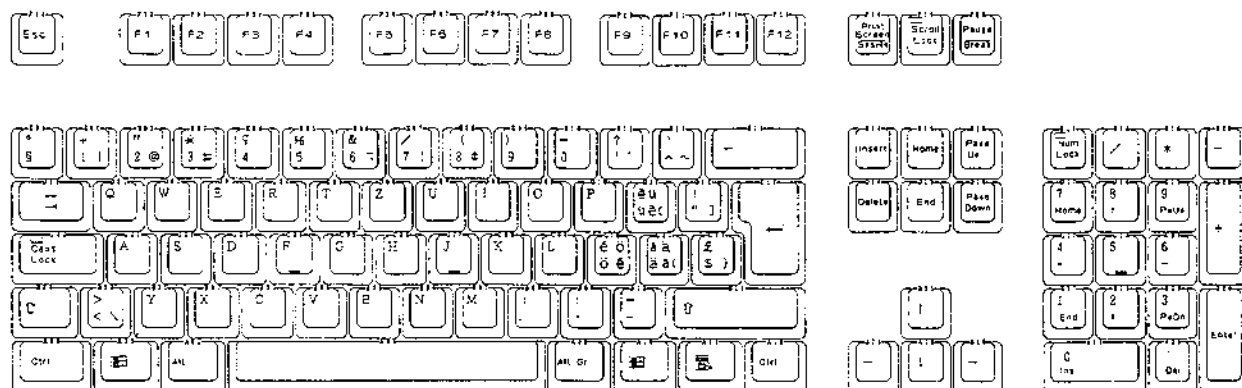


# FKB4726 SERIES


Spanish

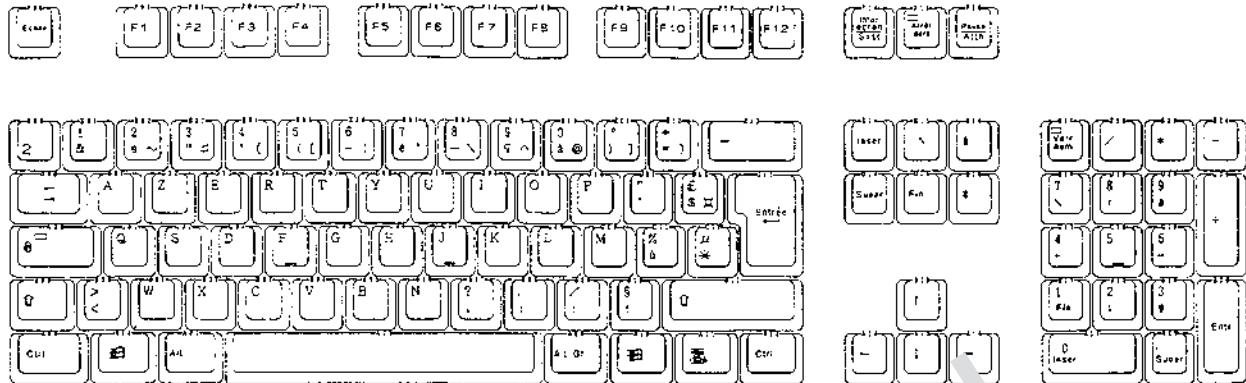

## Swedish

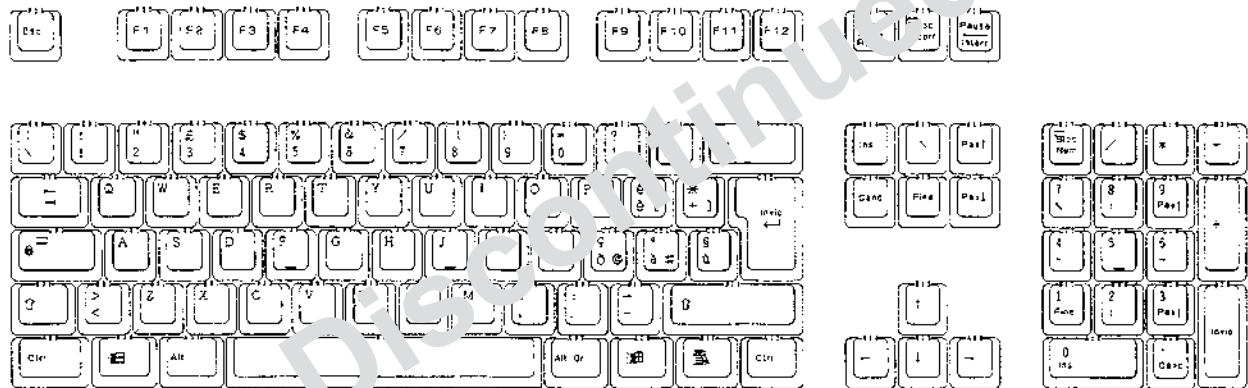

## Swiss

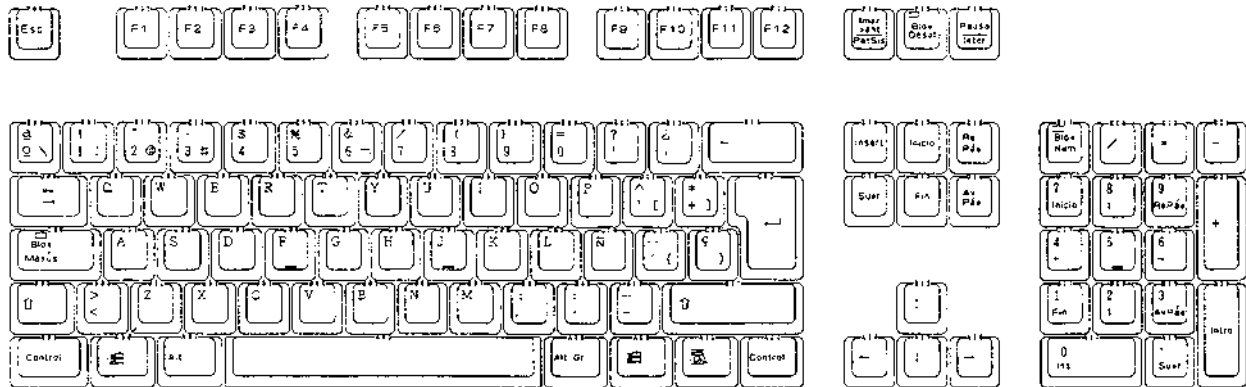

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevice/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcsl@fcal.fujitsu.com](mailto:fcsl@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. August 20, 2009

Discontinued

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCL Components:](#)

[FKB4726-651](#) [FKB4726-601](#)