

SIGNAL RELAY 2 POLES - 2A HIGH ISOLATION WIDE CONTACT GAP

FTR-C2 Series

RoHS Compliant

■ FEATURES

- DPDT 2A
- Contact gap: More than 2.0mm
- Conforms to IEC60950 / EN60950 / UL1950 / CSA C22.2 No.950 Working voltage 250V
- · Insulation:

Clearance 2.0mm (between open contacts, coil and contacts, contact sets) Creepage 2.5mm (between open contacts, coil and contacts, contact sets)

- · High reliability bifurcated contacts
- Power consumption 300mW
- · Latching types available
- RoHS compliant
- Plastic sealed



■ APPLICATIONS

VoIP, modems, STB, interlock switches etc.

■ PART NUMBERS

[Example] $\underline{\mathsf{FTR-C2}}$ $\underline{\mathsf{G}}$ $\underline{\mathsf{A}}$ $\underline{\mathsf{005}}$ $\underline{\mathsf{G}}$ (a) (b) (c) (d) (e)

(a)	Relay type	FTR-C2 series	
(b)	Contact configuration	C : Through hole type G : Surface mount type	
(c)	Coil type	A : Standard type B : Latching type	
(d)	Coil rated voltage	005 : 324VDC Please refer to coil rating table	
(e)	Contact material	G : Gold plated silver palladium (stationary contact) Silver palladium (movable contact)	

Remarks: Actual marking on relay would not carry code FTR and be as below:

Ordering code: FTR-C2CA012G Actual marking: C2CA012G

Note: FTR-C2 series available in tube packaging only.

1

■ SPECIFICATIONS

		Specific			
Item			Non-latching	Latching	Remarks/Conditions
		FTR-C2()A	FTR-C2()B		
Contact	act Configuration		2c (2 F	orm C)	
Data	Construction		Bifurcated		
	Material		Gold plated silver pallad		
			Silver palladium (
	Resistance (initi	al)	Max. 150mΩ		At 1A, 6VDC
	Contact rating		0.3A, 125VAC/1A, 30VDC		Resistive
	Max. switching	voltage	250VAC/	/220VDC	
	Max. switching	power	62.5VA	4/30W	
	Max. carrying cu	urrent	2.	A	
	Min. switching lo	pad *1	0.01mA, 10mVDC		Reference
Coil	Rated power		300mW	150mW	
	Operate power		169mW	85mW	
	Pulse width		-	Min. 20ms	
	Operating temp	erature range	-40°C to	-+85°C	No frost
Time			Max.	15ms	Without bounce
	Release (at nominal voltage)		Max.	15ms	Without bounce
Life	Mechanical		Min. 10 x 10 ⁶ operations		
	Electrical (resist	ive)	Min. 100 x 10 ³ operations at 0.3A, 125VAC/1A, 30VDC		
Insulation			000ΜΩ	At 500VDC	
	D: 1	Open contacs	1,500VAC (50/60Hz) 1min.		
	Dielectric strength	Adjacent contacts	1,500VAC (50/60Hz) 1min.		
		Contacts to coil	2,000VAC (50/60Hz) 1min.		
	Surge strength	Contacts to coil	2,500V, 2 x 10µs standard wave		
	Clearance	Open contacts	2.0mm		
		Adjacent contacts	2.0mm		
		Contacts to coil	2.0mm		
		Open contacts	2.0mm		
	Creepage	Adjacent contacts	2.0mm		
		Contacts to coil	2.5mm		
Other		Minomontinus	40 t- EE t 40 t- '	de enemitted - 4 CC-	Coil ON/OFF, 3 axis,
	Vibration resistance	Misoperation>1µs	10 to 55 to 10Hz single amplitude 1.65mm		total 6 cycles
		Endurance	10 to 55 to 10Hz single amplitude 2.5mm		Coil OFF, 3 axis,
					total 6 hours
	Sock resistance	Misoperation>1μs Endurance	Min. 300m/s² (11±1ms) Min. 1,000m/s² (6±1ms)		Coil ON/OFF, 3 axis,
					total 36 operations
					Coil OFF, 3 axis,
			· · ·		total 18 operations
	Dimensions / W	eight	9.85 x 20.05 x 11.4mm / Approximately 3.7g		
	Sealing		RT III (plas	stic sealed)	

^{*1:} Minimujm switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

■ COIL DATA

• Standard (non-latching) type

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance (Ω) ±10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)	Nominal Coil Power (mW)
003	3	30	2.25	0.3	
005	5	83.3	3.75	0.5	200
012	12	480	9.0	1.2	300
024	24	1,920	18.0	2.4	

Latching type

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance (Ω) ±10%	Set Voltage (VDC)	Reset Voltage [*] (VDC)	Nominal Coil Power (mW)
003	3	60	+2.25	-2.25	
005	5	167	+3.75	-3.75	150
012	12	960	+9.0	-9.0	150
024	24	3,840	+18.0	-18.0	

Note: All values in the table are valid for 20°C and zero contact current unless otherwise specified.

■ SAFETY STANDARDS

Туре	Compliance	Contact Rating		
	Flammability: UL 94-V-0 (plastics)			
UL	UL 508	0.3A, 125VAC (resistive)		
	File No. E63615	1A, 30VDC		
CSA	C22.2 No.14	2A, 30VDC		
	File No. LR 40304	0.3A, 110VDC		

Comply with Telcordia specifications and meet BSI, IEC 60950-1:2006 Marking only for UL, CSA $\,$

■ PART NUMBER LIST


Part Number	Contact configuration	Coil Type	Contact Material
FTR-C2CA()G	Through halo	Standard	
FTR-C2CB()G	Through hole	Latching	Gold plated silver palladium (stationary contact)
FTR-C2GA()G	Surface mount	Standard	Silver palladium (movable contact)
FTR-C2GB()G	Surface mount	Latching	

^{*} Specified operate values are valid for pulse wave voltage.


■ DIMENSIONS


Through Hole Type

Dimensions




Schematics (BOTTOM VIEW)






Surface Mount Type


Dimensions



Schematics (TOP VIEW)



•Recommended PCB layout (TOP VIEW)




(): Reference Unit: mm

Notes:

- · Dimensions of the terminals do not include thickness of pre-solder
- Dimensions do not include tolerances. Please ask specification in the case you need tolerances.
- Tolerance of PCB layout: ±0.1 unless otherwise specified.
- +/-: Polarity to apply set voltage, (+)/(-): Polarity to apply reset voltage
- Contacts show de-energized/reset position


■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

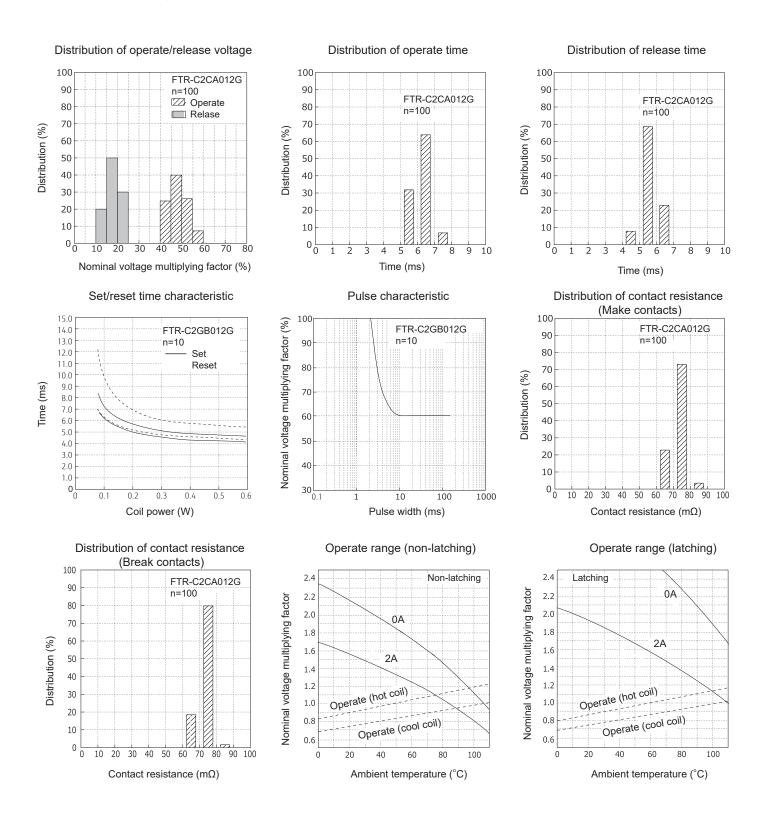

■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)



CAUTIONS

- · All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- · Reflow soldering is not available with standard type.
- · Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- · Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

Notes for latching relays

- Latching relays are shipped in the state reset, but state may change due to shock during transportation or mounting.

 Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence.

 Otherwise, it will or will not operate simultaneously with power activation.
- · Please connect relay coils according to specified polarity.
- · Do not apply voltage to both set coil and reset coil at a time.

GENERAL INFORMATION

1. RoHS Compliance

 All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C

solder bath


Relay must be cooled by air immediately after

soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 350-360°C Duration: Maximum 3 sec.

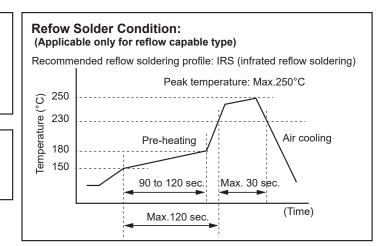

Important notes for reflow soldering

- Temperature shall be measured at PC board upper surface.
- Temperature at PC board upper surface may be changed depending on size of PC board, components mounted on the PC board and/or heating method. Please perform the confirmation test with actual PC board.
- This reflow condition is applicable only for reflow-capable relays. Do not reflow reflow-incapable relays.
- Recommended solder for assembley: Sn-3.0 Ag -0.5 Cu.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

· Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

• Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED Shinagawa Seaside Park Tower 12-4, Higashi-shinagawa 4-chome, Tokyo 140 0002, Japan

Tel: +81-3-3450-1682

Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA. INC. 2055 Gateway Place Suite 480, San Jose, CA 95110 USA Tel: +1-408-745-4900

Europe

FCL COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp, Netherlands

Tel: +31-23-556-0910

Asia Pacific

FCL COMPONENTS ASIA PTE LTD. No. 20 Harbour Drive, #07-01B Singapore 117612

Tel: +65-6375-8560

Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO.,LTD. Unit 1105, Central Park - Jing An, No.329 Heng Feng Road, Shanghai 200070, China

Tel: +86-21-3253 0998

Email: fcsh@fcl-components.com

Hong Kong

FCL COMPONENTS HONG KONG CO., Unit 2313, Seapower Tower, Concordia Plaza, No.1 Science Museum Road, TST, Kowloon, Hong Kong

Tel: +852-2881-8495

Email: fcal@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, expect as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. November 22, 2024.