

## HN Male to HN Male Right Angle Cable Using RG213 Coax




### PE3C2644

#### Configuration

- Connector 1: HN Male
- Connector 2: HN Male Right Angle
- Cable Type: RG213
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

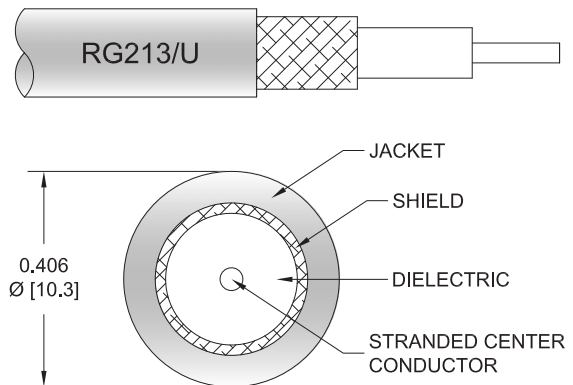

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C2644 HN male to HN male right angle cable using RG213 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack HN to HN cable assembly has a male to male gender configuration with 50 ohm flexible RG213 coax. The PE3C2644 HN male to HN male cable assembly operates to 1 GHz. The right angle HN interface on the RG213 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

#### Specifications by Frequency

## HN Male to HN Male Right Angle Cable Using RG213 Coax



### PE3C2644

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	1000	MHz	
PE3C2644	Custom Lengths Available	Insertion Loss (Typ.)	0.011	0.022	0.03	0.053	0.08	dB/ft	
			0.04	0.08	0.1	0.18	0.27	dB/m	
PE3C2644-24	24 inch	Insertion Loss (Typ.)	0.33	0.35	0.36	0.41	0.46	dB	0.576
PE3C2644-36	36 inch	Insertion Loss (Typ.)	0.34	0.37	0.39	0.46	0.54	dB	0.677
PE3C2644-48	48 inch	Insertion Loss (Typ.)	0.35	0.39	0.42	0.52	0.62	dB	0.778
PE3C2644-60	60 inch	Insertion Loss (Typ.)	0.36	0.41	0.45	0.57	0.7	dB	0.879
PE3C2644-72	72 inch	Insertion Loss (Typ.)	0.37	0.44	0.48	0.62	0.78	dB	0.98

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
 Loss due to Connector 2: 0.2 dB  
 Base Weight: 0.474 pounds  
 Additional Weight per Inch: 0.00842 pounds

## Mechanical Specifications

### Cable Assembly

Weight 0.474 lbs [215 g]

### Cable

Cable Type RG213  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PE  
 Number of Shields 1  
 Shield Layer 1 Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.405 in [10.29 mm]

## HN Male to HN Male Right Angle Cable Using RG213 Coax



### PE3C2644

#### Connectors

Description	Connector 1	Connector 2
Type	HN Male	HN Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum

#### Environmental Specifications

Operating Range Temperature -25 to +70 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## HN Male to HN Male Right Angle Cable Using RG213 Coax



### PE3C2644

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3C2644**

**- xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C2644-12 = 12 inches long cable  
PE3C2644-100cm = 100 cm long cable


HN Male to HN Male Right Angle Cable Using RG213 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [HN Male to HN Male Right Angle Cable Using RG213 Coax PE3C2644](https://www.pasternack.com/hn-male-to-hn-male-cable-using-rg213-pe3c2644-p.aspx)

URL: <https://www.pasternack.com/hn-male-to-hn-male-cable-using-rg213-pe3c2644-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C2644 CAD Drawing
HN Male to HN Male Right Angle Cable Using RG213 Coax

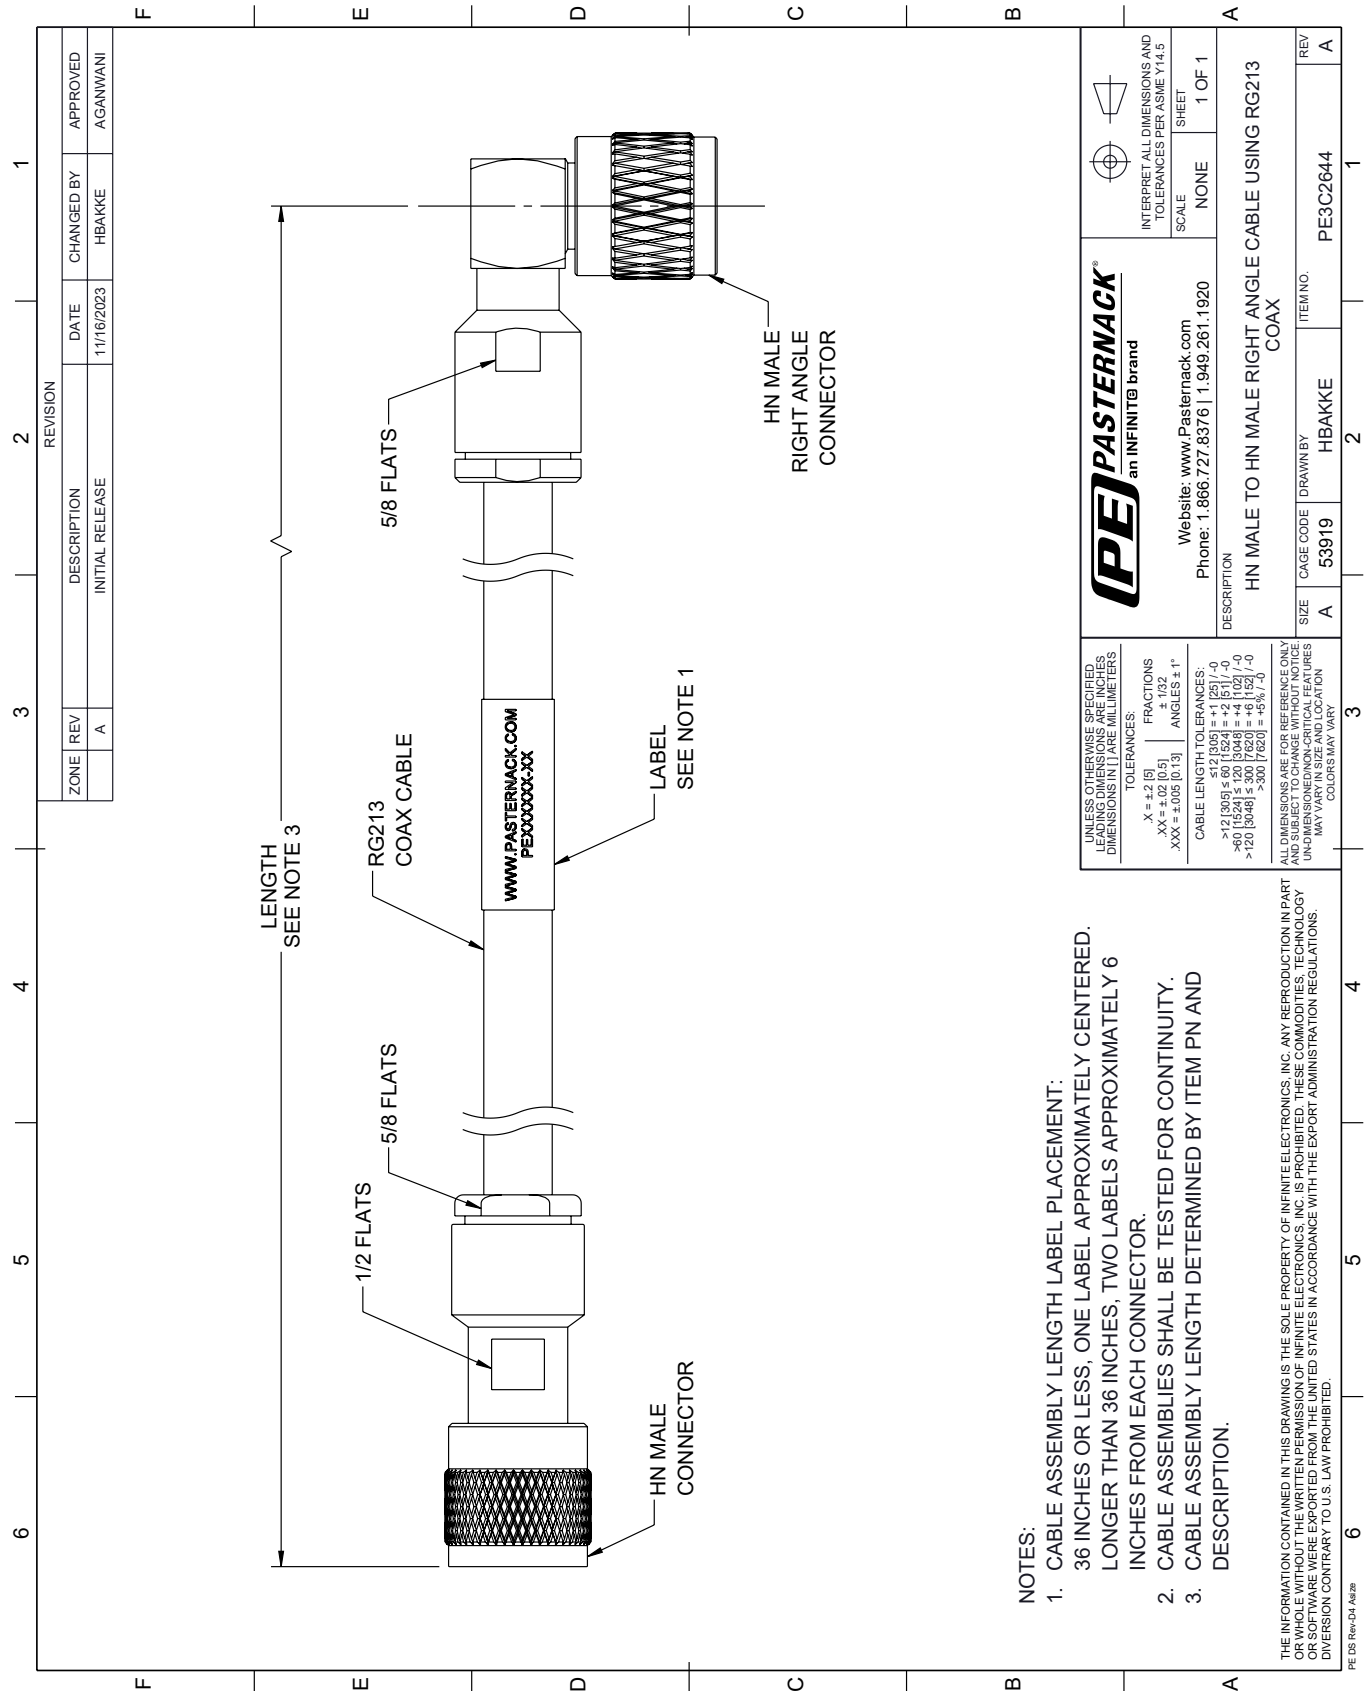

- NOTES:
- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
  - 2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
  - 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

<b>PE PASTERNAK</b> an INFINITI® brand		Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1
UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, DIMENSIONS IN [ ] ARE MILLIMETERS TOLERANCES: X = ±.2 [5] .XX = ±.02 [0.5] .XXX = ±.005 [0.13] FRACTIONS: ± 1/32 ANGLES: ± 1° CABLE LENGTH TOLERANCES: >12 [305] ≤ 60 [1524] = ±.125 [-0 >60 [1524] ≤ 120 [3048] = ±.125 [-0 >120 [3048] ≤ 300 [7620] = ±.125 [-0 ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.		DESCRIPTION HN MALE TO HN MALE RIGHT ANGLE CABLE USING RG213 COAX	REV A
SIZE A	CAGE CODE 53919	DRAWN BY HBAKKE	ITEM NO. PE3C2644

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pasternack:](#)

[PE3C2644-72](#)