

## 4.1/9.5 Mini DIN Male to 7/16 DIN Male Right Angle Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components

### PE3C8288-100CM




#### Configuration

- Connector 1: 4.1/9.5 Mini DIN Male
- Connector 2: 7/16 DIN Male Right Angle
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

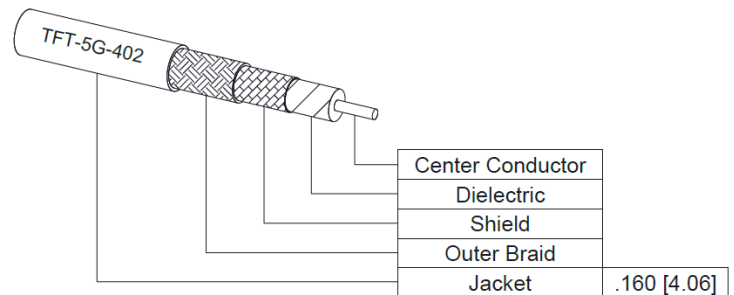

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

#### Description

Pasternack's PE3C8288-100CM 4.1/9.5 Mini DIN male to 7/16 DIN male right angle 100 cm cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 4.1/9.5 Mini DIN to 7/16 DIN cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3C8288-100CM 4.1/9.5 Mini DIN male to 7/16 DIN male cable assembly operates to 3 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle 7/16 DIN interface on the TFT-5G-402 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description                                | Minimum | Typical | Maximum | Units |
|--------------------------------------------|---------|---------|---------|-------|
| Frequency Range                            | DC      |         | 3       | GHz   |
| VSWR                                       |         |         | 1.4:1   |       |
| Velocity of Propagation                    |         | 76      |         | %     |
| RF Shielding                               | 80      |         |         | dB    |
| Passive Intermodulation                    |         |         | -160    | dBc   |
| IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz |         |         |         |       |

## 4.1/9.5 Mini DIN Male to 7/16 DIN Male Right Angle Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components



### PE3C8288-100CM

#### Electrical Specifications

| Description | Minimum | Typical     | Maximum | Units        |
|-------------|---------|-------------|---------|--------------|
| Capacitance |         | 26.7 [87.6] |         | pF/ft [pF/m] |

#### Specifications by Frequency

| Description           | F1   | F2   | F3  | F4   | F5  | Units |
|-----------------------|------|------|-----|------|-----|-------|
| Frequency             | 0.1  | 0.25 | 0.5 | 1    | 3   | GHz   |
| Insertion Loss (Typ.) | 0.34 | 0.41 | 0.5 | 0.61 | 0.9 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.12 dB for the right angle connector.

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 1.25 in [31.75 mm]

##### Cable

Cable Type TFT-5G-402  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PTFE  
 Number of Shields 2  
 Jacket Material FEP, Blue  
 Jacket Diameter 0.16 in [4.06 mm]  
 One Time Minimum Bend Radius 0.75 in [19.05 mm]

#### Connectors

| Description                        | Connector 1           | Connector 2               |
|------------------------------------|-----------------------|---------------------------|
| Type                               | 4.1/9.5 Mini DIN Male | 7/16 DIN Male Right Angle |
| Impedance                          | 50 Ohms               | 50 Ohms                   |
| Configuration                      | Straight              | Right Angle               |
| Contact Material and Plating       | Brass, Silver         | Brass, Silver             |
| Contact Plating Specification      | 5 µm                  | 200 µin                   |
| Dielectric Type                    | PTFE                  | PTFE                      |
| Body Material and Plating          | Brass, Tri-Metal      | Brass, Tri-Metal          |
| Body Plating Specification         | 2 µm                  | 100 µin                   |
| Coupling Nut Material and Plating  | Brass, Nickel         | Brass, Tri-Metal          |
| Coupling Nut Plating Specification | 5 µm                  | 100 µin                   |
| Torque                             | 106 in-lbs 11.98 Nm   | 22.083 ft-lbs 29.95 Nm    |

4.1/9.5 Mini DIN Male to 7/16 DIN Male Right Angle  
Low PIM Cable 100 CM Length Using TFT-5G-402 Coax  
Using Times Microwave Components



**PE3C8288-100CM**

**Environmental Specifications**

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Performance Data**

**How to Order**

Part Number Configuration: **PE3C8288 - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE3C8288-12 = 12 inches long cable  
PE3C8288-100cm = 100 cm long cable

4.1/9.5 Mini DIN Male to 7/16 DIN Male Right Angle Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.1/9.5 Mini DIN Male to 7/16 DIN Male Right Angle Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components PE3C8288-100CM](#)

URL: <https://www.pasternack.com/4.1-9.5-mini-din-male-to-7-16-din-male-low-pim-cable-100-cm-length-using-tft-5g-402-pe3c8288-100cm-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C8288-100CM CAD Drawing

4.1/9.5 Mini DIN Male to 7/16 DIN Male Right Angle Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components

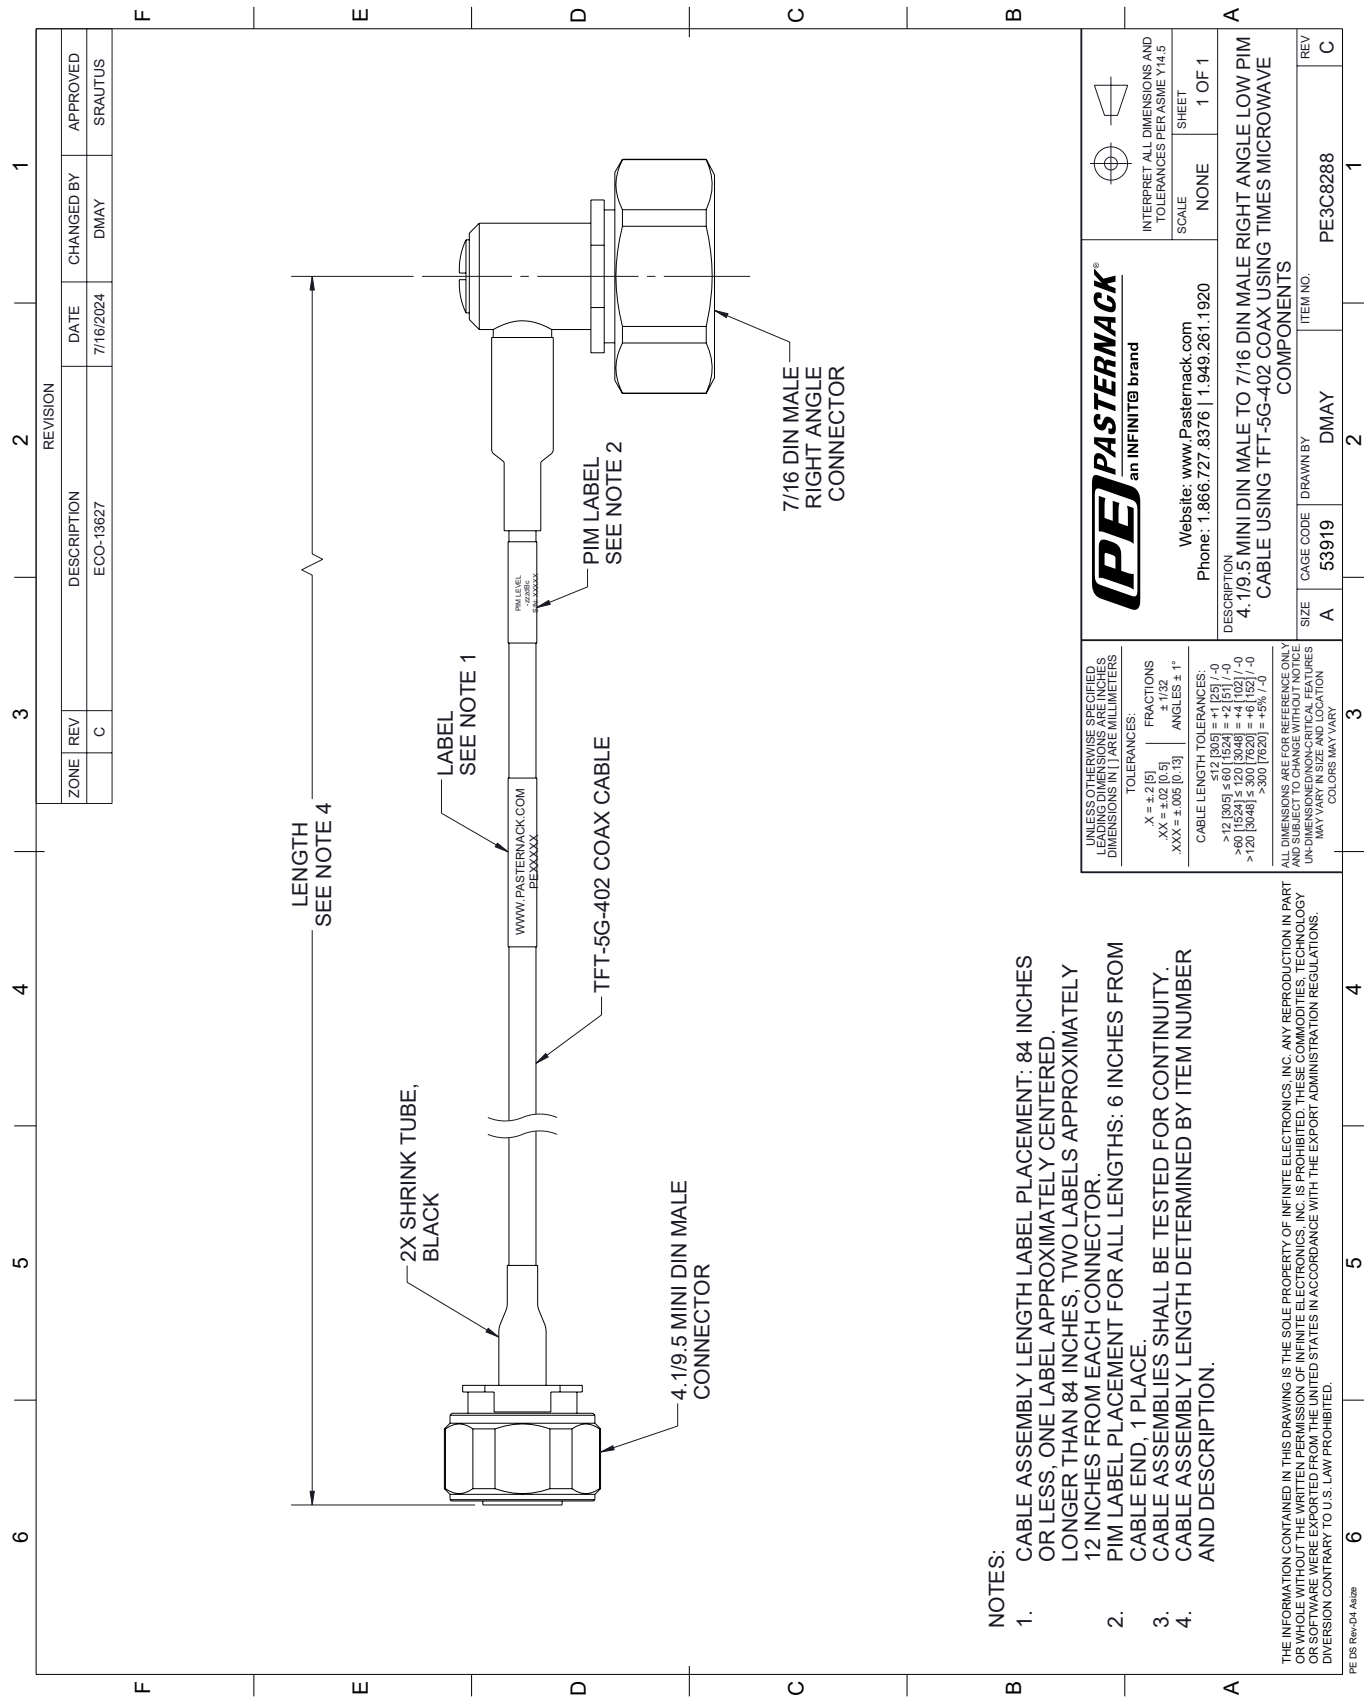

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 84 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 84 INCHES, TWO LABELS APPROXIMATELY 12 INCHES FROM EACH CONNECTOR.
2. PIM LABEL PLACEMENT FOR ALL LENGTHS: 6 INCHES FROM CABLE END, 1 PLACE.
3. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM NUMBER AND DESCRIPTION.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pasternack:](#)

[PE3C8288-100CM](#)