



0.5 Watt RF Load Up to 18 GHz With SMP Female Input Gold Plated Beryllium Copper

RF Terminations Technical Data Sheet

PE6183

Features

- DC to 18 GHz Frequency Range
- VSWR 1.35:1 Max
- Max Power 0.5 Watt (CW)
- SMP Female Coaxial Interface

Applications

- Wireless
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

Description

Pasternack's PE6183 is an RF termination (also called RF load or dummy load) that operates from DC to 18 GHz and handles up to 0.5 Watt (CW). Our SMP termination / load has a female gender. PE6183 SMP load termination offers 1.35:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.35:1	
Input Power (CW)			0.5	Watts

Mechanical Specifications

Size	
Length	0.5 in [12.7 mm]
Width	0.19 in [4.83 mm]
Weight	0.0025 lbs [1.13 g]
Configuration	
Connector	SMP Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 Watt RF Load Up to 18 GHz With SMP Female Input Gold Plated Beryllium Copper PE6183](#)



0.5 Watt RF Load Up to 18 GHz With SMP
Female Input Gold Plated Beryllium Copper

RF Terminations Technical Data Sheet

PE6183

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Insulation	PTFE	
Body	Beryllium Copper	Gold
Housing	Beryllium Copper	Gold

Environmental Specifications

Temperature

Operating Range -45 to +125 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant 12/17/2015

Plotted and Other Data

Notes:

0.5 Watt RF Load Up to 18 GHz With SMP Female Input Gold Plated Beryllium Copper from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 Watt RF Load Up to 18 GHz With SMP Female Input Gold Plated Beryllium Copper PE6183](http://www.pasternack.com/0.5-watts-smp-female-rf-load-up-to-18-ghz-pe6183-p.aspx)

URL: <http://www.pasternack.com/0.5-watts-smp-female-rf-load-up-to-18-ghz-pe6183-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6183 CAD Drawing

0.5 Watt RF Load Up to 18 GHz With SMP Female Input Gold Plated Beryllium Copper

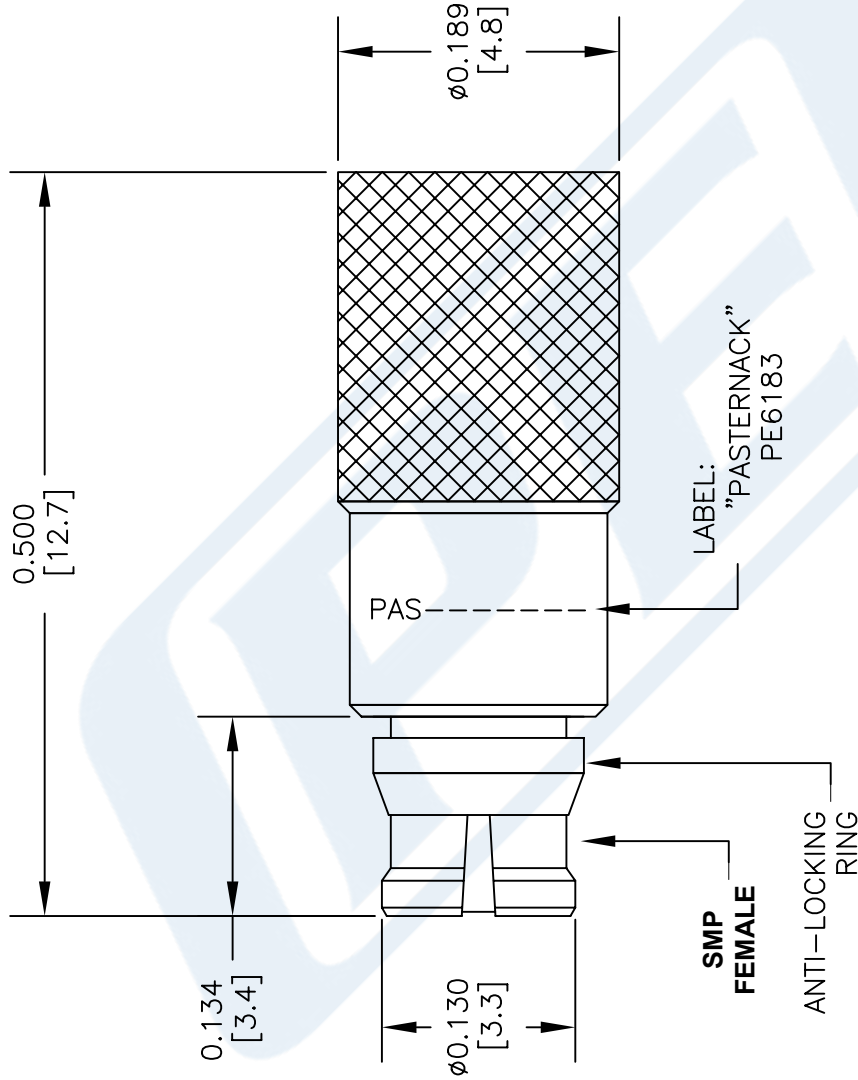

STANDARD TOLERANCES

DECIMAL

.XX ±0.20

.XXX ±0.10

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

DWG TITLE

PE6183

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE

052616

SCALE N/A

SIZE A

3045

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pasternack:](#)

[PE6183](#)