

GLOBAL CONNECTIVITY SOLUTIONS

Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components

LCCA30228-FT2

Configuration

- Connector 1: N Male
- Connector 2: TNC Male
- Cable Type: LMR-195


Features

- Using Times Microwave Components
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity

Applications

- General Purpose
- · Laboratory Use
- Antenna Installations

- PE Jacket
- Low Insertion Loss
- Bend Radius of 2 Inches
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

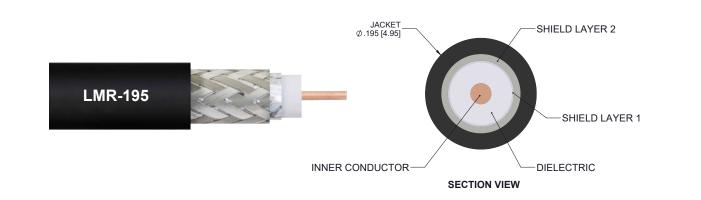

Description

L-com's LCCA30228-FT2 is a low loss N male to TNC male cable assembly using LMR-195 coax, 2 FT with Times Microwave components and ships same-day. The LMR-195 coax of this N cable uses the PE (F) dielectric with a VoP of 80%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to TNC cable assembly has a male to male gender configuration with flexible LMR-195 series coax and operates to 5.8 GHz. The double shield of this N cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. *LMR™ is a trademark of Times Microwave Systems.

Custom versions of this N male to N male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30228-FT2 L-com Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.



Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components



LCCA30228-FT2

Electrical Specifications

Minimum	Typical	Maximum	Units
DC		5.8	GHz
		1.4:1	
	80		%
90			dB
	1.27 [4.17]		ns/ft [ns/m]
	25.4 [83.33]		pF/ft [pF/m]
	0.064 [0.21]		uH/ft [uH/m]
luctor	7.6 [24.93]		Ohms/1000ft [Ohms/Km]
ductor	4.9 [16.08]		Ohms/1000ft [Ohms/Km]
		3,000	Vrms
	DC 90 uctor	DC 80 90 1.27 [4.17] 25.4 [83.33] 0.064 [0.21] uctor 7.6 [24.93]	DC 5.8 1.4:1 80 90 1.27 [4.17] 25.4 [83.33] 0.064 [0.21] uctor 7.6 [24.93] ductor 4.9 [16.08]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units	
Frequency	0.25	0.5	1	2.5	5.8	GHz	
Insertion Loss (Typ.)	0.31	0.36	0.43	0.58	0.8	dB	

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly Length Diameter	24 in [609.6 mm] 0.81 in [20.57 mm]
Weight	0.15 lbs [68.04 g]
Cable Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2	LMR-195 50 Ohms Solid Copper PE (F) 2 Aluminum Tape Tinned Copper Braid
,	



GLOBAL CONNECTIVITY SOLUTIONS

Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components

LCCA30228-FT2

Jacket Material Jacket Diameter

One Time Minimum Bend Radius Repeated Minimum Bend Radius Bending Moment Flat Plate Crush Tensile Strength PE, Black 0.195 in [4.95 mm]

0.5 in [12.7 mm] 2 in [50.8 mm] 0.2 lbs-ft [0.27 N-m] 15 lbs/in [0.27 Kg/mm] 40 lbs [18.14 Kg]

Connectors

Description	Connector 1	Connector 2	
Туре	N Male	TNC Male	
Specification	MIL-STD-348		
Impedance	50 Ohms 50 Ohms		
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold	
Contact Plating Specification	ASTM B488		
Dielectric Type	Teflon	Teflon	
Body Material and Plating	Brass, Tri-Metal	Brass, Silver	
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Silver	
Hex Size	13/16 Inch		

Environmental Specifications

Temperature	
Operating Range	-40 to +85 deg C
Storage Range	-70 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data Notes:

LCCA30228-FT2 REV 1.0 | © 2019 Infinite Electronics, Inc. L-com is a registered trademark of Infinite Electronics, Inc.






Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components

LCCA30228-FT2

How to Order

Example:

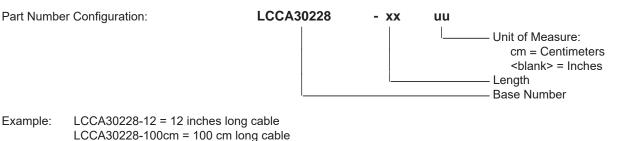


Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Low Loss N Male to TNC Male Cable Assembly using LMR-195 Coax, 2 FT with Times Microwave Components

L-com CAD Drawing

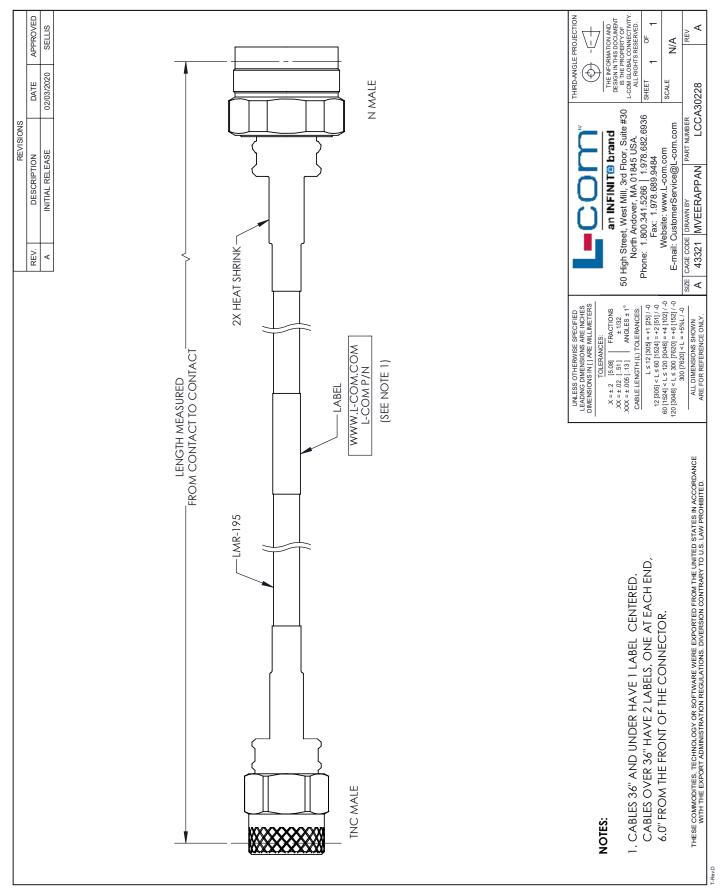

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

infinite Electronics:

LCCA30228-FT2 LCCA31219-FT2