

## **CLP0224FP Open Frame Power Supply**

90-264V<sub>ac</sub> Input; 24V<sub>dc</sub> Output; 200W Output Power



#### **Description**

In a small 2 x 4 inch footprint, the 24V<sub>dc</sub> single-output CLP0224FP open frame power supply delivers greater than 90 percent typical power efficiency and full load output at +50°C. With its small size, the CLP series is specifically designed to handle power challenges associated with tight space and low airflow. Offering a leading 18W/in³ power density in a 1U high, fan-less form factor, the CLP series addresses a broad range of

applications in new products from industrial equipment and communications original equipment manufacturers (OEMs). Higher temperature operation is possible at derated output. The CLP series utilizes a unique design approach at this power level, leveraging zero voltage switching techniques in conjunction with quasi-resonant power factor correction (PFC) circuits. Protection features include overcurrent (OCP), overvoltage (OVP), and overtemperature (OTP).

### **Applications**

- Industrial equipment
- Telecommunications equipment

#### **Features**

- Compact size 50.8 mm x 101.6 mm x 37.2 mm (2 in x 4 in x 1.46 in) with density of 18 W/in<sup>3</sup>
- Universal AC Input Range (90 264VAC)
- Output voltage of 24V (adjustable ±5%)
- Maximum output current of 8.3A@ 24Vout (200W)
- High efficiency (93% at Full Load, 230VAC in)
- Full load capability at 50°C and 1m/s airflow with derating at higher temperatures or lower airflows
- Output overcurrent protection (non-latching)
- Overtemperature protection
- Output overvoltage protection
- Up to 11ms of holdup time at 200W out

- Active power factor corrected input
- Conducted EMI meets CISPR32 (EN55032) and FCC Class B requirements
- Compliant to RoHS II EU "Directive 2011/65/EU" and amended Directive (EU) 2015/863.
- Compliant to REACH Directive (EC) No 1907/2006
- UL and cUL approved to UL/CSA62368-1, TUV (EN62368-1), CE Mark (for LVD) and CB Report available
- ISO\*\* 9001 and ISO 14001 certified manufacturing facilities

#### **FOOTNOTES**

<sup>\*</sup> UL is a registered trademark of Underwriters Laboratories, Inc.

<sup>&</sup>lt;sup>†</sup>CSA is a registered trademark of Canadian Standards Association.

<sup>&</sup>lt;sup>‡</sup>VDE is a registered trademark of Verband Deutscher Elektrotechniker e..V.

<sup>\*\*</sup> ISO is a registered trademark of the International Organization of Standard



## **Technical Specifications**

### **Absolute Maximum Ratings**

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress rating only, functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

Parameter	Device	Min	Max	Unit
Input Voltage - Continuous	All	90	264	V <sub>ac</sub>
Operating Ambient Temperature (see Thermal Considerations section)	All	-40	85	°C
Storage Temperature	All	-40	85	°C
Humidity (non-condensing)	All	5	95	%
Altitude	All		5000	m
Isolation Voltage – Input to output	All		3000	V <sub>ac</sub>
Input to safety ground	All		1500	Vac
Outputs to safety ground	All		50	V <sub>ac</sub>

## **Electrical Specifications**

Parameter	Device	Min	Тур	Max	Unit
Operating Input Voltage	All	90	115/230	264	Vac
Input Source Frequency	All	47	50/60	63	Hz
Input Current (V <sub>IN</sub> = 90V <sub>ac</sub> )	All			4	A <sub>RMS</sub>
Input Power Factor (115VAC or 230VAC in at full load)	All exceptZ02A	0.95			
	Z02A	0.92			
Inrush Transient Current (V <sub>IN</sub> = 264V <sub>ac</sub> , T <sub>amb</sub> = 25°C)	All			100	A Peak
Leakage Current to earth ground (V <sub>IN</sub> = 264V <sub>ac</sub> )	All			2	mA
Output Voltage Setpoint	All		24		V <sub>dc</sub>
Output Voltage Tolerance (due to set point, temperature variations, load and line regulation)	All	-3		3	%
Output Voltage Adjustment Range	All	22.8		25.2	$V_{dc}$
Output Load Regulation	All			1	$%V_{out}$
Output Line Regulation	All			0.5	$%V_{out}$
Output Ripple and Noise – measured with 0.1µF ceramic capacitor in parallel with 10µF electrolytic capacitor, at 25°C¹ Peak-to-peak (20MHz Bandwidth)	All			360	$mV_{p-p}$
Dynamic Load Response – 50% to 100% load transient, 1A/µs slew rate Output voltage deviation Settling Time	All All			5% 500	% µs
Output Current	All exceptZ02A	0		8.33	$A_{dc}$
	Z02A	0		6.25	A <sub>dc</sub>
Output Current Limit Inception	All	110		160	% I <sub>o,max</sub>
Maximum Output Capacitance	All			3000	μF

<sup>&</sup>lt;sup>1</sup>Below -25°C, output ripple may exceed the specified level. Specification will be met after warm up period of 15s. Page 2



## **Electrical Specifications** (continued)

Parameter	Device	Min	Тур	Max	Unit
Efficiency at 25°C:					
V <sub>IN</sub> = 230V <sub>ac</sub> , 20% load	All exceptZ02A		88.1		%
50% load	All exceptZ02A		92.7		%
100% load	All exceptZ02A		93.1		%
V <sub>IN</sub> = 115V <sub>ac</sub> , 20% load	All exceptZ02A		88.6		%
50% load	All exceptZ02A		91.5		%
100% load	All exceptZ02A		90.8		%
V <sub>IN</sub> = 230V <sub>ac</sub> , 20% load	Z02A		85.7		%
50% load	Z02A		91.5		%
100% load	Z02A		93.1		%
V <sub>IN</sub> = 115V <sub>ac</sub> , 20% load	Z02A		87.6		%
50% load	Z02A		91.5		%
100% load	Z02A		91.4		%
Holdup Time – V <sub>IN</sub> = 115V <sub>ac</sub> , 100% load	All	11			ms
V <sub>IN</sub> = 230V <sub>ac</sub> , 100% load	All	11			ms

## **General Specifications**

Parameter	Device	Symbol	Тур	Unit
Calculated Reliability based on Telcordia SR-332 Issue 2: Method 1 Case 3 ( $V_{IN}$ =230 $V_{ac}$ , $I_o$ = 8.34A, $T_A$ = 40°C, airflow 200LFM, 90% confidence)	All	FIT MTBF	287.3 3,480,997	10º/Hours Hours
Weight	All		198 7.0	g (oz.)

## **Feature Specifications**

Parameter	Device	Min	Тур	Max	Unit
Output Voltage Rise Time (from 10 to 90% of final value)	All		20		ms
Delay from Input being applied to all outputs being in regulation	All		2000		ms
Output Overvoltage Protection	All	28.5		33.5	V <sub>dc</sub>
Input Undervoltage lockout <sup>2</sup>					
Turn-on Threshold	All	75	80	90	V <sub>ac</sub>
Turn-off Threshold	All	65	75	88	V <sub>ac</sub>

 $<sup>^{2}\</sup>text{The undervoltage lockout thresholds vary with output load current level – decreasing as the load goes down$ 



## **Environmental Specifications**

Parameter	Device	Specification/Test
Conducted Emissions	All	CISPR32 (EN55032) Class A with 3dB margin
Radiated Emissions	All	CISPR32 (EN55032) to comply with system enclosure
ESD	All	IEC61000-4-2, Level 3
Radiated Susceptibility	All	IEC61000-4-3, Level 2
Electrical Fast Transient Common Mode	All	IEC61000-4-4, Level 3
Surge Immunity	All	IEC61000-4-5, Level 3
Conducted RF Immunity	All	IEC61000-4-6, Level 3
Input Voltage Dips	All	Output stays within regulation for either ½ cycle interruption or 25% dip from nominal line for 1 second
Input Harmonics	All	IEC61000-3-2
Shock and Vibration	All	IPC-9592B

## **Safety Specifications**

Parameter	Device	Specification
Dielectric Withstand Voltage (between input and output)	All	Minimum of 4,250V <sub>dc</sub> for 1 minute
Insulation Resistance (between input and output)	All	Minimum of 5 M $\Omega$
Safety Standards	All	Class 1, IEC62368, EN62368, with the following deviations: Nemko, UL 62368 (Recognized Component), cUL (Canadian Approval by UL)



#### **Characteristic Curves**

The following figures provide typical characteristics for the CLP0224 power supply.




Figure 1. Power Supply Efficiency versus Output Current.




Figure 3. Typical output ripple and noise  $(V_{IN} = 230V_{ac}, 100\% \text{ load }).$ 




Figure 5. Typical Start-up ( $V_{IN}$  = 115 $V_{ac}$ , Full Load).




Figure 2. Derating Output Current versus Ambient Temperature and Airflow. Data shown for 115VAC in, at 230VAC in derating is the same or better. For derating at other input voltages, consult the OmniOn Technical representative.




Figure 4. Transient Response to Dynamic Load Change from 50% to 100% at V<sub>IN</sub> = 230V<sub>ac</sub>.




Figure 6. Typical Start-up ( $V_{IN} = 230V_{ac}$ , Full load).



### **Characteristic Curves** (Continued)

The following figures provide typical characteristics for the CLP0224 power supply.

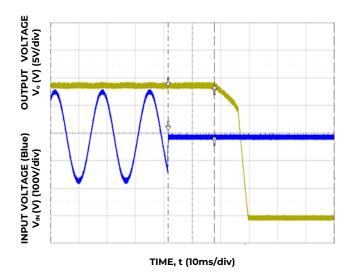


Figure 7. Typical Hold-up waveforms – all except ..Z02A version ( $V_{\text{IN}}$  = 115V, 100% load).




Figure 9. Typical Hold-up waveforms – ..Z02A version ( $V_{IN}$  = 115V, 100% load).




Figure 8. Typical Hold-up waveforms - all except ..Z02A version ( $V_{IN}$  = 115V, 100% load). ( $V_{IN}$  = 230V, 100% load).




Figure 10. Typical Hold-up waveforms -..Z02A version ( $V_{\rm IN}$  = 230V, 100% load).



#### **Safety Considerations**

The CLP0224 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand- alone product. The power supply meets Class 1, IEC62368-1, EN62368-1, with the appliable national deviations which approved by TUV and UL (Recognized Component) C-UL (Canadian Approval by UL).

#### **Feature Descriptions**

#### On/Off Considerations

The power supply output is available when the AC input is within operating range. No On/Off control is provided.

#### **Output Voltage Adjustment**

The output voltage can be adjusted between 22.8V and 25.2V using a potentiometer on the power supply.




Fig. 11. Diagram showing location of the potentiometer used to adjust the power supply output voltage.

#### **Overcurrent Protection**

To provide protection in a fault condition (output overload), the power supply is equipped with internal current-limiting circuitry and can endure current limiting continuously. At the point of current-limit inception, the unit enters hiccup mode. The power supply operates normally once the output current is brought back into its specified range.

#### **Overvoltage Protection**

Overvoltage protection is a feature of the CLP0224 power supply that protects both the load and the power supply from an output overvoltage condition. When an overvoltage occurs, the power supply shuts down and latches off until the overvoltage condition is removed. It is necessary to recycle the input to restart

the power supply when this protection is activated.

#### **Overtemperature Protection**

The CLP0224 also features overtemperature protection in order to provide additional protection in a fault condition. The power supply is equipped with a thermal shutdown circuit which detects excessive internal temperatures and shuts the unit down. Once the power supply goes into overtemperature shutdown, it will cool before attempting to restart. The overtemperature protection circuit will typically kick in when the unit is operated at 200W output with an ambient temperature of 75°C and 1m/s (200LFM) airflow, when input voltage is 115Vac. At 230Vac, the OTP kicks in at 80°C.

#### Input Undervoltage Lockout

At input voltages below the input undervoltage lockout limit, power supply operation is disabled. The power supply will begin to operate at an input voltage above the undervoltage lockout turn-on threshold.


#### Thermal Considerations

The power supply can be operated in a variety of thermal environments; however sufficient cooling should be provided to ensure reliable operation.

Considerations include ambient temperature, airflow, power supply dissipation and the need for increased reliability. A reduction in the operating temperature of the power supply will result in increased reliability. The thermal data presented here is based on measurements taken in a wind tunnel.

#### Heat Transfer via Convection

Increased airflow through the power supply enhances the heat transfer via convection. Figure 12 shows the preferred airflow direction. Contact your OmniOn technical representative for derating information in




other airflow directions.



Fig. 13. Example arrangement of the CLP0224 for sealed enclosure applications.

Table 1. Output Power Capability when the CLP0224 is operated in a sealed enclosure with thermal pad for conduction cooling.



Thermally Conductive Pad

Operation in a

#### Sealed Enclosure

Ambient Temperature (°C)	Max. Output Power (W)
25	180
40	160
55	130


The CLP0224 power supply can also be operated in a sealed enclosure provided proper means for removing heat from the power supply are used. Figure 13 shows an arrangement where a thermally conductive pad is used to transfer heat from the bottom of the power supply into the enclosure. Under such conditions, the power supply is capable of reduced power operation as shown in Table 1. Note that the Ambient Temperature shown in Table 1 is that outside the sealed enclosure, the CLP0224 may see higher ambient temperatures.




### Mechanical Outline (all except .. Z02A version)


Dimensions are in millimeters.

Tolerances: x.x mm ± 0.5mm [unless otherwise indicated] x.xx mm ± 0.25mm

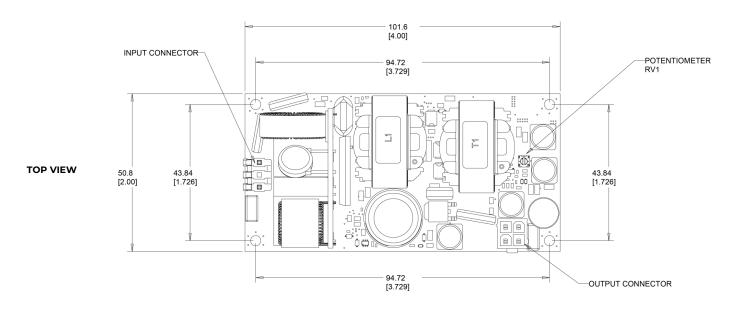

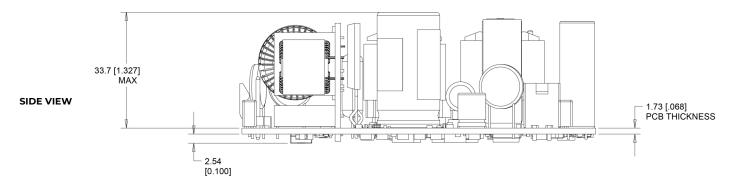

Minimum clearance of 6mm required on bottom of the unit.

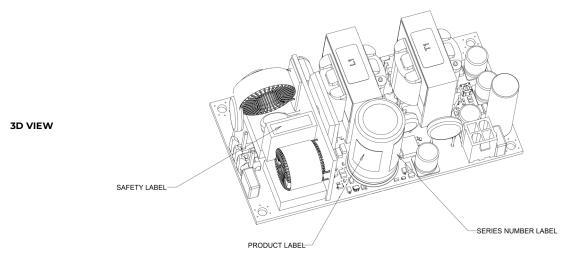




### Mechanical Outline (..Z02A version)


Dimensions are in millimeters.

Tolerances: x.x mm ± 0.5mm [unless otherwise indicated]

x.xx mm ± 0.25mm

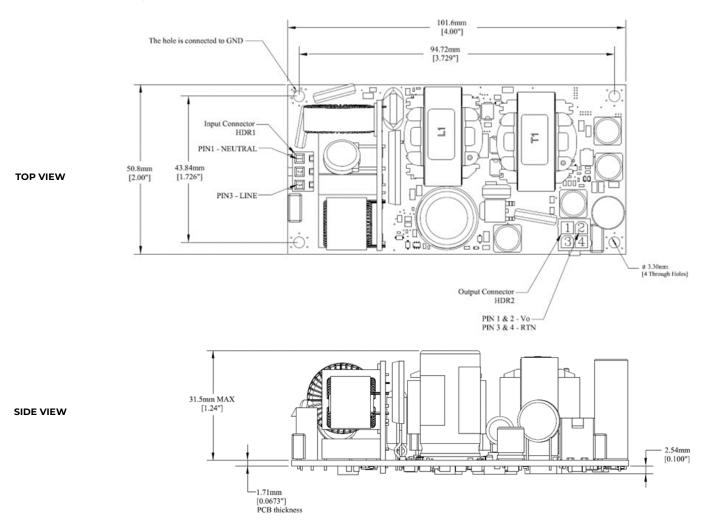

Minimum clearance of 6mm required on bottom of the unit.

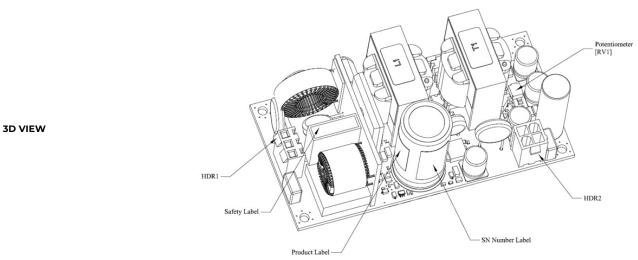



## **Connector Information**

Connector	<b>Connector on Power Supply</b>	<b>Mating Connector</b>
AC Input Connector (HDR1)	Molex 26-50-3030	Molex 09-50-3031
DC Output Connector (HDR2)	Molex 39-28-8040	Molex 39-01-3048

### **Pinout Information**

AC Input Cor	nnector (HDR1)	DC Output Con TE 282856		DC Output Con Molex 39-28-	
Pin 1	Neutral	Pin 1	VO	Pin 1	VO
Pin 2	NC (removed)	Pin 2	RTN	Pin 2	VO
Pin 3	Line			Pin 3	RTN
				Pin 4	RTN



## **Ordering Information**

Please contact your OmniOn Sales Representative for pricing, availability and any optional features.

Device Code	Input Voltage Range	Output Voltage	Output Current	Height	Conformal coating	Temperature Range
CLP0224FPXXXZ01A	90 – 264V <sub>ac</sub>	24.0V <sub>dc</sub>	8.33A	37.97mm	No	-40 to 85°C
CLP0224FPXXXZ02A (small height)	90 – 264V <sub>ac</sub>	24.0V <sub>dc</sub>	6.25A	35.75mm	No	-40 to 85°C
CLP0224FPXXXZ03A (conformal coated)	90 – 264V <sub>ac</sub>	24.0V <sub>dc</sub>	8.33A	37.97mm	Yes (Dip coating with approx. 1mil of Bectron)	-40 to 85°C

Table 2. Device Codes.

#### **Contact Us**

For more information, call us at +1-877-546-3243 (US)

+1-972-244-9288 (Int'l)



# **Change History (excludes grammar & clarifications)**

Revision	Date	Description of the change
9.3	11/24/2021	Updated as per template
9.4	4/18/2023	Corrected Elect. Spec. and Device Code
9.5	5/17/2023	Added 80 Plus Gold emblem (p.1)
9.6	06/22/2023	Graph content corrected Yel to Blue
9.7	11/02/2023	Updated as per OmniOn template
9.8	01/17/2024	Updated images in mechanical outline, Corrected height in Table 2



#### **OmniOn Power Inc.**

601 Shiloh Rd. Plano, TX USA

#### omnionpower.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power. This document does not convey license to any patent or any intellectual property right. Copyright© 2023 OmniOn Power Inc. All rights reserved.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## OmniOn Power:

CLP0224FPXXXZ01A CLP0224FPXXXZ03A CLP0224FPXXXZ02A