

330-001 and 330-002 Pipe Thread Adapters Rotatable Coupling

CONNECTOR DESIGNATORS **A-F-H-L-S** ROTATABLE COUPLING

330 F S 001 M 16 03-5

Product Series — 330
Connector Designator — F
Angle and Profile — S = Straight
Basic Part No. — 001 = External Thread
 002 = Internal Thread
Length Designator (1/2 inch increments: e.g. 5=2.5 inches, Minimum Lengths Table III)
Cable Entry (Table III)
Shell Size (Table I)
Finish (Table II)

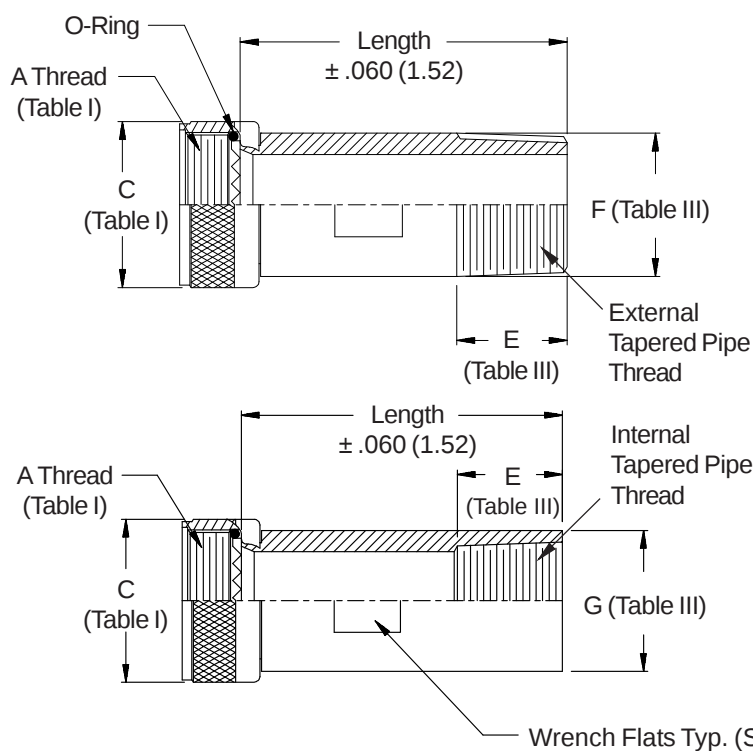


TABLE II: STANDARD FINISHES

GLENAIR SYMBOL	FINISH
B	Cadmium Plate, Olive Drab
C	Anodize, Black
G	Hard Coat, Anodic
M	Electroless Nickel
NF	Cadmium Plate, Olive Drab Over Electroless Nickel

See Back Cover for Complete Finish Information and Additional Finish Options

See inside back cover fold-out or pages 13 and 14 for unabridged Tables I and II.

TABLE III: CABLE ENTRY

Dash No.	Pipe Thread	E	F Dia	G Dia	Length	
					Min	Desig.
01	1/8	.391 (9.9)	.405 (10.3)	.500 (12.7)	1.5 (38.1)	3
02	1/4	.593 (15.1)	.540 (13.7)	.625 (15.9)	1.5 (38.1)	3
03	3/8	.593 (15.1)	.675 (17.1)	.875 (22.2)	1.5 (38.1)	3
04	1/2	.781 (19.8)	.840 (21.3)	1.000 (25.4)	2.0 (50.8)	4
05	3/4	.812 (20.6)	1.050 (26.7)	1.250 (31.8)	2.0 (50.8)	4
06	1	1.000 (25.4)	1.315 (33.4)	1.500 (38.1)	2.0 (50.8)	4
07	1 1/4	1.031 (26.2)	1.660 (42.2)	1.750 (44.5)	2.5 (63.5)	5
08	1 1/2	1.031 (26.2)	1.900 (48.3)	2.125 (54.0)	2.5 (63.5)	5
09	2	1.062 (27.0)	2.375 (60.3)	2.500 (63.5)	2.5 (63.5)	5
10	2 1/2	1.453 (36.9)	2.875 (73.0)	3.250 (82.6)	2.5 (63.5)	5

1. Pipe threads per American standard taper pipe thread.
2. Metric dimensions (mm) are indicated in parentheses.
3. O-Ring not supplied with Connector Designator A.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[330AS002N1805-4](#) [330AS002NF1004-3](#) [330BS001B1405-3A-705](#) [330BS002B2306-4A-705](#) [330AS002Z11004-4](#)
[330033-001](#) [33098015012](#) [330AS001B1204-4](#) [330AS001M1606-5](#) [330AS001Z11405-4](#) [330FS002M1404-4](#)
[330FS002M1204-4](#) [330HS001Z11104-4](#) [330HS002M2106-4](#)