



Cable Connectors with Crimp-and-Poke Contacts

791-001P, 791-002P Receptacle Connectors with Pin Contacts




791-001P
With Backshell Groove



791-002P
With Integral Banding Platform

Harsh environment. Rugged construction. Ultraminiature. Series 791 connectors save size and weight compared to M24308 D Subminiature and other rack-and-panel connectors. Crimp, snap-in machined socket contacts. Ruggedized dual lobe shell, recessed pins and ground spring for improved shielding.

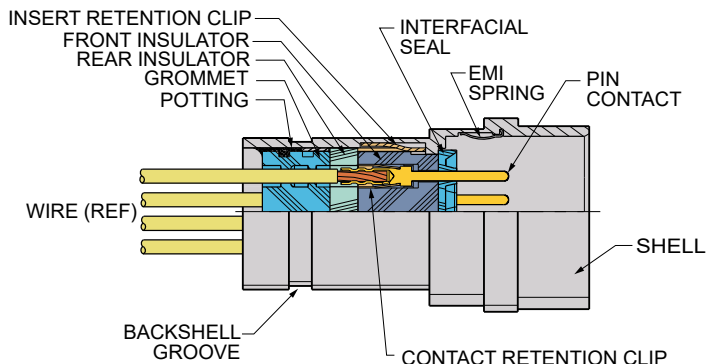

RELIABLE DESIGN

- 100% scoop-proof
- Snap-in, rear release contacts

VERSATILE

- Wide range of configurations
- Signal, power, RF, datalink
- Banding platform

HARSH ENVIRONMENT

- Humidity, water ingress
- Shock and vibration
- Temperature extremes
- Corrosion resistance
- High altitude

SIZE AND WEIGHT SAVING

- High density

Wire Accommodation

Contact Size	Wire Range AWG
23	22 – 28
16	16 – 20
12	12 – 14
8	8

How To Order

Sample Part Number	791-001P	M-102	MT	E	S
Product	791-001P = Cable Receptacle, Pin Contacts, Backshell Groove 791-002P = Cable Receptacle, Pin Contacts, Integral Banding Platform				
Arrangement Number (Shell Size - Insert Arr.)	See Table 2				
Shell Finish	M = Electroless Nickel MT = Nickel-PTFE ZR = Black Zinc-Nickel				
EMI Spring	E = EMI spring N = No EMI spring				
Hardware Option (Table 1)	N = Thru-Hole (no hardware) S = Low Profile Screwlock, Hex Head T = Extended Screwlock, Slot Head L = Low Profile Jackscrew, Hex Head K = Extended Jackscrew, Slot Head P = Jackpost				

Specifications

- **Operating temperature:** -65 to +150°C
- **Current and voltage ratings:**

Contact Size	Amps, max.	DWV Vac rms
23	5	750
16	13	1800
12	23	1800
8	46	1800
- **Shock:** EIA-364-27 condition D
- **Vibration:** EIA-364-28 condition V, letter E
- See pages 8-10 for additional information

Construction

- **Shell:** aluminum alloy
- **Insulators:** high grade rigid dielectric
- **Contacts:** copper alloy, 50 microinches gold over nickel plating
- **Interfacial seal:** fluorosilicone blend
- **Wire grommet:** fluorosilicone blend
- **Contact retention clip, insert retention clip:** beryllium copper
- **EMI spring:** beryllium copper, nickel plated
- **Hardware:** 300 series stainless steel, passivated

Cable Connectors with Crimp-and-Poke Contacts

791-001P, 791-002P Receptacle Connectors with Pin Contacts

Table 1 Hardware Option











Thread Sizes					
Hardware thread sizes vary by shell size. Shell sizes A, B, C, D, E, F, G, J, K have #4-40 UNC-2 thread, shell sizes H and L have #6-32 UNC-2 thread, shell size M has #8-32 UNC-2 thread.					
					
N No Hardware Mounting flange has thru-holes.	P Jackpost Supplied loosely assembled with nut and split washer. Stainless steel.	L Low Profile Jackscrew Non-removable, hex head. Stainless steel.	K Extended Jackscrew Slot head, stainless steel, non-removable.	S Low Profile Screwlock Hex head, stainless steel, non-removable. Screwlocks allow the connector to be mated before the screws are fastened.	T Extended Screwlocks Slot head, stainless steel, non-removable. Screwlocks allow the connector to be mated before the screws are fastened.


Table 2 Arrangement Number

Change the "P" to a "W" in any combo arrangement to delete power contacts. For example, arrangement **H-10P4** is supplied with a total of 10 contacts including (4) #12 power pins and (6) signal pins. Arrangement **H-10W4** is supplied with (6) signal pins and no power pins. Order coax contacts separately.

Arrangements with Size #23 Contacts	Arrangements with Size #16 Contacts	Arrangements with Size #12 Contacts
 A-5 5 #23  B-9 9 #23  C-13 13 #23  D-15 15 #23  E-19 19 #23  F-23 23 #23  G-33 33 #23  H-66 66 #23  J-33 33 #23  K-43 43 #23  L-78 78 #23  M-102 102 #23	 B-2P2 2 #16  D-3P3 3 #16  D-7P2 5 #23, 2 #16  E-11P2 9 #23, 2 #16  E-7P3 4 #23, 3 #16  F-14P3 11 #23, 3 #16  F-15P2 13 #23, 2 #16  F-5P5 5 #16  H-29P7 22 #23, 7 #16  H-54P2 52 #23, 2 #16  J-17P4 13 #23, 4 #16  J-25P2 23 #23, 2 #16  J-7P7 7 #16  K-27P4 23 #23, 4 #16  K-35P2 33 #23, 2 #16  K-9P9 9 #16  M-17P17 17 #16	 G-13P2 11 #23, 2 #12  G-3P3 3 #12  G-21P1 20 #23, 1 #12  H-10P4 6 #23, 4 #12  H-36P2 34 #23, 2 #12  H-5P5 5 #12  L-6P6 6 #12 Arrangements with Size #8 Contacts  M-4P4 Supplied with 4 #8 Power Contacts M-4W4 Contacts ordered separately, dielectric insert M-4G4 contacts ordered separately, metal insert

Cable Connectors with Crimp-and-Poke Contacts

791-001P, 791-002P Receptacle Connectors with Pin Contacts

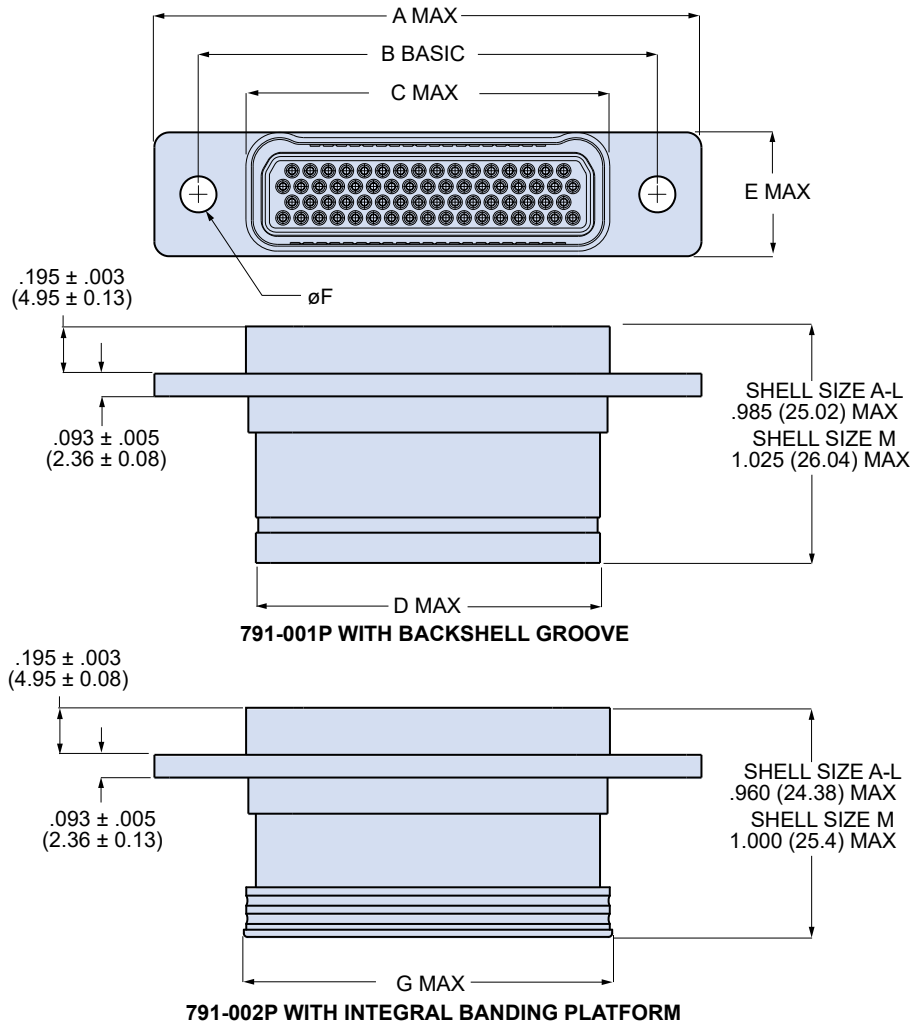

Crimp Tools			
Contact Size	Crimper	Positioner	Die
23	809-015 (M22520/2-01)	809-005 (no mil spec #)	(not required)
16	809-136 (M22520/1-01)	809-137 (M22520/1-04)	(not required)
12	809-136 (M22520/1-01)	809-137 (M22520/1-04)	(not required)
8	859-025 (M22520/23-01)	859-046 (WA23-395L)	859-026 (M22520/23-02)

Note: see "Contacts and Tools" section for additional information

Insertion/Removal Tools	
Contact Size	Insertion/Removal Tool
23	809-088 (no mil spec #)
16	809-131 (M81969/14-03)
12	809-132 (M81969/14-04)
8	859-049 (M81969/14-12)

Band-Master® Shield Termination
790-002P receptacles with integral banding platform are for use with Glenair Band-Master® micro-bands and installation tools.

791-001P and 791-002P Dimensions

Shell Size	A Max		B Basic		C Max		D Max		E Max		F Dia ±.004 (0.10)		G Max ±.010 (0.25)	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
A	1.040	26.42	.750	19.05	.490	12.45	.390	9.91	.415	10.54	.149	3.78	.440	11.18
B	1.190	30.23	.900	22.86	.640	16.26	.540	13.72	.415	10.54	.149	3.78	.590	14.99
C	1.340	34.04	1.050	26.67	.790	20.07	.690	17.53	.415	10.54	.149	3.78	.740	18.80
D	1.415	35.94	1.125	28.58	.865	21.97	.790	20.07	.415	10.54	.149	3.78	.840	21.34
E	1.565	39.75	1.275	32.39	1.015	25.78	.940	23.88	.415	10.54	.149	3.78	.990	25.15
F	1.715	43.56	1.425	36.20	1.165	29.59	1.090	27.69	.415	10.54	.149	3.78	1.140	28.96
G	1.678	42.62	1.388	35.26	1.127	28.63	1.090	27.69	.500	12.70	.149	3.78	1.130	28.70
H	2.275	57.79	1.900	48.26	1.516	38.51	1.440	36.58	.520	13.21	.172	4.37	1.525	38.74
J	2.090	53.09	1.800	45.72	1.540	39.12	1.450	36.83	.415	10.54	.149	3.78	1.490	37.85
K	2.465	62.61	2.175	55.25	1.915	48.64	1.840	46.74	.415	10.54	.149	3.78	1.890	48.01
L	2.511	63.78	2.136	54.26	1.752	44.50	1.675	42.55	.520	13.21	.172	4.37	1.760	44.70
M	2.580	65.53	2.200	55.88	1.815	46.10	1.740	44.20	.635	16.13	.200	5.08	1.825	46.36

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[791-001PG-33MEP](#) [791-001PA-5MES](#) [791-001PB-9MEN](#) [791-001PG-33MES](#) [791-002PL-78MEL](#) [791-001PK-43MES](#) [791-002PF-23MEP](#) [791-001PC-13MEP](#) [791-002PM-102MNPC](#) [791-001PA-5MEP](#) [791-002PB-9MEP](#) [791-001PF-14P3MET](#) [791-002PA-5MEK](#) [791-002PM-102MNPB](#) [791-002PA-5NFES](#) [791-002PF-14P3NFES](#) [791-001PB-9MEP](#) [791-002PE-7P3MEL](#) [791-002PJ-25P2MEL](#) [791-002PM-17P17MTEP](#) [791-002PA-5MEKB](#) [791-002PE-7P3MEK](#) [791-002PM-102MES](#) [791-001PH-66MES](#) [791-001PA-5MEL](#) [791-002PD-15MNPB](#) [791-002PD-15MEPB](#) [791-002PB-9MEKA](#) [791-002PF-14P3NFESA](#) [791-002PM-10210EPB](#) [791-002PK-27P4MES](#) [791-001PB-9MES](#) [791-002PH-66MNPA](#) [791-002PF-14P3MES](#) [791-002PH-66MNPC](#) [791-002PH-36W2MNK](#) [791-001PH-66MNLA](#) [791-002PJ-17P4MEL](#) [791-002PH-29P7MTEL](#) [791-002PB-2P2MEL](#) [791-002PH-66MEP](#) [791-002PD-15MNPC](#) [791-001PC-13MES](#) [791-002PB-9NFESA](#) [791-002PD-15MNPA](#) [791-002PD-15MNPD](#) [791-002PG-33MES](#) [791-001PM-102MNN](#) [791-002PB-9NFES](#) [791-001PF-23MES](#) [791-002PA-5MEL](#) [791-001PE-19MES](#) [791-002PF-5W5MEPA](#) [791-002PB-9MEL](#) [791-002PD-15MEPD](#) [791-001PF-5P5MNPA](#) [791-001PB-9NFES](#) [791-002PD-15MEPA](#) [791-002PH-66MNPE](#) [791-001PA-5NFES](#) [791-001PB-2P2MEP](#) [791-001PD-15MES](#) [791-001PH-54P2MES](#) [791-001PM-102MES](#) [791-002PA-5MNN](#) [791-002PE-19MNN](#) [791-002PM-4P4MES](#) [791-002PK-9W9MNS-429A](#)