









SERIES 80 ULTRAMINIATURE

MIGHTY MOUSE
CONNECTORS AND CABLES

LIGHTWEIGHT • HIGH-SPEED • INDUSTRY STANDARD

APRIL 2014





Glenair®

SERIES 80
MIGHTY MOUSE

THE WORLD'S MOST ADVANCED AND MATURE HIGH-PERFORMANCE ULTRAMINIATURE CONNECTOR

Constant, relentless innovation



MIGHTY MOUSE

© 2014 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324

Series 80 Mighty Mighty Mouse
Connectors and Cables
Table of Contents

Contacts, Crimp Tools and Assembly Tools



Product Selection Guide....A-1
Size #23 Contacts....A-3
Size #20HD Contacts....A-6
Size #12,#16, #20 Contacts....A-7
Size #12, #16, Coax Contacts....A-8
Pneumatic Contacts....A-10
Sealing Plugs....A-10
Crimp Tools....A-11
Insertion/Removal Tools....A-13
Contact Retention Tester....A-13
Band–Master ATS ® Tools....A-14
Jam Nut Tightening Tools....A-15
Twisted Pair Termination to High Speed Mighty Mouse Instructions....A-17

General Information and Reference



Product Selection Guide....B-1
Contact Arrangements....B-2
Printed Circuit Board Layouts....B-8
Torque Values....B-39
Series 80 Product Spec....B-40
Space Flight Information....B-47
Modification Codes....B-50
Material/Finish Codes....B-51

Series 800 Connectors
UNF Threads



Selection Guide....C-1
Contact Arrangements....C-2
General Information....C-4
Plugs....C-6
Crimp Receptacles....C-8
PCB Receptacles....C-12
Right Angle PCB Recep....C-15
Hermetic Receptacles....C-20
Bulkhead Feedthrough....C-24
Cordsets....C-21

Series 801 Connectors
Rugged Double–Start ACME Threads



Selection Guide....D-1
Contact Arrangements....D-2
General Information....D-5
Plugs....D-9
Receptacles....D-15
PCB Receptacles....D-20
Right Angle PCB Recep....D-23
Square Flange PCB Recep....D-28
Hermetic Receptacles....D-30
Bulk Head FeedthrougH....D-34
Connector Savers....D-36
Cordsets....D-38

Series 802 Connectors
"AquaMouse" 3500 PSI



Selection Guide....E-1
Contact Arrangements....E-2
General Information....E-5
Plugs....E-6
Receptacles....E-8
PCB Receptacle....E-12
Hermetic Receptacles....E-16
Bulkhead Feedthrough....E-21
Cordsets....E-23

Series 803 Connectors
Bayonet



Selection Guide....F-1
Contact Arrangements....F-2
General Information....F-4
Plugs....F-6
Receptacles....F-8
PCB Receptacles....F-12
Hermetic Receptacles....F-14
Bulkhead Feedthrough....F-16
Cordsets....F-18

Series 804 Connectors
Push-Pull



Selection Guide....G-1
Contact Arrangements....G-2
General Information....G-6
Plugs....G-7
Receptacles....G-12
PCB Receptacle....G-20
Hermetic Receptacles....G-23
Bulkhead Feedthrough....G-26
Quick-Release Plug & Receptacle....G-28
Cordsets....G-32
USB Cordset Hub & Patch Cable....G-38
Radio Connectors....G-42
USB Flash Drive....G-44
Series 824 Locking Push/Pull....G-45

Series 805 Connectors
Triple-Start ACME Threads



Selection Guide....H-1
Contact Arrangements....H-2
General Information....H-7
Plugs....H-8
Receptacles....H-13
PCB Receptacles....H-18
Hermetic Receptacles....H-22
Square Flange PCB Recep....H-27
Right Angle PCB Recep....H-29
Cat–Master Plug/Recep....H-33
Bulkhead Feedthrough....H-39
Connector Savers....H-41
Cordsets....H-43

Filtered Connectors
Planar Array Low–Pass



Selection Guide....J-1
Contact Arrangements....J-3
PCB Footprints....J-4
Series 801 Filtered Receptacles....J-8
Series 804 Filtered Receptacles....J-14
Series 805 Filtered Receptacles....J-16
Series 805 Filtered Adapter....J-20
Series 800 Filtered Receptacles....J-22

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Glenair®

Series 80 Mighty Mighty Mouse Connectors and Cables Table of Contents

K

New Size #8 Contact Arrangements
For Series 801 and 805 Connectors



Selection Guide K-1
General Information K-2
Contact Arrangements K-5
PCB Footprints K-6
Series 801 Plug and Receptacle K-9
Series 805 Plug and Receptacle K-16
#8 Power Contacts K-22
75 Ohm Coax Contacts K-24
50 Ohm Coax Contacts K-26
Quadrax Contacts K-28
Concentric Twinax Contacts K-30
Differential Twinax Contacts K-32
M39029 Coax Contacts K-34

L


Series 811 Connectors
High Density



Selection Guide L-1
General Information L-2
Prewired In-Line Plugs L-6
Prewired In-Line Receptacles L-7
Square Flange Pigtail Receptacles L-8
Jam Nut Pigtail Receptacles L-10
Jam Nut PCB Receptacles L-12
Square Flange PCB Receptacles L-13
Harsh Environment Cordsets L-15

M

Series 80 Connectors
With Stinger Contacts



Selection Guide M-1
General Information M-2
Insert Arrangements M-3
Series 841 Plug M-4
Series 841 Receptacle M-6
Series 844 Plug M-10
Series 844 Receptacle M-12
Series 845 Plug M-16
Series 845 Receptacle M-18
Series 80 Stinger™ Contact Tools M-23

N

Series 80 Overview:
Mighty Mouse High-Speed, High-Bandwidth Interconnect Solutions



High Speed Introduction N-1
High Speed Connectors N-4
Product Overview N-6
Contacts and Tools N-10

P

Series 801 *High–Speed* Connectors
Double–Start Acme Threads



Selection Guide P-1
General Information P-2
Plugs P-4
Receptacles P-6
PCB Receptacles P-10
Cordsets P-13

Q

Series 804 *High–Speed* Connectors
Quick–Disconnect Push-Pull Mighty Mouse



Selection Guide Q-1
General Information Q-2
Plugs Q-4
Crimp Receptacles Q-6
PCB Receptacles Q-10
Cordsets Q-12

R

Series 805 *High–Speed* Connectors
Triple–Start Acme Threads



Selection Guide R-1
General Information R-2
Plugs R-4
Receptacles R-6
Cordsets R-11

S

Ultra–Twinax Size #12
Low-Impedance High-Speed Twinax



Selection Guide S-1
General Information S-2
Contacts S-4
Plugs S-10
In-Line Receptacles S-12

T

SuperSeal Mighty Mouse Series 801
Micro USB Connectors



Selection Guide T-1
General Information T-2
Micro "B" USB Plug T-5
Micro "AB" USB Receptacle T-6
Front & Rear Micro "B" USB Plug T-7
Front and Rear Micro "AB" USB Receptacles T-8
Sav-Con with Micro "B" USB Plug and Micro "AB" USB Receptacle T-9

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 80 Mighty Mighty Mouse
Connectors and Cables
Table of Contents

Cordsets for *High-Speed* Differential Impedance



Selection Guide U-1
General Information U-2
Connector Selection Guide U-3
How To Order Cordsets U-4
Cable and Jacket Specifications U-5
Strain Relief Specifications U-6
Wiring Schematics U-8
USB 2.0 Cordsets U-11
RJ-45 Ethernet Cordsets U-13

High–Speed Cable
Optimized for High-Speed Protocols



Selection Guide V-1
General Information V-2
Parallel Pair Data Cable V-3
Tactical Cat 5e Ethernet Cable V-4
Avionic Cat 6e Ethernet Cable V-5
Cat 7 Ethernet Cable V-6
USB 2.0 Cable V-7
USB 3.0 Cable V-8
IEEE 13394 Cable V-9
SATA/eSATA Cable V-10

Fiber Optic Mighty Mouse
For Series 801, 802 and 805



Selection Guide W-1
Contact Information W-2
General Information W-4
Fiber Optic Termini W-5
Series 801 Plug W-11
Series 801 Receptacle W-13
Series 802 Plug W-18
Series 802 Receptacle W-20
Series 805 Plug W-24
Series 805 Receptacle W-26

Series 80 Accessories



Selection Guide X-1
Accessory Thread Table X-2
Heat-Shrinkable Boots X-3
Jam and Hex Nuts X-10
Gaskets and O-Rings X-12
Mounting Flange X-18
Shorting Caps X-19
Strain Relief Clamps X-22
EMI Adapters X-25
Backshells X-29
Protective Covers X-41
Dummy Receptacles X-73

Part Number Index



…and don't miss this late-breaking new product innovation



page G-40

Gold plated crimp contacts for #12 to #30 AWG wire

Series 824 Mighty Mouse

LOCKING PUSH-PULL CONNECTORS

Introducing the new Mighty Mouse Series 824 Locking Push-Pull Connector: all the familiar size, weight and performance advantages of the industry-standard Mighty Mouse 804 push-pull connector with a revolutionary low-profile locking coupling mechanism.

- **Fast mating, locking quick-release coupling mechanism**
- **31 insert arrangements**
- **Integrated cable shield termination platform**

Specifications	
Current Rating	#23 - 5 AMPS, #16 - 13 A., #12 - 23 A.
Dielectric Withstanding Voltage	#23 - 500 VAC RMS, #12 and #16 - 1800 VAC RMS
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C to +150° C
Shock / Vibration	100 g / 16 g
Shell-to-Shell Resistance, Nickel Plated	2 milliohms maximum
Durability	2000 mating cycles
Breakaway Force	50 pounds minimum


© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

MIGHTY MOUSE

THE NEW HIGH-PERFORMANCE STANDARD

Glenair has recognized a growing need in tactical military, aerospace and specialty industrial markets for a connector series that mimics the electrical and mechanical performance of popular mil-standard connectors, such as MIL-DTL-38999, but in a smaller and lighter package. The Series 80 Mighty Mouse Connector is perfectly suited for the wide range of power and signal applications that depend on reliable environmental and mechanical performance and electromagnetic compatibility as well as high-speed applications such as gigabit Ethernet. Six different coupling styles are offered. Size #23 crimp contacts are standard, set on .076" centers. At just half the size and weight of D38999, the high-performance Mighty Mouse is now specified on hundreds of mission-critical interconnect applications worldwide and has become the de facto high-performance connector solution for many former users of D38999.

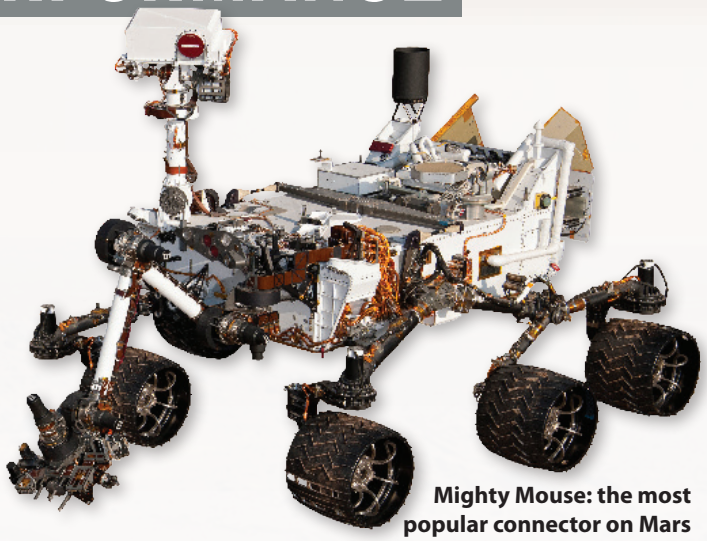

Mighty Mouse: the most popular connector on Mars

Glenair developed the Series 80 Mighty Mouse over a dozen years ago as a smaller and lighter version of D38999. Our goal was to radically reduce the size and weight of this flight-critical connector while maintaining its core performance features. Our miniaturization work took place in three key areas beginning with reduction of the shell package size and the integration of banding and shrink boot accessory functions. The integration of the backshell not only saves size and weight, it reduces cost and complexity.



Mighty Mouse vs. 38999: Half the Size and Weight

Next, we designed and qualified our own SAE-AS39029 contacts based on the shorter "Series II" family of signal, data and specialty contacts. We also developed an extensive range of innovative short contacts including fiber optic and pneumatic applications. The development of our own range of shorter, Series II type contacts was a key step in gearing Mighty Mouse to meet any and all interconnection challenges. The graphic on the next page shows just some of these high-performance contacts—from standard 39029 crimp signal and power contacts to our own unique shielded differential Twinax contact, miniaturized fiber optic contacts and highly specialized gas and pneumatic contact solutions.

Finally, we re-designed the sub-miniature D38999 insert arrangements to a higher density, ultra-miniature standard. Legacy circular connectors can be grouped into standard, miniature and subminiature families. These groupings reflect the packaging density and the contact size, and also represent the evolution of the connectors over the past 70 years. The standard group includes the venerable 5015's (including Glenair IT/ITS connectors) as well as the 28840 shipboard connector (which we also supply). Miniature circulars include the 26482 (Glenair IPT series), and the 26500 and 83723 which are still popularly specified in both military and commercial aerospace applications. The D38999 series, the only significant subminiature circular, has been a standard choice for high-performance systems for decades and Glenair supplies these connectors in every class including QPL hermetic versions, as well as environmentals, filters, fiber optics and more.

The Series 80 Mighty Mouse represents the evolution of circular technology beyond the 38999 sub-miniature format— a technology which is absolutely unmatched in today's interconnect industry. Glenair is the unchallenged

Mighty Mouse contact sampler



design and market leader for reduced package size and weight connectors of this type and style. All Series 80 Mighty Mouse versions use #23 contacts on .076 inch (1.9 mm) spacing as core contact technology, and we have extended this model with special-purpose rectangular, modular and (even) higher-density connectors.

This then is the benchmark we have established with Mighty Mouse: Interconnect systems that are so small and light that they are weighed in tenths of grams while still meeting the performance specifications of even the most mission-critical of applications. But the benefits of connector package size reduction are not limited to the connector itself, as we will discuss in the following paragraphs.

Large format connectors: The hidden costs

Let's look at some of the hidden costs of large format/weight connectors, starting at the board. Obviously, large form factor I/O-to-board connectors, such as the array of D38999 Series III connectors shown to the right, force an expansion of board real estate. Larger boards in turn lead to larger form factor boxes, panels and enclosures. And of course larger gage wires and lower density contact arrangements lead to fatter and heavier interconnecting cables, including increases in accessory hardware size, and the amount of shielding and jacketing material required.

The final result is that electronic systems pay a huge penalty in size and weight. Obviously this is not a problem in every application. But with the lower power and signal voltage requirements of today's electronic systems, the opportunity is ripe to design systems with reduced size circuits and connectors.

The graphic says it all. Small connectors, small wires and contacts, higher density contact arrangements, integrated accessory functions and the many other design advancements of the Series 80 Mighty Mouse translate to smaller and lighter boards, boxes, cables and systems.



Mighty Mouse means smaller and lighter boxes, boards and cables compared to MIL-DTL-38999

Mighty Mouse Mechanical Performance: Equal to D38999

Mechanical

Nothing illustrates the performance potential of the Series 80 Mighty Mouse better than a cross-sectional view of the ultraminiature connector's architecture. Note that this plug and receptacle pair on page 7 share many of the same design features as D38999. Shells are precision machined and are designed for keyed mating and shell-to-shell bottoming. Sealing features include cork-and-bottle interfacial seals, O-ring seals and robust grommet wire seals. In the mated condition, the connectors are sealed IAW MIL-STD-810, method 512, 1 meter for 1 hour, and pass rigorous altitude immersion requirements IAW MIL-DTL-38999. Two-piece dielectrics and copper contact retention clips are modeled after D38999 and, together with the shell-to-shell bottoming, provide for equal levels of grounding and shell-to-shell resistance as D38999. Contacts, as we mentioned before, are either QPL AS39029 signal contacts, such as the size 23 pin and socket contacts shown in the diagram, or enhanced-durability contacts designed IAW AS39029 requirements (in the case of our fiber optic solutions and proprietary shielded contacts). Note that Mighty Mouse offers either an integrated band porch or accessory threads as a standard feature of the design.

Series 80 Mighty Mouse
Performance and Specifications Review

Mechanical Perf. Feature/Connector Class	MIL-DTL-38999	Mighty Mouse
Full Mate Visual Indicator	Yes	Yes
Integrated Contact Retention System	Yes	Yes
Interfacial and Grommet Seals	Yes	Yes
Fully Shielded	Yes	Yes
Lightning Strike	Yes	Yes
Shell-to-Shell Bottoming	Yes	Yes
Threaded/Toothed Accessory Interface	Yes	Yes
Full Range of Assembly Tools	Yes	Yes
Environmental	Yes	Yes
Space-Grade	Yes	Yes
Hermetic	Yes	Yes
EMI Filter	Yes	Yes
3500 PSI Submersible	No	Yes
Ground Plane	Yes	Yes
ESD	Yes	Yes
Lanyard Release	Yes	Yes
Bulkhead Feed-Thru	Yes	Yes
Sav-Con® Connector Saver	Yes	Yes

The table shown above lists some of the core mechanical features of the Mighty Mouse, again in lock-step with D38999. Note that all the desirable features of the 38999 are duplicated in the Mighty Mouse: from a full-mate visual indicator, to its adequate mass in resistance to lightning strike.

Service Class

You will see the term Service Class still used in many connector catalogs. This pertains to the environmental parameters in which the connector will operate successfully. For example, service class defines the level of environmental sealing, or chemical resistance, or the ability to withstand vibration, or corrosion resistance or operating temperature. Some examples from 38999 Series III: class G for space grade, class H for hermetic, class K for firewall. These class grades are all fully supported and qualified in the Series 80 Mighty Mouse. For a detailed report on all these benchmarks, please see Section B of this catalog, where a complete performance specification is supplied. In addition, we are pleased to offer our Mighty Mouse customers detailed test reports on any aspect of the connector's performance. As we like to point out, Mighty Mouse is a mature connector series with over twleve years of successful deployment in high-reliability applications. And we have the testing to prove it.

See the table above for a little more detail on connector classes. Note that Mighty Mouse again stacks up well against D38999 and even surpasses thirty-eight-nine in the category of high-pressure submersible interconnects. From standard environmentals to space-grade versions, hermetics, EMI filters, ground plane designs and more, Mighty Mouse delivers every class of connector available in D38999. And these are not just special capabilities available with long-lead times. These products are all available as standard catalog offerings, with thousands of popular part numbers available for immediate same-day shipment.

Wire Termination

Turning to wire termination, Mighty Mouse is again the equal of its larger and heavier role-model. We offer straight and right-angle PC tail terminations, single and double-ended cordsets (which by the way are available as quick-turn catalog items, even including high-speed variants, shielded and overmolded versions), solder cup, and of course crimp. We even offer flex terminations and back-to-back jumpers.

Plating


Glenair is a major innovator in material and plating technologies, particularly for conductive and RoHS (cadmium–free) applications. Some of the more popular Glenair material and plating solutions include plated composites, RoHS compliant Nickel-PTFE and electroless-nickel—all available for Mighty Mouse. Glenair has mastered the difficult challenges of fielding plated specialty metal parts in harsh and corrosive applications and can offer standard Mil-qualified formulas as well as unique solutions for special applications. All our materials are sourced in accordance with DFARS 252.225-7014 Preference for domestic specialty metals requirements.

Mighty Mouse Performance: Superior to D38999

We've already offered quite a few facts demonstrating how Mighty Mouse, even with its smaller size and weight, is equal to the performance standards set by MIL-DTL-38999. So next we'll take a look at some of the ways this ultraminiature connector actually outperforms 38999.

More Shell Sizes & Contact Arrangements

First off, Mighty Mouse offers a greater range of shell sizes and contact counts for more efficient matching of circuit requirements to available shell sizes and insert arrangements. This, combined with the broader range of coupling styles offered by Mighty Mouse, makes the connector series far more versatile than 38999. In other words, users can standardize on Mighty Mouse more readily than 38999—throughout their entire range of application requirements—without having to turn to a different series with new contact termination tooling, assembly procedures, quality standards and so on to meet unique or unanticipated circuit requirements.

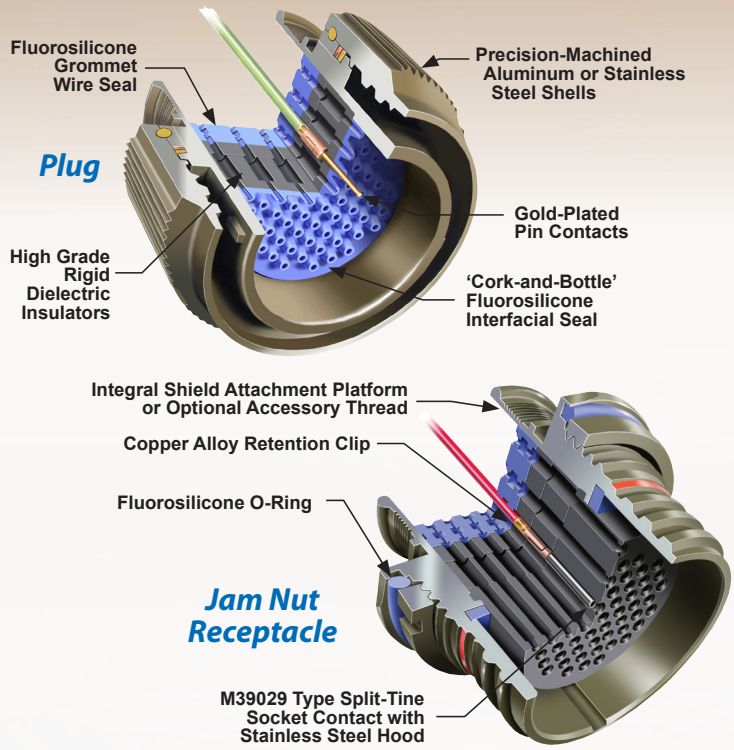

More Wire Sizes Supported

Mighty Mouse also offers broader wire support, from size 22 to 28; turnkey cordsets—right out of the catalog with short leadtimes and guaranteed quality; Integrated band porch or accessory thread interface; Split shell Cobra connectors (more on this later) for ultra-low-profile wire routing; high speed PFA Teflon inserts for optimized high-speed performance; a compatible rectangular series—Micro-Crimp—that features the exact same contacts, density and performance as Mighty Mouse; and last but not least, the performance benefits of lower harmonic shock susceptibility that comes from the reduced mass of Mighty Mouse compared to 38999.

Six Mating Styles

Turning to mating technology, MIL-DTL-38999 offers four mating styles: two bayonets, the popular triple-start threaded and the rarely used breach-lock series IV version. Mighty Mouse offers six mating technologies: The series 800 UNF thread version designed for use in small instruments; the Series 801—our most popular style—that combines small size with rapid double-start stub acme mating; The threaded-coupling Aqua Mouse with its high-pressure piston seal for 3500 PSI applications; the quarter-turn-to-full-mate series 803 bayonet; the Quick disconnect series 804 push-pull; and the Series 805 with triple-start coupling and ratcheting anti-decoupling mechanism—an exact work-alike to the series III 38999—of course with reduced size and weight as the principle differentiator.

A Broader Range of Contacts

Both 38999 and Mighty Mouse offer an incredibly broad range of signal, data, power and specialty contacts. But Mighty Mouse once again outstrips 38999 with a broader range of contact sizes and types including layouts with size 23, 20, 20HD, 16, 12, and size 8 contacts and cavities. Mighty Mouse also offers a broader range of hybrid layouts and more sizes and types of fiber optic termini, pneumatic termini and, opto-electric contacts, low-insertion force contacts and more. In fact, no other connector series in our industry supports as diverse a range of contact technologies as Mighty Mouse.

Mighty Mouse Rectangular Version

The Series 79 Micro-Crimp takes all the attributes of the Mighty Mouse and packages them up in a high-performance rectangular.

Like the Mighty Mouse, the Micro-Crimp connector features crimp, rear-release size #23 contacts on .075 inch (1.9 mm) spacing, as well as size #12 and #16 power and coaxial crimp contacts in a range of hybrid layouts. Available in 29 insert arrangements, Micro-Crimp provides superior EMI shielding and improved environmental sealing compared to M24308 D-sub connectors. Micro-Crimp plugs include an EMI spring made of gold plated stainless steel or copper alloy. Right angle PCB receptacles feature an aluminum alloy EMI shroud.

Micro-Crimp meets the shielding effectiveness requirements of EIA 364-66, and fluorosilicone interfacial seals and grommets, and watertight EMI gaskets for panel mounts ensure adherence to MIL-STD-810F for 1 meter immersion for 1 hour. The Series 79 Micro-Crimp is ideally suited for blind-mate rack and panel and/or module-to-chassis applications and is a perfect complement to Mighty Mouse in systems that require both high-density, stackable connectors as well as circulars for ease of mating.

Constant, Relentless Innovation

Another strength of Mighty Mouse compared to D38999 is the relentless innovation that has brought the series to a point where it now outstrips the series in versatility and application. Glenair also offers a range of series extentions including high-speed, high-density, USB equipped, and fiber-optic variants. High-quality documentation, including performance specifications and comprehensive test reports are available for every solution. Complete information is available in this catalog, and at www.glenair.com.

Series 80 Mighty Mouse
Standard Series
Discrete Connector Offerings

The Series 80 Mighty Mouse Connector is designed for high-reliability commercial and aerospace/defense interconnect applications that require both robust environmental/EMI performance and reduced size and weight. The Series 80 Mighty Mouse Connector offers comparable performance to MIL-DTL-38999 Series interconnects with up to 71% weight and 52% size savings for similar contact layouts. The six versions of the product offer a variety of styles and features to suit just about any application.

	Series 800	Series 801
		
Description	**Original Mighty Mouse with UNF Threads**	**Double-Start ACME Thread**
Notes	A general purpose connector for high-speed Ethernet switches, tactical equipment and instrumentation.	More rugged keys and threads compared to Series 800. Faster mating, slightly larger than Series 800.
Number of Contacts	1 to 37	1 to 130
Coupling	Threaded Coupling with 4 ½ Turns to Full Mate	Threaded Coupling with 1 ½ Turns to Full Mate
Water Immersion, Mated	MIL-STD-810 Method 512 1 Meter for 1 Hour	MIL-STD-810 Method 512 1 Meter for 1 Hour
EMI Shielding	Good	Good
Vibration and Shock	37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock
Mating Cycles	2000 Cycles	2000 Cycles
Electrical Performance	#12: 23 Amp, 1800 VAC #16: 13 Amp, 1800 VAC #20HD: 7.5 Amp, 1000 VAC #23: 5 Amp, 750 VAC	#12: 23 Amp, 1800 VAC #16: 13 Amp, 1800 VAC #20HD: 7.5 Amp, 1000 VAC #23: 5 Amp, 750 VAC
Proven Performance Applications	Commercial air frame sensors; UAV telemetry; Tactical computers; field radios	Military air frame; Dismounted soldier; Tactical ground weaponry; Avionic (FLIR) systems

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 80 Mighty Mouse
Standard Series
Discrete Connector Offerings

Series 802	Series 803	Series 804	Series 805
			
AquaMouse™ 3500 PSI	**Bayonet**	**Push-Pull**	**Triple-Start ACME Thread**
Rugged stainless steel, resists chemicals. For geophysical and underwater applications.	Quick-mating, light duty, general purpose. Not rated for immersion. 50 milliohms shell-to-shell resistance.	Breakaway connector for headsets and tactical equipment. Gold-plated spring for long mating life and superior EMI shielding.	"Clicker" ratchet mechanism and ground spring for military airframes and avionics boxes. Fast-mating, D38999 equivalent.
1 to 130	1 to 55	1 to 55	1 to 130
Threaded Coupling with UN Threads	Push-to-Mate, ¼ Turn to Lock	Quick-Disconnect	One Full Turn for Full Mate
1000 Feet Immersion in Salt Water	Splashproof	MIL-STD-810 Method 512 1 Meter for 1 Hour	MIL-STD-810 Method 512 1 Meter for 1 Hour
Good	Fair	Very Good	Excellent
37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock
2000 Cycles	250 Cycles Aluminum 2000 Cycles SST	2000 Cycles Aluminum 2000 Cycles SST	500 Cycles
#12: 23 Amp, 1800 VAC #16: 13 Amp, 1800 VAC #20HD: 7.5 Amp, 1000 VAC #23: 5 Amp, 750 VAC	#12: 23 Amp, 1800 VAC #16: 13 Amp, 1800 VAC #20HD: 7.5 Amp, 1000 VAC #23: 5 Amp, 750 VAC	#12: 23 Amp, 1800 VAC #16: 13 Amp, 1800 VAC #20HD: 7.5 Amp, 1000 VAC #23: 5 Amp, 750 VAC	#12: 23 Amp, 1800 VAC #16: 13 Amp, 1800 VAC #20HD: 7.5 Amp, 1000 VAC #23: 5 Amp, 750 VAC
Pipe line inspection equipment; Well logging; Amphibious vehicles; Unmanned submersibles	Soldier system radios; Autosport diagnostics; Airborne surveillance; Communication systems	Helmet breakaway connector; QDC battery; Missile applications; Weapon interconnects	Military air frame; Joint Strike Fighter

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 80 Mighty Mouse
Special Application Series
Discrete Connector Offerings

In addition to our standard Series 80 Mighty Mouse Connector offerings Glenair has introduced unique variations of the Mighty Mouse Series to meet the requirements of high speed, high density applications






Description	Size #8 Contact Arrangements	High–Density
	For Use with Power or Shielded Size #8 Contacts	High–Density
Notes	Low-profile, lightweight connector compatible with size #8 Twinax, Quadrax and coax contacts as well as power	TwistPin contacts for increased circuit density and outstanding shock and vibration performance
Number of Contacts	1 to 5	7 to 42
Coupling	Threaded Coupling with: 801 - 1 ½ Turns to Full Mate 805 - 1 full turn to Full Mate	Threaded Coupling with 1 ½ Turns to Full Mate
Water Immersion, Mated	MIL-STD-810 Method 512 1 Meter for 1 Hour	MIL-STD-810 Method 512 1 Meter for 1 Hour
EMI Shielding	801 - Good 805 - Excellent	Good
Vibration and Shock	37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock
Mating Cycles	801 - 2000 Cycles 805 - 500 Cycles	2000 Cycles
Electrical Performance	#8 Power Contacts: 46 Amp #8 Coax: 75 Ohm; 1300 VAC #8 Quadrax: 100 Ohm #8 Con. Twinax: 1A; 500 VAC #8 Dif.Twinax: 100 Ohm	3 Amp, 600 VAC
Proven Performance Applications	Commercial and military avionics that use industry standard size #8 quadrax, coax, twinax and power contacts	Ultra high–density solution for soldier gear, umanned systems and man-portable satellite uplink equipment

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

High–Speed	Low Impedance Twinax	Micro USB	Ultra Low Profile
			
High–Speed	**#12 Ultra–Twinax**	**SuperSeal™**	**Cobra™**
Features DuPont Teflon® insulators for superior electrical performance in protocol specific applications like eSATA and USB 2.0/3.0	Size #12 Twinax contacts for ultra-high speed differential pair applications such as LVDS and CML	Superior sealing–IP68 when mated–for complete system protection against water, sand and dust	Superior sealing–IP68 when mated–for complete system protection against water, sand and dust
4 to 26	1 to 200	Micro USB	4 to 130
801 - Threaded Coupling with 1 ½ Turns to Full Mate 804 - Push/Pull	Threaded Coupling with 1 ½ Turns to Full Mate	Double–Start Stub Acme Threaded, QDC Push–Pull, and Triple–Start Threaded	801 - Double Start 804 -Push Pull Plug 805 - Triple Start Plug
MIL-STD-810 Method 512 1 Meter for 1 Hour	MIL-STD-810 Method 512 1 Meter for 1 Hour	MIL-STD-810 Method 512 1 Meter for 1 Hour	MIL-STD-810 Method 512 1 Meter for 1 Hour
801 - Good 804 - Very Good	Good	Good	Excellent
37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock	37 g's Random Vibration; 300 g's Shock
2000 Cycles	2000 Cycles	2000 Cycles	801 and 804: 2000 Cycles 805: 500 Cycles
#23: 5 Amp; 750 VAC	#12: 1 Amp, 1800 VAC	USB: Signal pins: 1 Amp Power pins: 1.8 Amp DWV: 600 VAC	#23: 5 Amp; 750 VAC
High–speed solution for databus frequencies above 1 GHz such as eSATA, 10GBASE-T and LVDS	High–speed differential impedance solution for multi–gigabit data rate applications such as CML	Ruggedized environmental solution for commercial grade micro USB integration in military and avionics gear	Ideal for soldier systems such as battery units, ruggedized laptops, command and communications equipment

© 2014 Glenair, Inc.

Standard and High-Speed Cordsets

AVAILABLE FOR ALL MIGHTY MOUSE SERIES CONNECTORS

Harsh Environment Shielded Cordsets



Point-to-point cordsets with polyamide or high-temp rubber overmolding and shielded, jacketed cable for environmental applications

Ultraflexible Phantom Cordsets



Point-to-point cordsets with polyamide or high-temp rubber overmolding and flexible fabric overbraid for non-environmental applications

High Pressure AquaMouse Cordsets



Point-to-point cordsets with polyamide or high-temp rubber overmolding and shielded, jacketed cable for high-pressure applications

Mighty Mouse Cordsets for Ethernet and other high-speed data applications



Native Mighty Mouse to Mighty Mouse point-to-point cordsets with polyamide or high-temp rubber overmolding and shielded, jacketed cable for high-speed applications




Mighty Mouse to commercial USB point-to-point cordsets with polyamide or high-temp rubber overmolding and shielded, jacketed cable for Universal Serial Bus applications



Mighty Mouse to commercial RJ45 point-to-point cordsets with polyamide or high-temp rubber overmolding and shielded, jacketed cable for Cat 5 and Cat 6 Ethernet applications

Special application, point-to-point cordsets

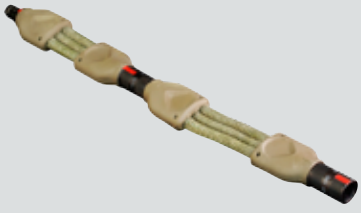

Unique overmolding compounds, jacketing and overbraid materials available on a build-to-print basis



Incorporation of customer-supplied connectors, including audio frequency and non-standard power connectors



Ethernet jumpers incorporating Mighty Mouse connectors in place of non-rugged commercial connectors

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com
E-Mail: sales@glenair.com

Turnkey Complex and Multibranch Cable Assemblies

SAVE TIME, LABOR, AND ENGINEERING BANDWIDTH WITH GLENAIR MIGHTY MOUSE BUILD-TO-PRINT CABLES AND ASSEMBLIES

Harsh Environment Overmolded



Overmolded breakout assembly featuring 100% Glenair content; a true turnkey solution



Multibranch cable assembly with Glenair Mighty Mouse, HiPer-D M24308 and customer-supplied power connector



Turnkey overmolded GPS cable assembly with integrated switch



Environmental cable with Glenair Series 804 Mighty Mouse, Series 79 Micro-Crimp, and RF Coax terminations

Ultraflexible Fabric Overbraid



Non-environmental aircraft cable with integrated circuit breakout box and Mighty Mouse 804 push-pull connectors



Heads-up display (HUD) cable with custom Series 804 Mighty Mouse and low-profile cable routing



Military jet jumper cable with user-serviceable backshells and fabric overbraid for mechanical protection



Hybrid Mighty Mouse and Micro-D aircraft pilot helmet cable assembly

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Turnkey Engineering, Fabrication, and Assembly


MIGHTY MOUSE TECHNOLOGY AND GLENAIR DESIGN EXPERTISE TURNS COMPLEX INTERCONNECT CHALLENGES INTO TURNKEY SOLUTIONS

Glenair invented the ultra-small form factor Mighty Mouse used in hundreds of the most advanced land, sea, air and space interconnect applications. Today, our factory is positioned to meet every requirement for complex integrated systems—from cable and enclosure design to turnkey electronic system packaging. Glenair is your one-stop-shopping solution for integrated interconnect cabling and electronic equipment



Lightweight soldier system with ruggedized computing, radio communications, power supply and tactical USB/networking patchcords—all integrated with turnkey Glenair connector technology.



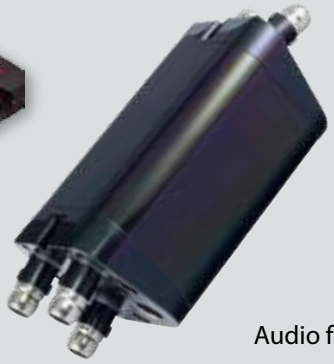

Ultra-flexible RF cable assembly, USB hub, and connectorized black box enclosure—tested, terminated, and ready for immediate application








Turnkey integrated cable and EUD assembly featuring Mighty Mouse, 55116 audio and USB interconnects—all fabricated, assembled and tested by Glenair's Mighty Mouse integrated systems group

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com




USB 3.0 Flash Drive Features 804 Series Push/Pull ruggedized interface available with 8GB, 16GB, 32GB or 64GB storage capacities. Designed for ground soldier data upload and download; IP67 sealed for harsh environments.

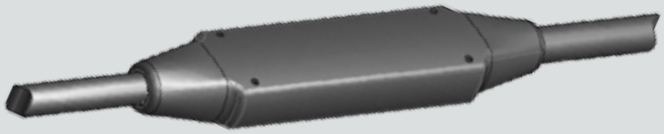


Ethernet-to-USB 2.0 and RS232-to-USB 2.0 Cordset with In–line overmolded conversion adapters. Unique Glenair solution to mixed-protocol network environments. Available for Mighty Mouse Series 801 thru 805 equipped cordsets.

From simple integration projects like the USB 3.0 flash drive shown above, to highly-complex integrated assemblies such as this helicopter FLIR package, Glenair has become the industry's design partner and turnkey fabrication and assembly supplier.

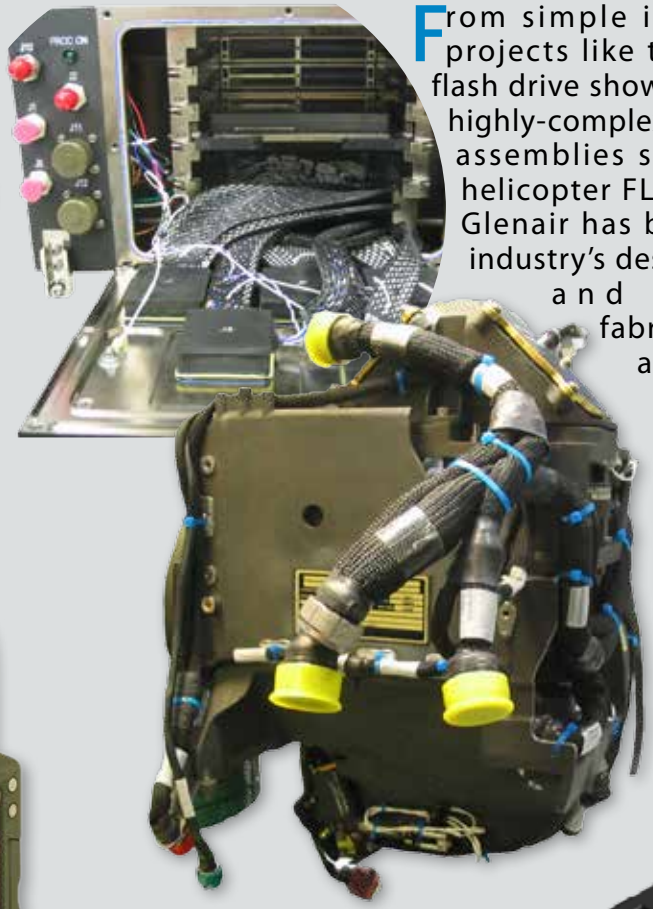



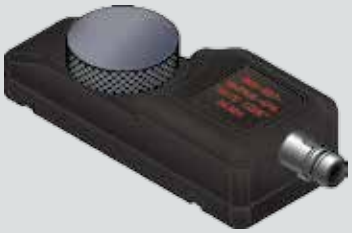



AN/PRC-148, AN/PRC-152, 152A, 154 and RF-7800T Radio Connectors with Series 804 Mighty Mouse Push/Pull Interface. Radio connector cables are available as cabled, un-cabled, and pigtail versions. Radio interface features spring-loaded contacts for reliable and mating and are 100% electrically tested for shorts, continuity and insulation resistance at 200 Megohms minimum.



Connectorized (Series 804 Mighty Mouse push-pull) PDA for ruggedized/tactical applications.

© 2014 Glenair, Inc.


GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

TOOLS AND CONTACTS

MIGHTY MOUSE

The widest range of standard signal and special-purpose contacts available in *any* ultraminiature connector



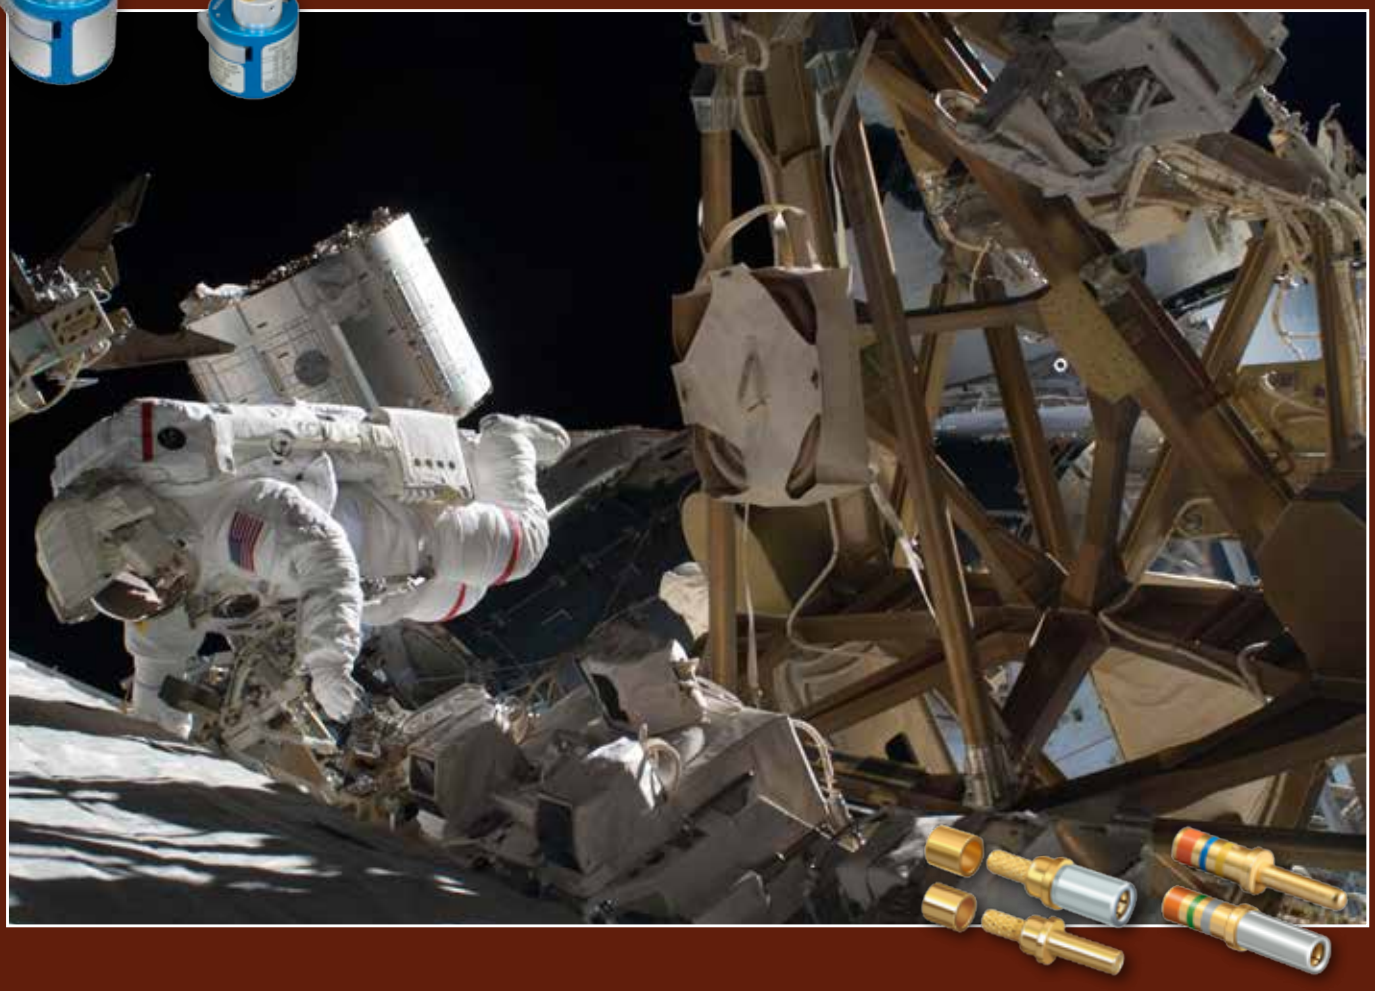

Glenair Series 80 Mighty Mouse connectors are designed around our qualified SAE-AS39029 contacts based on the shorter "Series II" family of signal, data and specialty contacts. Glenair has also developed an extended range of innovative short contacts including fiber optic and pneumatic applications. The development of our own range of shorter, Series II type contacts was a key step in gearing Mighty Mouse to meet any interconnection challenge. All our contacts are supported with appropriate extraction and crimp tools—all typically in-stock and ready for immediate shipment.

Glenair®


Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

Series 80 Mighty Mouse Contacts and Tools
Table of Contents and Introduction


PRODUCT SELECTION GUIDE




About Series 80 Contacts
Page A-3




#23 Contacts
Page A-3




#20HD Contacts
Page A-7



#20, #16, #12 Contacts
Page A-8



#16 and #12 Coaxial Contacts
Page A-9




#12, 50 Ohm Matched Impedance Coaxial Contacts
Page A-10



#23 - #20 Wire Adapter
Page A-7



#12 Pneumatic Contacts
Page A-11



Grommet Sealing Plugs
Page A-11



Contact Crimping Tools
Page A-12



Positioners for Crimp Tools
Page A-12



Insertion/Extraction Tools
Page A-14



Contact Retention Tester
Page A-14



Band-Master™ ATS Shield Band Installation Tool
Page A-15




Band-Master™ ATS Shield Bands
Page A-15



Jam Nut Tightening Tools
Page A-16



Connector Holding Tools
Page A-17



Shield Twisted Pair Termination to High Speed Mighty Mouse
Page A-18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

About Series 80 Mighty Mouse Contacts

This section of the catalog contains ordering information for contacts. Series 80 Mighty Mouse connectors are supplied with a full complement of crimp contacts. Contacts are terminated to wire using special tools and are snapped into place by hand or with a hand-held insertion tool. Damaged or miswired contacts may be removed from the connector using special extraction tools.

Although the connectors are supplied with a full complement of contacts, extra contacts are commonly purchased as spares or to use for quality assurance purposes such as crimp tensile tests.

Coaxial contacts must be ordered separately. If your application requires coaxial contacts, select contact types "A" or "B" (pin or socket) in the connector part number. The connector will be supplied without contacts. Select the appropriate coaxial or pneumatic contact from this catalog.

Mighty Mouse contacts conform to the requirements of ***Aerospace Standard AS39029***. This SAE specification defines the design, dimensions and performance of contacts used in aerospace grade electrical connectors. The "***general specification***" covers a variety of contacts including thermocouple, hermetic, coaxial and triaxial types.

The ***"slash sheets"*** contain dimensions and other information for specific types of contacts. Each contact is assigned a ***Basic Identification Number (BIN)***, a non-significant three digit code corresponding to the color code on the contacts.

A ***Qualified Products List (QPL)*** identifies those manufacturers whose products have been verified to meet all requirements.

Series 80 Size #23 and size #20HD contacts conform to AS39029 requirements, but are not covered by a slash sheet. Size #20, #16 and size #12 contacts are standard AS39029 contacts.

About Crimp Tools

Series 80 signal, power and coaxial contacts are crimped to wire using mil spec crimpers. ***Military Specification MIL-DTL-22520*** provides the aerospace/defense industry with a common set of rugged, reliable hand crimp tools. This specification controls the voltage drop and tensile strength of crimp terminations.

Before ordering, check to see if you might already have these tools! We have listed the military part number and the Daniels part number. Daniels Manufacturing Corporation is the leading manufacturer of these tools. However, size #23 and #20HD contacts require special positioners unique to the Mighty Mouse product line.

Tip: Use the Tool Code to Find The Right Crimp Tool

1 Find the contact part number in the catalog. Note the tool codes in the right column. These tool codes identify the crimp tools required to terminate the contact. Usually two tools are required—a crimp frame plus a positioner to locate the contact.

Contact Type	Wire Size	Material	Part Number	Ø A		Color Band	Tool Code
				In.	mm.		
Pin	#22 – #28	BeCu	809-001	.0335-.0355	0.851-0.902	None	A, C
Pin	#26 – #30	BeCu	809-042	.0229-.0245	0.582-0.622	Blue	A, D
Pin	#22 – #28	Alumel	809-065A	.0335-.0355	0.851-0.902	None	A, C
Pin	#22 – #28	Chromel	809-065C	.0335-.0355	0.851-0.902	None	A, C
Socket	#22 – #28	BeCu	809-002	.0335-.0355	0.851-0.902	None	A, C
Socket	#26 – #30	BeCu	809-043	.0229-.0245	0.582-0.622	Blue	A, D

2 Turn to the tool section starting on page A-11. Each crimp tool is identified with a letter code. Match the contact letter to the tool letter.

Miniature Adjustable Crimp Tools



These crimp tools perform precision eight indent crimps for gas-tight wire terminations and excellent tensile strength. Adjustment wheel has 8 settings. Ratchet mechanism prevents improper crimps. Use with bayonet-type positioners. Check calibration with M22520/3 gages. Length is 6.75 inches, weight is approx. 10 oz.

A Standard M22520/2-01 crimper. Use with standard size #23 and #20HD Mighty Mouse contacts and with M39029/76 and /78 coaxial center contacts. Requires positioner, ordered separately.


B Special MH992 crimper used with 50 ohm matched impedance coaxial inner contacts. Requires positioner, ordered separately.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
A	809-015	M22520/2-01	AFM8	A
B	809-128	(none)	MH992	B

Dimensions in Inches (millimeters) are subject to change without notice.

Size #23 crimp contacts for AWG 22 to 30 gauge


Standard size #23 contacts accept #22 to #28 AWG wire. Choose "small bore" versions for #26 to #30 AWG wire. For thermocouple applications, specify alumel or chromel contacts. Contacts are bulk packaged. Terminate with standard M22520 crimper with special positioner.

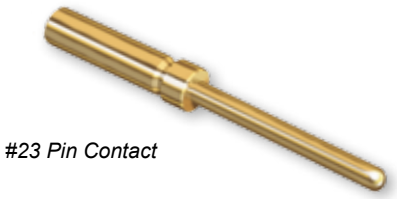


#23 Pin Contact



#23 Socket Contact

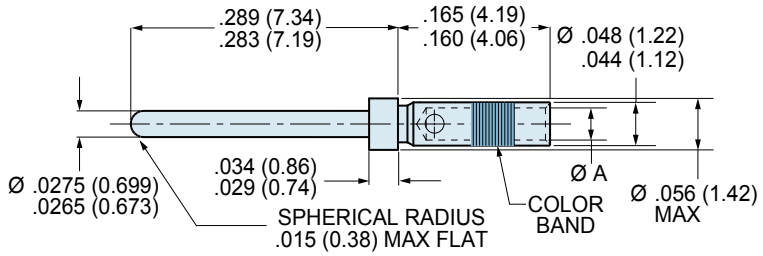

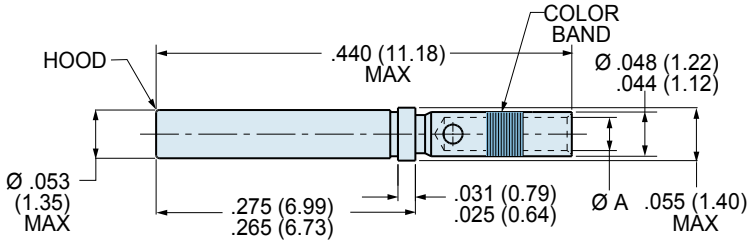

NOTES

Material and Finish

- Beryllium copper alloy per ASTM B196 or B197, 50 microinches gold plated per ASTM B488 Type II Code C Class 1.25 over nickel plate per QQ-N-290 Class 2, 50-100 microinches.
- Thermocouple contacts: alumel or chromel alloy, unplated, per ANSI 96.1
- Socket contact hood: stainless steel, passivated per AMS-QQ-P-35.

Specifications

- Current Rating: 5 Amps maximum
- Voltage Drop (at 5 Amps and 25° C): 70 millivolts maximum
- Temperature Range: -65° to +175° C
- Socket Contact Minimum Separation Force: 0.5 ounces

Crimp Tools and Insertion/Removal Tools

- Crimper: 809-015
- Positioner: 809-005 (standard). Use P/N 809-057 for small bore contacts 809-042 and 809-043
- Standard Insertion/Removal Tool: 809-088

Size #23 Removable Crimp Contacts

Contact Type	Wire Size	Material	Part Number	Ø A		Color Band	Tool Code
				In.	mm.		
Pin	#22 – #28	BeCu	809-001	.0335-.0355	0.851-0.902	None	A, C
Pin	#26 – #30	BeCu	809-042	.0229-.0245	0.582-0.622	Blue	A, D
Pin	#22 – #28	Alumel	809-065A	.0335.0355	0.851-0.902	None	A, C
Pin	#22 – #28	Chromel	809-065C	.0335-.0355	0.851-0.902	None	A, C
Socket	#22 – #28	BeCu	809-002	.0335-.0355	0.851-0.902	None	A, C
Socket	#26 – #30	BeCu	809-043	0229-.0245	0.582-0.622	Blue	A, D
Socket	#22 – #28	Alumel	809-066A	.0335-.0355	0.851-0.902	None	A, C
Socket	#22 – #28	Chromel	809-066C	.0335-.0355	0.851-0.902	None	A, C

Crimp Tensile Strength (Values are in pounds and are minimums.)

Wire Gage	Silver or Tin Coated Copper Wire	Nickel Coated Copper Wire	Wire Gage	Silver or Tin Coated Copper Wire	Nickel Coated Copper Wire
#22	12	8	#28	3	2
#24	8	6	#30	1.5	1.5
#26	5	3			


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse
Contacts and Tools
809-335 Size #23 Pin Contact and 857-034 Socket

A

Size #23 crimp contacts for combo arrangements with size #8 contacts

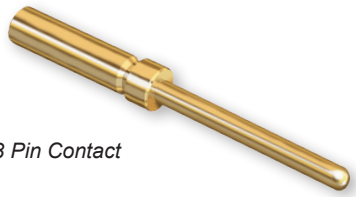


#23 Pin Contact

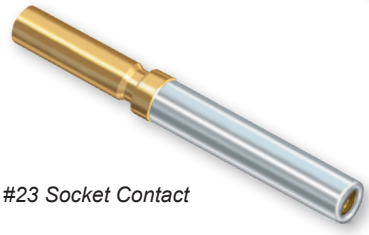


#23 Socket Contact


Select these longer Size #23 contacts when ordering combo arrangements with size #8 contacts. Combo arrangements with size #8 contacts require the use of longer pin and socket, size #23 contacts. These contacts accept #22 to #28 AWG wire. Terminate with standard M22520/2-01 crimper for use with pin positioner, part number 809-174 and socket positioner, part number 809-369. Use insertion/extraction tool, part number 809-088. Contacts are bulk packaged.

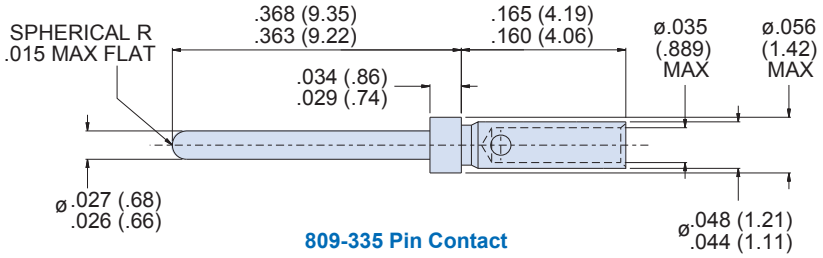


809-335 Pin Contact

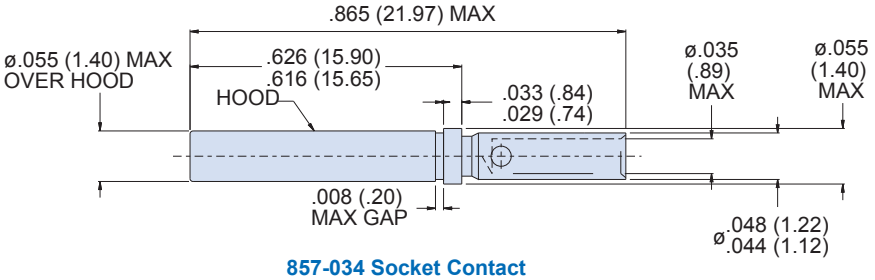

857-034 Socket Contact



809-335
RECOMMENDED WIRE
STRIP LENGTH



857-034
RECCOMMENDED WIRE
STRIP LENGTH

NOTES

Material

809-335 Pin:

- Beryllium copper per ASTM B196 or ASTM B197

857-034 Socket:

- Contact: Beryllium copper per ASTM B197.
  Hood : Stainless steel per QQ-S-763

Finish

809-335 Pin:
50 microinches minimum gold plating per ASTM B 488 over nickel underplate

857-034 Socket:
Contact - 50 microinches minimum gold plating per ASTM B 488 over nickel underplate
Hood - stainless steel per QQ-S-763

Specifications

- Current Rating: 5 Amps maximum
- Voltage Drop (at 5 Amps and 25° C): 70 millivolts maximum
- Temperature Range: -65° to +175° C
- Socket Contact Minimum Separation Force: 0.5 ounces

Crimp Tools and Insertion/Removal Tools

- Crimper: M22520/2-01
- Socket Positioner: 809-369
  Pin Positioner: 809-174
- Standard Insertion/Removal Tool: 809-088


Size #23 Removable Crimp Contacts					
Contact Type	**Wire Size**	**Material**	**Part Number**	**Color Band**	**Tool Code**
Pin	#22 – #28	BeCu	**809-335**	None	A, U
Socket	#22 – #28	BeCu	**857-034**	None	A, T

Crimp Tensile Strength (Values are in pounds)	
Wire Gage	Axial Load
#22	12
#24	8
#26	5
#28	3

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #23 crimp contacts for AWG #20 wire (Non-Removable)

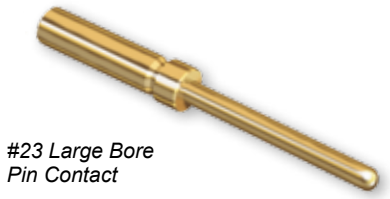



#23 Large Bore Pin Contact



#23 Small Bore Socket Contact

Standard size #23 contacts accept #22 to #28 AWG wire. Choose "large bore" versions for #20 to #22 AWG wire. Contacts are bulk packaged. Terminate with standard M22520 crimper with special positioner. **Note contacts are installed with standard size #23 insertion tools.**

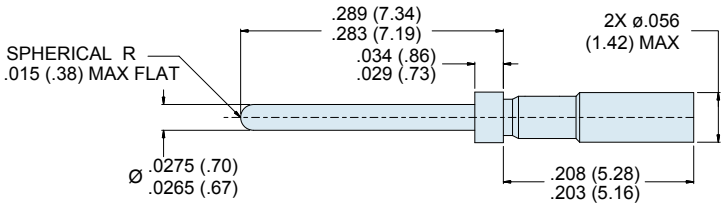

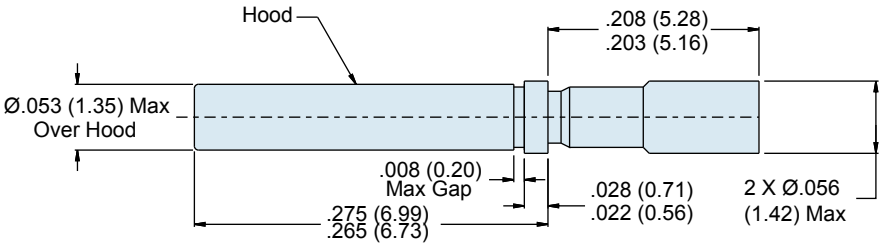

NOTES

Material and Finish

- Contact: beryllium copper alloy per ASTM B 196 or ASTM B 197, 50 microinches gold plated per ASTM B488 Type II Code C Class 1.25 over nickel underplate
- Socket contact hood: stainless steel, passivated per AMS-QQ-P-35.

Specifications

- Current Rating: 5 Amps maximum
- Voltage Drop (at 5 Amps and 25° C): 70 millivolts maximum
- Temperature Range: -65° to + 175° C
- Socket Contact Minimum Separation Force: 0.5 ounces

Crimp Tools and Insertion/Removal Tools

- Crimper: M22520/2-01 Pin/Socket
- Positioner: 809-301 (large bore).

Size #23 Non-Removable Crimp Contacts					
Contact Type	**Wire Size**	**Material**	**Part Number**	**Color Band**	**Tool Code**
Pin	#23 – #20	BeCu	**809-299**	None	A, S
Socket	#23 – #20	BeCu	**809-300**	None	A, S

Crimp Tensile Strength (Values are in pounds and are minimums.)	
Wire Gage	Axial Load
#20	20
#22	12

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Contacts and Tools

Size #23 Crimp Contact Instructions

How To Terminate, Install and Remove Size #23 Contacts

1 ***Set Up Crimp Tool.*** Install proper positioner into crimp tool. The label on the positioner shows the proper tool setting for each wire size. Turn the adjustment wheel to the correct setting.


2 ***Strip Wire.*** Remove wire insulation, taking care to avoid nicking or cutting wire strands. Strip wire to length shown.

3 ***Insert wire*** into contact. The wire should be visible in the inspection hole.

4 ***Insert contact into crimp tool as shown.*** Make sure that the contact is fully inserted into the tool. Squeeze handle completely. The ratchet mechanism will not allow a partial crimp. Release handle and remove contact.


5 ***Inspect crimped contact.*** Wire should be fully inserted and the crimp should be uniform in appearance.

Insertion/Extraction Tool 809-088



6 ***Install contact into connector.*** Push the contact through the rear grommet until the contact locks into place. This can usually be done by hand without the need for a tool. If the wire gage is #26 or smaller, a tool is helpful. There are two techniques for installing contacts with a tool. One method is to push the contact in by hand, then use the tool to finish the insertion. The other method is to position the insertion tip against the contact shoulder, then insert the contact. Use insertion/extraction tool 809-088 to install contacts. Slide the wire into the groove on the blue end of the tool. Slide the tool tip up the contact until it touches the contact shoulder. **USE CARE TO AVOID DAMAGING THE CONNECTOR.**

7 ***Contact Extraction.*** Use tool 809-088. The white end is used for contact extraction. First, push the wire into the groove of the metal tip. Slide the tip of the tool into the connector. Push the tool into the connector cavity until the tip bottoms in the connector. Avoid wiggling or rocking the tip. This may damage the cavity. A straight push is best. Pinch the wire between your finger and the white plastic grip and slide the tool and contact out of the connector. **Wire insulation diameter greater than 0.045 inches (1.14mm) is too large to work properly with the extraction tool. connector damage is possible.**

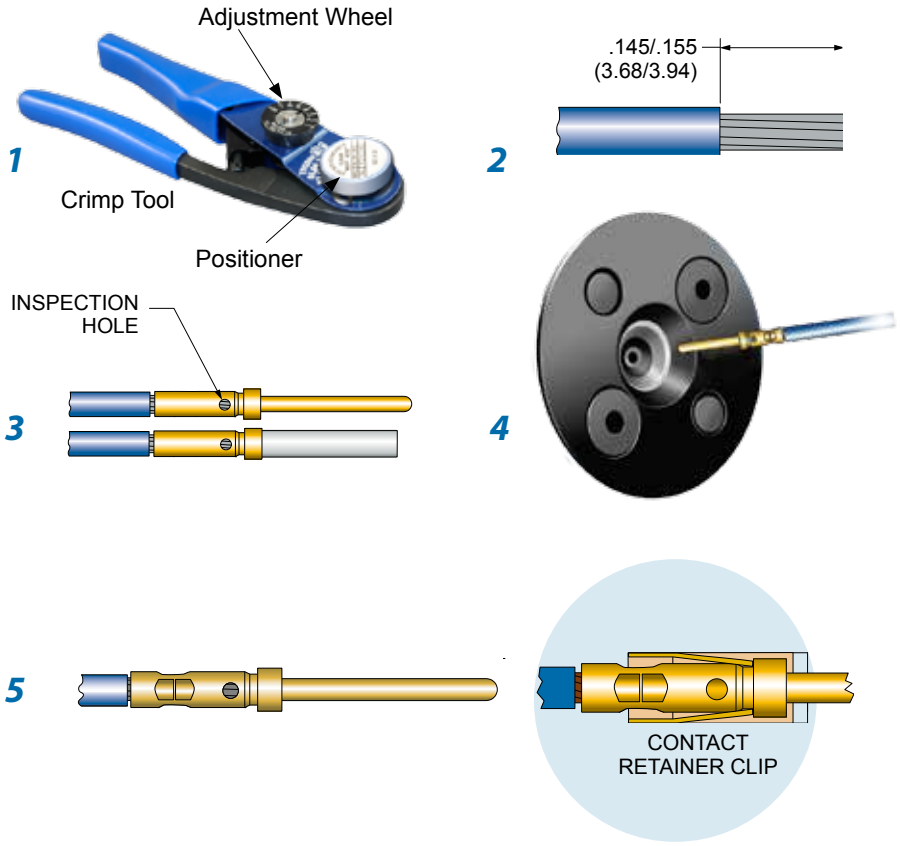

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **A-6** **E-Mail: sales@glenair.com**


Adapter for crimping #20 awg wire to size #23 contacts




#20 AWG Wire Adapter

Size #22 AWG wire is the largest wire size that fits standard size 23 contacts. Use this adapter to attach larger #20 gage wire. First, crimp wire to adapter, then crimp the adapter into the size #23 contact. Adapters are made of tellurium copper alloy #1452, and are gold plated. Crimp with M22520/1-01 tool and 809-138 (Daniels TH653) positioner. These adapters cannot be removed from connectors.

Adapter Size	Wire Size	Part Number	Tool Code
#22-20	#20	809-093	J, L

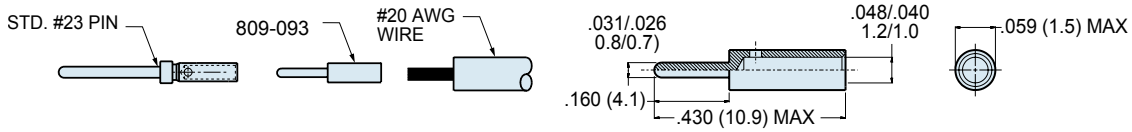


Size #20HD crimp contacts




#20HD Pin Contact

#20HD Socket Contact

High-density size #20HD contacts accept #20 to #24 AWG wire. At rated test current of 7.5 amps, the maximum voltage drop is 55 millivolts. Contacts are gold-plated copper alloy. Socket contacts feature stainless steel hoods to protect against probe damage. Contacts are bulk packaged. Terminate with M22520/2-01 crimper and 809-206 positioner.

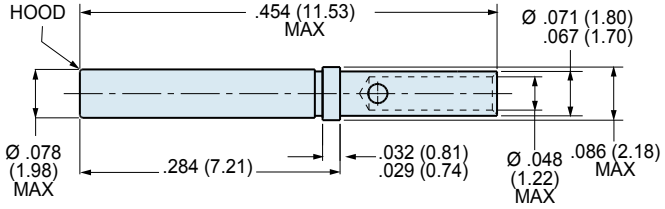

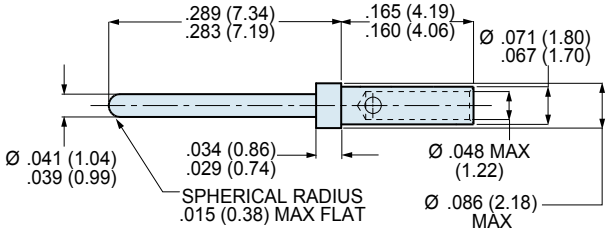

NOTES

Material and Finish

- Beryllium copper alloy, 50 microinches gold plated per ASTM B488 Type II Code C Class 1.25 over nickel plate per QQ-N-290 Class 2, 50-100 microinches. Socket contact hood: stainless steel, passivated per AMS-QQ-P-35.

Specifications

- Current Rating: 7.5 Amps maximum Temperature Range: -65° to + 175° C Socket Contact Minimum Separation Force: 0.7 ounces


Crimp Tensile Strength		
Values are in pounds and are minimums.		
Wire Gage	Silver or Tin Coated Copper Wire	Nickel Coated Copper Wire
#20	20	19
#22	12	8
#24	8	6

Contact Type	Wire Size	Part Number	Tool Code
Pin	#20 – #24	809-204	A, I
Socket	#20 – #24	809-205	A, I

Dimensions in Inches (millimeters) are subject to change without notice.

Series 80 Mighty Mouse Contacts and Tools
#20, #16, #12 Contacts

Size #20 Crimp Contacts





#20 Pin Contact

#20 Socket Contact

Standard size #20 contacts accept #20 to #24 AWG wire. At rated test current of 7.5 amps, the maximum voltage drop is 55 millivolts. Contacts are gold-plated copper alloy. Socket contacts feature stainless steel hoods to protect against probe damage. Approved to SAE-AMS-39029. Contacts are bulk packaged. Terminate with M22520/1-01 crimper and M22520/1-04 positioner.

Contact Type	Wire Size	Part Number	Military Part Number	Color Band			Tool Code
				1st	2nd	3rd	
Pin	#20 – #24	850-002-20-363	M39029/58-363	Orange	Blue	Orange	J, K
Socket	#20 – #24	850-003-20-357	M39029/57-357	Orange	Green	Violet	J, K

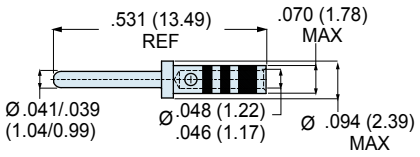

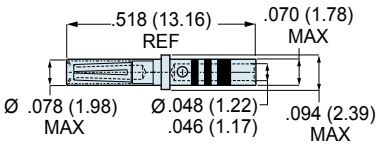

Size #16 Crimp Contacts





#16 Pin Contact

#16 Socket Contact

Standard size #16 contacts accept #16 to #20 AWG wire. At rated test current of 13 amps, the maximum voltage drop is 49 millivolts. Contacts are gold-plated copper alloy. Socket contacts feature stainless steel hoods to protect against probe damage. Approved to SAE-AMS-39029. Contacts are bulk packaged. Terminate with M22520/1-01 crimper and M22520/1-04 positioner.

Contact Type	Wire Size	Part Number	Military Part Number	Color Band			Tool Code
				1st	2nd	3rd	
Pin	#16 – #20	809-110	M39029/58-364	Orange	Blue	Yellow	J, K
Socket	#16 – #20	809-111	M39029/57-358	Orange	Green	Gray	J, K

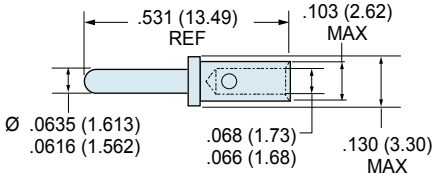

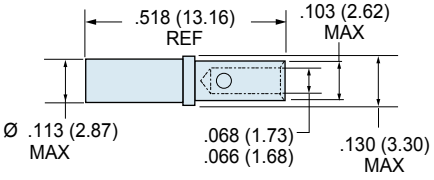

Size #12 Crimp Contacts





#12 Pin Contact

#12 Socket Contact

Standard size #12 contacts accept #12 to #14 AWG wire. At rated test current of 23 amps, the maximum voltage drop is 63 millivolts. Contacts are gold-plated copper alloy. Socket contacts feature stainless steel hoods to protect against probe damage. Approved to SAE AS39029. Contacts are bulk packaged. Terminate with M22520/1-01 crimper and M22520/1-04 positioner.

Contact Type	Wire Size	Part Number	Military Part Number	Color Band			Tool Code
				1st	2nd	3rd	
Pin	#12 – #14	809-112	M39029/58-365	Orange	Blue	Green	J, K
Socket	#12 – #14	809-113	M39029/57-359	Orange	Green	White	J, K

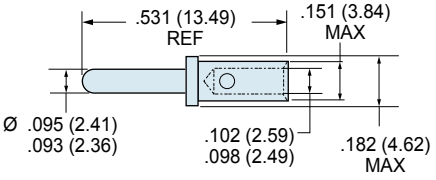

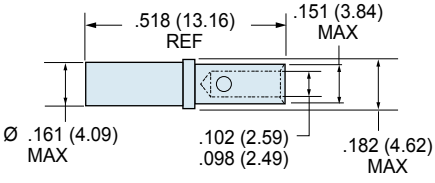

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #16 coaxial contacts





#16 Pin Contact

#16 Socket Contact

These #16 contacts accept 50 ohm and 75 ohm coaxial cable. Inner contact is rated at 1 amp, the outer contact 12 amps. DWV voltage rating is 800 Vac rms sea level, 250 Vac at 50,000 feet. Contacts are packaged individually and are unassembled with instruction sheet. One contact consists of outer contact , fluorocarbon dielectric, inner contact and shield crimp sleeve. Inner and outer contacts are gold-plated copper alloy. Approved to SAE AS39029. VSWR rating 1.5:1 maximum up to 700 MHz. 5000 megohm insulation resistance.

Type	Cable Size	Part Number	Military Part Number	Color Band			Tool Code
				1st	2nd	3rd	
Pin	RG174, RG316, RG179	809-114	M39029/76-424	Yellow	Red	Yellow	A, E, M, N
Pin	RG178	809-115	M39029/76-425	Yellow	Red	Green	A, E, M, N
Socket	RG174, RG316, RG179	809-116	M39029/78-432	Yellow	Orange	Red	A, E, M, N
Socket	RG178	809-117	M39029/78-433	Yellow	Orange	Orange	A, E, M, N

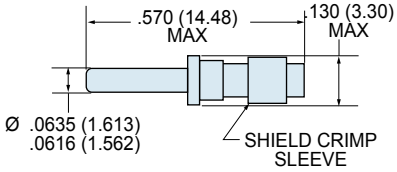

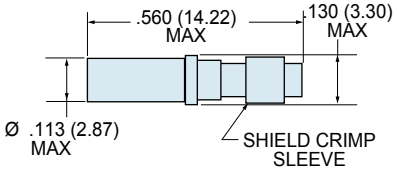

Size #12 coaxial contacts





#12 Pin Contact

#12 Socket Contact

These #12 contacts accept 50 ohm and 75 ohm coaxial cable. Inner contact is rated at 1 amp, the outer contact 12 amps. DWV voltage rating is 1000 Vac rms sea level, 250 Vac at 50,000 feet. Contacts are packaged individually and shipped unassembled with instruction sheet. One contact consists of outer contact , fluorocarbon dielectric, inner contact and shield crimp sleeve. Inner and outer contacts are gold-plated copper alloy. Approved to SAE AS39029. VSWR rating 1.5:1 maximum up to 700 MHz. 5000 megohm insulation resistance.


Type	Cable Size	Part Number	Military Part Number	Color Band			Tool Code
				1st	2nd	3rd	
Pin	RG174, RG316, RG179	809-118	M39029/28-211	Red	Brown	Brown	A, G, O, P
Pin	RG180	809-119	M39029/28-409	Yellow	Black	White	A, G, O, P
Socket	RG174, RG316, RG179	809-120	M39029/27-210	Red	Brown	Black	A, G, O, P
Socket	RG180	809-121	M39029/27-402	Yellow	Black	Red	A, G, O, P

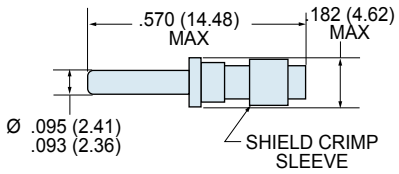

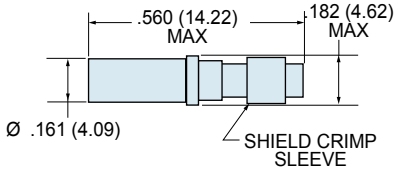

Dimensions in Inches (millimeters) are subject to change without notice.

Size #12, 50 ohm matched impedance coaxial contacts

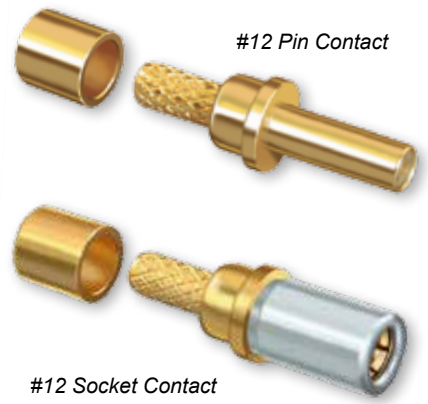

These contacts offer improved frequency response compared to standard coaxial contacts above. VSWR is 1.32:1 at 3GHz . Nominal impedance is 50 ohms. Insertion loss at 3GHz is 0.20 dB maximum. Inner contact is rated at 1 amp, the outer contact 12 amps. DWV voltage rating is 1000 Vac rms sea level, 250 Vac at 50,000 feet. Contacts are packaged individually and shipped unassembled with instruction sheet. Inner and outer contacts are gold-plated copper alloy. 5000 megohm insulation resistance. Terminate crimp type coaxial center contact with hand tool 809-128 (Daniels MH992). Terminate cable braid to contact with 809-129 (Daniels HX4) parallel action crimp tool and 809-120 (Daniels Y196) hex die.

Contact Type	Cable Type	Part Number	Termination	Fig.	Tool Code
Pin	M17/113-RG316	852-016-01	Crimp	1	B, H, Q, R
Pin	M17/152-00001(RG316DS)	852-016-02	Crimp	1	B, H, Q, R
Pin	M17/93-RG178	852-016-03	Crimp	1	B, F, Q, R
Pin	TFLEX-405	852-018	Solder	2	(No Tool)
Socket	M17/113-RG316	852-015-01	Crimp	3	B, H, Q, R
Socket	M17/152-00001(RG316DS)	852-015-02	Crimp	3	B, H, Q, R
Socket	M17/93-RG178	852-015-03	Crimp	3	B, F, Q, R
Socket	TFLEX-405	852-017	Solder	4	(No Tool)

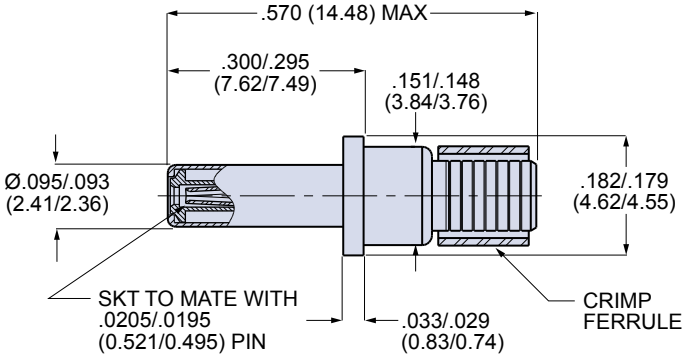


Figure 1

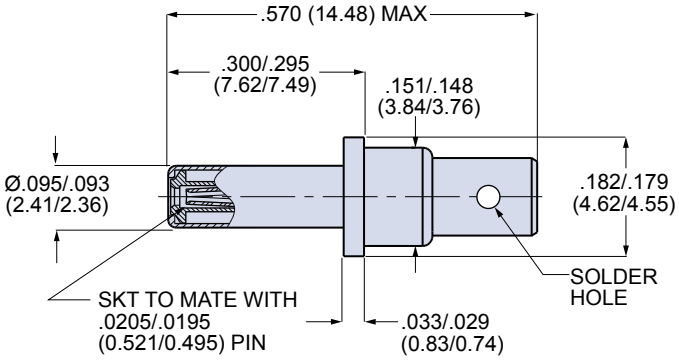


Figure 2

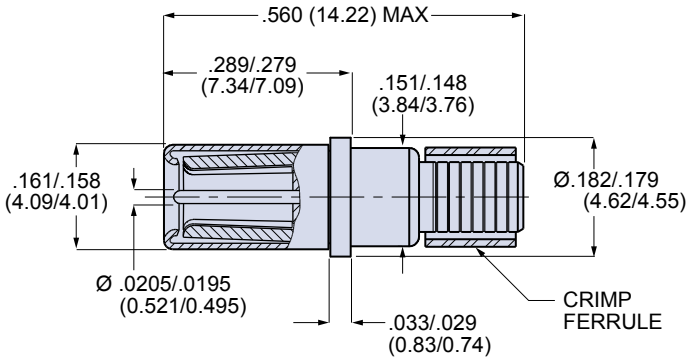


Figure 3

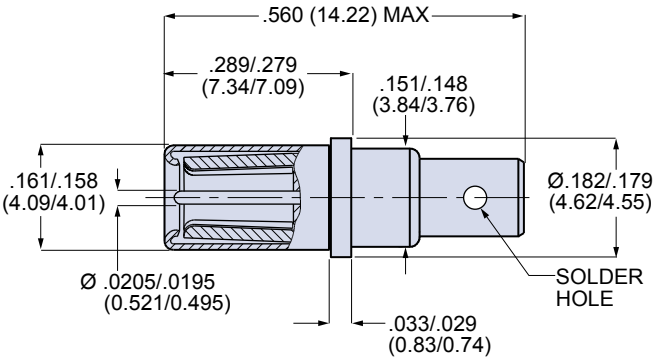


Figure 4

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #12 pneumatic contacts



Stainless steel pneumatic contacts attach to 3/32 inch (2.38) diameter tubing. Socket contact has o-ring and PTFE backup washers. Contacts snap into size #12 connector cavities. Ideal for pitot tube connections, these pneumatic contacts are rated for 100 PSI maximum air pressure. No installation tool is required. Remove contacts with plastic extraction tool 809-132.


Contact Type	Tube I.D.	Part Number
Pin	.094 (2.38)	830-004*
Socket	.094 (2.38)	830-003*

*857-004 supercedes 857-011
*857-003 supercedes 857-010


NOTES

Material and Finish

- Body and Cap: stainless steel, passivated
- O-ring: fluorosilicone
- Washers: PTFE

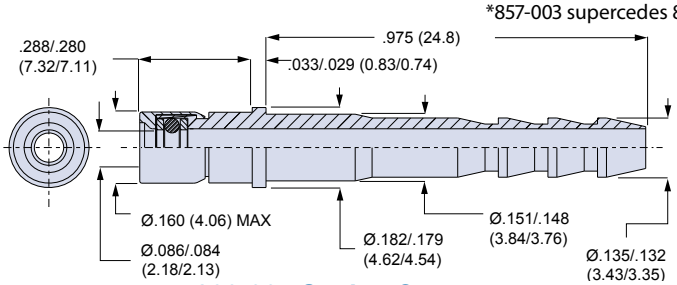


830-004 Socket Contact

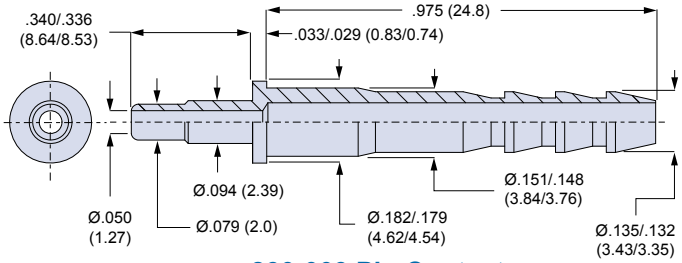

830-003 Pin Contact

Grommet sealing plugs

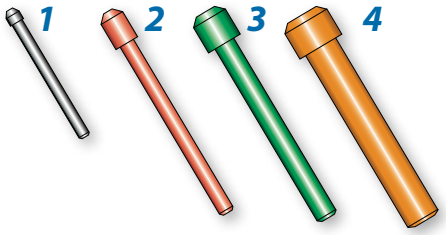

Grommet sealing plugs are used to seal unwired contact cavities. The size #23 sealing plug is specially designed to fit Glenair Series 80 grommets. Sizes 20, 16 and 12 plugs conform to MS27488 requirements. After installing unwired contacts into unused cavities, insert knob end of sealing plug into grommet until it bottoms against the unwired contact per illustration. Install sealing plugs with standard contact insertion/extraction tools . Size #23 plug is polyphenylsulphone, other sizes are per MS27488 requirements.


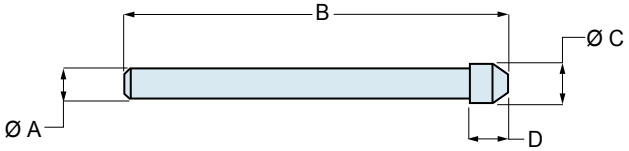


Fig.	Size	Color	Part Number	Military Part Number	Insertion/ Removal Tool	A Ref.		B Ref.		C Ref.		D Ref.	
						in.	mm.	in.	mm.	in.	mm.	in.	mm.
1	#23	Black	809-155	(None)	M81969/14-01	.040	1.02	.51	13.0	.052	1.32	.050	1.27
2	#20	Red	859-012	MS27488-20-2	M81969/14-11	.053	1.35	.82	20.8	.085	2.16	.125	3.18
3	#16	Green	859-013	MS27488-16-2	M81969/14-03	.074	1.88	.88	22.4	.125	3.18	.125	3.18
4	#12	Orange	859-014	MS27488-12-2	M81969/14-04	.120	3.05	.85	21.6	.165	4.19	.125	3.18



Installation of Sealing Plugs

"When installing sealing plug in connector cavities without contacts, the end opposite the knob shall be inserted first and the knob shall be seated against the grommet face. When installing into cavities with contacts, the sealing plugs shall be installed knob end first and shall bottom on the contact wire barrel." (NAVAIR 01-1A-505–1 Installation manual)

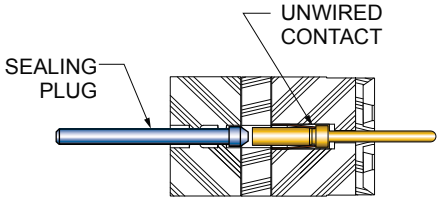

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Glenair®

Series 80 Mighty Mouse Contacts and Tools

Crimp Tools and Positioners

Miniature Adjustable Crimp Tools






These crimp tools perform precision eight indent crimps for gas-tight wire terminations and excellent tensile strength. Adjustment wheel has 8 settings. Ratchet mechanism prevents improper crimps. Use with bayonet-type positioners. Check calibration with M22520/3 gages. Length is 6.75 inches, weight is approx. 10 oz.

A Standard M22520/2-01 crimper. Use with standard size #23 and #20HD Mighty Mouse contacts and with M39029/76 and /78 coaxial center contacts. Requires positioner, ordered separately.

B Special MH992 crimper used with 50 ohm matched impedance coaxial inner contacts. Requires positioner, ordered separately.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
A	809-015	M22520/2-01	AFM8	A
B	809-128	(none)	MH992	B

Positioners for use with Miniature Adjustable Crimp Tools

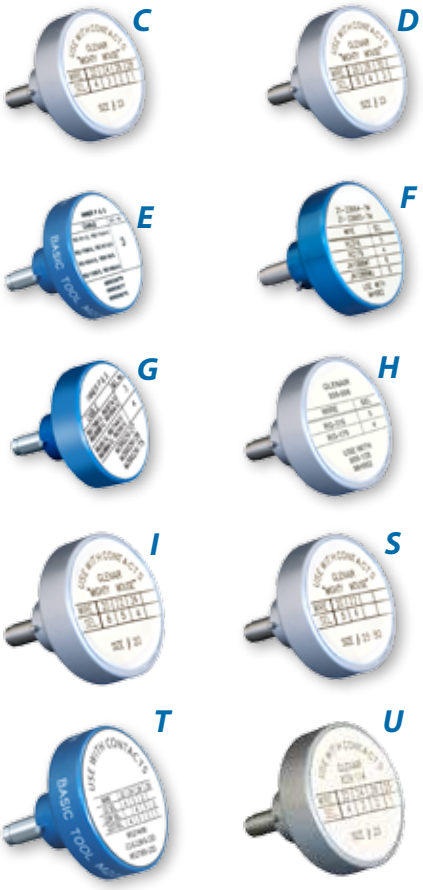

These bayonet-type positioners hold contacts at correct height for crimping with M22520/2 type miniature step adjustable tools, above. Face plate shows correct tool settings.

C Positioner for standard size #23 contacts. #22-#28 AWG. Use with 809-015 crimp tool.

D Positioner for small bore size #23 contacts. #26-#30 AWG. Use with 809-015 crimp tool.

E Positioner for M39029/76 and 78 coaxial inner contact. Use with 809-015 crimp tool.

F Positioner for matched impedance #12 coaxial inner contact. Use with 809-128 crimp tool.

G Positioner for M39029/27 and 28 #12 coaxial inner contact. Use with 809-015 crimp tool.

H Positioner for matched impedance #12 coaxial inner contact. Use with 809-128 crimp tool.

I Positioner for #20HD contacts. Use with 809-015 crimp tool.

S Positioner for large bore size #23 contacts. #20-#22 AWG. Use with M22520/2-01 crimp tool.

T Positioner for long size #23 pin contact for use with combo arrangements with size #8 contacts. Use with M22520/2-01 crimp tool.

U Positioner for long size #23 socket contact for use with combo arrangements with size #8 contacts. Use with M22520/2-01 crimp tool.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
C	809-005	(none)	K1461	C
D	809-057	(none)	(none)	D
E	809-125	M22520/2-35	K532-1	E
F	809-124	(none)	K1360	F
G	809-135	M22520/2-34	K323	G
H	859-006	(none)	K1721	H
I	809-206	(none)	(none)	I
S	809-301	(none)	(none)	S
T	809-174	(none)	(none)	T
U	809-369	M22520/2-07	K40	U

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Crimp tool and positioner for #12, #16 and #20 power contacts, 809-093 adapters



J Crimp tool for use with size #20, #16 and #12 power pins. 9.75 inches OAL, 1.25 pounds. Use with M39029/57 and /58 contacts and 809-093 adapters.

K Positioner for use with size #20, #12 and #16 Power contacts.

L Positioner for use with 809-093 adapters.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
J	809-136	M22520/1-01	AF8	J
K	809-137	M22520/1-04	TH163	K
L	809-138	(none)	TH653	L

Crimp tool and positioner for #16 coaxial outer contact



For crimping size #16 shield sleeves. These mil spec approved tools feature a ratchet mechanism to prevent damage from overcrimping. Check calibration with M22520/3 gage.

M Crimp tool for use with size #16 coaxial contacts. Blue handles. 9.75 inches OAL, 1.25 pounds.

N Positioner for use with size #16 coaxial contacts. Use with 809-127 (M22520/4-01) crimp tool.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
M	809-127	M22520/4-01	GS100-1	M
N	809-126	M22520/4-02	GP295	N

Crimp tool and positioner for #12 coaxial outer contact




For crimping size #12 shield sleeves. These mil spec approved tools feature a ratchet mechanism to prevent damage from overcrimping. Check calibration with M22520/3 gage.

O Crimp tool for use with size #12 coaxial contacts. Black handles. 9.75 inches OAL, 1.25 pounds.

P Positioner for use with size #12 coaxial contacts. Use with 809-133 (M22520/31-01) crimp tool.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
O	809-133	M22520/31-01	GS200-1	O
P	809-134	M22520/31-02	G2P330	P

Parallel action crimp tool and hex die set for 50 ohm matched impedance #12 coax

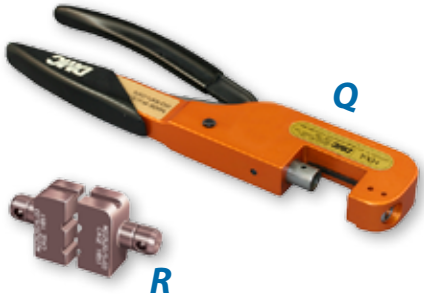

Q Parallel action tool for use with hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Includes tool for die set removal. Accepts all M22520/5 die sets.

R Die set for terminating coaxial shield to outer contact. Use with size #12 matched impedance M39029/102 and 103 type coaxial contacts. Set consists of upper and lower halves. Made of hardened steel with black oxide finish. Die set has two closures.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
Q	809-129	M22520/5-01	HX4	Q
R	809-130	M22520/5-03	Y196	R

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Contacts and Tools

Contact Insertion and Removal Tools and Contact Retention Tester 809-107

Contact insertion and removal tools

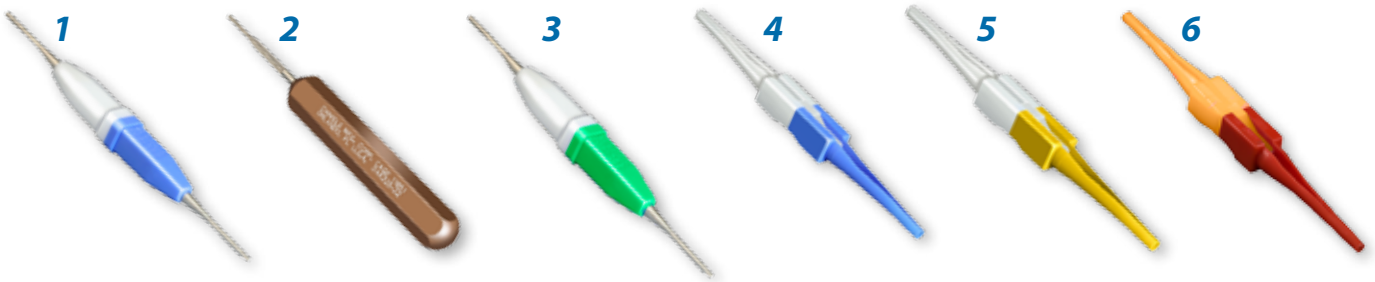


Figure	Size	Type	Part Number	Military Part Number	Daniels Part Number
1	#23	Insertion/Extraction	809-088	(None)	(None)
2	#23	Insertion Only	809-013	(None)	DAK225-22
3	#20HD	Insertion/Extraction	809-203 (Append D for Delrin tip)	(None)	(None)
4	#16	Insertion/Extraction	809-131	M81969/14-03	(None)
5	#12	Insertion/extraction	809-132	M81969/14-04	(None)
6	#20	Insertion/extraction	809-207	M81969/14-10	(None)

1 Insertion/Extraction Tool for #23 Contacts. Features molded plastic grips and sturdy stainless steel tips. Blue/White molded handle.

2 Insertion Tool for #23 Contacts. This tool features anodized aluminum handle and stainless steel insertion tip.

3 Insertion/Extraction Tool for #20HD Contacts. This tool features molded plastic grips and sturdy stainless steel or Delrin tips. Molded handle in Green/White for SS or Green/Blue for Delrin tips.

4 Insertion/Extraction Tool for #16 Contacts. Use with size #16 coaxial or power contacts. Economical molded plastic. White extraction tip, blue insertion tip.

5 Insertion/Extraction Tool for #12 Contacts. Use with size #12 coaxial or power contacts. Molded plastic. White extraction tip, yellow insertion tip.

6 Insertion/Extraction Tool for #20 Contacts. Molded plastic. Orange extraction tip, red insertion tip.

Contact retention testers for size #23, #20, #16, #12 contacts (Kit or Individual Parts)



Check for properly seated contacts with this spring-loaded tester. Apply the tool tip to the mating end of a contact. Push on the handle until the spring compresses to the recommended force. A visual indicator shows full compression. The contact is properly retained if it is not displaced.

Adjust handle to appropriate settings:

Contact	P/N	Setting
#23	809-107-1	3.2 pounds
#20 & 20HD	809-370-1	8 pounds
#16	809-371-1	13 pounds
#12	809-372-1	13 pounds

Contact Size	Handle	Pin Tip	Socket Tip	Complete Kit
#23	809-107-1 (HT250-2)	809-107-2 (68-023-01)	809-107-3 (67-023-01)	809-107-4
#20 & 20HD	809-370-1 (HT250-4)	890-370-2 (68-020-01)	809-370-3 (67-020-01)	809-370-4
#16	809-371-1 (HT250-4)	809-371-2 (68-016-01)	809-371-3 (67-016-01)	809-371-4
#12	809-372-1 (HT250-4)	809-372-2 (68-012-01)	809-372-3 (67-012-01)	809-372-4

Daniels part numbers provided in parethesis

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Band-Master™ ATS shield termination system





Fast, cost-effective shield termination. Attach cable shields to Series 80 connectors or backshells with ***Band-Master™*** stainless steel straps. The ***Band-Master™*** system offers fast termination and the flexibility to handle a wide range of parts with just one band size. Approved for aerospace and defense, these straps have successfully passed rigorous shock, vibration and environmental testing.


1 Micro Band Installation Tool. Use with .120" (3.05 mm) wide bands. 6.75 inches (172 mm.) length, 1.2 pounds (0.6 Kg.)

2 Micro Band, .120" (3.05 mm) wide. Available in two lengths, flat or pre-coiled. Stainless steel.

Figure	Description	Part Number
1	Micro Band Installation Tool	600-061

Figure	Length		Part Number		Acommodates Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
2	8.125	206.38	601-060	601-061	.88	22.35
2	14.250	361.95	601-064	601-065	1.88	47.75

Contact Glenair or visit our website (glenair.com) to view our complete line of ***Band-Master ATS™*** products, including pneumatic tools for high volume production and calibration kits.

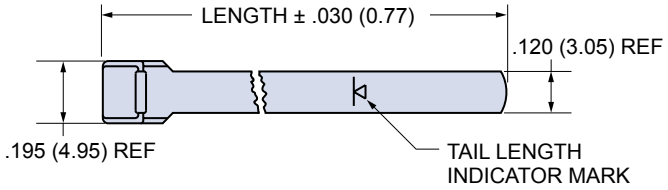

Band-Master™ ATS shield termination instructions

1. Prepare Cable Braid for termination process (Figure 1).
2. Push Braid forward over Adapter Retention Lip to the Adapter Incline Point (or .4" [10.2mm] minimum braid length). Milk Braid as required to remove slack and insure a snug fit around the shield termination area (Figure 2).
3. Prepare the Band in the following manner:

   IMPORTANT: Due to Connector/Adapter circumference, it may be necessary to prepare the Band around the Cable or Retention Area.

   A. Roll Band through the Buckle Slot twice. (Bands must be double-coiled.)

   B. Pull on Band until Mark (▷|) is within approximately .250 inch (6.4mm) of Buckle Slot (Figure 3). The Band may be tightened further if desired.


NOTE: Prepared Band should have (▷|) Mark visible approximately where shown in Figure 3.


Shield Termination
Clamping Process (Figures 4 thru 8)


NOTE: To free Tool Handles, move Holding Clips to center of Tool.


4. Squeeze Gripper Release Lever and insert Band into the front end opening of the Tool. (NOTE: Circular portion of looped band must always face downward.)
5. Aligning the Band and Tool with the Shield Termination Area, squeeze Black Pull-Up Handle repeatedly using short strokes until it locks against Tool Body. (This indicates the Band is compressed to the Tool Precalibrated Tension.)


   NOTE: If alignment of band and shield is unsatisfactory, tension on band can be relaxed by pushing on slotted release lever on top of tool. Make adjustments as necessary and again squeeze black pull-up handle.
6. Complete the Clamping Process by squeezing the Gray Cut-Off Handle.
7. Remove excess band from tool and dispose.
8. Inspect Shield Termination.





















Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Contacts and Tools
Jam Nut Tightening Tools, Connector Holding Fixtures and Mighty Mouse Recommended Torque Values,

Spanner tool for tightening Series 80 jam nuts



Use these tools to tighten Series 80 jam nuts. 1/4" or 3/8" square drive for use with torque wrenches. Heat-treated steel, nickel plated.

Spanner Tool Part Number						
Shell Size	Series 800	Series 801	Series 803	Series 804 Style 07	Series 804 Style 00	Series 805
5	600-146-01	600-146-02	600-137-05	600-146-03	600-147-5	—
6	600-146-02	600-146-03	600-137-06	600-146-04	600-147-6	—
7	600-146-03	600-146-05	600-137-07	600-146-06	600-147-7	—
8	600-146-04	600-146-05	600-137-09	600-146-06	600-147-7	600-154-08
9	600-146-05	600-146-06	600-137-09	600-146-07	600-147-9	600-154-09
10	600-146-06	600-146-07	600-137-10	600-146-08	600-147-10	600-154-09
11	—	600-146-08	—	—	—	600-154-11
12	600-146-08	—	600-137-12	600-146-10	600-147-12	600-154-12
13	—	600-146-10	—	—	—	600-154-13
14	600-146-10	—	600-137-14	600-146-12	600-147-14	—
15	600-146-11	—	600-137-15	600-146-13	600-147-15	600-154-15
16	—	600-146-13	—	—	—	—
17	—	600-146-14	—	—	—	—
18	—	—	—	—	—	600-154-18
19	—	—	—	—	—	600-154-19
21	—	600-146-17	—	—	—	—
23	—	—	—	—	—	600-154-23

Sample Part Number


600-146	-01
Product Series and Basic Part Number	Dash Number

See Table I for torque values

To order as a kit replace dash number with "KIT" i.e.: sustitute 600-146-*01* with 600-146-*KIT*.

Kit consists of all connector family shell size tools

Spanner tool for tightening Series 80 extended length jam nut connectors with size #8 contacts



These Lengthened spanner tools are used to tighten jam nuts on extended-length connectors with size #8 contacts. 3/8" square drive. Nickel-plated heat-treated steel.

Size #8 Spanner Tool Part Number			
Part No.	Series 801 Series Shell Size	Series 805 Series Shell Size	Jam Nut Thread Size Ref
600-197-05	8	N/A	.562
600-197-07	N/A	10	.688
600-197-13	16	N/A	1.062
600-197-14	17	N/A	1.125
600-197-15	N/A	18	1.188
600-197-16	19	19	1.250
600-197-17	21	21	1.375
600-197-18	N/A	23	1.500

Sample Part Number

600-197	-05
Product Series and Basic Part Number	Dash Number

See Table I for torque values

To order as a kit replace dash number with "KIT" i.e.: substitute 600-197-*05* with 600-197-*KIT*

Kit consists of all connector family shell size tools

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Connector holding tool for tightening backshells and accessories

1 Plug tool for holding Series 80 plug connectors. Heat-treated steel, nickel plated.

2 Receptacle tool for holding Series 80 receptacle connectors. Heat-treated steel, nickel plated.



1



2

Holding Tool Part Number (Add P or R)												
Shell Size	Series 800		Series 801		Series 803		Series 804		Series 805	
5	600M005-05	★	600MM005-05	♦	600-140-5	★	600-141-5	■	—	
6	600M005-06	★	600MM005-06	♦	600-140-6	★	600-141-6	■	—	
7	600M005-07	★	600MM005-07	♦	600-140-7	★	600-141-7	■	—	
8	600M005-08	★	600MM005-08	♦	600-140-8	★	600-141-8	■	600-185-8	O
9	600M005-09	★	600MM005-09	♦	600-140-9	★	600-141-9	■	600-185-9	O
10	600M005-10	★	600MM005-10	♦	600-140-10	★	600-141-10	■	600-185-10	O
11	—		600MM005-11	♦	—		—		600-185-11	O
12	600M005-12	★	—		600-140-12	★	600-141-12	■	600-185-12	O
13	—		600MM005-13	♦	—		—		600-185-13	O
14	—		—		600-140-14	★	600-141-14	■	—	
15	—		—		600-140-15	★	600-141-15	■	600-185-15	O
16	—		600MM005-16	♦	—		—		—	
17	—		600MM005-17	♦	—		—		—	
18	—		—		—		—		600-185-18	O
19	—		—		—		—		600-185-19	O
21	—		600MM005-21	♦	—		—		600-154-21	
23	—		—		—		—		600-185-23	O

★ Add **P** for plug holder or **R** for receptacle holder, followed by polarizing position (**N**, **X**, **Y**, **Z**).
♦ Add **P** for plug holder or **R** for receptacle holder, followed by polarizing position (**A**, **B**, **C**, **D**).
■ Add **P** for plug holder or **R** for receptacle holder, followed by polarizing position (**A**, **B**, **C**, **D**, **E**, **F**). Omit for single master key).
O Add **P** for plug holder or **R** for receptacle holder, followed by polarizing position (**A**, **B**, **C**, **D**, **E**, **F**). Omit polarization for receptacle tools.

The following tabulations show the changes to the Glenair recommended torque values for connector coupling torque and backshell tightening torque. The jam nut tightening torque values will remain the same.

Series 800 Recommended Torque Values		
Series 800	Backshell Tightening In-Lbs.	
	Min.	Max.
5	12	16
6	14	18
7	16	20
8	16	20
9	16	20
10	16	20
12	16	20

Series 801, 802, 803, 804, 805 Recommended Torque Values			
Shell Size Series 801, 802, 803	Shell Size Series 805	Backshell Tightening In-Lbs.	
		Min.	Max.
5	-	12	16
6	8	14	18
7	9	16	20
8	10	18	22
9	11	20	24
10	12	22	26
12, 13	15	28	32
14, 16	18	28	32
15, 17	19	28	32
19, 21	23	28	32


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Recommended Shielded Twisted Pair Termination to High Speed Mighty Mouse


Step 1

Strip jacket back .400" Max. If pair is unjacketed, install shrink tubing .400" Max from end of wires.

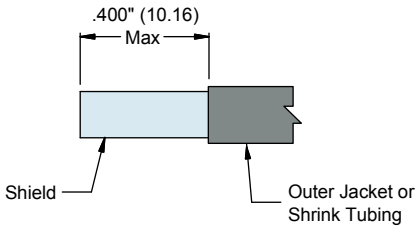


Step 2

Trim shield back to jacket. Ensure that wires do not become separated underneath jacket.

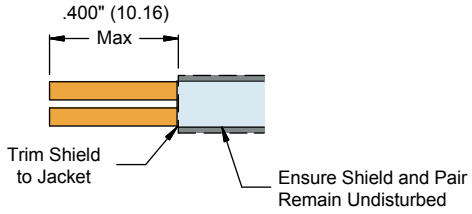


Step 3

Install #23 crimp contacts included with connector per recommended installation procedure.

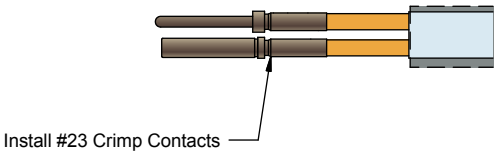


Step 4

Insert contacts into adjacent cavities of high-speed mighty mouse connector with rear grommet removed (MOD-422B).

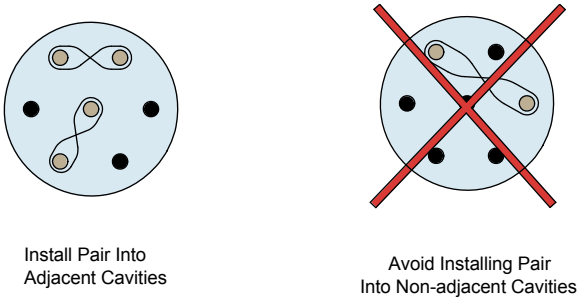

Step 5

Assembled view

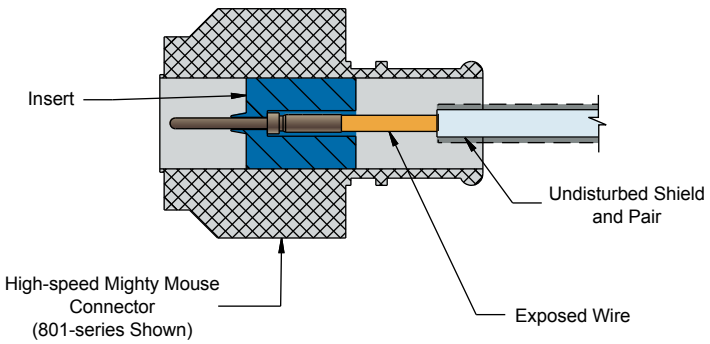

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

SERIES 80

MIGHTY MOUSE

Everything you always wanted in a high-performance ultraminiature, reduced weight connector





Non-Magnetic RF



Shielded/Ground Plane



Ruggedized USB



Fiber Optic



Submersible




EMI/RFI Filter

Glenair®


Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE




Series 80 Contact Arrangements
Single contact size arrangements begin on B-3
Combo contact size arrangements begin on B-6

Page B-2




Series 80 Straight PCB Footprints
Single contact size arrangements begin on B-9
Combo contact size arrangements begin on B-29

Page B-8



Series 80 Recommended Torque Values

Page B-39



Series 80 Product Specifications
Performance specs, materials and finishes

Page B-40



Series 80 Space Grade Application Guidelines

Page B-47



Series 80 Space Modification Codes and Material/Finish Codes

Page B-51


Dimensions in Inches (millimeters) are subject to change without notice.

© 2013 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 80 Mighty Mouse
Contact Arrangement Summary

Series 80 Mighty Mouse Contact Arrangements

Contact Size		Contact Quantity						Contact Arrangement*					
		#23	#20	#20HD	#16	#12	#8	Series 800	Series 801	Series 802	Series 803	Series 804	Series 805
Size #23 Contacts 5 Amp Max. Current #22-#28 AWG **750 VAC DWV**		3						5-3	5-3	5-3	5-3	5-3	N/A
		4						6-4	6-4	6-4	6-4	6-4	8-4
		6						6-6	6-6	6-6	6-6	6-6	8-6
		7						6-7	6-7	6-7	6-7	6-7	8-7
		10						7-10	7-10	7-10	7-10	7-10	9-10
		13						8-13	8-13	8-13	8-13	8-13	10-13
		19						9-19	9-19	9-19	9-19	9-19	11-19
		26						10-26	10-26	10-26	10-26	10-26	12-26
		31						N/A	11-31	N/A	11-31	11-31	13-31
		37						12-37	13-37	12-37	12-37	12-37	15-37
		55						N/A	16-55	14-55	14-55	14-55	18-55
		85						N/A	17-85	15-85	N/A	N/A	19-85
		100						N/A	19-100	19-100	N/A	N/A	21-100
		130						N/A	21-130	21-130	N/A	N/A	23-130
Size #20HD Contacts 7.5 Amp Max.Current #20-#24 AWG **1000 VAC DWV**				3				6-23	6-23	6-23	6-23	6-23	8-23
				5				7-25	7-25	7-25	7-25	7-25	9-25
				8				8-28	8-28	8-28	8-28	8-28	10-28
				10				9-210	9-210	9-210	9-210	9-210	11-210
				20				12-220	13-220	12-220	12-220	12-220	15-220
				35				N/A	16-235	14-235	14-235	14-235	18-235
				41				N/A	17-241	15-241	N/A	N/A	19-241
				55				N/A	19-255	19-255	N/A	N/A	21-255
				69				N/A	21-269	21-269	N/A	N/A	23-269
Size #16 Contacts 13 Amp Max. Current #16-#20 AWG **1800 VAC DWV**					1			6-1	6-1	6-1	6-1	6-1	8-1
					2			8-2	8-2	8-2	8-2	8-2	10-2
					4			9-4	9-4	9-4	9-4	9-4	11-4
					5			10-5	10-5	10-5	10-5	10-5	12-5
					7			12-7	13-7	12-7	12-7	12-7	15-7
					12			N/A	16-12	14-12	14-12	14-12	18-12
					14			N/A	17-14	15-14	N/A	N/A	19-14
					19			N/A	19-19	19-19	N/A	N/A	21-19
					22			N/A	21-22	21-22	N/A	N/A	23-22
Size #12 Contacts 23 Amp Max. Current #12-#14 AWG **1800 VAC DWV**						1		7-1	7-1	7-1	7-1	7-1	9-1
						2		10-2	10-2	10-2	10-2	10-2	12-2
						2		12-2	13-2	12-2	12-2	12-2	15-2
						3		12-3	13-3	12-3	12-3	12-3	15-3
						5		N/A	16-5	14-5	14-5	14-5	18-5
						7		N/A	17-7	15-7	N/A	N/A	19-7
						12		N/A	21-12	21-12	N/A	N/A	23-12
Size #8 Contacts 46 Amp Max. Current #8 AWG	 **1800 VAC DWV**						1	8-1	8-1	8-1	8-1	8-1	10-1
							2	N/A	16-2	14-2	14-2	14-2	18-2
							3	N/A	17-3	15-3	N/A	N/A	19-3
							4	N/A	19-4	19-4	N/A	N/A	21-4
							5	N/A	21-5	21-5	N/A	N/A	23-5
Combo Arrangements Featuring #23 Contacts 5 Amp Max. Current #22 - #28 AWG **750 VAC DWV**		12				1		10-200	10-200	10-200	10-200	10-200	12-200
		4				2		10-201	10-201	10-201	10-201	10-201	12-201
		6				2		12-200	13-200	12-200	12-200	12-200	15-200
		10				2		12-201	13-201	12-201	12-201	12-201	15-201
		4			2			9-200	9-200	9-200	9-200	9-200	11-200
		8			2			10-202	10-202	10-202	10-202	10-202	12-202
		4	2					8-200	8-200	8-200	8-200	8-200	10-200
		8	2					9-201	9-201	9-201	9-201	9-201	11-201
Featuring #23 Contacts 5 Amp Max. Current #22 - #28 AWG **1300 VAC DWV**		20			2			12-202	13-202	12-202	12-202	12-202	15-202
		12			4			12-203	13-203	12-203	12-203	12-203	15-203
		40			2			N/A	16-204	14-204	14-204	14-204	18-204
		32			4			N/A	16-205	14-205	14-205	14-205	18-205
		40			4			N/A	17-203	15-203	N/A	N/A	19-203
		12				2		12-204	13-204	12-204	12-204	12-204	15-204
		4				4		12-205	13-205	12-205	12-205	12-205	15-205
		34				2		N/A	16-206	14-206	14-206	14-206	18-206
		20				4		N/A	16-207	14-207	14-207	14-207	18-207
		28				4		N/A	17-204	15-204	N/A	N/A	19-204
		32					1	N/A	16-208	14-208	14-208	14-208	18-208
		40					1	N/A	17-205	15-205	N/A	N/A	19-205
		44					2	N/A	19-201	19-201	N/A	N/A	21-201
		12					4	N/A	19-202	19-202	N/A	N/A	21-202
		28					4	N/A	21-200	21-200	N/A	N/A	23-200

* DWV rating is applicable to contact arrangements shown.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference
Standard Contact Arrangements
Mating Face View of Pin Connector (socket layout reversed)

Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8



Series 800, 801, 802, 803, 804	5-3	6-1	6-23	6-4	6-6	6-7
Series 805	N/A	8-1	8-23	8-4	8-6	8-7
No. of Contacts	3	1	3	4	6	7
Contact Size	#23	#16	#20HD	#23	#23	#23
DWV Voltage (VAC)	750	1800	1000	750	750	750
Current Rating (Amps)	5	13	7.5	5	5	5

Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8




Series 800, 802, 803, 804	6-1	7-25	7-10	N/A	8-2	8-28
Series 801	6-1	7-25	7-10	8-1	8-2	8-28
Series 805	9-1	9-25	9-10	10-1	10-2	10-28
No. of Contacts	1	5	10	1	2	8
Contact Size	#12	#20HD	#23	#8	#16	#20HD
DWV Voltage (VAC)	1800	1000	750	1800	1800	1000
Current Rating (Amps)	23	7.5	5	46	13	7.5

Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8



Series 800, 801, 802, 803, 804	8-13	9-4	9-210	9-19
Series 805	10-13	11-4	11-210	11-19
No. of Contacts	13	4	10	19
Contact Size	#23	#16	#20HD	#23
DWV Voltage (VAC)	750	1800	1000	750
Current Rating (Amps)	5	13	7.5	5

Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8





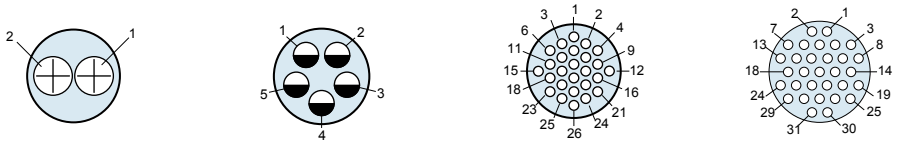


Series 800, 801, 802, 803, 804	10-2	10-5	10-26	11-31
Series 805	12-2	12-5	12-26	13-31
No. of Contacts	2	5	26	31
Contact Size	#12	#16	#23	#23
DWV Voltage (VAC)	1800	1800	750	750
Current Rating (Amps)	23	13	5	5

© 2014 Glenair, Inc.






Series 80 Mighty Mouse Technical Reference
Standard Contact Arrangements
Mating Face View of Pin Connector (socket layout reversed)

Contact Legend
#23 ○ #16
#20HD #12
#20 ● #8






Series 800, 802, 803, 804	12-2	12-3	12-7	12-220	12-37
Series 801	13-2	13-3	13-7	13-220	13-37
Series 805	15-2	15-3	15-7	15-220	15-37
No. of Contacts	2	3	7	20	37
Contact Size	#12	#12	#16	#20HD	#23
DWV Voltage (VAC)	1800	1800	1800	1000	750
Current Rating (Amps)	23	23	13	7.5	5

Contact Legend
#23 ○ #16
#20HD #12
#20 ● #8

Series 802, 803, 804	N/A	14-5	14-12	14-235	14-55
Series 801	16-2	16-5	16-12	16-235	16-55
Series 805	18-2	18-5	18-12	18-235	18-55
No. of Contacts	2	5	12	35	55
Contact Size	#8	#12	#16	#20HD	#23
DWV Voltage (VAC)	1800	1800	1800	1000	750
Current Rating (Amps)	46	23	13	7.5	5

Contact Legend
#23 ○ #16
#20HD #12
#20 ● #8









Series 802	N/A	15-7	15-14	15-241	15-85
Series 801	17-3	17-7	17-14	17-241	17-85
Series 805	19-3	19-7	19-14	19-241	19-85
No. of Contacts	3	7	14	41	85
Contact Size	#8	#12	#16	#20HD	#23
DWV Voltage (VAC)	1800	1800	1800	1000	750
Current Rating (Amps)	46	23	13	7.5	5


© 2014 Glenair, Inc.

Contact Legend

#23	○	#16	◒
#20HD	◓	#12	⊕
#20	●	#8	◉










Series 801, 802	19-4[1]	19-19[1]	19-255[1]
Series 805	21-4	21-19	21-255
No. of Contacts	4	19	55
Contact Size	#8	#16	#20HD
DWV Voltage (VAC)	1800	1800	1000
Current Rating (Amps)	46	13	7.5

Contact Legend

#23	○	#16	◒
#20HD	◓	#12	⊕
#20	●	#8	◉






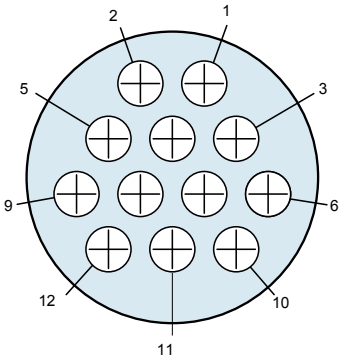



Series 801, 802	19-100[1]	21-5[1]	21-12
Series 805	21-100	23-5	23-12
No. of Contacts	100	5	12
Contact Size	#23	#8	#12
DWV Voltage (VAC)	750	1800	1800
Current Rating (Amps)	5	46	23

Contact Legend

#23	○	#16	◒
#20HD	◓	#12	⊕
#20	●	#8	◉











Series 801, 802	21-22	21-269	21-130
Series 805	23-22	23-269	23-130
No. of Contacts	22	69	130
Contact Size	#16	#20HD	#23
DWV Voltage (VAC)	1800	1000	750
Current Rating (Amps)	13	7.5	5

1. Not available for Series 802

© 2014 Glenair, Inc.





Series 80 Mighty Mouse Technical Reference
Combo Contact Arrangements
Mating Face View of Pin Connector (socket layout reversed)

Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8





Series 800, 801, 802, 803, 804	8-200		9-200		9-201		10-200	
Series 805	10-200		11-200		11-201		12-200	
No. of Contacts	2	4	2	4	2	8	1	12
Contact Size	#20	#23	#16	#23	#20	#23	#12	#23
DWV Voltage (VAC)	1000	750	1800	750	1000	750	1800	750
Current Rating (Amps)	7	5	13	5	7.5	5	23	5

Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8

Series 800, 802, 803, 804	10-201		10-202		12-200		12-201	
Series 801	10-201		10-202		13-200		13-201	
Series 805	12-201		12-202		15-200		15-201	
No. of Contacts	2	4	2	8	2	6	2	10
Contact Size	#12	#23	#16	#23	#12	#23	#12	#23
DWV Voltage (VAC)	1800	750	1800	750	1800	750	1800	750
Current Rating (Amps)	23	5	13	5	23	5	23	5


Contact Legend
#23 ○ #16
#20HD ◒ #12
#20 ● #8








Series 800, 802, 803, 804	12-202		12-203		12-204		12-205	
Series 801	13-202		13-203		13-204		13-205	
Series 805	15-202		15-203		15-204		15-205	
No. of Contacts	2	20	4	12	2	12	4	4
Contact Size	#16	#23	#16	#23	#12	#23	#12	#23
DWV Voltage (VAC)	1800	1300	1800	1300	1800	1300	1800	1300
Current Rating (Amps)	13	5	13	5	23	5	23	5


© 2014 Glenair, Inc.

Contact Legend
#23 ○ #16
#20HD #12
#20 ● #8













Series 802, 803, 804	14-204		14-205		14-206		14-207	
Series 801	16-204		16-205		16-206		16-207	
Series 805	18-204		18-205		18-206		18-207	
No. of Contacts	2	40	4	32	2	34	4	20
Contact Size	#16	#23	#16	#23	#12	#23	#12	#23
DWV Voltage (VAC)	1800	1300	1800	1300	1800	1300	1800	1300
Current Rating (Amps)	13	5	13	5	23	5	23	5

Contact Legend
#23 ○ #16
#20HD #12
#20 ● #8












Series 802	N/A		15-203		15-204		N/A	
Series 801	16-208		17-203		17-204		17-205	
Series 805	18-208		19-203		19-204		19-205	
No. of Contacts	1	32	4	40	4	28	1	40
Contact Size	#8	#23	#16	#23	#12	#23	#8	#23
DWV Voltage (VAC)	1800	1300	1800	1300	500	1300	500	1300
Current Rating (Amps)	46	5	13	5	23	5	46	5

Contact Legend
#23 ○ #16
#20HD #12
#20 ● #8

















Series 801	19-201		19-202		21-200	
Series 805	21-201		21-202		23-200	
No. of Contacts	2	44	4	12	4	28
Contact Size	#8	#23	#8	#23	#8	#23
DWV Voltage (VAC)	1800	1300	1800	1300	1800	1300
Current Rating (Amps)	46	5	46	5	46	5

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference


Straight PCB Footprints - Component Mounting Side of PCB

Insert Arrangement	Pin Connector	Socket Connector
 **Insert Arrangement 5-3** 3 #23 Contacts .022 (0.56) Max. Dia. Tail Series 801: **5-3** Series 800, 802, 803,804: **5-3** Series 805: **N/A**		
 **Insert Arrangement 6-23, 8-23** 3 #20HD Contacts .028 (0.56) Max. Dia. Tail Series 801: **6-23** Series 800, 802, 803,804: **6-23** Series 805: **8-23**		
 **Insert Arrangement 6-4, 8-4** 4 #23 Contacts .022 (0.56) Max. Dia. Tail Series 801: **6-4** Series 800, 802, 803,804: **6-4** Series 805: **8-4**		
 **Insert Arrangement 6-6, 8-6** 6 #23 Contacts .022 (0.56) Max. Dia. Tail Series 801: **6-6** Series 800, 802, 803,804: **6-6** Series 805: **8-6**		

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
6-7, 8-7
7 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **6-7**
Series 800, 802, 803,804: **6-7**
Series 805: **8-7**










Insert Arrangement
7-25, 9-25
5 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **7-25**
Series 800, 802, 803,804: **7-25**
Series 805: **9-25**









Insert Arrangement
7-10, 9-10
10 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **7-10**
Series 800, 802, 803,804: **7-10**
Series 805: **9-10**









Insert Arrangement
8-2, 10-2
2 #16 Contacts
.064 (1.63) Max. Dia. Tail

Series 801: **8-2**
Series 800, 802, 803,804: **8-2**
Series 805: **10-2**






Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference


Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
8-28, 10-28
8 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **8-28**
Series 800, 802, 803,804: **8-28**
Series 805: **10-28**

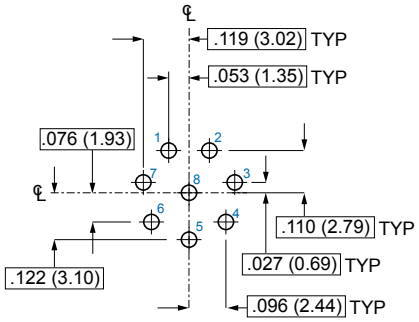


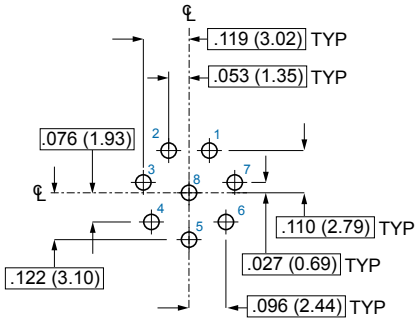





Insert Arrangement
8-13, 10-13
13 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **8-13**
Series 800, 802, 803,804: **8-13**
Series 805: **10-13**

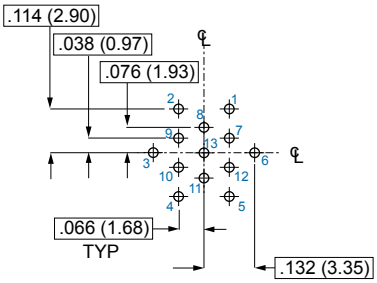


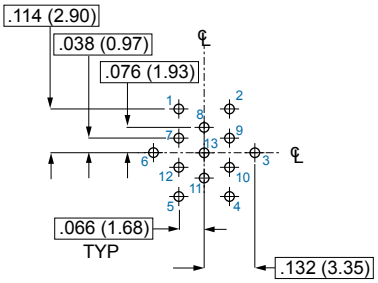




Insert Arrangement
9-4, 11-4
4 #16 Contacts
.064 (1.63) Max. Dia. Tail

Series 801: **9-4**
Series 800, 802, 803,804: **9-4**
Series 805: **11-4**






Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
9-210, 11-210
10 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **9-210**
Series 800, 802, 803,804: **9-210**
Series 805: **11-210**










Insert Arrangement
9-19, 11-19
19 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **9-19**
Series 800, 802, 803,804: **9-19**
Series 805: **11-19**









Insert Arrangement
10-2, 12-2
2 #12 Contacts
.096 (2.44) Max Dia. Tail

Series 801: **10-2**
Series 800, 802, 803,804: **10-2**
Series 805: **12-2**






Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
10-5, 12-5
5 #16 Contacts
.064 (1.63) Max. Dia. Tail

Series 801: **10-5**
Series 800, 802, 803,804: **10-5**
Series 805: **12-5**

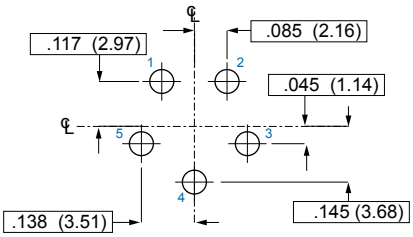


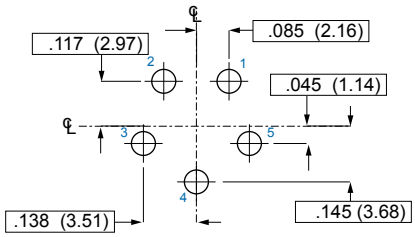





Insert Arrangement
10-26, 12-26
26 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **10-26**
Series 800, 802, 803,804: **10-26**
Series 805: **12-26**

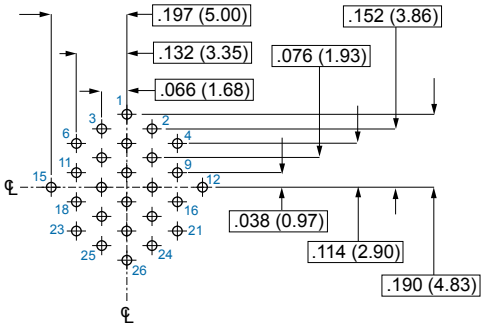


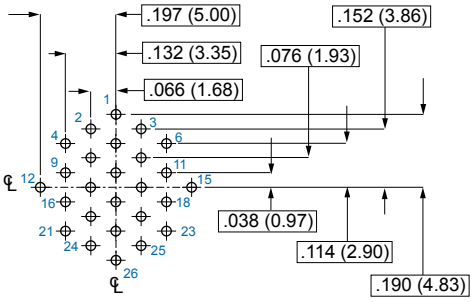




Insert Arrangement
11-31, 13-31
31 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **11-31**
Series: 802, 803,804: **11-31**
Series 805: **13-31**

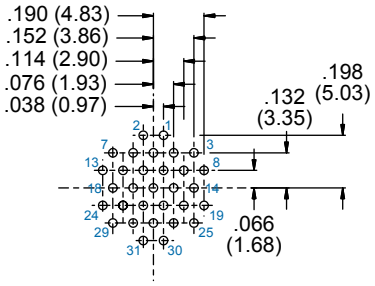

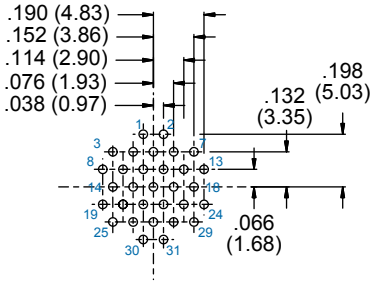


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
12-2, 13-2, 15-2
2 #12 Contacts
.096 (2.44) Max Dia. Tail

Series 801: **13-2**
Series 800, 802, 803,804: **12-2**
Series 805: **15-2**

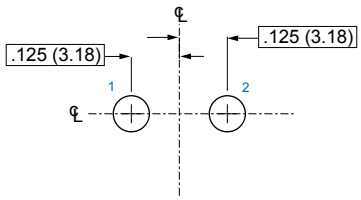


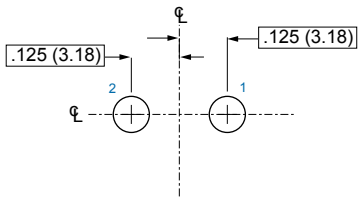





Insert Arrangement
12-3, 13-3, 15-3
3 #12 Contacts
.096 (2.44) Max Dia. Tail

Series 801: **13-3**
Series 800, 802, 803,804: **12-3**
Series 805: **15-3**









Insert Arrangement
12-7, 13-7, 15-7
7 #16 Contacts
.064 (1.63) Max. Dia. Tail

Series 801: **13-7**
Series 800, 802, 803,804: **12-7**
Series 805: **15-7**

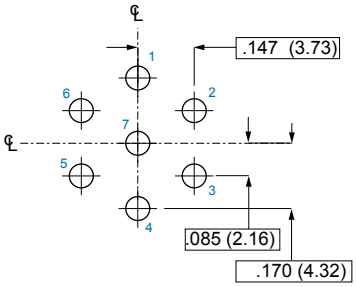

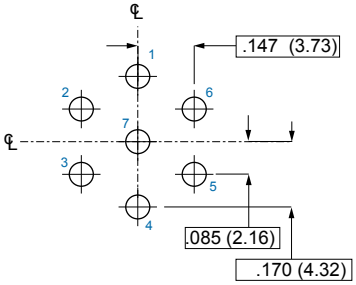


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference

Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement




Insert Arrangement
12-220, 13-220, 15-220
20 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **13-220**
Series 800, 802, 803,804: **12-220**
Series 805: **15-220**

Pin Connector

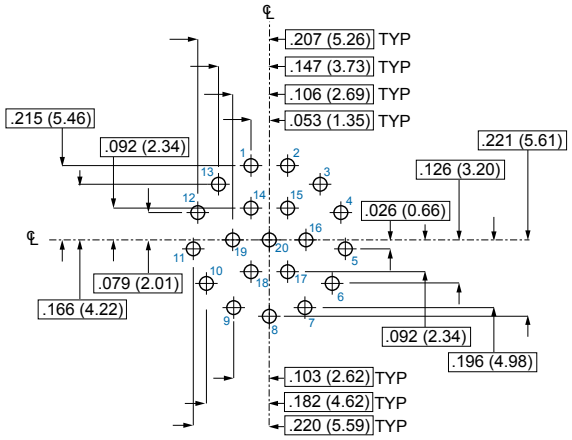


Socket Connector

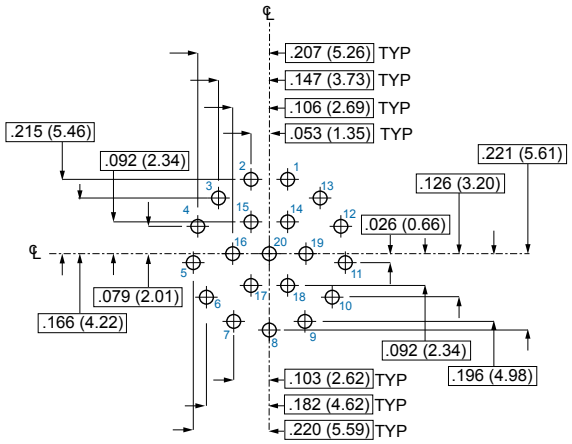

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Insert Arrangement	Pin Connector	Socket Connector



Insert Arrangement
12-37, 13-37, 15-37
37 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **13-37**
Series 800, 802, 803,804: **12-37**
Series 805: **15-37**

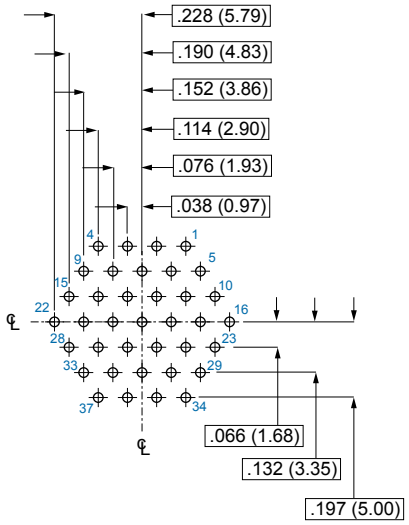

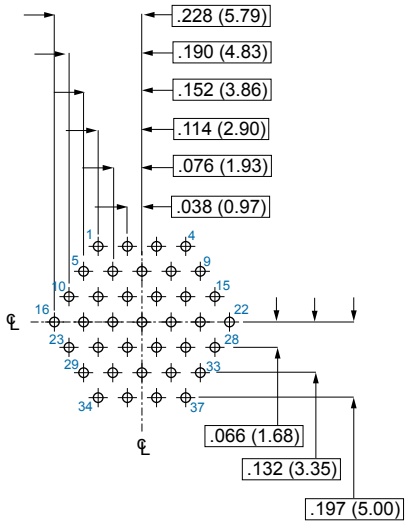


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Insert Arrangement	Pin Connector	Socket Connector


B




Insert Arrangement
14-5, 16-5, 18-5
5 #12 Contacts
.096 (2.44) Max Dia. Tail

Series 801: **16-5**
Series 802, 803, 804: **14-5**
Series 805: **18-5**

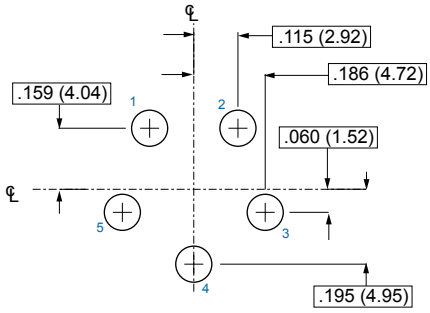


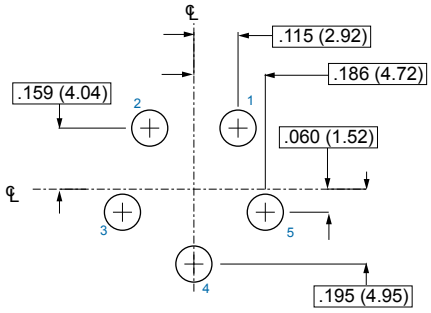




Insert Arrangement
14-12, 16-12, 18-12
12 #16 Contacts
.064 (1.63) Max Dia. Tail

Series 801: **16-12**
Series 802, 803, 804: **14-121**
Series 805: **18-12**

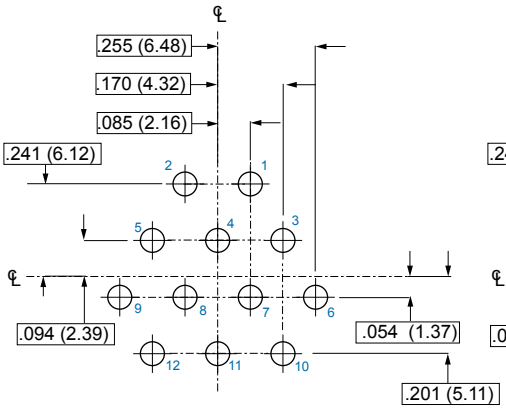


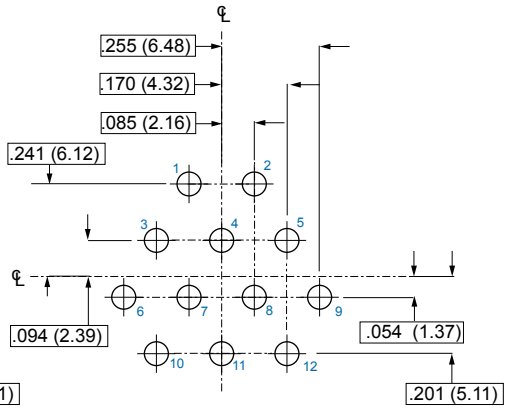

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
14-235, 16-235, 18-235
35 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **16-235**
Series 802, 803,804: **14-235**
Series 805: **18-235**







Pin No.	X		Y		Pin No.	X		Y		Pin No.	X		Y	
	In.	mm.	In.	mm.		In.	mm.	In.	mm.		In.	mm.	In.	mm.
1	-.053	-1.35	.301	7.65	**13**	-.234	-5.94	-.196	-4.98	**25**	.000	0.00	-.209	-5.31
2	.053	1.35	.301	7.65	**14**	-.287	-7.29	-.104	-2.64	**26**	-.100	-2.54	-.172	-4.37
3	.153	3.89	.264	6.71	**15**	-.305	-7.75	.000	0.00	**27**	-.181	-4.60	-.104	-2.64
4	.234	5.94	.196	4.98	**16**	-.287	7.29	.104	2.64	**28**	-.199	-5.05	.000	0.00
5	.287	7.29	.104	2.64	**17**	-.234	-5.94	.196	4.98	**29**	-.181	-4.60	.104	2.64
6	.305	7.75	.000	0.00	**18**	-.153	-3.89	.264	6.71	**30**	-.100	-2.54	.172	4.37
7	.287	7.29	-.104	-2.64	**19**	.000	0.00	.209	5.31	**31**	-.053	-1.35	.073	1.85
8	.234	5.94	-.196	-4.98	**20**	.100	2.54	.172	4.37	**32**	.053	1.35	.073	1.85
9	.153	3.89	-.264	-6.71	**21**	.181	4.60	.104	2.64	**33**	.086	2.18	-.028	-0.71
10	.053	1.35	-.301	-7.65	**22**	.199	5.05	.000	0.00	**34**	.000	0.00	-.090	-2.29
11	-.053	-1.35	-.301	-7.65	**23**	.181	4.60	-.104	-2.64	**35**	-.086	-2.18	-.028	-0.71
12	-.153	-3.89	-.264	-6.71	**24**	.100	2.54	-.172	-4.37					



Insert Arrangement
14-55, 16-55, 18-55
55 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **16-55**
Series 802, 803, 804: **14-55**
Series 805: **18-55**

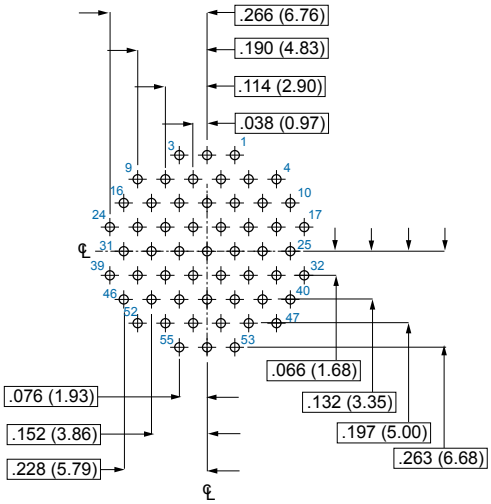


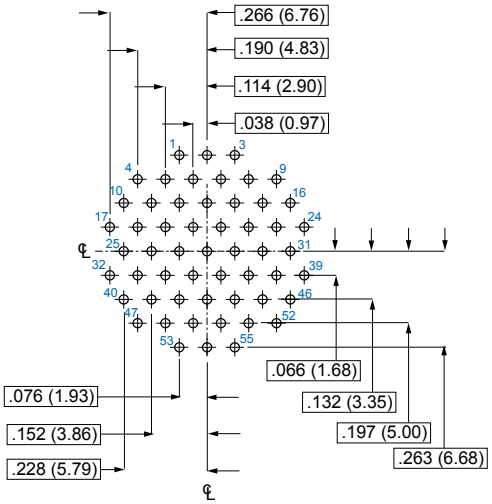

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
15-7, 17-7, 19-7
7 #12 Contacts
.096 (2.44) Max Dia. Tail

Series 801: **17-7**
Series 802: **15-7**
Series 805: **19-7**

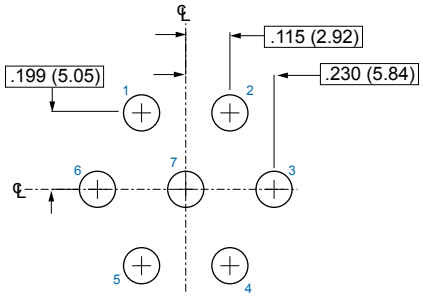


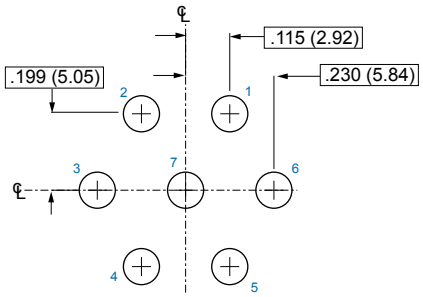




Insert Arrangement
15-14, 17-14, 19-14
14 #16 Contacts
.064 (1.63) Max Dia. Tail

Series 801: **17-14**
Series 802: **15-14**
Series 805: **19-14**

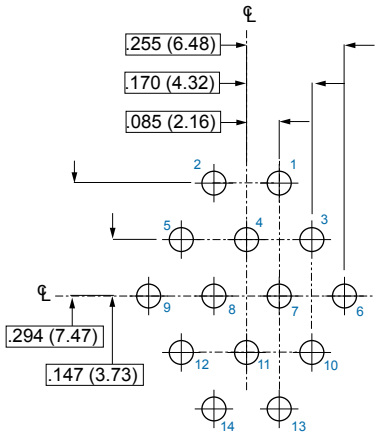


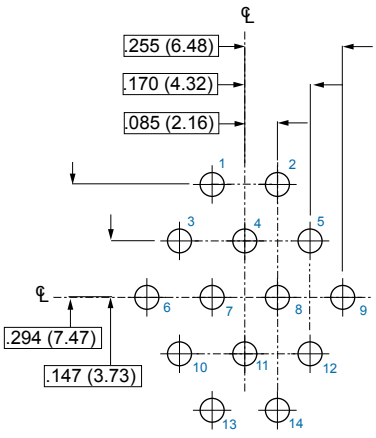

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Insert Arrangement	Pin Connector	Socket Connector



Insert Arrangement
15-241, 17-241, 18-241
41 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **17-241**
Series 802: **15-241**
Series 805: **19-241**

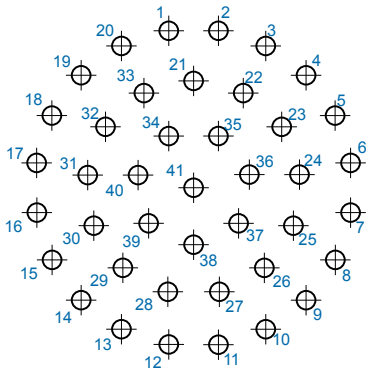

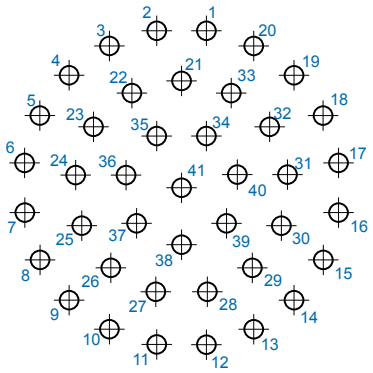

Pin No.	X		Y		Pin No.	X		Y		Pin No.	X		Y	
	In.	mm.	In.	mm.		In.	mm.	In.	mm.		In.	mm.	In.	mm.
1	-.053	-1.35	.335	8.51	**15**	-.302	-7.67	-.154	-3.91	**29**	-.151	-3.84	-.171	-4.34
2	.053	1.35	.335	8.51	**16**	-.335	-8.51	-.053	-1.35	**30**	-.213	-5.41	-.081	-2.06
3	.154	3.91	.302	7.67	**17**	-.335	-8.51	.053	1.35	**31**	-.226	-5.74	.028	0.71
4	.240	6.10	.240	6.10	**18**	-.302	-7.67	.154	3.91	**32**	-.188	-4.78	.130	3.30
5	.302	7.67	.154	3.91	**19**	-.240	-6.10	.240	6.10	**33**	-.106	-2.69	.202	5.13
6	.335	8.51	.053	1.35	**20**	-.154	-3.91	.302	7.67	**34**	-.053	-1.35	.110	2.79
7	.335	8.51	-.053	-1.35	**21**	.000	0.00	.228	5.79	**35**	.053	1.35	.110	2.79
8	.302	7.67	-.154	-3.91	**22**	.106	2.69	.202	5.13	**36**	.119	3.02	.027	0.69
9	.240	6.10	-.240	-6.10	**23**	.188	4.78	.130	3.30	**37**	.096	2.44	-.076	-1.93
10	.154	3.91	-.302	-7.67	**24**	.226	5.74	.028	0.71	**38**	.000	0.00	-.122	-3.10
11	.053	1.35	-.335	-8.51	**25**	.213	5.41	-.081	-2.06	**39**	-.096	-2.44	-.076	-1.93
12	-.053	-1.35	-.335	-8.51	**26**	.151	3.84	-.171	-4.34	**40**	-.119	-3.02	.027	0.69
13	-.154	-3.91	-.302	-7.67	**27**	.055	1.40	-.222	-5.64	**41**	.000	0.00	.000	0.00
14	-.240	-6.10	-.240	-6.10	**28**	-.055	-1.40	-.222	-5.64					


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference


Straight PCB Footprints - Component Mounting Side of PCB

Insert Arrangement	Pin Connector




Insert Arrangement
15-85, 17-85, 19-85
85 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **17-85**
Series 802: **15-85**
Series 805: **19-85**

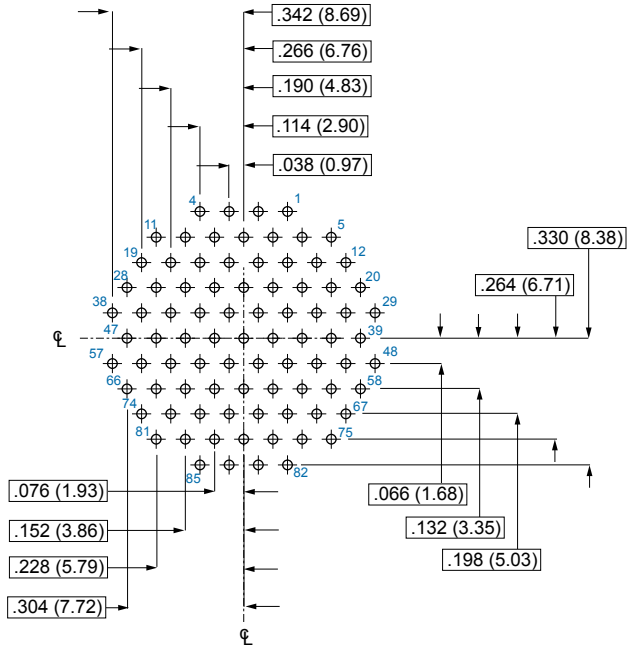


Socket Connector

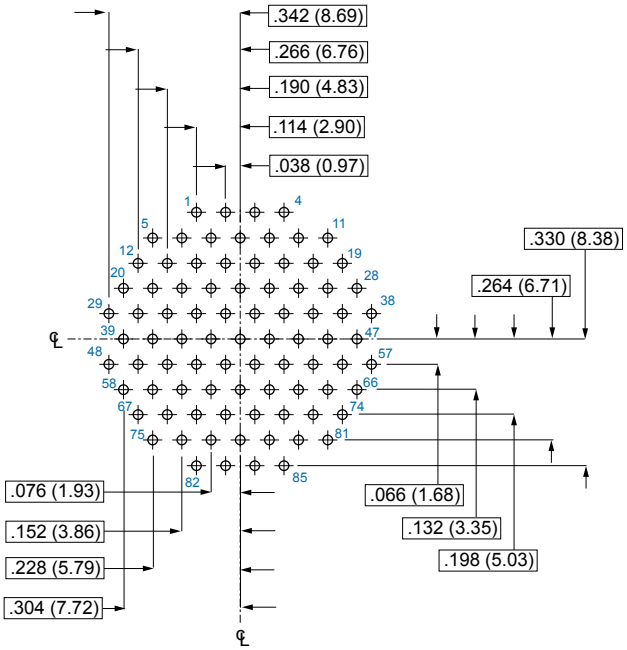

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
16-2, 18-2
2 #8 Contacts
.182 (4.62) Max. Dia. Tail

Series 801: **16-2**
Series 805: **18-2**









Insert Arrangement
17-3, 19-3
3 #8 Contacts
.182 (4.62) Max. Dia. Tail


Series 801: **17-3**
Series 805: **19-3**






© 2014 Glenair, Inc.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
19-4, 21-4
4 #8 Contacts
.182 (4.62) Max Dia. Tail

Series 801: **19-4**
Series 805: **21-4**

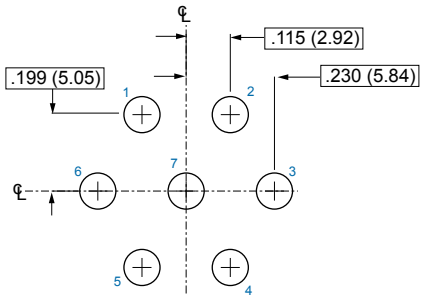


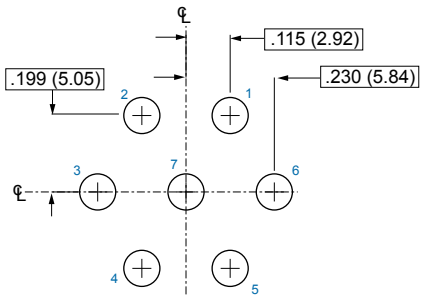




Insert Arrangement
19-19, 19-19, 21-19
19 #16 Contacts
.064 (1.63) Max Dia. Tail

Series 801: **19-19**
Series 802: **19-19**
Series 805: **21-19**

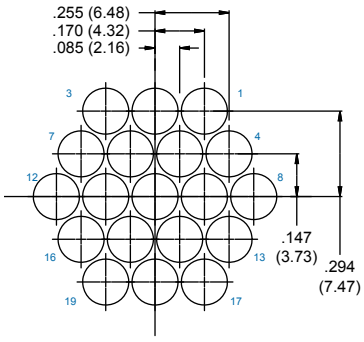


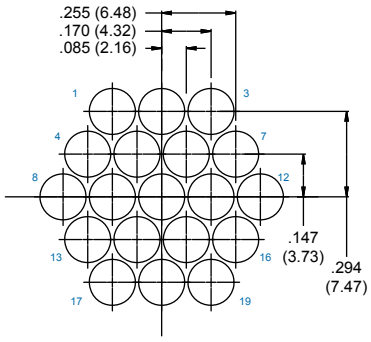

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Insert Arrangement




Insert Arrangement
19-255 21-255
55 #20HD Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **19-255**
Series 802: **19-255**
Series 805: **21-255**

Pin Connector

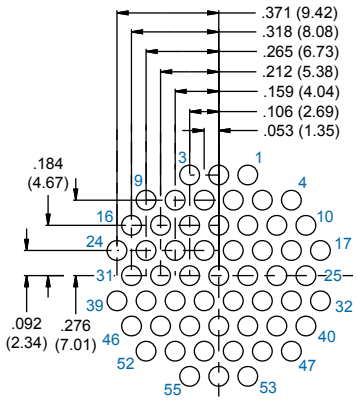

Socket Connector

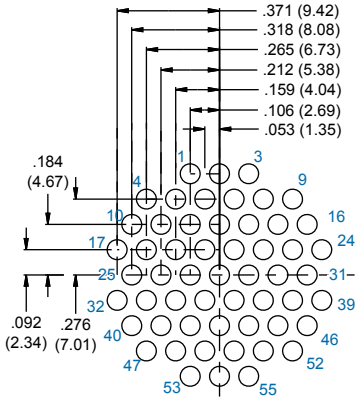


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference


Straight PCB Footprints - Component Mounting Side of PCB

Insert Arrangement	Pin Connector




Insert Arrangement
19-100 21-100
100 #23 Contacts
.022 (.559) Max Dia

Series 801: **19-100**
Series 802: **19-100**
Series 805: **21-100**

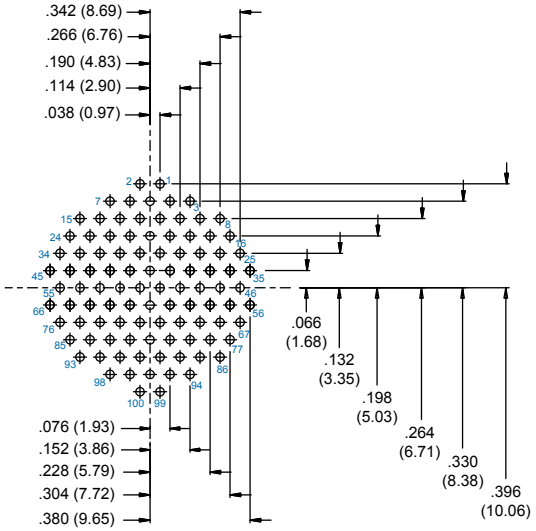

Socket Connector

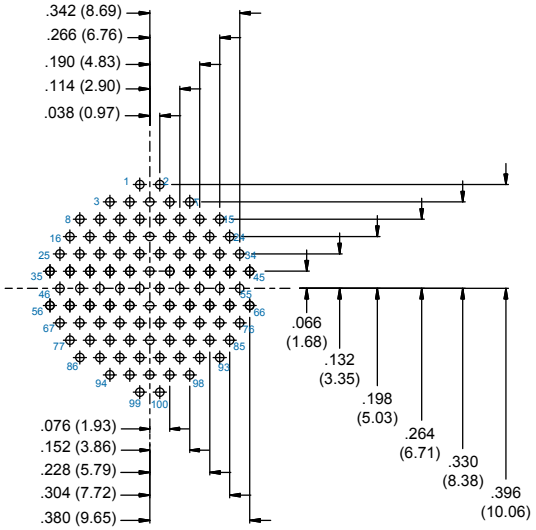


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Insert Arrangement




Insert Arrangement
21-5, 23-5
5 #8 Contacts
.182 (4.62) Max Dia. Tail

Series 801: **21-5**
Series 805: **23-5**

Pin Connector

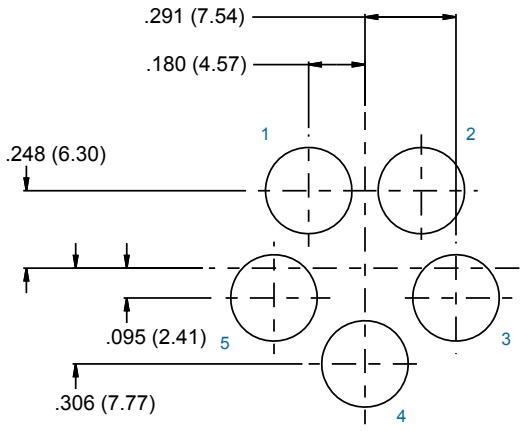

Socket Connector

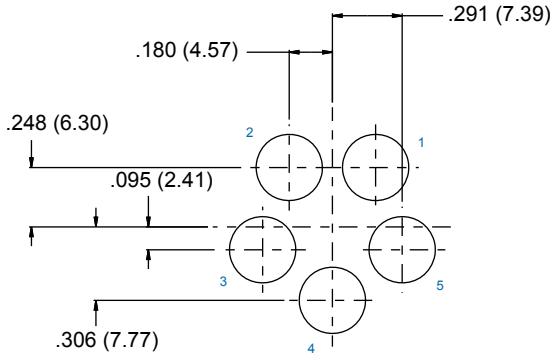


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Straight PCB Footprints - Component Mounting Side of PCB

Insert Arrangement	Pin Connector




Insert Arrangement
21-12, 23-12
12 #12 Contacts
.096 (2.44) Max Dia

Series 801: **21-12**
Series 802 : **21-12**
Series 805: **23-12**

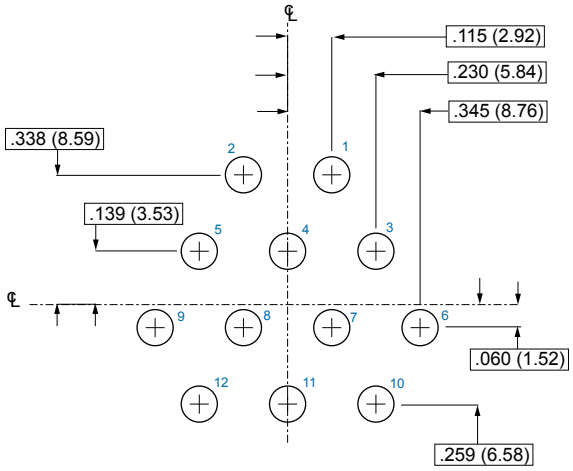


Socket Connector

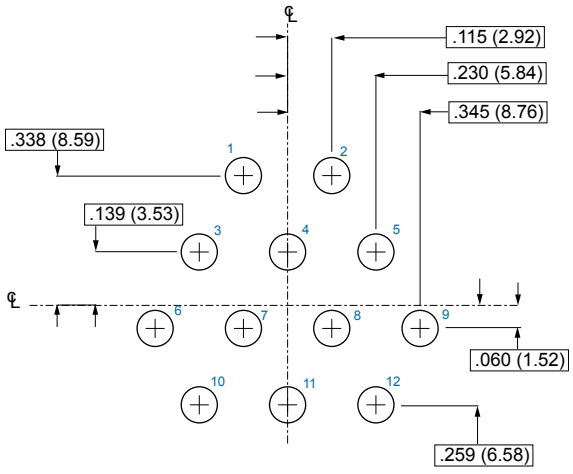

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Insert Arrangement




Insert Arrangement
21-22, 23-22
22 #16 Contacts
.064 (1.63 Max. Dia. Tail)

Series 801: **21-22**
Series 800,802, 803, 804: **21-22**
Series 805: **23-22**

Pin Connector

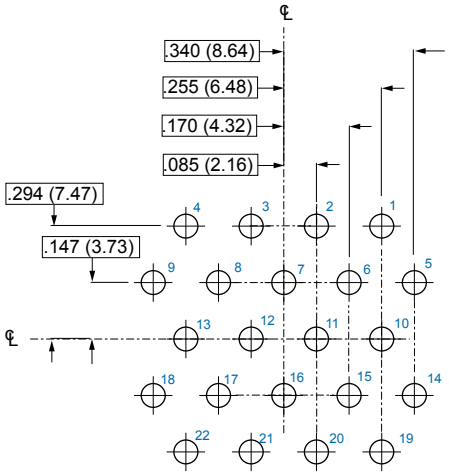

Socket Connector

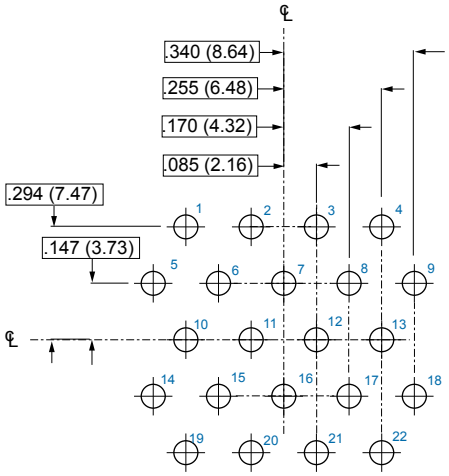

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Series 80 Mighty Mouse Technical Reference


Straight PCB Footprints - Component Mounting Side of PCB

Insert Arrangement	Pin Connector	Socket Connector



Insert Arrangement
21-269, 23-269
69 #20HD Contacts
.028 (0.71) Max. Dia. Tail

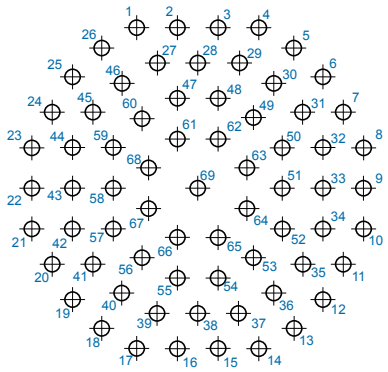

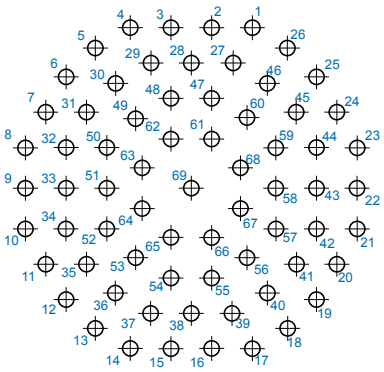

Series 801: **21-269**
Series 804: **21-269**
Series 805: **23-269**


Pin No.	X		Y		Pin No.	X		Y		Pin No.	X		Y	
	In.	mm.	In.	mm.		In.	mm.	In.	mm.		In.	mm.	In.	mm.
1	-.159	-4.04	.418	10.62	**24**	-.379	-9.63	.198	5.03	**47**	-.053	-1.35	.234	5.94
2	-.053	-1.35	.418	10.62	**25**	-.326	-8.28	.290	7.37	**48**	.053	1.35	.234	5.94
3	.053	1.35	.418	10.62	**26**	-.251	-6.38	.365	9.27	**49**	.145	3.68	.181	4.60
4	.159	4.04	.418	10.62	**27**	-.106	-2.69	.326	8.28	**50**	.220	5.59	.106	2.69
5	.251	6.38	.365	9.27	**28**	.000	0.00	.326	8.28	**51**	.220	5.59	.000	0.00
6	.326	8.28	.290	7.37	**29**	.106	-2.69	.326	8.28	**52**	.220	5.59	-.106	-2.69
7	.379	9.63	.198	5.03	**30**	.198	5.03	.273	6.93	**53**	.145	3.68	-.181	-4.60
8	.432	10.97	.106	2.69	**31**	.273	6.93	.198	5.03	**54**	.053	1.35	-.234	-5.94
9	.432	10.97	.000	0.00	**32**	.326	8.28	.106	2.69	**55**	-.053	-1.35	-.234	-5.94
10	.432	10.97	-.106	-2.69	**33**	.326	8.28	.000	0.00	**56**	-.145	-3.68	-.181	-4.60
11	.379	9.63	-.198	-5.03	**34**	.326	8.28	-.106	-2.69	**57**	-.220	-5.59	-.106	-2.69
12	.326	8.28	-.290	-7.37	**35**	.273	6.93	-.198	-5.03	**58**	.220	-5.59	.000	0.00
13	.251	6.38	-.365	-9.27	**36**	.198	5.03	-.273	-6.93	**59**	-.220	-5.59	.106	2.69
14	.159	4.04	-.418	-10.62	**37**	.106	2.69	-.326	-8.28	**60**	-.145	-3.68	.181	4.60
15	.053	1.35	-.418	-10.62	**38**	.000	0.00	-.326	-8.28	**61**	-.053	-1.35	.128	3.25
16	-.053	-1.35	-.418	-10.62	**39**	-.106	-2.69	-.326	-8.28	**62**	.053	1.35	.128	3.25
17	-.159	-4.04	-.418	-10.62	**40**	-.198	-5.03	-.273	-6.93	**63**	.128	3.25	.053	1.35
18	-.251	-6.38	-.365	-9.27	**41**	-.273	-6.93	-.198	-5.03	**64**	.128	3.25	-.053	-1.35
19	-.326	-8.28	-.290	-7.37	**42**	-.326	-8.28	-.106	-2.69	**65**	.053	1.35	-.128	-3.25
20	-.379	-9.63	-.198	-5.03	**43**	-.326	-8.28	.000	0.00	**66**	-.053	-1.35	-.128	-3.25
21	-.432	-10.97	-.106	-2.69	**44**	-.326	-8.28	.106	2.69	**67**	-.128	-3.25	-.053	-1.35
22	-.432	-10.97	.000	0.00	**45**	-.273	-6.93	.198	5.03	**68**	-.128	-3.25	.053	1.35
23	-.432	-10.97	.106	2.69	**46**	-.198	-5.03	.273	6.93	**69**	.000	0.00	.000	0.00

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Insert Arrangement




Insert Arrangement
21-130, 23-130
130 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **21-130**
Series 804: **21-130**
Series 805: **23-130**

Pin Connector

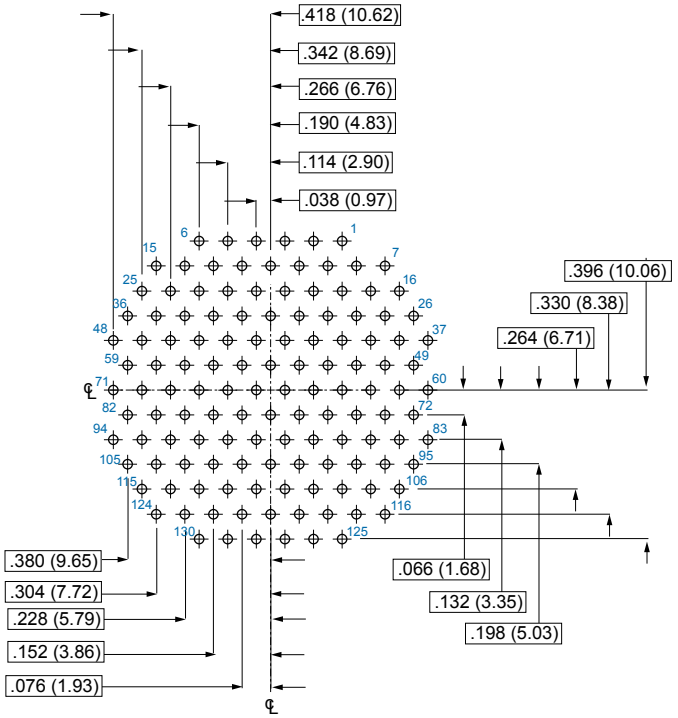

Socket Connector

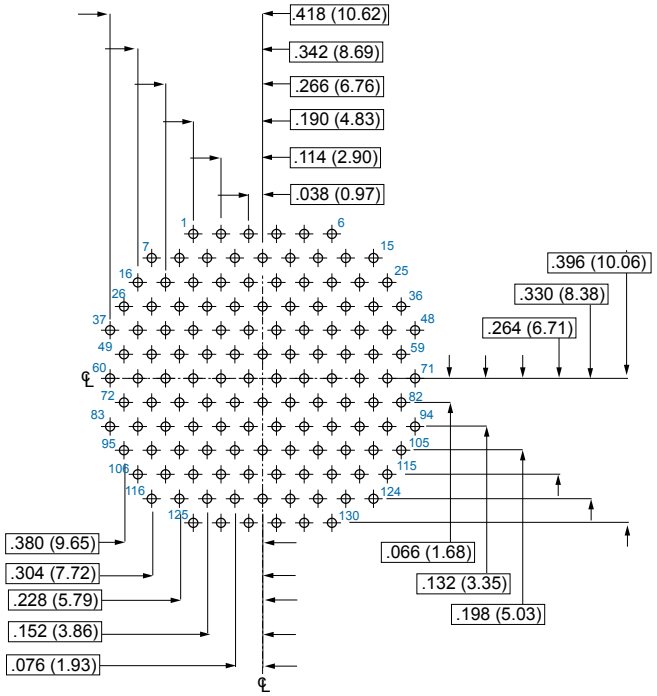


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Combo Arrangements
Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
8-200, 10-200
2 #20 Contacts
.028 (0.71) Max. Dia. Tail
4 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **8-200**
Series 800, 802, 803,804: **8-200**
Series 805: **10-200**










Insert Arrangement
9-200, 11-200
4 #23 Contacts
.022 (0.56) Max. Dia. Tail
2 #16 Contacts
.064 (1.63) Max. Dia. Tail

Series 801: **9-200**
Series 800, 802, 803,804: **9-200**
Series 805: **11-200**









Insert Arrangement
9-201, 11-201
2 #20 Contacts
.028 (0.71) Max Dia Tail
8 #23 Contacts
.022 (0.56) Max Dia Tail

Series 801: **9-201**
Series 800, 802, 803,804: **9-201**
Series 805: **11-201**






Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
10-200, 12-200
1 #12 Contact
.096 (2.44) Max Dia Tail
12 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **10-200**
Series 800, 802, 803,804: **10-200**
Series 805: **12-200**

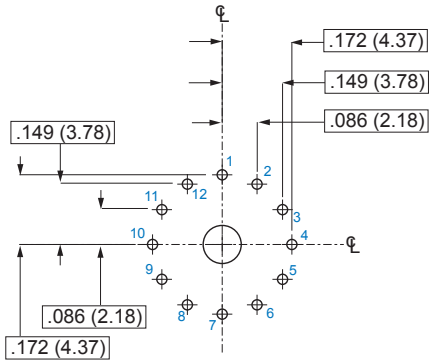


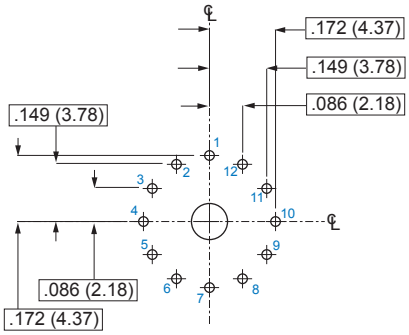





Insert Arrangement
10-201, 12-201
2 #12 Contacts
.096 (2.44) Max. Dia. Tail
4 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **10-201**
Series 800, 802, 803,804: **10-201**
Series 805: **12-201**









Insert Arrangement
10-202, 12-202
2 #16 Contacts
.064 (1.63) Max. Dia. Tail)
8 #23 Contacts
.022 (0.5 Max. Dia. Tail)

Series 801: **10-203**
Series 800, 802, 803,804: **10-202**
Series 805: **12-202**

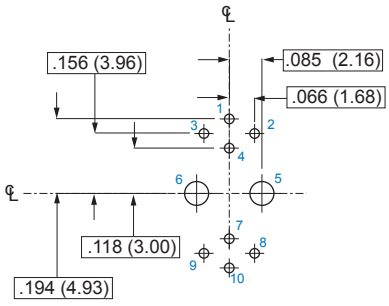

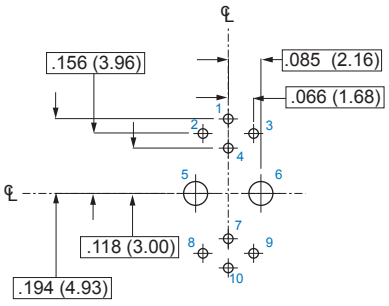


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Combo Arrangements
Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
12-200, 13-200, 15-200
2 #12 Contacts
.096 (2.44) Max. Dia. Tail
6 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **13-200**
Series 800, 802, 803,804: **12-200**
Series 805: **15-200**

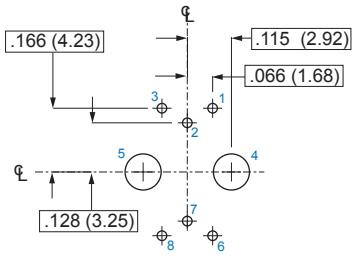


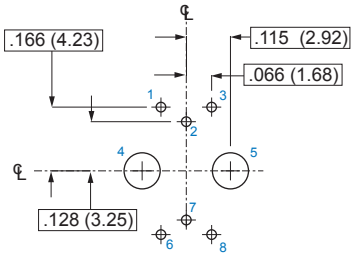





Insert Arrangement
12-201, 13-201, 15-201
2 #12 Contacts
.096 (2.44) Max. Dia. Tail
10 #23 Contacts
.022 (0.56) Max. Dia. Tail

Series 801: **13-201**
Series 800, 802, 803,804: **12-201**
Series 805: **15-201**

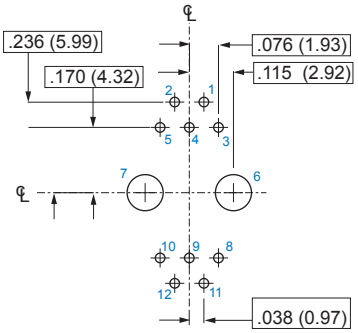


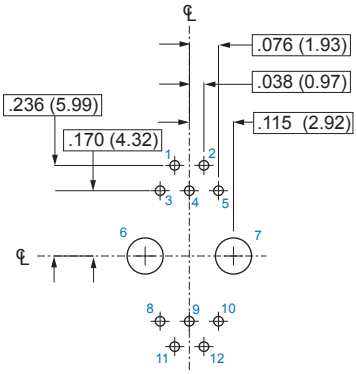




Insert Arrangement
12-202, 13-202, 15-202
2 #16 Contacts
.064 (1.63) Max. Dia. Tail
20 #23 Contacts
.028 (0.71) Max. Dia. Tail

Series 801: **13-202**
Series 800, 802, 803,804: **12-202**
Series 805: **15-202**

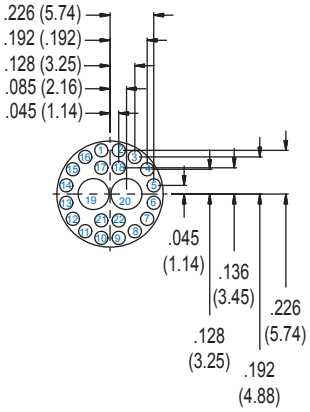

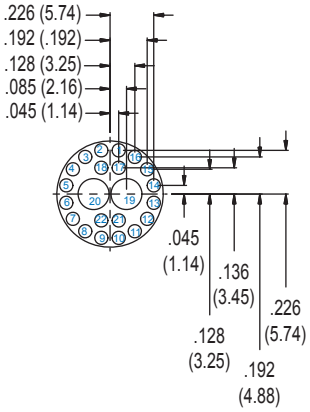


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com
E-Mail: sales@glenair.com


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
12-203, 13-203, 15-203
4 #16 Contacts
.064 (1.63) Max. Dia. Tail
12 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **13-203**
Series 800, 802, 803,804: **12-203**
Series 805: **15-203**










Insert Arrangement
12-204, 13-204, 15-204
2 #12 Contacts
.096 (2.44) Max. Dia. Tail
12 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **13-204**
Series 800, 802, 803,804: **12-204**
Series 805: **15-204**









Insert Arrangement
12-205, 13-205, 15-205
4 #12 Contacts
.096 (2.44) Max. Dia. Tail
4 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **13-205**
Series 800, 802, 803,804: **12-205**
Series 805: **15-205**






Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Combo Arrangements
Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
14-204, 16-204, 18-204
2 #16 Contacts
.064 (1.63) Max. Dia. Tail
40 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **16-204**
Series 802, 803,804: **14-204**
Series 805: **18-204**

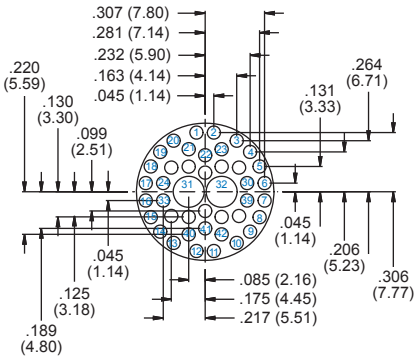


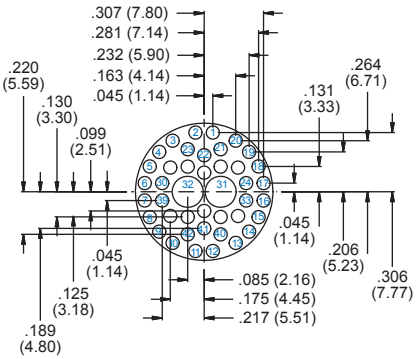





Insert Arrangement
14-205, 16-205, 18-205
4 #16 Contacts
.064 (1.63) Max. Dia. Tail
32 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **16-205**
Series 802, 803,804: **14-205**
Series 805: **18-205**

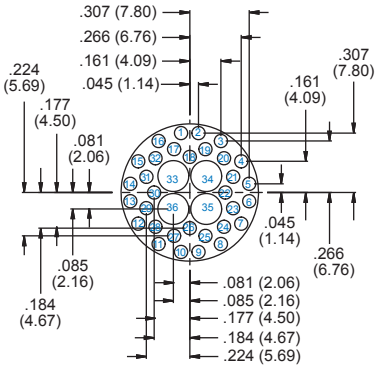


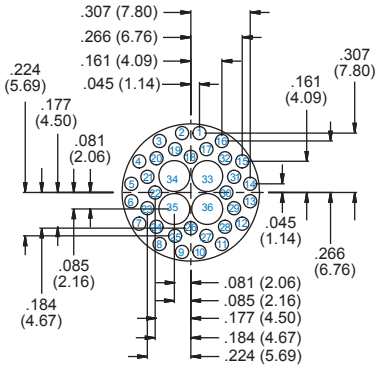




Insert Arrangement
14-206, 16-206, 18-206
2 #12 Contacts
.096 (2.44) Max. Dia. Tail
34 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **16-206**
Series 802, 803,804: **14-206**
Series 805: **18-206**

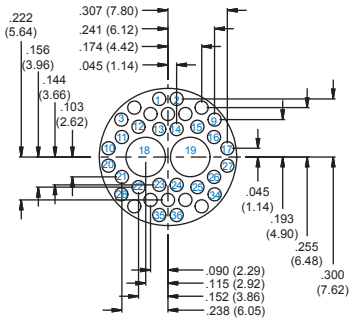


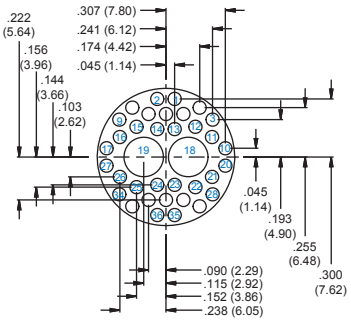

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
14-207, 16-207, 18-207
4 #12 Contacts
.096 (2.44) Max. Dia. Tail
20 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **16-207**
Series 802, 803,804: **14-207**
Series 805: **18-207**










Insert Arrangement
16-208, 18-208
1 #8 Contacts
.182 (4.62) Max. Dia. Tail
32 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **16-208**
Series 805: **18-208**

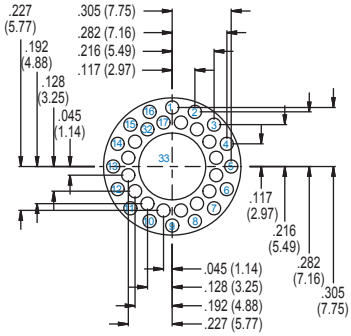


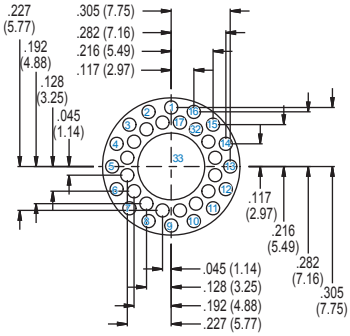




Insert Arrangement
15-203, 17-203, 19-203
4 #16 Contacts
.064 (1.63) Max. Dia. Tail
40 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **17-203**
Series 802: **15-203**
Series 805: **19-203**

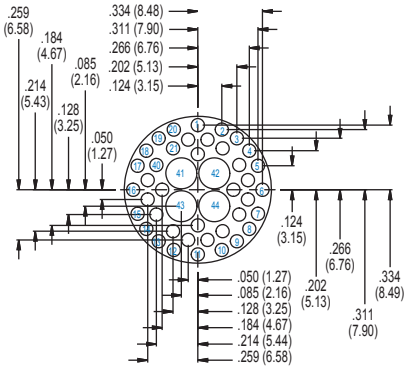

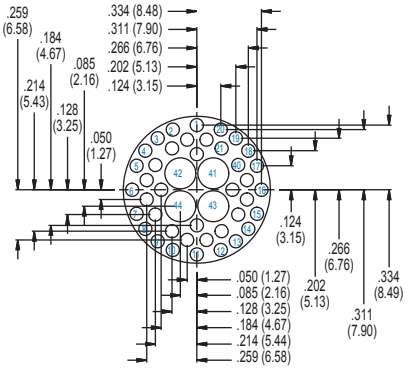


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Combo Arrangements
Straight PCB Footprints - Component Mounting Side of PCB


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
15-204, 17-204, 19-204
4 #12 Contacts
.096 (2.44) Max. Dia. Tail
28 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **17-204**
Series 802: **15-204**
Series 805: **19-204**

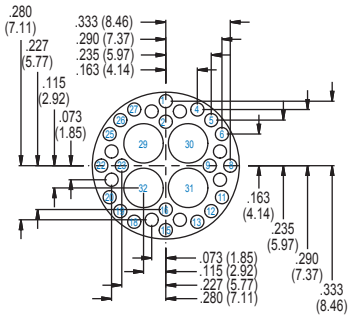


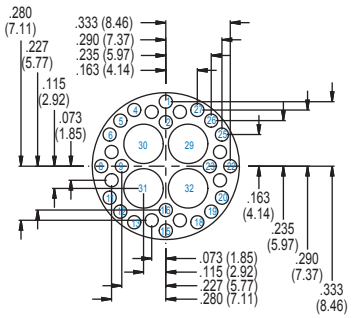




Insert Arrangement
17-205, 19-205
1 #8 Contacts
.182 (4.62) Max. Dia. Tail
40 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **17-205**
Series 805: **19-205**

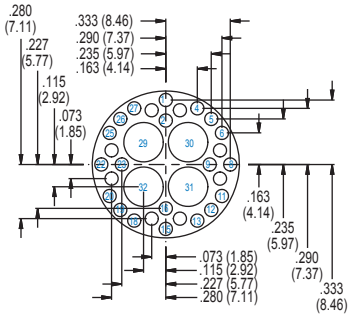

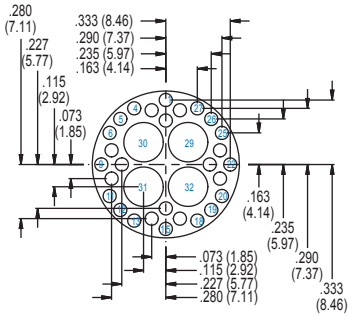


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **E-Mail: sales@glenair.com**


Insert Arrangement	Pin Connector	Socket Connector




Insert Arrangement
19-201, 21-201
2 #8 Contacts
.182 (4.62) Max. Dia. Tail
44 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **19-201**
Series 805: **21-201**

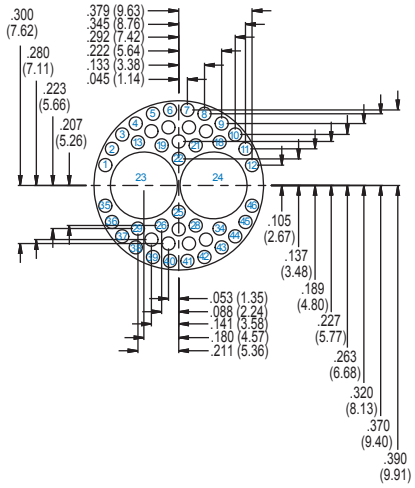


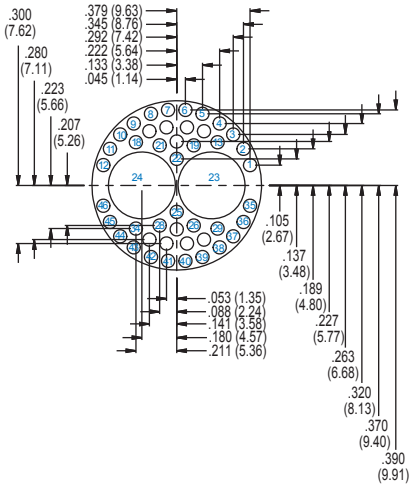




Insert Arrangement
19-202, 21-202
4 #8 Contacts
.182 (4.62) Max. Dia. Tail
12 #23 Contacts
.022 (0.71) Max. Dia. Tail

Series 801: **19-202**
Series 805: **21-202**






Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Series 80 Mighty Mouse Technical Reference
Combo Arrangements
Straight PCB Footprints - Component Mounting Side of PCB

Insert Arrangement	Pin Connector	Socket Connector



Insert Arrangement
21-200, 23-200
4 #8 Contacts
.182 (4.62) Max. Dia. Tail
28 #23 Contacts
.022 (0.71) Max. Dia. Tail

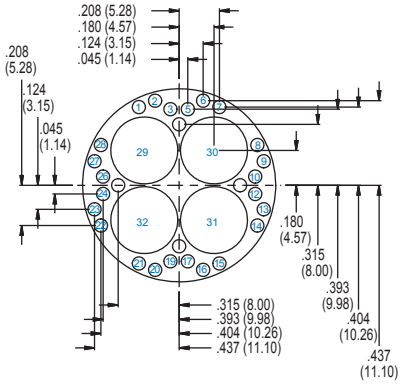

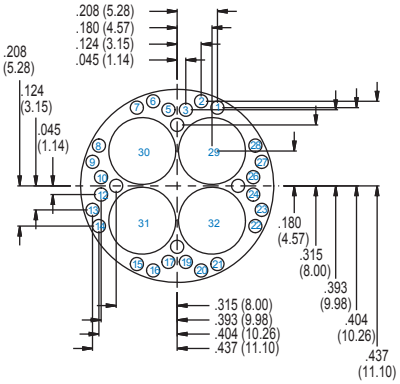

Series 801: **21-200**
Series 805: **23-200**

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Recommended Torque Values						
Series 800	Coupling Torque		Jam Nut Tightening		Backshell Tightening	
	In-lbs.		In-lbs.		In-lbs.	
	Min.	Max.	Min.	Max.	Min.	Max.
5	16	20	20	25	12	16
6	18	22	20	25	14	18
7	20	24	20	25	16	20
8	20	24	20	25	16	20
9	20	24	25	30	16	20
10	20	24	25	30	16	20
12	20	24	25	30	16	20

Series 801, 802, 803, 804, 805 Recommended Torque Values							
Shell Size Series 801, 802, 803, 804	Shell Size Series 805	Coupling Torque		Jam Nut Tightening		Backshell Tightening	
		In-lbs.		In-lbs.		In-lbs.	
		Min.	Max.	Min.	Max.	Min.	Max.
5	-	16	20	20	25	12	16
6	8	18	22	20	25	14	18
7	9	20	24	20	25	16	20
8	10	22	26	20	25	18	22
9	11	24	28	20	25	20	24
10	12 & 13	26	30	25	30	22	26
12 & 13	15	32	36	25	30	28	32
14 & 16	18	38	42	25	30	28	32
15 & 17	19 & 21	40	44	25	30	28	32
19 & 21	23	48	52	25	30	28	32

Series 804 Recommended Mate/Demate Values	
Shell Size/Insert Arrangement	In-lbs.
5-3	11
6-4	11
6-7	12
7-10	12
8-13	13
9-19	14
10-26	16
12-37	18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Technical Reference
809-009 Complete Product Specification

Summary Performance Specifications

Current Rating (Maximum): Size #23 Contact: 5 A., **Size** #20 contact: 7.5 A., **Size** #16 contact: 13 A., **Size** #12 contact: 23 A.

Test Voltage (Dielectric Withstanding Voltage) Mated Connectors:

Size #23 contacts: 750 VAC RMS sea level, 400 VAC RMS 40,000 feet
Size #20HD contacts: 1000 VAC RMS sea level, 400 VAC RMS 40,000 feet
Size #20 contacts: 1800 VAC RMS sea level, 400 VAC RMS 40,000 feet
Size #16 contacts: 1800 VAC RMS sea level, 1000 VAC RMS 40,000 feet
Size #12 contacts: 1800 VAC RMS sea level, 1000 VAC RMS 40,000 feet

Insulation Resistance: 5000 megohms minimum

Contact Resistance:

Size #23 Contact: 70 millivolt drop at 5 A. test current
Size #20 contact: 55 millivolt drop at 7.5 A. test current
Size #16 contact: 49 millivolt drop at 13 A. test current
Size #12 contact: 42 millivolt drop at 23 A. test current

Operating Temperature: -65° C. to +175° C.

Immersion, Mated: 1 meter water immersion for 1 hour (Series 803 splashproof only)

Shock: 300 g **Vibration:** 37 g **Magnetic Permeability:** 2.0 µ maximum

Please refer to the comprehensive Series 80 Product Specification for additional parameters and test methods· Filter and hermetic versions have performance specifications which differ from this information.

1 SCOPE

1.1 Scope. This specification covers performance requirements for Glenair Series 80 Mighty Mouse miniature environment resistant circular connectors.

1.2 Description. Series 80 connectors with crimp, rear-release or non-removable printed circuit board contacts, environmental sealing, aluminum and corrosion resistant steel, threaded, bayonet and quick-disconnect coupling. Series 80 connectors with M39029 type contacts are intended for applications where standard MS circular connectors may be too large or too heavy. Interfacial seal and rear grommet provide environmental protection. Beryllium copper contact retention clips. Integral shield termination platform provides direct termination of cable shield to connector without the need for adapters.

Series 800	Threaded coupling, UNF fine threads, shell sizes 5 through 12
Series 801	Double-start stub ACME threaded coupling, shell sizes 5 through 21
Series 802	Threaded coupling, severe environment, dynamic o-ring seal, 316L stainless steel, shell sizes 5 through 21. Rated for continuous immersion at up to 3500 PSI.
Series 803	Bayonet coupling, light to medium duty, shell sizes 5 through 14.
Series 804	Quick-disconnect, shell sizes 5 through 15.
Series 805	Triple-start stub ACME threaded coupling, EMI spring, ratchet anti de-coupling mechanism, shell sizes 8 through 23.

2 APPLICABLE DOCUMENTS

2.1 Industrial Standards.

EIA-364 Electrical Connector/Socket Test Procedures Including Environmental Classifications

IEC-60512	Electromechanical Components for Electronic Equipment; Basic Testing Procedures and Measuring Methods Part 1: General
IEC-60529	Degrees of protection Provided By Enclosures (IP Code)
IEC 60068	Environmental Testing Part 1: General and Guidance

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

2.2 Military Standards and Specifications

MIL-STD-810	Test Method Standard for Environmental Engineering Considerations and Laboratory Tests
MIL-DTL-38999	Connectors, Electrical, Circular, Miniature, High Density, Quick Disconnect (Bayonet, Threaded, AND breech Coupling), Environment Resistant, Removable Crimp and Hermetic Solder Contacts, General Specification For

2.3 Aerospace Standards

SAE AS39029	Contacts, Electrical Connector, General Specification For

3 REQUIREMENTS

3.1 Materials

Materials and Finishes

Aluminum Shell, Barrel, Jam Nut and Coupling Nut	Aluminum Alloy 6061-T6 Code C: black anodize per MIL-A-8625 Code M: electroless nickel per ASTM B-733 Code MT: Nickel fluorocarbon polymer Code NF: Olive drab cadmium per SAE-AMS-QQ-P-416 over electroless nickel Code ZNU: Black zinc nickel over electroless nickel
Stainless Steel Shell, Barrel Coupling and Jam Nut	Stainless steel per AMS-QQ-S-763, passivated per SAE-AMS-QQ-P-35
Insulators	High Grade Rigid Dielectric
Contact Retention Clip	Beryllium copper, heat-treated, unplated
Grommet, Peripheral Seal and Interfacial Seal	High performance silicone/fluorosilicone elastomer
Contacts	Copper alloy, 50 microinches gold plated per MIL-DTL-45204 over nickel underplating
Socket Contact Hood	Stainless steel, passivated per AMS-QQ-P-35
Adhesives	Silicone and epoxy
Potting Compound, PCB and Solder Cup Versions	Environmental Connectors: epoxy Waterblocked connectors (Glenair modification code 518): RTV silicone

3.2 Performance requirements.

DESCRIPTION	REQUIREMENT	PROCEDURE
Contact resistance, copper alloy contacts	SAE AS39029 Table 5	EIA-364-06 IEC 60512-2-1 Test current in Amperes. Voltage drop in millivolts. Silver-coated copper wire, +25°C.

Wire Size	Test Current	Max Voltage Drop
8	46	26
10	33	33
12	23	42
14	17	40
16	13	49
20	7.5	55
22	5	73
24	3	45
26	2	52
28	1.5	54

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

<table>
<tr><th>DESCRIPTION</th><th>REQUIREMENT</th><th>PROCEDURE</th></tr>
<tr><td>Low level contact resistance</td><td>SAE AS39029 Table 4
<table><tr><th>Wire Size</th><th>Max. Milliohms</th></tr><tr><td>16</td><td>5</td></tr><tr><td>20</td><td>9</td></tr><tr><td>22</td><td>15</td></tr><tr><td>24</td><td>20</td></tr><tr><td>26</td><td>31</td></tr><tr><td>28</td><td>50</td></tr></table></td><td>EIA-364-23

25° C</td></tr>
<tr><td>Insulation resistance</td><td>5000 megohms minimum</td><td>EIA-364-21
IEC-60512-3-1
500 volts DC ± 50 volts. Test between adjacent contacts and contacts to shell.</td></tr>
<tr><td>Dielectric withstanding voltage, sea level

(See 809-099 for combo insert test voltages)</td><td>No breakdown or flashover

#23 contacts 750 volts
#20HD contacts 1000 volts
#16 contacts 1800 volts
#12 contacts 1800 volts</td><td>EIA-364-20
IEC-60512-4-1
AC rms 60 Hz. 2 Sec min. dwell.

Unmated or mated</td></tr>
<tr><td>Dielectric withstanding voltage, 40,000 feet altitude

(See 809-099 for combo insert test voltages)</td><td>No breakdown or flashover

#23 contacts 400 volts
#20HD contacts 400 volts
#16 contacts 1000 volts
#12 contacts 1000 volts</td><td>EIA-364-20
IEC-60512-4-1
AC rms 60 Hz. 2 Sec min. dwell.

mated condition</td></tr>
<tr><td>Current carrying capacity</td><td><table><tr><th>Contact Size</th><th>Current (Amps)</th></tr><tr><td>12</td><td>23</td></tr><tr><td>16</td><td>13</td></tr><tr><td>20</td><td>7.5</td></tr><tr><td>23</td><td>5</td></tr></table></td><td>EIA-364-70 Method 1
IEC-60512-5 Test 9b</td></tr>
<tr><td>Shell-to-shell conductivity, Initial</td><td>The maximum voltage drop across a mated pair shall not exceed the values shown.

<table><tr><th>Series</th><th>Voltage Drop (mV)</th></tr><tr><td>800</td><td>5</td></tr><tr><td>801</td><td>5</td></tr><tr><td>802</td><td>5</td></tr><tr><td>804</td><td>2.5</td></tr><tr><td>805</td><td>2.5</td></tr></table></td><td>EIA-364-83
IEC-60512-2-6

Electroless nickel plated connectors.</td></tr>
</table>

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

<table>
<tr><th>DESCRIPTION</th><th>REQUIREMENT</th><th>PROCEDURE</th></tr>
<tr><td>Shell-to-shell conductivity, after conditioning (48 hours salt spray)</td><td>The maximum voltage drop across a mated pair shall not exceed the values shown.

<table><tr><th>Series</th><th>Voltage Drop (mV)</th></tr><tr><td>800</td><td>10</td></tr><tr><td>801</td><td>10</td></tr><tr><td>802</td><td>10</td></tr><tr><td>804</td><td>5</td></tr><tr><td>805</td><td>5</td></tr></table></td><td>EIA-364-83
IEC-60512-2-6

Electroless nickel plated connectors.</td></tr>
<tr><td>Shielding effectiveness, low frequency (100MHz-1000 MHz)</td><td>Series 800, 801, 804, 805

<table><tr><th>Frequency</th><th>Min. dB Attenuation</th></tr><tr><td>100 MHz</td><td>75</td></tr><tr><td>200 MHz</td><td>70</td></tr><tr><td>300 MHz</td><td>65</td></tr><tr><td>400 MHz</td><td>63</td></tr><tr><td>800 MHz</td><td>58</td></tr><tr><td>1000 MHz</td><td>55</td></tr></table></td><td>MIL-DTL-38999 para. 4.5.28.1

Electroless nickel plated connectors</td></tr>
<tr><td>Shielding effectiveness, high frequency (1Ghz-10GHz)</td><td>Series 800, 801, 804
<table><tr><th>Frequency</th><th>Min. dB Attenuation</th></tr><tr><td>1 GHz</td><td>55</td></tr><tr><td>3 GHz</td><td>50</td></tr><tr><td>6 GHz</td><td>45</td></tr><tr><td>10 GHz</td><td>40</td></tr></table>Series 805
<table><tr><th>Frequency</th><th>Min. dB Attenuation</th></tr><tr><td>1 GHz</td><td>85</td></tr><tr><td>3 GHz</td><td>69</td></tr><tr><td>6 GHz</td><td>66</td></tr><tr><td>10 GHz</td><td>65</td></tr></table></td><td>EIA-364-66

IEC-60512-23-3

Electroless nickel plated connectors</td></tr>
<tr><td>Vibration, sine Series 800, 801, 803, 804, 805</td><td>No discontinuity of greater than 1 microseconds, no cracking, breaking or loosening of parts, plug shall not become disengaged from receptacle.</td><td>MIL-DTL-38999

30 g’s, 3 axes, 4 hours per axis</td></tr>
<tr><td>Vibration, random Series 800, 801, 803, 804, 805</td><td>No discontinuity of greater than 1 microseconds, no cracking, breaking or loosening of parts, plug shall not become disengaged from receptacle.</td><td>EIA-364-28 Test Condition V
Letter I
IEC-60512-6-4
100 milliamp test current
50- 2,000 Hz
37.80 g rms</td></tr>
</table>

© 2014 Glenair, Inc.

<table>
<tr><th>DESCRIPTION</th><th>REQUIREMENT</th><th>PROCEDURE</th></tr>
<tr><td>Gunfire vibration
Series 800, 801, 803, 804, 805</td><td>No discontinuity of greater than 1 microseconds, no cracking, breaking or loosening of parts, plug shall not become disengaged from receptacle.</td><td>MIL-STD-810 Method 519</td></tr>
<tr><td>Mechanical shock
Series 800, 801, 803, 804, 805</td><td>No discontinuity of greater than 1 microsecond, no cracking, breaking or loosening of parts, plug shall not become disengaged from receptacle.</td><td>EIA-364-27 Condition D
IEC-60512-6-3
3 shocks X 3 axes X 2 directions = 18 shocks 2941 m/s2 (300 g's), 3 ms, half-sine</td></tr>
<tr><td>Mechanical durability, at ambient temperature</td><td>No mechanical or electrical defects detrimental to the operation of the connector after the specified number of cycles of mating and unmating.

Series 800, 801, 804
2000 Cycles

805
500 cycles

Series 803
Aluminum alloy 100 cycles
Stainless steel 250 cycles</td><td>EIA-364-09
IEC-60512-5 Test 9a</td></tr>
<tr><td>Solderability, PC tail contacts</td><td>95% solder coverage. Smooth, bright and even finish.</td><td>EIA-364-52 Category 3
IEC-60512-12-1
IEC-68-2-20</td></tr>
<tr><td>Contact retention</td><td><table><tr><th>Contact Size</th><th>Min.Pounds</th><th>Min.Newtons</th></tr><tr><td>23</td><td>6</td><td>27</td></tr><tr><td>20</td><td>15</td><td>67</td></tr><tr><td>20HD</td><td>9</td><td>40</td></tr><tr><td>16</td><td>25</td><td>111</td></tr><tr><td>12</td><td>25</td><td>111</td></tr></table></td><td>EIA-364-29</td></tr>
<tr><td>Contact engaging and separation force</td><td>SAE AS39029 Table 9</td><td>EIA-364-37</td></tr>
<tr><td>Demating force (Series 804)</td><td>Series 804 quick-disconnect connectors<table><tr><th>Contact Arrangement</th><th>Pounds</th></tr><tr><td>5-3</td><td>11</td></tr><tr><td>6-4</td><td>11</td></tr><tr><td>6-7</td><td>12</td></tr><tr><td>7-10</td><td>12</td></tr><tr><td>8-13</td><td>13</td></tr><tr><td>9-19</td><td>14</td></tr><tr><td>10-26</td><td>16</td></tr></table></td><td></td></tr>
</table>

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

<table>
<tr><th>DESCRIPTION</th><th>REQUIREMENT</th><th>PROCEDURE</th></tr>
<tr><td>Insert retention</td><td>Unmated connectors shall retain their inserts in their proper location in the shell and there shall be no evidence of cracking, breaking, separation from the shell, or loosening of parts.

Shell Size
<table>
<tr><th>Series 800
803 804</th><th>Series 801</th><th>Series 805</th><th>Minimum Force in Pounds</th></tr>
<tr><td>5</td><td>5</td><td></td><td>25</td></tr>
<tr><td>6</td><td>6</td><td>8</td><td>25</td></tr>
<tr><td>7</td><td>7</td><td>9</td><td>25</td></tr>
<tr><td>8</td><td>8</td><td>10</td><td>25</td></tr>
<tr><td>9</td><td>9</td><td>11</td><td>25</td></tr>
<tr><td>10</td><td>10</td><td>12</td><td>25</td></tr>
<tr><td>12</td><td>13</td><td>15</td><td>25</td></tr>
<tr><td>14</td><td>16</td><td>18</td><td>40</td></tr>
<tr><td>15</td><td>17</td><td>19</td><td>50</td></tr>
<tr><td>21</td><td>23</td><td>80</td><td></td></tr>
</table></td><td>EIA-364-35</td></tr>
<tr><td>Residual magnetism</td><td>2 µ maximum.</td><td>EIA-364-54</td></tr>
</table>

ENVIRONMENTAL

Operating temperature	-65° to +175°C	
Water immersion, mated	No evidence of water penetration into mated connectors.	MIL-STD-810F Method 512.4 1 meter immersion 1 hour
Ingress protection, open face panel mount receptacles with non-removable printed circuit board or solder cup contacts, with Glenair Modification Code 518 sealing process	IP67	IEC 60529
Humidity	No deterioration which will adversely affect the connector.	MIL-DTL-38999 4.5.26

© 2014 Glenair, Inc.

DESCRIPTION	REQUIREMENT	PROCEDURE
Temperature cycling	No mechanical damage or loosening of parts. Following thermal shock, connector shall meet contact resistance, DWV, insulation resistance and shell-to-shell resistance requirements.	EIA-364-32 Test Condition IV IEC-60512-11-4 5 cycles consisting of -65° C 30 minutes, +25° C 5 minutes max., +150° C 30 minutes, +25° C 5 minutes max.
Salt Spray	No exposure of base metal.	EIA-364-26 IEC 60512-11-6 Code M: 48 hours Code MT: 500 hours Code NF: 500 hours Code ZN: 500 hours Code ZNU: 500 hours
Sand and dust	Mated connectors shall withstand the effects of blowing sand and dust	MIL-STD-810, Method 510
Fungus	Connector materials shall be fungus inert.	MIL-STD-810, Method 508
Fluid immersion	No visible damage from immersion in various fuels and oils. Connector shall meet coupling torque and dielectric withstanding voltage requirements.	EIA-364-10
Altitude immersion	No evidence of moisture on connector interface or contacts. Connector shall meet dielectric withstanding voltage and insulation resistance	EIA-364-03 40,000 feet simulated altitude with additional supplemental potting for all series except 805
Outgassing	ASTM E595 1.0% maximum Total Mass Loss 0.1% maximum Total Collected Volatile Material (Special oven bake or thermal vacuum outgassing is required)	ASTM-E595

© 2014 Glenair, Inc.



Five things you should know about Series 80 connectors for space flight

1 Material Selection: What materials are approved for space-grade connectors? What materials are prohibited? Does the Series 80 connector contain space-approved materials?

2 Outgassing: What is outgassing, why is it important, and how does it affect connector selection? Is special processing required to meet outgassing requirements?

3 Screening: What is NASA screening and what level of screening is required?

4 Magnetic permeability: Are nonmagnetic connectors required?

5 Cryogenic exposure: Are these connectors suitable for -200° C. exposure?

Series 80 Connectors for Space Flight

The small size and reduced weight of the Series 80 connector make it an excellent choice for space instrumentation. Series 80 connectors are available with special screening and outgassing for satellites and space vehicles. This section explains NASA guideline for connector selection, screening and outgassing. This section also explains how to order connectors screened to meet NASA EEE-INST-002.

How To Order Space Grade Series 80 Connectors

Step 1: Find a Standard Part Number
Electroless nickel plated shells are preferred for space flight. Cadmium plating is prohibited.

Step 2: Select a NASA Screening Level
The term "Screening Level" refers to the final inspection procedure.
Level 1 for mission-critical highest reliability
Level 2 for high reliability
Level 3 for standard reliability

Step 3: Choose Outgassing
A detailed explanation of outgassing is on the following pages. The fluorosilicone rubber seals commonly used on aerospace-grade connectors such as MIL-DTL-38999 and Series 80 connectors, along with certain bonding agents and inks, do not meet NASA outgassing requirements unless the connector is specially processed. Glenair outgassing tests have shown oven baking or thermal vacuum outgassing processing are sufficient to reduce outgassing levels to NASA standards. Oven baking is more economical than thermal vacuum outgassing.

Step 4: Select the Mod Code that Matches the Desired Level of Screening and Outgassing
Use the following table to choose the right modification code. Add the mod code to the connector part number. Example: 801-007-16M6-7PA-***429C***

NASA Screening and Outgassing Modification Codes

NASA Screening Level	Special Screening Only	Special Screening Plus Outgassing	
		48 Hour Oven Bake 175° C.	**Thermal Vacuum Outgassing** 24 hrs. 125° C.
Level 1 Highest Reliability	Mod 429B	Mod 429J	Mod 429C
Level 2 High Reliability	Mod 429	Mod 429K	Mod 429A
Level 3 Standard Reliability	(Use standard part number)	Mod 186	Mod 186M

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Connectors for Space Flight

B

1 Material Selection: *What materials are approved for space flight? What materials are restricted? How to choose the right materials for Series 80 connectors.*

What materials are approved for space flight?

Section C2 "Connectors and Contacts" of NASA EEE-INST-002 provides guidelines for materials used in connectors for space flight applications. Aluminum is a preferred material for connector components, and electroless nickel is the preferred finish. Beryllium copper is a preferred material for contacts. 50 microinch minimum gold plating is the preferred contact finish. LCP is a preferred material for dielectric insulating materials.

What materials are prohibited?

100% tin plating shall not be used. Pure tin can grow "whiskers" which can lead to catastrophic electrical short circuits. Silver plating is prohibited because of corrosion concerns. Cadmium is prohibited because it is unstable in vacuum environments.

Specifying Series 80 connectors for space flight

Standard Series 80 connectors meet NASA guidelines for material selection. Specify "M" for aluminum shells with electroless nickel finish. The table below lists the Series 80 materials.

2 Outgassing: *What is outgassing and how does it affect connector selection? Is special processing required to meet outgassing requirements?*

What is outgassing?

Plastic and rubber materials give off gaseous molecules. For example, the smell inside a new car is caused by polymer outgassing. Heat and vacuum increase the rate of diffusion. In a spacecraft the gases coming off polymers can contaminate optical surfaces and instruments. The result is degraded performance.

How is outgassing measured?

The space industry has adopted a standardized test procedure, ASTM E 595, to evaluate out-gassing properties of polymers. Small samples of material are heated to 125° C. at a vacuum of 5 X 10^{-5} torr for 24 hours.

Then the sample is weighed to calculate the ***Total Mass Loss*** (TML). The TML cannot exceed 1.00% of the total initial mass. During the test, outgassed matter condenses on a cooled collector plate. The quantity of outgassed matter is calculated to determine the ***Collected Volatile Condensable Material*** (CVCM). The CVCM cannot exceed 0.10% of the original specimen mass.

Is special outgassing processing necessary on Series 80 connectors?

NASA states "A bakeout for outgassing control is driven by the application and may be required where tight contamination control must be maintained." NASA generally recommends that military circular connectors undergo outgassing processing. This processing can be performed by Glenair; however, some customers prefer to fabricate higher level subassemblies before outgassing processing.

Outgassing At-a-Glance

1. Fluorosilicone rubber components and encapsulants exceed NASA outgassing limits.
2. NASA recommends outgassing processing to reduce outgassing to acceptable levels.
3. An inexpensive oven bakeout has better results than the more costly thermal vacuum outgassing. The higher temperature of the oven bakeout is more effective at removing volatile materials. However, both methods assure compliance with outgassing limits.
4. Glenair Mod 429 codes provide an easy ordering solution, whatever the outgassing option.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Outgassing Properties of Materials used in Series 80 connectors				
Component	Material	TML %	TCVML %	Test Reference
Front and Rear Insulator	LCP	0.07	0.0	Glenair test at Pacific Testing Laboratories 07-25-2017
Rear Grommet Interfacial Seal Peripheral Seal	Blended flourosilicone/silicone elastomer, 30% silicone per ZZ-R-765, 70% flourosilicone per MIL-R-25988	0.48	0.14	Glenair testing conducted at NuSil Technology 02/27/2001
Front-To-Rear Insulator Bonding Material	Eccobond 104 A/B	0.52	0.08	Emerson & Cuming Data Sheet
Insulator-to-Rubber Bonding Material	DC3145 RTV, per MIL-A-46146	2.52	0.58	NASA Test GSC28621
Coupling Nut Retainer	Torlon® 4203L	1.88	0.01	Glenair Test at NuSil Technology 03-12-2003
Coupling Nut Epoxy	Hysol C9-4215	0.48	0.01	Glenair Test
O-Ring	Flourosilicone Rubber	0.32	0.03	NASA Test GSFC8687
White Epoxy Ink for Silkscreening	Markem 7224 White	0.49	0.03	NASA Test #GSC19899
Black Ink for Part Number Identification	Videojet #16-5600Q	TBD	TBD	
Potting Compound, Solder Cup and PC Tail Connectors	Hysol C9-4215	0.48	0.01	Glenair Test
Potting Compound, Solder Cup and PC Tail Connectors	DC3145 RTV, per MIL-A-46146	2.52	0.58	NASA Test GSC28621
Potting Compound, Filter Receptacles	Stycast epoxy, 2850FT/Catalyst 11	0.29	0.02	Mfgr Data Sheet

© 2014 Glenair, Inc.

3 Screening: *What is NASA screening and what level of screening is required?*

What is NASA screening?

NASA specification EEE-INST-002 provides instructions on selecting, screening and qualifying parts for use on NASA GSFC space flight projects. Table 2A in the NASA specification contains inspection instructions for circular connectors including MIL-DTL-38999. Series 80 connectors are not mentioned in the NASA spec but are similar to D38999 connectors, so Table 2A applies by similarity to Series 80 connectors.

What screening level is required?

NASA defines three levels of screening: level 1 for highest reliability, level 2 for high reliability, and level 3 for standard reliability. Level 3 equates to standard lot acceptance inspection. Levels 1 and 2 call for additional testing.

What about qualification requirements?

Projects using connectors covered by military specifications are typically able to waive qualification testing. The Series 80 connector has been rigorously tested by Glenair but is not covered by a military specification. Projects considering using the Series 80 for space flight should obtain guidance from the overseeing space agency regarding the suitability of existing Glenair Series 80 test data, available on request.

NASA EEE-INST-002 Screening Requirements		
Inspection/ Test	NASA Level 1	NASA Level 2
Visual Inspection	100%	100%
Mechanical	2 pcs.	2 pcs.
Voltage (DWV)	2 pcs.	2 pcs.
Insulation Resistance	2 pcs.	2 pcs.
Contact Engagement and Separation Force (socket contacts)	2 pcs.	N/A
Coupling Force	2 pcs.	N/A
Air leakage (Hermetic connectors only)	100%	100%
Solderability/Resistance to Soldering Heat	2 pcs.	N/A
1. NASA screening requirements from Table 2A of EEE-INST-002 "Screening Requirements for Circular Connectors..."		

4 Magnetic permeability: *Are nonmagnetic connectors required?*

Spacecraft designers generally avoid the use of ferromagnetic materials, which can become magnetized and can interfere with sensitive instruments. Series 80 aluminum shell connectors have a maximum permeability of 2 mu. Hermetic Series 80 connector pins are iron alloy, a highly magnetic material.

5 Cryogenic exposure: *Space programs sometimes need cryogenic connectors capable of withstanding temperatures as low as -270° C. Can Series 80 connectors operate satisfactorily at this temperature?*

Series 80 connectors are rated to -65° C. Glenair does not have data to validate these connectors for cryogenic applications. EEE-INST-002 states "...experience has proven it is possible for (non-certified) connector types to be used successfully at cryogenic temperatures. It is recommended that connector samples should be subjected to five cycles of cryogenic temperature... (followed by examination for cracks and DWV)".

© 2014 Glenair, Inc.

Series 80 Modification Codes			
Modification Code	Description	Application Notes	Part Number Example
MOD-186	Oven bake connector for 48 hours at 400° F.	Intended for space flight applications. See **Guidelines for Space-Grade Applications.**	800-006-06M5-3SN-***186***
MOD-429	Special NASA high-reliability screening and processing	Use this mod code on all Series 80 connectors. See **Guidelines for Space-Grade Applications.**	801-010-02M13-37PB-***429J***
MOD-489	Solder dip PC tails in 63/37 tin-lead	For use with all connectors with PC tail contacts.	801-011-02M7-10PA-***489***
MOD-501	Replace spanner-style jam nut w/hex-style jam nut w/ safety wire holes	Use this mod code on all Series 80 rear panel mount jam nut connectors (style 07).	800-010-07M6-4SN-***501***
MOD-518	Waterblock sealing of printed circuit board and solder cup receptacles. Sealing meets 10^{-4} cc/second maximum helium leak rate at 15 PSI pressure differential following three cycles of thermal shock.	For use on all panel mount receptacles with printed circuit board or solder cup contacts.	801-011-07M9-19SA-***518***
MOD-864	Provides five additional panel thickness options: -864A = .125 thick panel -864B = .150 thick panel -864C = .175 thick panel -864D = .200 thick panel -864E = .225 thick panel	Use this mod code on all Series 80 rear panel mount jam nut connectors (style 07).	801-011-07M9-19SA-***864***

Standard Material and Finish Codes							
Code	Material	Finish	Finish Specification	Hrs. Salt Spray	Electrical Conductivity	Operating Temp. Range	RoHS Compliance
AB	Marine Bronze	Unplated		1000	Conductive	-65 to +200°C	✓
AL	Aluminum	AlumiPlate	MIL-DTL-83488	1000	Conductive	-65 to +175°C	✓
C	Aluminum	Anodize, Black	AMS-A-8625	48	Non-Conductive	-65 to +175°C	✓
E	Aluminum	Chem Film	MIL-DTL-5541	168	Conductive	-65 to +175°C	
G2	Aluminum	Anodize, Hardcoat	AMS-A-8625	336	Non-Conductive	-65 to +200°C	✓
JF	Aluminum	Cadmium, Gold	SAE-AMS-QQ-P-416	1000	Conductive	-65 to +175°C	
LF	Aluminum	Cadmium, Clear	SAE-AMS-QQ-P-416	1000	Conductive	-65 to +175°C	
M	Aluminum	Electroless Nickel	AMS-C-26074	48	Conductive	-65 to +200°C	✓
ME	Aluminum	Electroless Nickel	AMS-C-26074	96	Conductive	-65 to +200°C	✓
MT	Aluminum	Nickel-PTFE	AMS2454	500	Conductive	-65 to +175°C	✓
NC	Aluminum	Zinc-Cobalt, Olive Drab	ASTM B 840	350	Conductive	-65 to +175°C	
NF	Aluminum	Cadmium, Olive Drab	SAE-AMS-QQ-P-416	500	Conductive	-65 to +175°C	
P	Stainless Steel	Electrodeposited Nickel	SAE-AMS-QQ-N-290	500	Conductive	-65 to +200°C	✓
UC	Aluminum	Zinc-Cobalt, Black	ASTM B 840	350	Conductive	-65 to +175°C	
UCR	Aluminum	Zinc-Cobalt, Black (RoHS)	ASTM B 840	350	Conductive	-65 to +175°C	✓
Z1	Stainless Steel	Passivate	SAE-AMS-QQ-P-35	1000	Conductive	-65 to +200°C	✓
Z2	Aluminum	Gold	MIL-DTL-45204	48	Conductive	-65 to +200°C	✓
ZC	Stainless Steel	Zinc-Cobalt, Black	ASTM-B840		Conductive	-65 to +175°C	
ZCR	Stainless Steel	Zinc-Cobalt, Black (RoHS)	ASTM-B840		Conductive	-65 to +175°C	✓
ZL	Stainless Steel	Electrodeposited Nickel	SAE-AMS-QQ-N-290	1000	Conductive	-65 to +200°C	✓
ZM	Stainless Steel	Electroless Nickel	AMS-C-26074		Conductive	-65 to +200°C	✓
ZMT	Stainless Steel	Nickel-PTFE	AMS2454	1000	Conductive	-65 to +175°C	✓
ZN	Aluminum	Zinc-Nickel, Olive Drab	ASTM B841	500	Conductive	-65 to +175°C	
ZNU	Aluminum	Zinc-Nickel, Black	ASTM B841	500	Conductive	-65 to +175°C	
ZR	Aluminum	Zinc-Nickel, Black	ASTM B841	500	Conductive	-65 to +175°C	✓
ZU	Stainless Steel	Cadmium, Black	SAE-AMS-QQ-P-416	1000	Conductive	-65 to +175°C	
ZW	Stainless Steel	Cadmium, Olive Drab	SAE-AMS-QQ-P-416	2000	Conductive	-65 to +175°C	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SERIES 80

MIGHTY MOUSE

series 800 light weight connectors with UN thread and crimp rear release contacts.



Glenair series 800 Mighty Mouse Connectors are ideally suited for use in applications where weight is a significant factor. Designed for use with test equipment and instrumentation, the Series 800 UNF thread connector is available with solder cup, PCB or insulated wire. Every connector incorporates crimp rear release contacts and are available with integral band platform or with accessory threads for attachment of backshells or strain reliefs.



Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com


PRODUCT SELECTION GUIDE



Series 800 Plugs
Available with hex shaped or round, knurled coupling nuts. The integral shield termination platform accepts heat-shrink boots (ordered separately), or select accessory threads for use with a variety of strain relief and backshell accessory options. **Page C-6**



Series 800 Crimp Receptacles for Insulated Wire
Jam nut, square flange and in-line versions make it easy to find a style for every application. The integral shield termination platform accepts heat-shrink boots (ordered separately), or select accessory threads for use with a variety of strain relief and backshell accessory options. Contacts are crimp-type and are packaged with the connector. **Page C-8**



Series 800 Receptacles With Solder Cup or PCB Termination
These panel mount connectors feature gold plated, factory-installed non-removeable contacts. Choose printed circuit terminals for attachment to flex circuits or rigid boards, or choose solder cup contacts. Connectors are potted with epoxy for general purpose applications, or choose silicone-sealed, leak-tested versions for 1 meter water immersion. **Page C-12**



Right Angle PCB Receptacles
Supplied with factory-installed, non-removable PC tail contacts for attachment to rigid boards or flex circuits. Epoxy-sealed. Includes threaded inserts for attachment to PC board. **Page C-15**



Series 800 Hermetic Receptacles
Need a miniaturized hermetic for a sealed box or instrument? These stainless steel, glass-sealed connectors are available with solder cup or PC tail contacts. Choose jam nut, square flange or solder mount versions. Contacts are gold plated iron alloy. 100% tested to meet 1 X 10^{-7} cc/sec helium leakage. Open face pressure rating 1000 PSI. **Page C-20**



Series 800 Bulkhead Feed–Thru Receptacle Connector
Jam Nut mount, shell sizes 5 to 12. This connector mates with all high density plug connectors with the same polarization and opposite contact genders. Copper alloy gold-plated contacts, pins to pin, pin to plug or plug to plug. **Page C-24**



Series 800 Cordsets
Specify overmolded cordsets for optimum convenience and performance. Select standard polyurethane-jacketed cable for general purpose applications, or choose low-smoke, zero halogen polyurethane for applications where toxic combustion products are restricted. **Page C-26**

C

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 800 Mighty Mouse with UN Mating Thread
Contact Arrangements, Keyway Positions and Jam Nut Panel Cutout Dimensions


Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
5-3	3				
6-1				1	
6-23			3		
6-4	4				
6-6	6				
6-7	7				
7-1					1
7-25			5		
7-10	10				
8-2				2	
8-13	13				
8-28			8		
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
12-2					2
12-3					3
12-7				7	
12-220			20		
12-37	37				
12-200	6				2
12-201	10				2
12-202	20				
12-203	12				
12-204	12				2
12-205	4				4

*Arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend

#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕

Mating Face View of Pin Connector
(socket connector numbers are reversed)

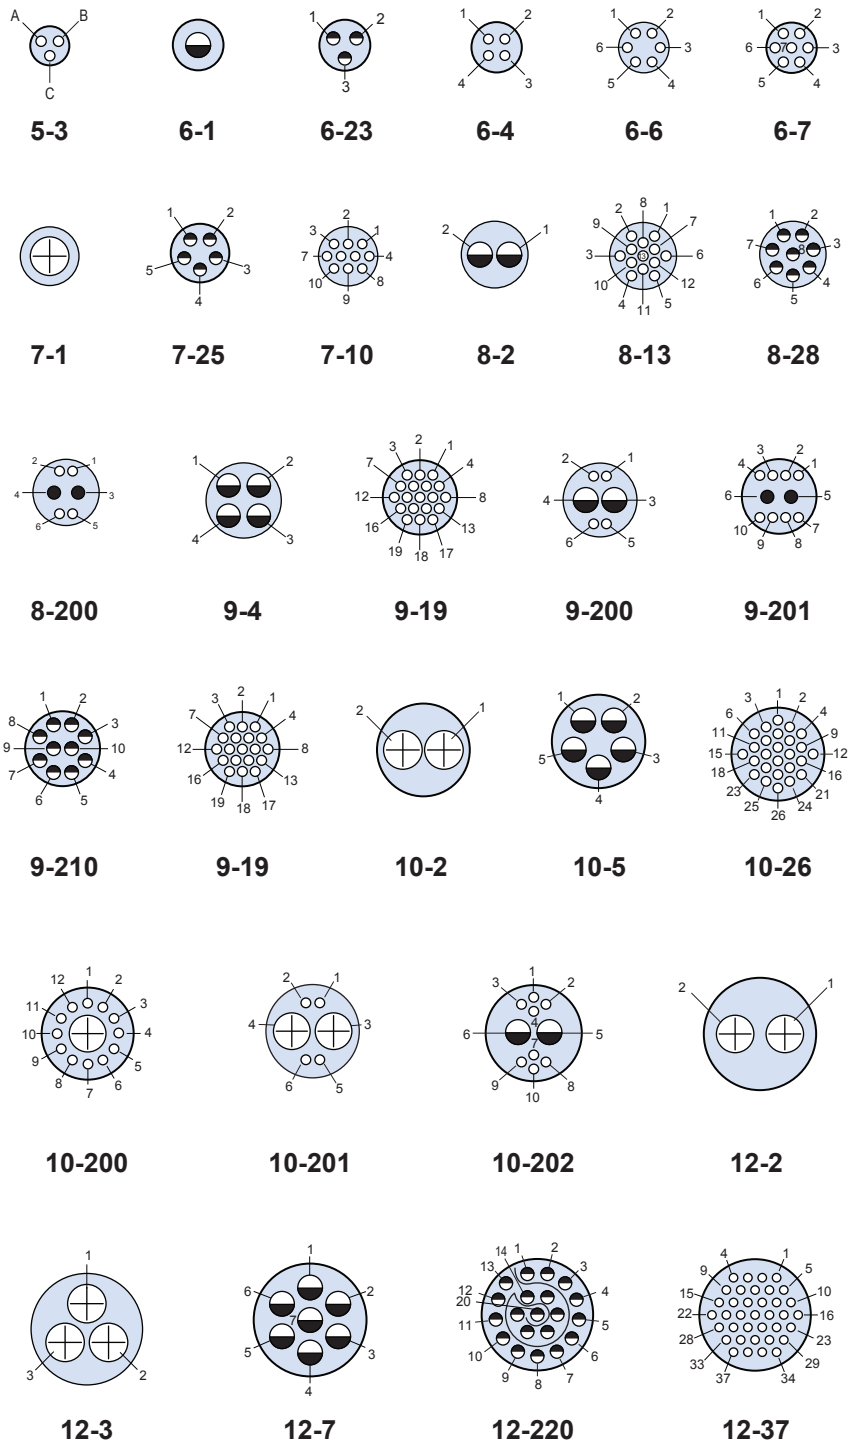


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 800 Mighty Mouse with UN Mating Thread Contact Arrangements, Keyway Positions and Jam Nut Panel Cutout Dimensions


Mating Face View of Pin Connector
(socket connector numbers are reversed)




12-200




12-201




12-202



12-203



12-204




12-205

Shell Size	N	X	Y	Z
5	150°	140°	130°	120°
6				
7				
8				
9				
10				
12				


Shell size 5 and 6: master key is located at top dead center for normal (N) position.

Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.

Series 800 Key Positions

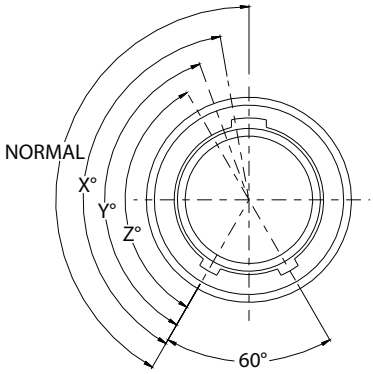


Shell Size 5 and 6 Key Position

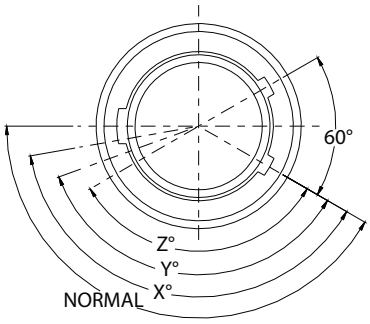

Shell Size 7 thru 12 Key Position

Jam Nut Panel Cut Out


Shell Size	Ø M		N Flat	
	in	mm	in	mm
5	.318	8.08	.302/.298	7.67/7.56
6	.386	9.80	.365/.361	9.27/9.17
7	.449	11.40	.429/.424	10.90/10.77
8	.510	12.95	.486/.482	12.34/12.24
9	.574	14.58	.543/.539	13.79/13.69
10	.635	16.13	.617/.613	15.67/15.57
12	.760	19.30	.725/.721	18.41/18.31



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse with UN Mating Thread
General Information

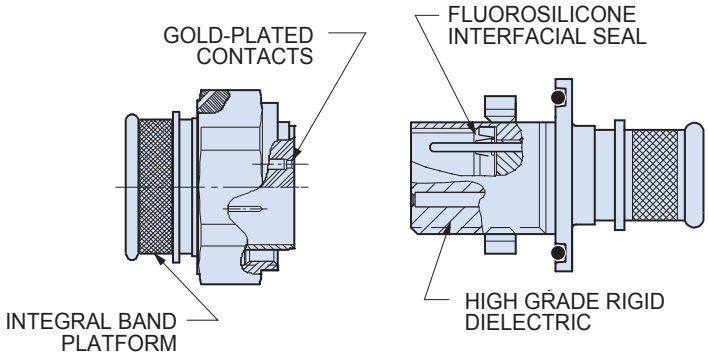

- **Threaded Coupling Mechanism**
- **Crimp Rear Release Contacts**
- **Integral Band Platform**
- **Available with Size #12, #16, 20, #20HD and #23 Contacts**
- **Environmentally Sealed**

C

Glenair Series 800 Mighty Mouse Offers Environmental Sealing and Rugged Design in a Lightweight, Ultraminiature Package

Series 800 connectors are intended for light and medium duty applications where size, weight and cost outweigh the need for heavier-duty Series 80 connectors. Terminate shielded cable directly to the integral band platform for excellent EMI protection. Originally used for aerospace sensors, these Series 800 connectors have proven to be a good solution for small form factor tactical equipment including keyboards, radios, ruggedized RPDA's and other dismounted soldier equipment. These connectors meet the requirements of MIL-STD-810 for immersion, vibration, sand and dust, shock, and corrosion resistance.



Specifications	
Current Rating	#23–5 A, #20–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD– 1000 VAC, #12 and #16–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum from 100MHz to 1000MHz.
Durability	2000 mating cycles

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	High-Grade Rigid Dielectric
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Connector Weights			
Maximum Weight In Grams			
Layout	Cable Plug	Jam Nut Receptacle	
		Crimp Contacts	PCB Contacts
5-3P	3.6	2.5	2.5
5-3S	3.7	2.6	2.6
6-1P	4.3	3.2	3.2
6-1S	4.4	3.3	3.3
6-4P	4.8	3.7	3.9
6-4S	5.2	4.0	3.7
6-6P	4.9	3.8	4.2
6-6S	5.3	4.1	4
6-7P	4.8	3.6	3.7
6-7S	4.7	4.0	3.9
6-23P	4.3	3.1	3.2
6-23S	4.6	3.4	3.3
7-1P	5.7	4.7	4.4
7-1S	5.9	5.0	4.5
7-10P	6.9	5.7	5.1
7-10S	7.4	6.2	5.4
7-25P	5.6	4.6	4.3
7-25S	5.9	5	4.3
8-2P	7.4	6.2	6.2
8-2S	8.1	6.9	6.9
8-28P	7.6	6.4	6.8
8-28S	8.6	7.4	7.5
8-13P	6.7	5.5	5.5
8-13S	7.2	5.9	5.9
8-200P	7.7	6.5	6.5
8-200S	8.4	7.2	7.2
9-4P	8.7	7.4	6.7
9-4S	8.8	7.6	6.8
9-210P	8.5	7.2	6.2
9-210S	8.8	7.6	6.5
9-19P	10.5	9.2	7.7
9-19S	11.2	9.6	7.9
9-200P	8.3	6.8	6.2
9-200S	9.4	7.9	7.3
9-201P	8.4	6.9	6.3

Connector Weights			
Maximum Weight In Grams			
Layout	Cable Plug	Jam Nut Receptacle	
		Crimp Contacts	PCB Contacts
9-201S	9.5	8.0	7.4
10-2P	9.5	9.7	11.3
10-2S	10.8	11	12.8
10-5P	9.7	9.9	12.2
10-5S	11.1	11.3	13.6
10-26P	7.9	8.1	10.5
10-26S	8.6	8.4	9.9
10-200P	8.8	9.0	11.3
10-200S	10.3	10.6	12.8
10-201P	9.1	9.4	11.7
10-201S	10.7	10.9	13.2
10-202P	8.8	9.0	11.2
10-202S	10.2	10.5	12.8
12-2P	10.5	10.1	11.6
12-2S	10.6	10.2	11.7
12-3P	10.7	10.3	11.8
12-3S	10.8	10.5	11.9
12-7P	14.3	13.8	15.3
12-7S	16.9	16.5	17.9
12-37P	12.5	12.1	13.5
12-37S	16.1	13.6	14.9
12-200P	13.2	12.8	14.2
12-200S	15.5	15.1	16.5
12-201P	13.3	12.9	14.3
12-201S	15.7	15.3	16.7
12-220P	11.3	10.6	13.9
12-220S	12.2	11.7	14.2
12-202P	10.6	10.2	13
12-202S	11.1	10.6	12.9
12-203P	10.2	10.5	13.5
12-203S	11.4	10.9	13.4
12-204P	11	10.6	13.3
12-204S	11.5	11	13.4
12-205P	12.1	11.7	17.6
12-205S	12.5	12	18

C

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 800 Mighty Mouse UN Mating Thread Plug

800-006 Thru 800-009 Ordering Information






Glenair's Smallest Mighty Mouse Connector has compact size and rugged design for hostile environments. UN mating thread. Connector shells are machined aluminum or stainless steel. Supplied with crimp contacts, packaged separately. Terminate contacts with standard M22520 tools. Metal clips inside the connector body lock contact into place. Contacts are removable. Fluorosilicone seals and rear grommet protect connector from water ingress. Choose hex or knurled coupling nut. Terminate cable shield directly to connector body with Band-Master™ ATS strap, or choose rear accessory thread to attach optional cable clamp or backshell. Available in shell sizes 5 through 12 in 36 contact arrangements.

C

How To Order							
Sample Part Number			**800-006**	**-06**	**M**	**6-7**	**P**	**N**
Series (See Table I)	**800-006** = Hex Plug with Banding Platform **800-007** = Hex Plug with Accessory Thread **800-008** = Plug with Band Platform **800-009** = Plug with Accessory Thread							
Shell Style	**-06** = Standard Coupling Nut **-16** = Coupling Nut with Anti-Decoupling Wave Spring							
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant							
Shell Size - Insert Arrangement	See Contact Arrangements page C-2							
Contact Type	**Connector supplied with crimp contacts** **P** = Pin **S** = Socket	**Connector supplied without contacts** **A** = Pin Connector **B** = Socket Connector	**Connector supplied with 30 AWG crimp contacts** **G** = Pin **H** = Socket					
Shell Key Positions (See Table II)	**N** = Normal **X** = Pos. X **Y** = Pos. Y **Z** = Pos. Z							


Table I: Series

			
800-006 Hex Plug with Banding Platform	**800-007** Hex Plug with Accessory Thread	**800-008** Knurled Round Plug with Band Platform	**800-009** Knurled Round Plug with Accessory Thread

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Plug connector

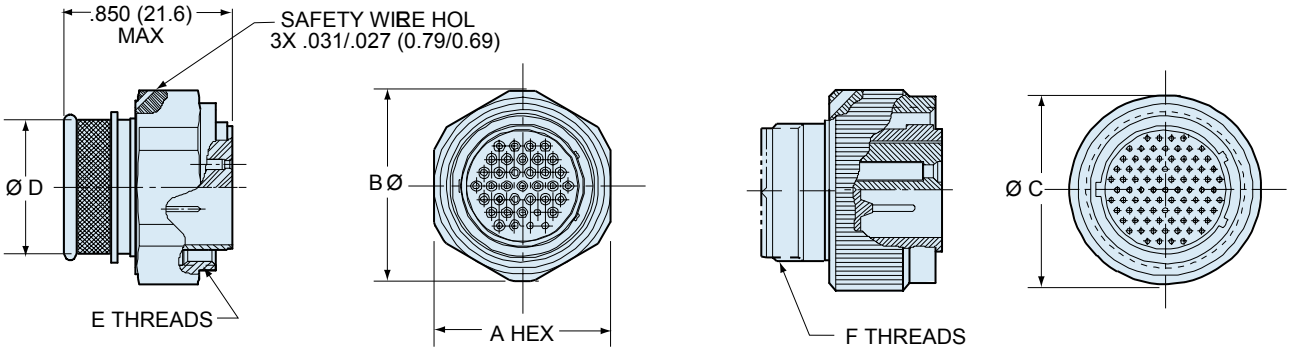

Integral Band Platform
(Hex Coupling Shown)
800-006
800-008



Hex Coupling Nut
800-006
800-007

Accessory Thread
(Round Coupling Shown)
800-007
800-009

Plug Coupling
800-008
800-009

C

Dimensions																
Shell Size	Std Coupling Nut - Style 06						Coupling Nut with Wave Spring - Style 16						Ø D		E Threads Coupling Nut	F Threads Accessory
	A Hex		Ø B		Ø C		A Hex		B Ø		Ø C					
	In.	mm.	In.	mm.	In.	mm.	In .	mm.	In.	mm.	In.	mm.	In.	mm.		
5	.430	10.92	.47	11.94	.43	10.92	.495	12.57	.54	13.72	.49	12.45	.230	5.84	.3125-28 UN-2B	.250-32 UNEF-2A
6	.500	12.70	.55	13.97	.50	12.70	.563	14.30	.62	15.75	.56	14.22	.286	7.26	.3750-28 UN-2B	.3125-32 UNEF-2A
7	.625	15.88	.68	17.27	.62	15.75	.720	18.29	.80	20.32	.68	17.27	.390	9.91	.4375-28 UNEF-2B	.4375-28 UNEF-2A
8	.680	17.27	.75	19.05	.68	17.27	.743	18.87	.83	21.08	.75	19.05	.445	11.30	.5000-32 UN-2B	.5000-28 UNEF-2A
9	.750	19.05	.83	21.08	.75	19.05	.813	20.65	.89	22.61	.81	20.57	.500	12.70	.5625-32 UN-2B	.5625-24 UNEF-2A
10	.812	20.62	.90	22.86	.81	20.57	.875	22.23	.96	24.38	.88	23.35	.565	14.35	.6250-32 UN-2B	.6250-24 UNEF-2A
12	.875	22.23	.97	24.64	.88	22.35	.938	23.83	1.03	26.16	.94	23.88	.650	16.51	.7500-28 UN-2B	.6875-24 UNEF-2A

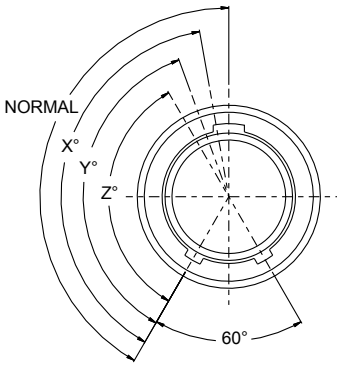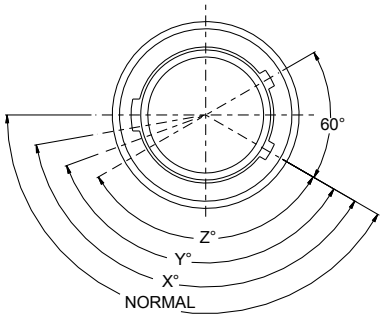Table II: Shell Key Positions			
Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		

Shell size 5 and 6: Master key is located at top dead center for normal (N) position.

Shell size 7 thru 12: Master key is rotated 90° from TDC for normal position.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse UN Mating Thread Inline and Panel Mount Receptacles

800-010 and 800-011 Ordering Information



In-Line



Square Flange



Rear Panel Jam Nut

Integral Band Platform for direct attachment of a cable shield using a Band-Master™ ATS strap. Install a boot, or overmold onto the band platform. An accessory thread is available for attaching strain reliefs and backshells.

Three Shell Options: Jam nut with o-ring for rear panel mounting, square flange or in-line receptacle for free-hanging cables.

C

How To Order						
Sample Part Number	**800-011**	**-01**	**M**	**6-7**	**P**	**N**

Series (See Table I)	**800-010** = With Banding Platform **800-011** = With Accessory Thread
Shell Style (See Table II)	**-01** = In-Line **-02** = Square Flange for Front or Rear Mounting **-07** = Jam Nut for Rear Panel Mounting *(See Jam Nut Panel Cutout Dimensions Page C-3)*
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement	See Contact Arrangements page C-2
Contact Type	**Connector supplied with crimp contacts** **P** = Pin **S** = Socket **Connector supplied without contacts** **A** = Pin Connector **B** = Socket Connector **Connector supplied with 30 AWG crimp contacts** **G** = Pin **H** = Socket Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Position (See Table III)	**N** = Normal **X** = Pos. X **Y** = Pos. Y **Z** = Pos. Z

Table I: Series






	
800-010 Receptacle with Banding Platform	**800-011** Receptacle with Accessory Thread


Table II: Shell Style

		
-01 In-Line	**-02** Square Flange or Rear Mounting	**-07** Jam Nut for Rear Panel Mounting

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam nut, rear panel mount receptacle - shell style 07

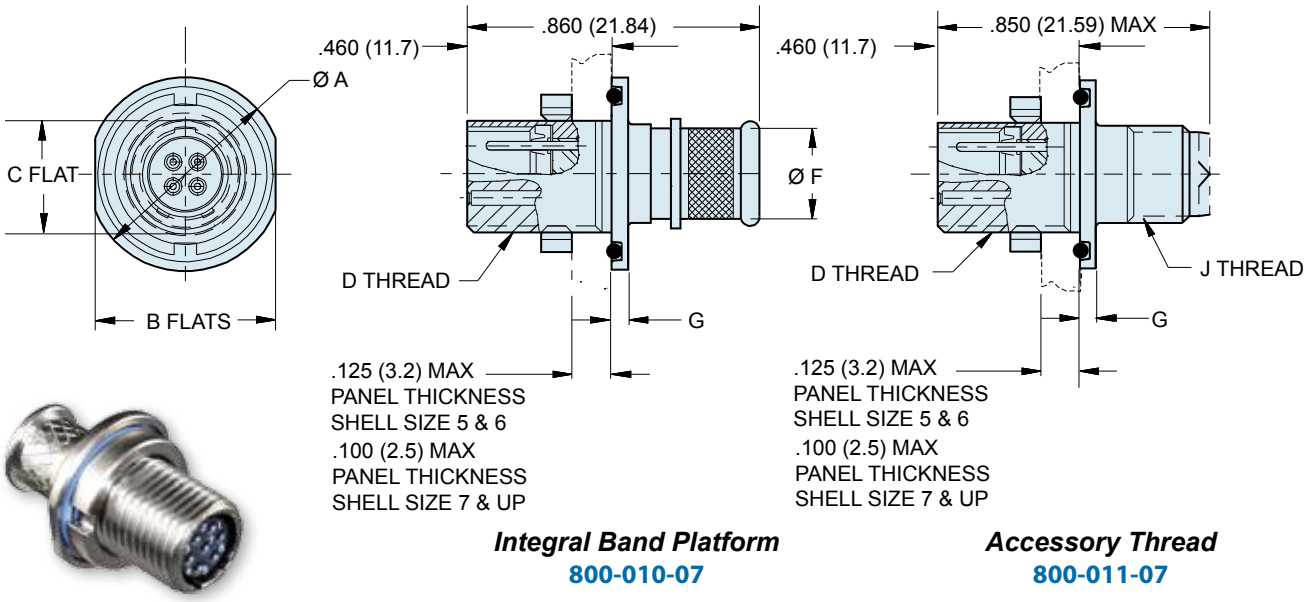


Integral Band Platform
800-010-07

Accessory Thread
800-011-07

C

Dimensions												
Shell Size	Ø A		B Flat		C Flat		D Threads Mating	Ø F		G		J Threads Accessory
	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
5	.541	13.74	.500	12.70	.285	7.24	.3125-28 UN-2A	.230	5.84	.051	1.30	.250-32 UNEF-2A
6	.610	15.49	.562	14.27	.352	8.94	.3750-28 UN-2A	.286	7.26	.051	1.30	.3125-32 UNEF-2A
7	.670	17.02	.635	16.13	.418	10.62	.4375-28 UNEF-2A	.390	9.91	.093	2.36	.4375-28 UNEF-2A
8	.775	19.69	.735	18.67	.473	12.01	.5000-32 UN-2A	.445	11.30	.093	2.36	.5000-28 UNEF-2A
9	.875	22.23	.806	20.47	.530	13.46	.5625-32 UN-2A	.500	12.70	.093	2.36	.5625-24 UNEF-2A
10	.980	24.89	.940	23.88	.604	15.34	.6250-32 UN-2A	.565	14.35	.093	2.36	.6250-24 UNEF-2A
12	1.062	26.97	.986	25.04	.712	18.08	.7500-28 UN-2A	.650	16.51	.093	2.36	.6875-24 UNEF-2A

Jam Nut Panel Cut Out




Shell Size	Ø M		N Flat ± .002	
	in	mm	in	mm
5	.318	8.08	.302/.298	7.67/7.56
6	.386	9.80	.365/.361	9.27/9.17
7	.449	11.40	.429/.424	10.90/10.77
8	.510	12.95	.486/.482	12.34/12.24
9	.574	14.58	.543/.539	13.79/13.69
10	.635	16.13	.617/.613	15.67/15.57
12	.760	19.30	.725/.721	18.41/18.31


Table III: Shell Key Positions

Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		

Shell size 5 and 6: master key is located at top dead center for normal (N) position.

Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.






Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse UN Mating Thread
Inline and Panel Mount Receptacles
800-010 and 800-011 Dimensions

Square flange rear panel mount receptacle - shell style 02


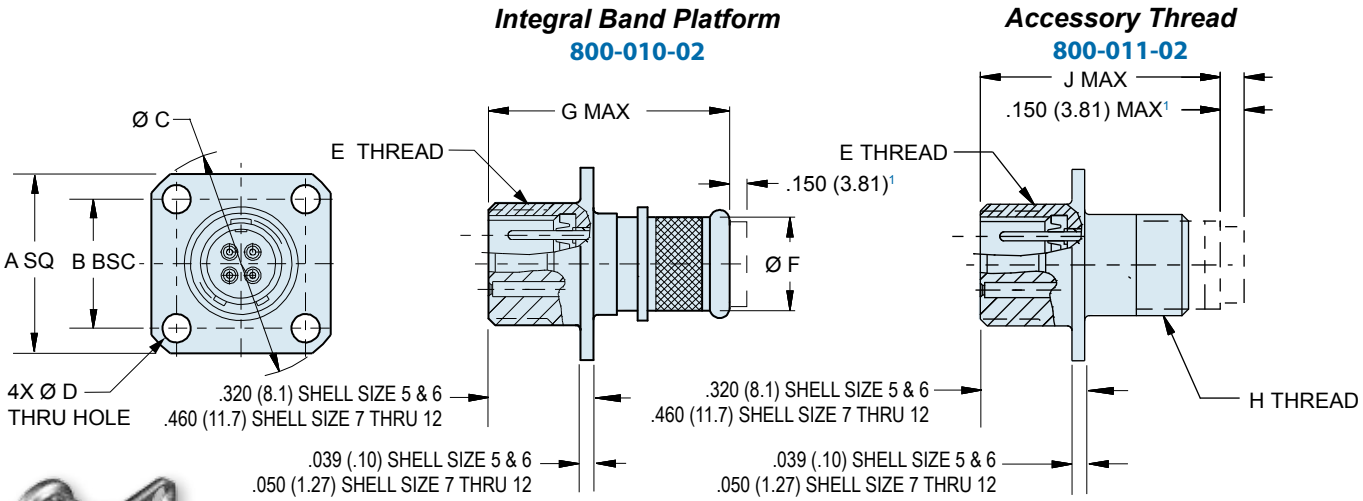




Dimensions																
Shell Size	A SQ		B Bsc		Ø C		Ø D		E Threads Mating	Ø F		G Max.		H Threads Accessory	J Max.	
	In.	mm.	In.	mm.	In.	mm.	In. ± .005	mm. ± 0.13		In.	mm.	In.	mm.		In.	mm.
5	.527	13.39	.363	9.22	.680	17.27	.094	2.39	.3125-28 UN-2A	.230	5.84	.730	18.54	.250-32 UNEF-2A	.725	18.42
6	.588	14.92	.423	10.74	.750	19.05	.094	2.39	.3750-28 UN-2A	.286	7.26	.730	18.54	.3125-32 UNEF-2A	.725	18.42
7	.650	16.51	.483	12.27	.830	21.08	.128	3.25	.4375-28 UNEF-2A	.390	9.91	.805	20.45	.4375-28 UNEF-2A	.800	20.32
8	.710	18.03	.542	13.77	.938	23.83	.128	3.25	.5000-32 UN-2A	.445	11.30	.805	20.45	.5000-28 UNEF-2A	.800	20.32
9	.938	23.83	.719	18.26	1.250	31.75	.128	3.25	.5625-32 UN-2A	.500	12.70	.805	20.45	.5625-24 UNEF-2A	.800	20.32
10	.938	23.83	.719	18.26	1.250	31.75	.128	3.25	.6250-32 UN-2A	.565	14.35	.805	20.45	.6250-24 UNEF-2A	.800	20.32
12	1.031	26.19	.812	20.62	1.375	34.93	.128	3.25	.7500-28 UN-2A	.650	16.51	.805	20.45	.6875-24 UNEF-2A	.800	20.32

NOTES

1. Grommet protrudes for power and/combo arrangements
2. For panel cut out dimensions see page C-3

Table III: Shell Key Positions			
Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		
Shell size 5 and 6: master key is located at top dead center for normal (N) position. Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.			


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In-line cable receptacle - shell style 01



Integral Band Platform
800-010-01

Accessory Thread
800-011-01

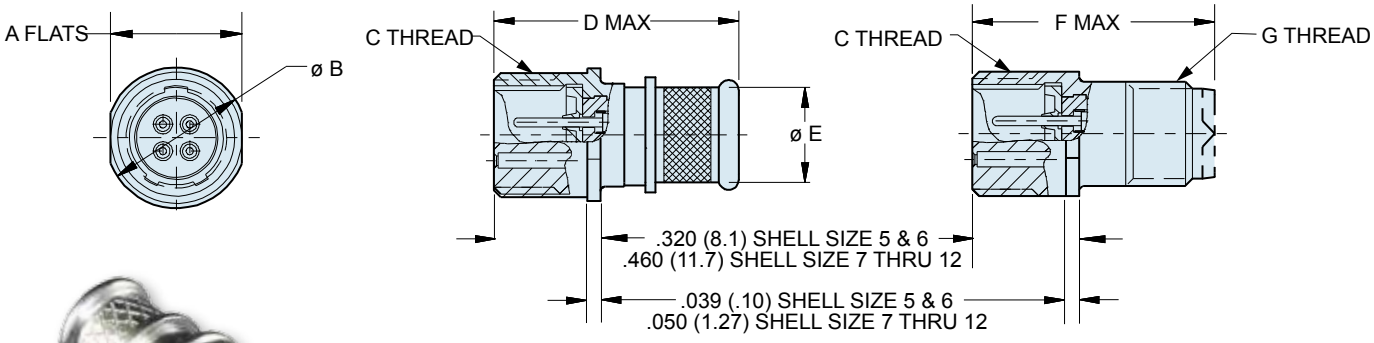



Dimensions												
Shell Size	A Flats		Ø B		C Threads Mating	D Max.		Ø E		F Max.		G Threads Accessory
	In.	mm.	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.312	7.92	.355	9.02	.3125-28 UN-2A	.750	19.05	.230	5.84	.725	18.42	.250-32 UNEF-2A
6	.375	9.53	.400	10.16	.3750-28 UN-2A	.750	19.05	.286	7.26	.725	18.42	.3125-32 UNEF-2A
7	.445	11.30	.490	12.45	.4375-28 UNEF-2A	.825	20.96	.390	9.91	.800	20.32	.4375-28 UNEF-2A
8	.550	13.97	.600	15.24	.5000-32 UN-2A	.825	20.96	.445	11.30	.800	20.32	.5000-28 UNEF-2A
9	.613	15.57	.663	16.84	.5625-32 UN-2A	.825	20.96	.500	12.70	.800	20.32	.5625-24 UNEF-2A
10	.675	17.15	.725	18.42	.6250-32 UN-2A	.825	20.96	.565	14.35	.800	20.32	.6250-24 UNEF-2A
12	.800	20.32	.850	21.59	.7500-28 UN-2A	.825	20.96	.650	16.51	.800	20.32	.6875-24 UNEF-2A

Table III: Shell Key Positions			
Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		
Shell size 5 and 6: master key is located at top dead center for normal (N) position. Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.			

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse UN Mating Thread PC Tail or Solder Cup PCB Receptacle

800-012 and 800-040 Ordering Information





Printed Circuit Board/ Solder Cup Receptacles feature low profile shells for minimum protrusion inside enclosures and integral board standoffs. Contacts are non-removable.

Water Immersion, Unmated Specify ***800-012*** connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify ***800-040*** watertight connectors . These 800-040 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40C to +70C.

C


How To Order							
Sample Part Number		**800-012**	**-07**	**M**	**7-10**	**P**	**Z**
Series	**800-012** = Receptacle for Solder Cup or PCB Termination, with Standard Epoxy Potting **800-040** = Receptacle for Solder Cup or PCB Termination, With Special "MOD-518" Sealing For Open Face (Unmated) Water Immersion Requirements. 100% Leak Tested.						
Shell Style (See Table I)	**-02** = Square Flange **-07** = Jam Nut *(See Jam Nut Panel Cutout Dimensions Page C-3)*						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement	See Contact Arrangements page C-2						
Contact Type	**P** = Pin, PC Tail **E** = Pin, Solder Cup **S** = Socket , PC Tail **F** = Socket, Solder Cup						
Shell Key Position (See Table II)	**N** = Normal **X** = Pos. X **Y** = Pos. Y **Z** = Pos. Z						

Table I: Shell Style

	
-02 Square Flange Front Mount	**-07** Jam Nut for Rear Panel Mounting

Recommended Panel Cut Out


Shell Size	Ø M		N Flat ± .002	
	in	mm	in	mm
5	.318	8.08	.297/.292	7.54/7.42
6	.386	9.80	.365/.360	9.27/9.14
7	.449	11.40	.429/.424	10.90/10.77
8	.510	12.95	.483	12.67
9	.574	14.58	.540	13.71
10	.635	16.13	.614	15.60
12	.760	19.30	.722	18.34



Dimensions in Inches (millimeters) are subject to change without notice.



© 2014 Glenair, Inc.

Jam nut mount receptacle - shell style 07

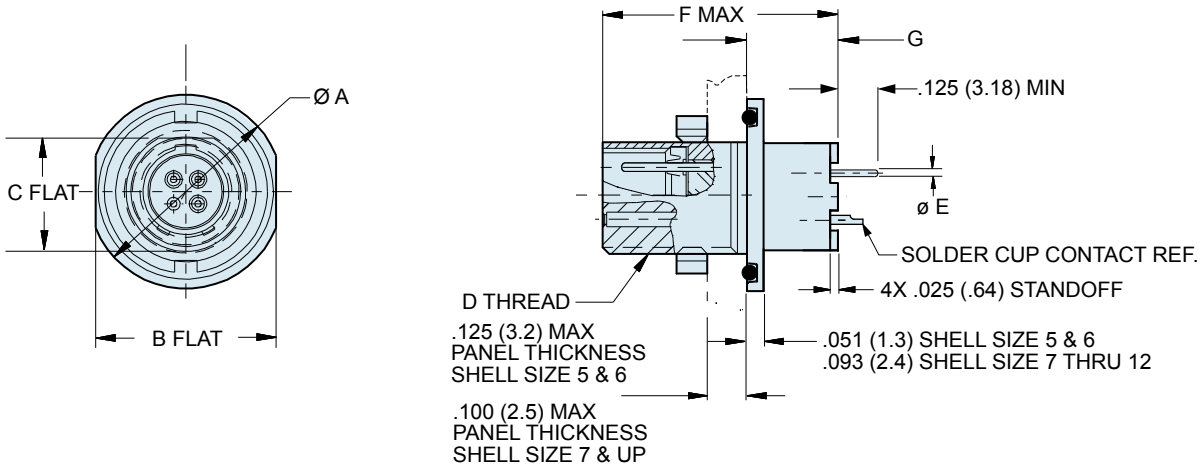

Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Threads Mating	Ø E Tail Dia.	F Max		G	
	In.	Mm.	In.	Mm.	In.	Mm.			In.	Mm.	In.	Mm.
5	.541	13.74	.500	12.70	.285	7.24	.3125-28 Un-2A	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)	.725	18.42	.247	6.27
6	.610	15.49	.562	14.27	.352	8.94	.3750-28 Un-2A		.725	18.42	.247	6.27
7	.670	17.02	.635	16.13	.411	10.44	.4375-28 Unef-2A		.700	17.78	.205	5.21
8	.775	19.69	.735	18.67	.473	12.01	.5000-32 Un-2A		.700	17.78	.205	5.21
9	.875	22.23	.806	20.47	.530	13.46	.5625-32 Un-2A		.700	17.78	.205	5.21
10	.980	24.89	.940	23.88	.604	15.34	.6250-32 Un-2A		.700	17.78	.205	5.21
12	1.062	26.97	.986	25.04	.712	18.08	.7500-28 Un-2A		.700	17.78	.205	5.21

Table II: Shell Key Positions

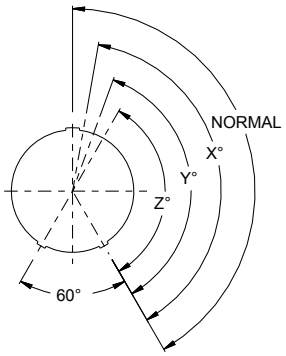
Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		
Shell size 5 and 6: master key is located at top dead center for normal (N) position. Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.			

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse UN Mating Thread
PC Tail or Solder Cup PCB Receptacle
800-012 and 800-040 Dimensions

Square flange mount receptacle - shell style 02

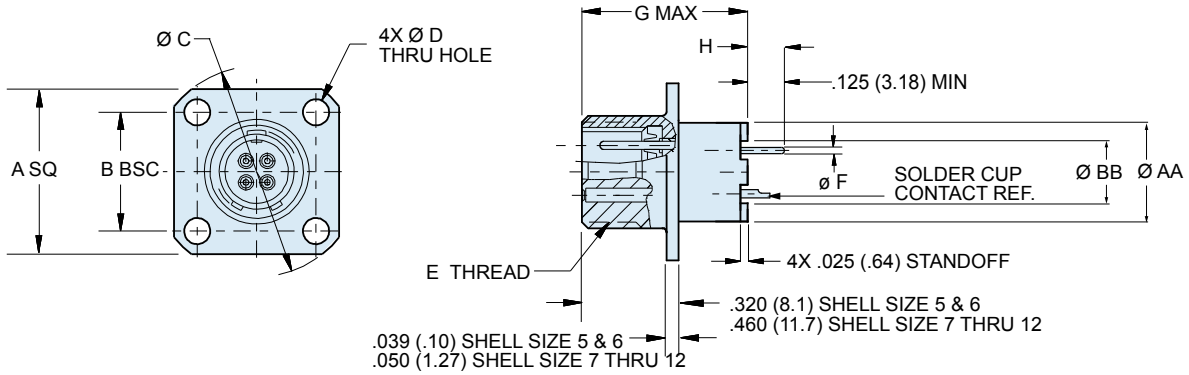

Dimensions													
Shell Size	A SQ		B		Ø C		Ø D		E Threads Mating	Ø F Tail Dia.	G Max		H	
							In.	mm.						
	In.	mm.	In.	mm.	In.	mm.	± .005	± 0.13			In.	mm.	In.	mm.
5	.527	13.39	.363	9.22	.680	17.27	.096/	2.44/	.3125-28 UN-2A	**#23** .018/.022 (0.46/0.56)	.725	18.42	.426	10.82
6	.588	14.92	.423	10.74	.750	19.05	.091	2.31	.3750-28 UN-2A		.725	18.42	.426	10.82
7	.650	16.51	.483	12.27	.830	21.08	.128	3.25	.4375-28 UNEF-2A	**#20** .024/.028 (0.61/0.71)	.700	17.78	.255	6.48
8	.710	18.03	.542	13.77	.938	23.83	.128	3.25	.5000-32 UN-2A		.700	17.78	.255	6.48
9	.938	23.83	.719	18.26	1.250	31.75	.128	3.25	.5625-32 UN-2A	**#16** .060/.064 (1.52/1.63)	.700	17.78	.255	6.48
10	.938	23.83	.719	18.26	1.250	31.75	.128	3.25	.6250-32 UN-2A		.700	17.78	.255	6.48
12	1.031	26.19	.812	20.62	1.375	34.93	.128	3.25	.7500-28 UN-2A	**#12** .092/.096 (2.34/2.44)	.700	17.78	.255	6.48

Dimensions (Continued)				
Shell Size	Ø AA O.D.		Ø BB I.D.	
	In.	mm.	In.	mm.
5	.265	6.73	.186	4.72
6	.330	8.38	.238	6.05
7	.424	10.77	.327	8.31
8	.448	11.38	.388	9.86
9	.500	12.70	.446	11.33
10	.575	14.61	.515	13.08
12	.660	16.76	.599	15.21

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse UN Mating Thread
Right Angle Printed Circuit Board Receptacle Headers
800-032 Ordering Information




Printed Circuit Board Right Angle I/O Header features gold-plated size #23 contacts. UN mating thread, and aluminum or stainless steel shells. Rubber seal protects mated connectors from water ingress. 5 amp current rating, 500 VAC voltage rating. Contacts are factory-installed and are non-removable. Thermoplastic rear housing has #2-56 threaded inserts for attaching to circuit board with customer-supplied mounting screws. Connectors attach to chassis or panel with low-profile jam nut and O-ring. Available in six contact arrangements, these right angle headers are ideal for hostile environments where 100/1000BASE-T Ethernet applications where commercial-grade RJ-45 jacks are not advised.


C

How To Order						
Sample Part Number	**800-032**	**-07**	**M**	**7-10**	**P**	**Z**
Series	**800-032** PCB Receptacle					
Shell Style	**-07** = Jam Nut					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	**5-3**, **6-1**, **6-4**, **6-6**, **6-7**, **7-1**, **7-10**, **8-2**, **8-13**, **9-4**, **9-19**, **9-200**, **10-2**, **10-5**, **10-201**					
Contact Type	**P** = Pin, PC Tail **S** = Socket, PC Tail					
Shell Key Position (See Table I)	**N** = Normal **X** = Pos. X **Y** = Pos. Y **Z** = Pos. Z					

Recommended Panel Cutout





SHELL SIZE 5, 6, 7, 9



SHELL SIZE 8

Shell Size	A Flat		øB	
	In.	mm.	In.	mm.
	+.004/-.000	+0.10/-0.00	±.005	±0.13
5	.292	7.47	.322	8.18
6	.358	9.14	.385	9.78
7-1	.417	10.64	.447	11.35
7-10	.417	10.64	.449	11.40
8	.479	12.22	.510	12.95
9	.536	13.67	.572	14.53
10	.610	15.49	.635	16.13

Table I: Shell Key Positions


Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		
Shell size 5 and 6: master key is located at top dead center for normal (N) position. Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.			


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 800 Mighty Mouse UN Mating Thread
Right Angle Printed Circuit Board Receptacle Headers
800-032 Dimensions

Jam nut mount receptacle - shell style 07

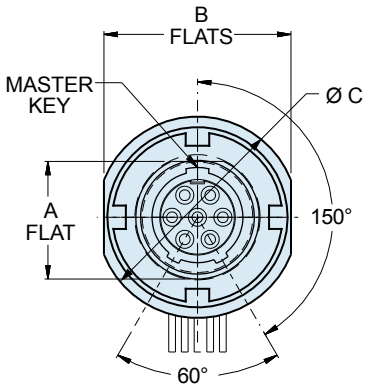

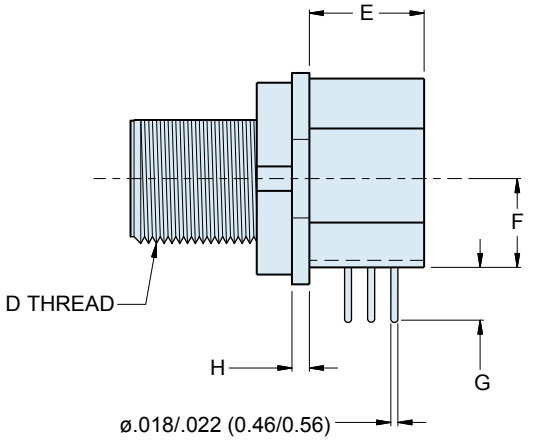



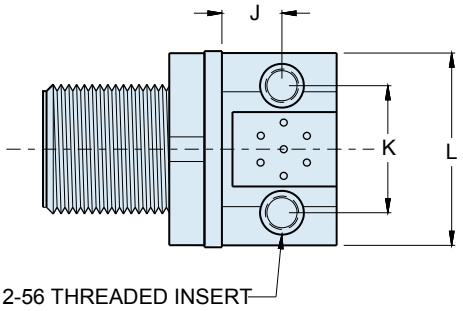


Dimensions																						
Size - Arr	A Flat		B Flat		Ø C		D Threads	E		F		G		H		J		K		L	
	In.	mm.										In.	mm.	In.	mm.						
	±.005	±0.13	In.	mm.	In.	mm.		In.	mm.	In.	mm.	±.035	±0.89	±.005	±0.13	In.	mm.	In.	mm.	In.	mm.
5-3	.282/.291	7.16/7.39	.497	12.62	.538	13.67	.3125-28 UN-2A	.260	6.60	.235	5.97	.257	6.53	.050	1.27	.165	4.19	.310	7.87	.49	12.45
6-1	.350/.359	8.89/9.12	.559	14.20	.602	15.29	.3750-28 UN-2A	.350	8.89	.225	5.72	.285	7.24	.050	1.27	.224	5.69	.385	9.78	.58	14.73
6-4	.350/.359	8.89/9.12	.559	14.20	.602	15.29	.3750-28 UN-2A	.330	8.38	.225	5.72	.285	7.24	.050	1.27	.224	5.69	.385	9.78	.58	14.73
6-6,6-7	.350/.359	8.89/9.12	.559	14.20	.602	15.29	.3750-28 UN-2A	.350	8.89	.225	5.72	.285	7.24	.050	1.27	.187	4.75	.408	10.36	.58	14.73
7-1	.409/.418	10.39/10.62	.643	16.33	.664	16.87	.4375-28 UNEF-2A	.350	8.89	.296	7.52	.200	5.08	.092	2.34	.170	4.32	.452	11.48	.71	18.03
7-10	.409/.418	10.39/10.62	.643	16.33	.664	16.87	.4375-28 UNEF-2A	.350	8.89	.296	7.52	.274	6.96	.092	2.34	.170	4.32	.452	11.48	.71	18.03
8-2	.471/.480	11.96/12.19	.731	18.57	.770	19.56	.5000-28 UN-2A	.490	12.45	.320	8.13	.336	8.53	.092	2.34	.230	5.84	.490	12.45	.71	18.03
8-13	.471/.480	11.96/12.19	.731	18.57	.770	19.56	.5000-32 UN-2A	.490	12.45	.320	8.13	.315	8.00	.092	2.34	.230	5.84	.490	12.45	.71	18.03
9-4	.528/.537	13.41/13.64	.803	20.40	.872	22.15	.5625-28 UN-2A	.490	12.45	.362	9.19	.288	7.32	.092	2.34	.342	8.69	.600	15.24	.80	20.32
9-19	.528/.537	13.41/13.64	.803	20.40	.872	22.15	.5625-32 UN-2A	.490	12.45	.362	9.19	.283	7.19	.092	2.34	.342	8.69	.600	15.24	.80	20.32
9-200	.528/.537	13.41/13.64	.803	20.40	.872	22.15	.5625-28 UN-2A	.490	12.45	.362	9.19	.240	6.10	.092	2.34	.342	8.69	.600	15.24	.80	20.32
10-2	.528/.537	13.41/13.64	.940	23.88	.976	24.79	.6250-28 UN-2A	.570	14.48	.397	10.08	.272	6.91	.092	2.34	.362	9.19	.640	16.26	.84	21.34
10-5	.602/.611	15.29/15.52	.940	23.88	.976	24.79	.6250-28 UN-2A	.570	14.48	.397	10.08	.305	7.75	.092	2.34	.362	9.19	.640	16.26	.84	21.34
10-201	.602/.611	15.29/15.52	.940	23.88	.976	24.79	.6250-28 UN-2A	.570	14.48	.397	10.08	.272	6.91	.092	2.34	.362	9.19	.640	16.26	.84	21.34

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Panel Cutouts for Right Angle PCB Headers




SHELL SIZE 5, 6, 7, 9


Size - Arr.	A Flat		øB	
	In.	mm.	In.	mm.
	+.004/-.000	+0.10/-0.00	±.005	±0.13
5-3	.292	7.42	.322	8.18
6-1	.358	9.09	.385	9.78
6-4	.358	9.09	.385	9.78
6-6, 6-7	.358	9.09	.385	9.78
7-1	.417	10.59	.447	11.35
7-10	.417	10.59	.449	11.40
8-2	.479	12.17	.510	12.95
8-13	.479	12.17	.510	12.95
9-4	.536	13.61	.572	14.53
9-19	.536	13.61	.572	14.53
9-200	.536	13.61	.572	14.53
10-2	.610	15.49	.635	16.13
10-5	.610	15.49	.635	16.13
10-201	.610	15.49	.635	16.13

C

FACE VIEWS OF RIGHT ANGLE PCB HEADERS




JAM NUT FLAT AND KEYWAY LOCATIONS
SHELL SIZE 5 AND 6
SOCKET FACE SHOWN

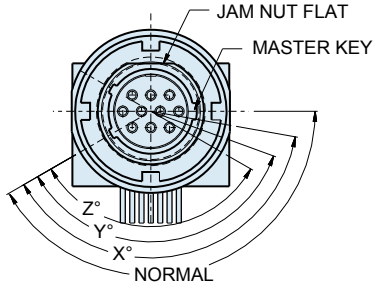


JAM NUT FLAT AND KEYWAY LOCATIONS
SHELL SIZE 7
SOCKET FACE SHOWN


Key Positions	
Key Position	Key Rotation
N Normal	150°
X	140°
Y	130°
Z	120°

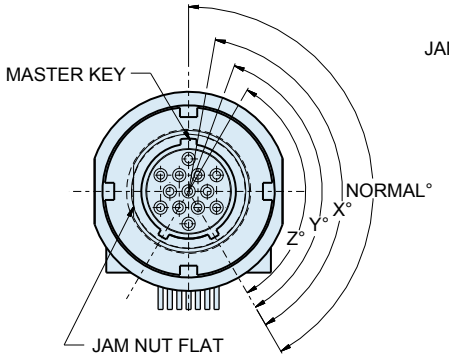

JAM NUT FLAT AND KEYWAY LOCATIONS
SHELL SIZE 8
SOCKET FACE SHOWN

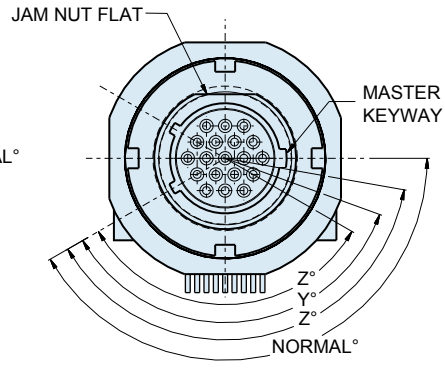

JAM NUT FLAT AND KEYWAY LOCATIONS
SHELL SIZE 9
SOCKET FACE SHOWN

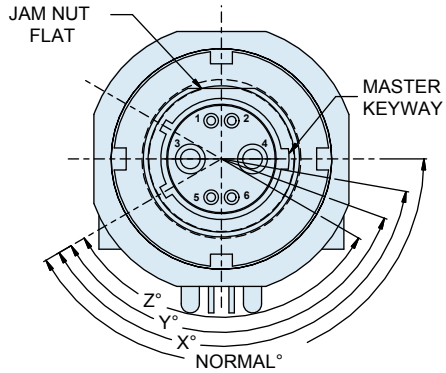

JAM NUT FLAT AND KEYWAY LOCATIONS
SHELL SIZE 10
SOCKET FACE SHOWN


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 800 Mighty Mouse UN Mating Thread
Right Angle Printed Circuit Board Receptacle Headers
800-032 PCB Mounting Footprints

RIGHT ANGLE PCB FOOTPRINTS: SOCKET CONNECTORS SHOWN


Patterns shown are for component mounting side of PCB.
Contacts are .022 (0.56) max. diameter, mounting holes are 2-56 threaded inserts

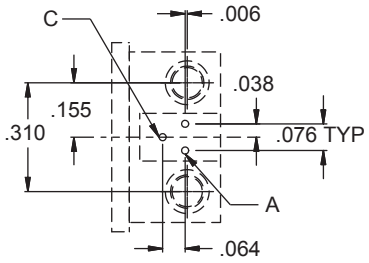


5-3




6-1

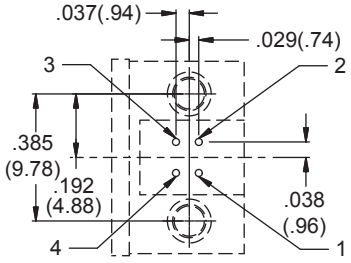


6-4

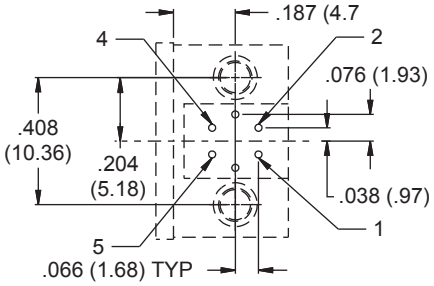


6-6

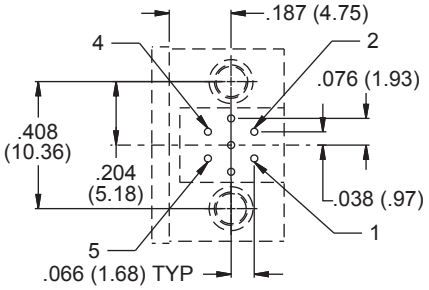


6-7




7-1

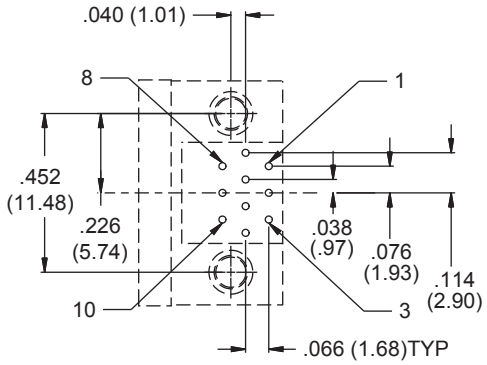

7-10

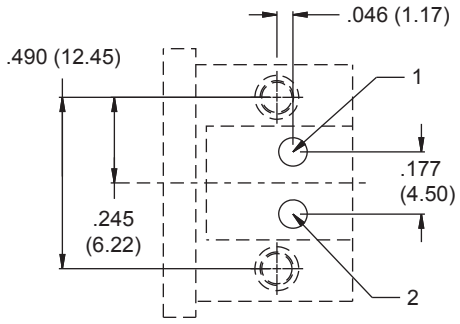

8-2

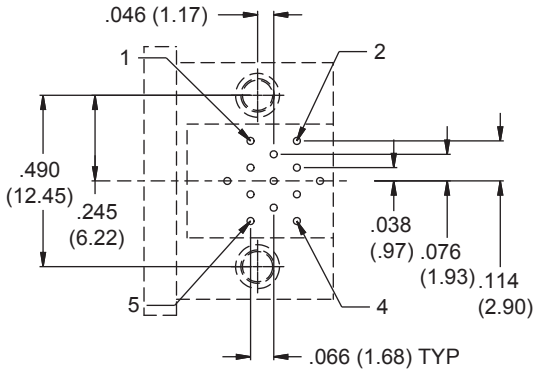

8-13


Rev. 11/30/17

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

RIGHT ANGLE PCB FOOTPRINTS: SOCKET CONNECTORS SHOWN


Patterns shown are for component mounting side of PCB.
Contacts are .022 (0.56) max. diameter, mounting holes are 2-56 threaded inserts

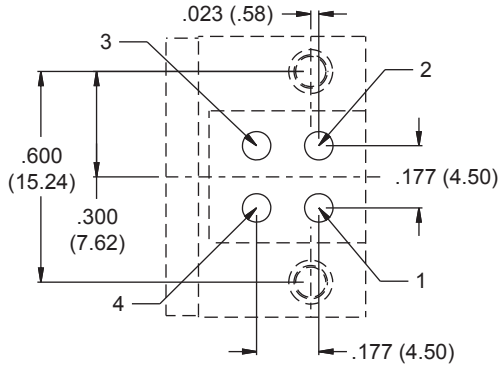


9-4

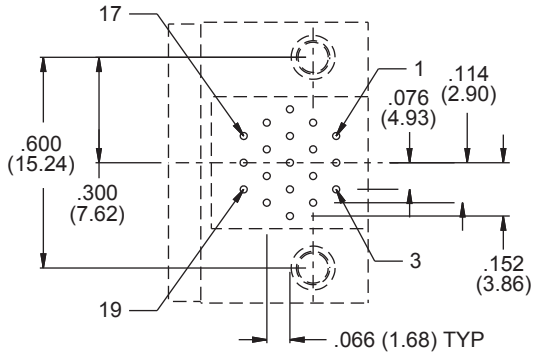


9-19

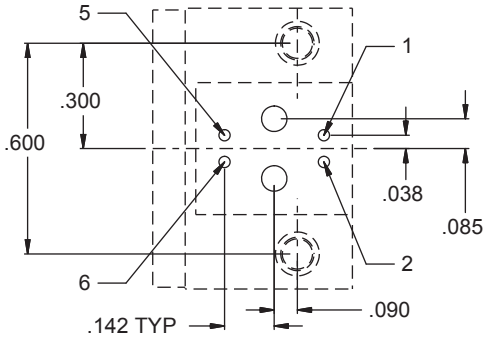


9-200

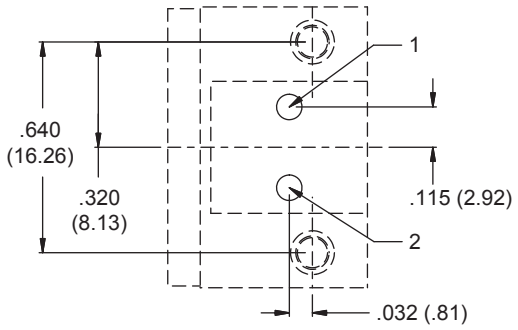

10-2

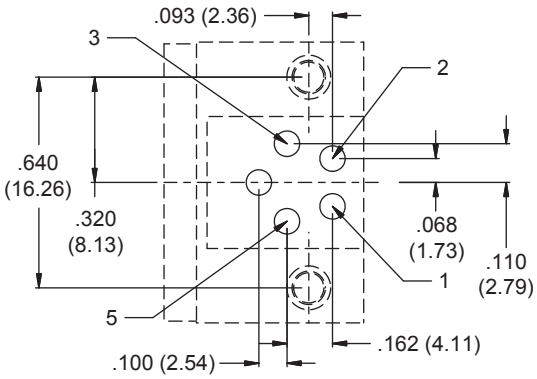

10-5

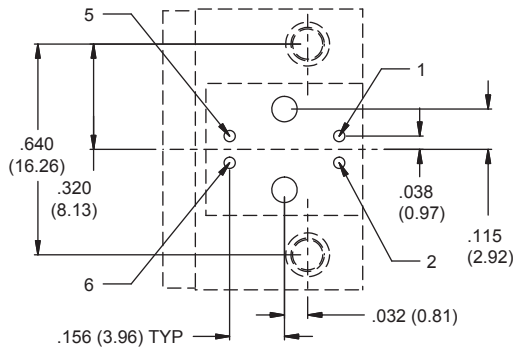

10-201

© 2014 Glenair, Inc.

Series 800 Mighty Mouse Hermetic UN Mating Thread Hermetic Receptacle

800-013 Ordering Information



Compact, Rugged Series 800 hermetic receptacles feature 304L stainless steel shells and vitreous glass insulators. Contacts are gold-plated iron alloy. UN mating thread. Available with male pin contacts (contact Glenair for hermetic connectors with female socket contacts). 100% helium leak tested to meet 1 x 10^{-7} cc/second maximum leak rate. 1000 psi open face (unmated) pressure rating. Contacts are factory-installed and are non-removable. Terminate to wires with solder cup versions, or choose PC tail versions for thru-hole soldering to rigid or flexible circuit boards. Available in all contact and insert arrangements between size 5 and 12.

How To Order						
Sample Part Number	**800-013**	**-02**	**Z1**	**6-7**	**P**	**N**
Series	**800-013** Hermetic Receptacle					
Shell Style (See Table I)	**02** = Square Flange **03** = Solder Mount **07** = Jam NutSee Shell					
Shell Material and Finish	**Z1** = Stainless Steel / Passivated RoHS Compliant **ZL** = Stainless Steel / Nickel Plated					
Shell Size - Insert Arrangement	See Contact Arrangements page C-2					
Contact Type	**P** = Pin, Solder Cup **S** = Socket, Solder Cup **C** = Pin, PC Tail **D** = Socket, PC Tail					
Shell Key Position	**N** = Normal **X** = Pos. X **Y** = Pos. Y **Z** = Pos. Z See page C-3					

Table I: Shell Style




		
-02 Square Flange	**-03** Solder Mount	**-07** Jam Nut


Table II: Contact Dimensions

Contact Size	Ø EE
23	.022/.018
20	.028/.024
16	.064/.060
12	.096/.092

Table III: CC and DD Dia.

Shell Size	Ø CC O.D.		Ø DD O.D.	
	in.	mm.	in.	mm.
5	.290	7.37	.197	5.00
6	.330	8.38	.256	6.50
7	.380	9.65	.325	8.26
8	.450	11.43	.390	9.91
9	.500	12.70	.452	11.48
10	.575	14.61	.520	13.21
12	.660	16.76	.610	15.49


Solder mount receptacle - shell style 03 - shell size 5 and 6

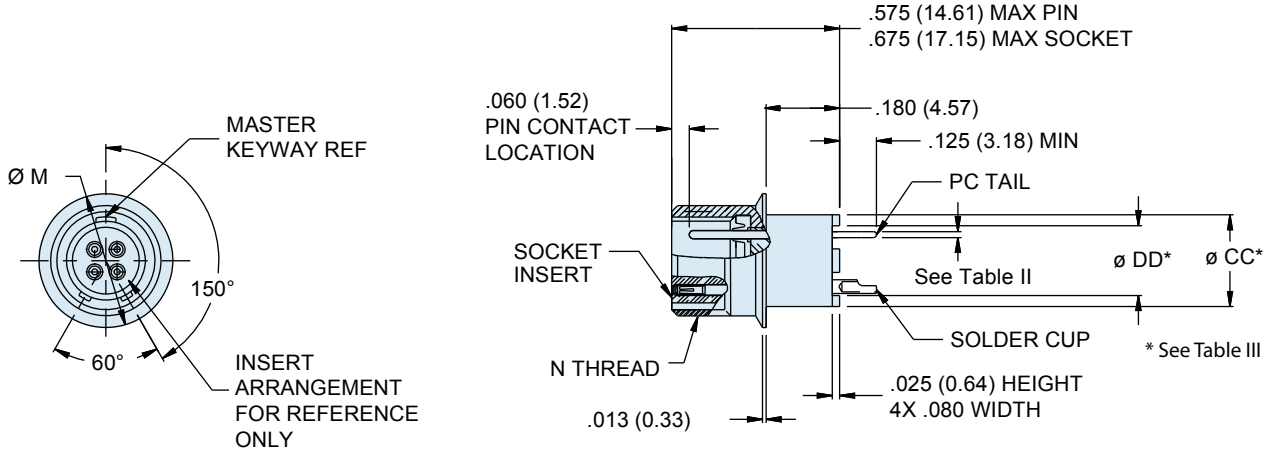


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Square flange mount receptacle - shell style 02 - shell size 5 and 6

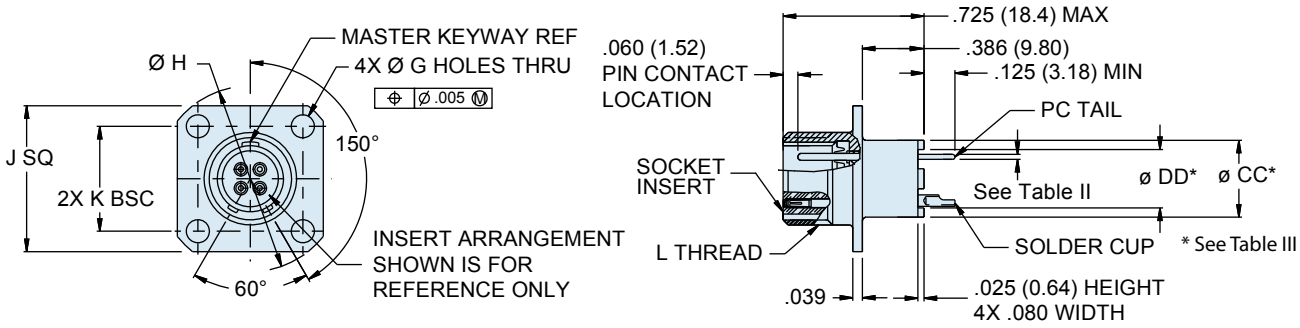

Jam nut mount receptacle - shell style 07 - shell size 5 and 6

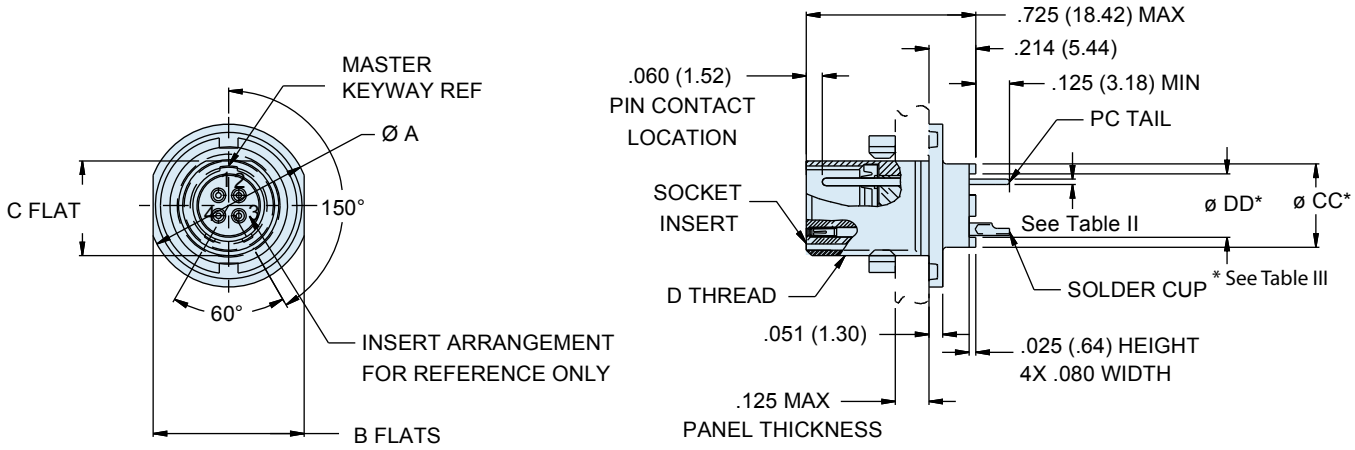


Solder Mount Dimensions			
Shell Size	Ø M		N Thread
	In	mm	
5	.400	10.16	.3125-28 UN-2A
6	.455	11.56	.3750-28 UN-2A

Square Flange Dimension									
Shell Size	Ø G		Ø H		J Sq		K BSC		L Thread
	In	mm	In	mm	In	mm	In	mm	
5	.096	2.44	.680	17.27	.527	13.39	.363	9.22	.3125-28 UN-2A
6	.091	2.31	.750	19.05	.588	14.93	.423	10.74	.3750-28 UN-2A

Jam Nut Dimensions							
Shell Size	Ø A		B Flat		C Flat		D Thread
	In	mm	In	mm	In	mm	
5	.541	13.74	.500	12.70	.285	7.24	.3125-28 UN-2A
6	.610	15.49	.562	14.27	.352	8.94	.3750-28 UN-2A

Jam Nut Panel Cut Out



Shell Size	Ø A		B Flat	
	In	mm	In	mm
5	0.318	8.08	0.297 0.292	7.54 7.42
6	0.386	9.80	0.365 0.360	9.27 9.14


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 800 Mighty Mouse Hermetic UN Mating Thread Hermetic Receptacle

800-013 Shell Size 7 thru 12 Dimensions

Square flange, front panel mount receptacle - shell style 02 - shell size 7 thru 12

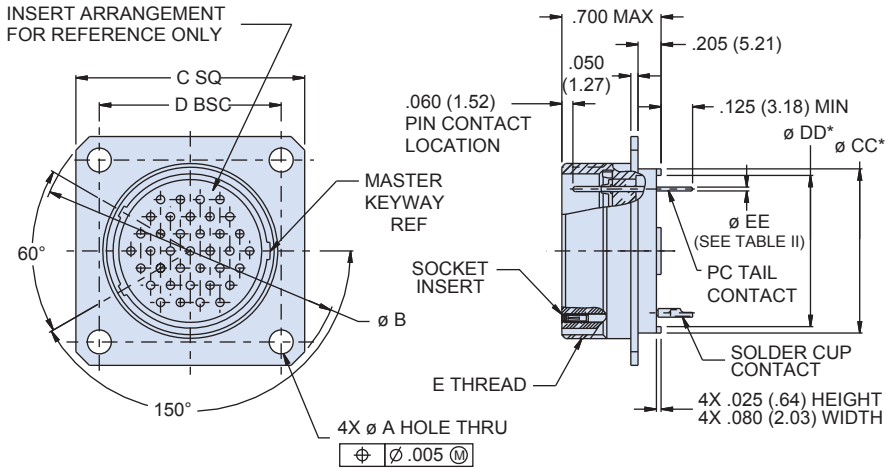


* See Table IIi

Solder Mount Dimensions									
Shell Size	Ø A		Ø B		C SQ		D BSC		E Thread
7	.096	2.44	.830	21.08	.650	16.51	.483	12.27	.4375-28 UNEF-2A
8	.091	2.31	.935	23.75	.710	18.03	.542	13.77	.5000-32 UN-2A
9	.130	3.30	1.250	31.75	.938	23.83	.719	18.26	.5625-32 UN-2A
10	.126	3.20	1.250	31.75	.938	23.83	.719	18.26	.6250-32 UN-2A
12			1.375	34.93	1.031	26.19	.812	20.62	.7500-28 UN-2A

Solder mount, front panel mount receptacle - shell style 03 - shell size 7 thru 12

Square Flange Mount Dimensions			
Shell Size	Ø A		B Thread
7	.520	13.21	.4375-28 UNEF-2A
8	.650	16.51	.5000-32 UN-2A
9	.764	19.41	.5625-32 UN-2A
10	.775	19.69	.6250-32 UN-2A
12	.858	21.79	.7500-28 UN-2A

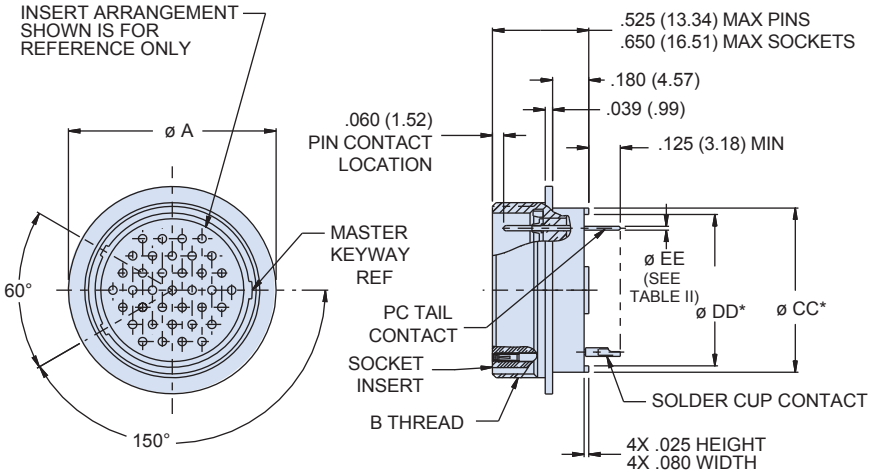


* See Table IIi

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount receptacle - shell style 07 - shell size 7 thru 12

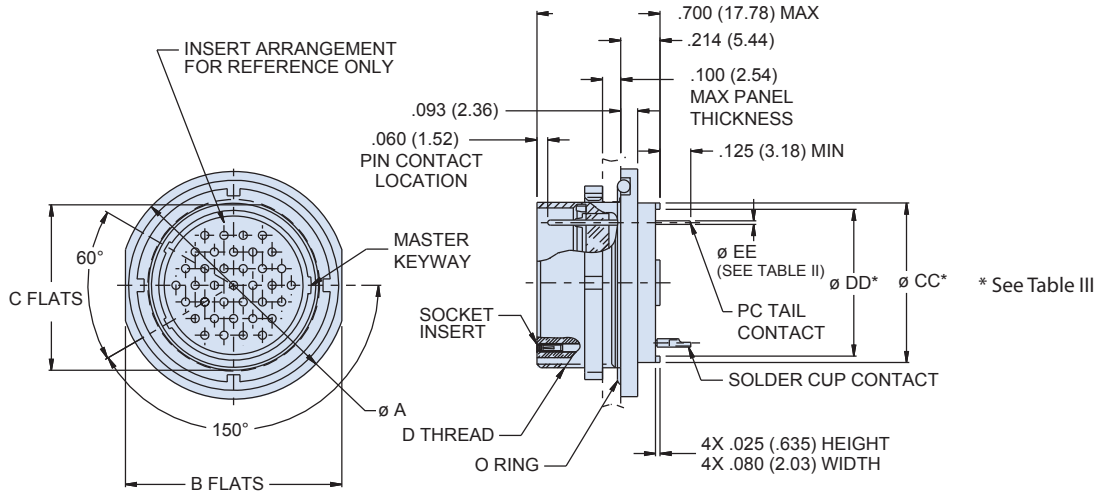

Jam Nut Dimensions							
Shell Size	Ø A		B Flats		C Flats		D Thread
7	.670	17.02	.635	16.13	.411	10.44	.4375-28 UNEF-2A
8	.775	19.69	.735	18.67	.473	12.01	.5000-32 UN-2A
9	.875	22.23	.806	20.47	.530	13.46	.5625-32 UN-2A
10	.980	24.90	.940	23.88	.604	15.34	.6250-32 UN-2A
12	1.062	26.97	.986	25.04	.712	18.08	.7500-28 UN-2A

Jam Nut Panel Cutouts



Shell Size	øA		B Flat	
	In.	mm.	In.	mm.
5	.318	8.08	.297 .292	7.54 7.42
6	.386	9.80	.365 .360	9.27 9.14
7	.449	11.40	.429 .424	10.90 10.77
8	.510	12.95	.483	12.27
9	.574	14.58	.540	13.72
10	.635	16.13	.614	15.60
12	.760	19.30	.722	18.34

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse Bulkhead Feed–Thru
UN Mating Thread Receptacle
800-060 Ordering Information



Series 800 Bulkhead Feed–Through these connectors are double ended receptacle with feed-through pin-pin, socket-socket, or pin-socket contacts and available in shell sizes 5 to 12 with copper alloy gold-plated contacts. Your choice of standard aluminum alloy or stainless steel and seven standard finishes (see below). Contacts are factory–installed, and are non removable



C

How To Order							
Sample Part Number	**800-060**	**-07**	**M**	**6-7**	**P**	**S**	**N**

Series	**800-060** = Feed–Through Jam Nut Mount Receptacle
Shell Style	**07** = Jam Nut
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement	See Page C-2 for Contact Arrangements
Contact Type* Jam Nut Side	**P** = Pin **S** = Socket
Contact Type* Other Side	**P** = Pin **S** = Socket
Shell Key Position (See Table I)	**N** = Normal **X** = Pos. X **Y** = Pos. Y **Z** = Pos. Z

* Connectors with PP and SS contact styles will cause the arrangement pattern to be mirrored about the vertical centerline.


Shell Key Positions

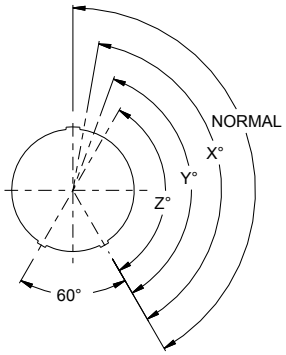Key Position	Key Rotation	Shell Size 5 and 6 Key Positions	Shell Size 7 thru 12 Key Positions
N Normal	150°		
X	140°		
Y	130°		
Z	120°		
Shell size 5 and 6: master key is located at top dead center for normal (N) position. Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.			


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount receptacle - shell style 07

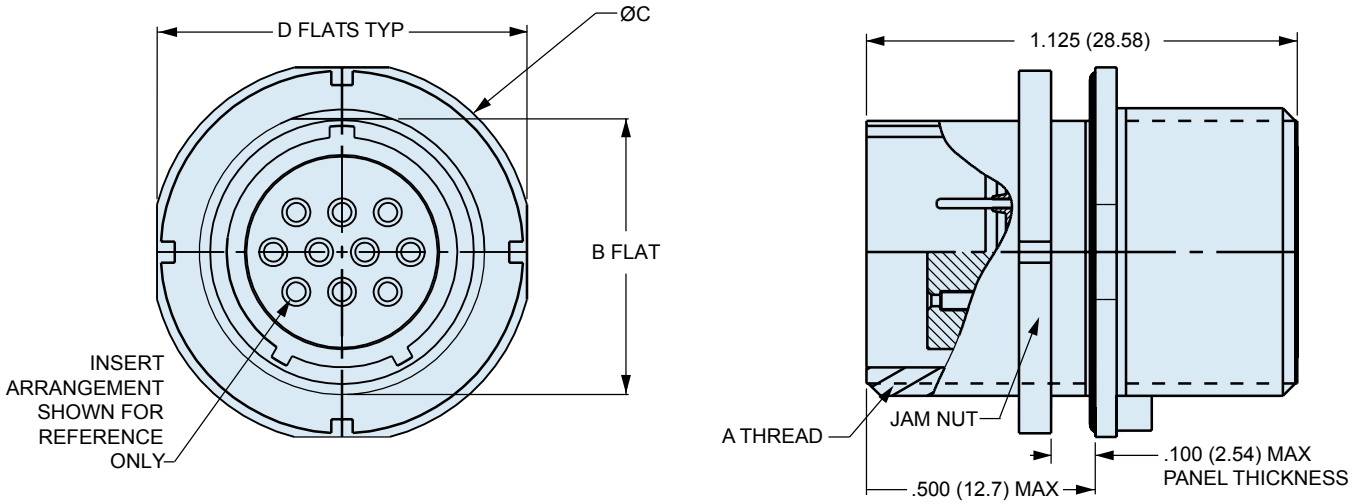

Dimensions								Panel Cutout Dimensions			
Shell Size	A Thread	B Flat		Ø C		D Flat		Ø E		F Flat	
		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	.3125-28 UN-2A	.289	7.34	.538	13.67	.497	12.62	.323	8.20	.299 .295	7.59 7.49
6	.3750-28 UN-2A	.352	8.94	.602	15.29	.559	14.20	.385	9.78	.362 .358	9.19 9.09
7	.4375-28 UNEF-2A	.418	10.62	.664	16.87	.643	16.33	.448	11.38	.428 .424	10.87 10.77
8	.5000-32 UN-2A	.473	12.01	.770	19.56	.731	18.57	.510	12.95	.483 .479	12.27 12.17
9	.5625-32 UN-2A	.530	13.46	.872	22.15	.803	20.40	.573	14.55	.540 .536	13.72 13.61
10	.6250-32 UN-2A	.604	15.34	.976	24.79	.940	23.88	.635	16.13	.614 .610	15.60 15.49
12	.7500-28 UN-2A	.712	18.08	1.062	26.97	.986	25.04	.760	19.30	.722 .718	18.34 18.24

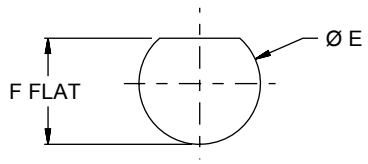

RECOMMENDED PANEL CUTOUT

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Harsh Environment Shielded Cordsets



High performance Mighty Mouse cordsets feature easy ordering and fast delivery. These fully shielded and watertight assemblies withstand abrasion, temperature extremes and chemicals. Flexible overmolding provides rugged, watertight protection to wire and shield. Two styles are available: ***Style 1*** polyamide overmold and polyurethane cable jacket, and ***Style 2*** improved temperature range, high flexibility thermoplastic rubber overmold and cable jacket. Overmolded Mighty Mouse cordsets are suitable for military gear and other hostile environments where interconnect reliability and survivability is essential.

C

Product Features

- Single-ended or double-ended
- Rugged, watertight construction
- 100% electrically tested
- Flexible to -55ºC. (Style 2)
- Stainless steel shield termination band
- Resistant to chemicals
- Withstands UV and ozone

High-Speed Cordsets

Controlled impedance twisted pair cordsets for Ethernet, USB and other protocols are available. Please refer to Section U


Harsh Environment Cordset Selection Guide		
Property	Style 1 Polyurethane Jacket Polyamide Overmold	Style 2 Rubber Jacket Rubber Overmold
Cable jacket	Thermoplastic polyurethane (TPU), black	Thermoplastic elastomer (TPV), black
Overmold	Polyamide, black	Thermoplastic elastomer (TPV), black
Operating temperature	-30° C. to +105° C.	-55° C. to +135° C.
Flexibility	Good	Excellent
Water Resistance	Waterproof	Waterproof
Solvent Resistance, Cable Jacket	Excellent	Good
Solvent Resistance, Overmold	Fair (1)	Good
Weatherability	Excellent	Excellent
Abrasion Resistance	Excellent	Good
Flammability	Flame retardant UL 94 V-0	Flame retardant UL 94 HB
Low Smoke, Zero Halogen Cable Jacket	Yes	No
(1) Excellent resistance to most solvents, fuels, and oils; poor resistance to strong acids and bipolar solvents (alcohol)		

Specifications	
Cable jacket	Style 1: thermoplastic polyurethane, black, low-smoke, zero-halogen Style 2: thermoplastic elastomer, black
Overmold	Style 1: polyamide Style 2: thermoplastic elastomer, black
Cable shield	Tin-coated copper braid, 90% minimum coverage
Conductors	Silver coated stranded wire, TFE insulated, per M22759/11
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	#23–5 amps, #20–7.5 amps, #16–13 amps, #12–23 amps
Test voltage (DWV)	#23–750 Vac, #20–1000 vac, #16 and #12–1800 VAC sea level
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

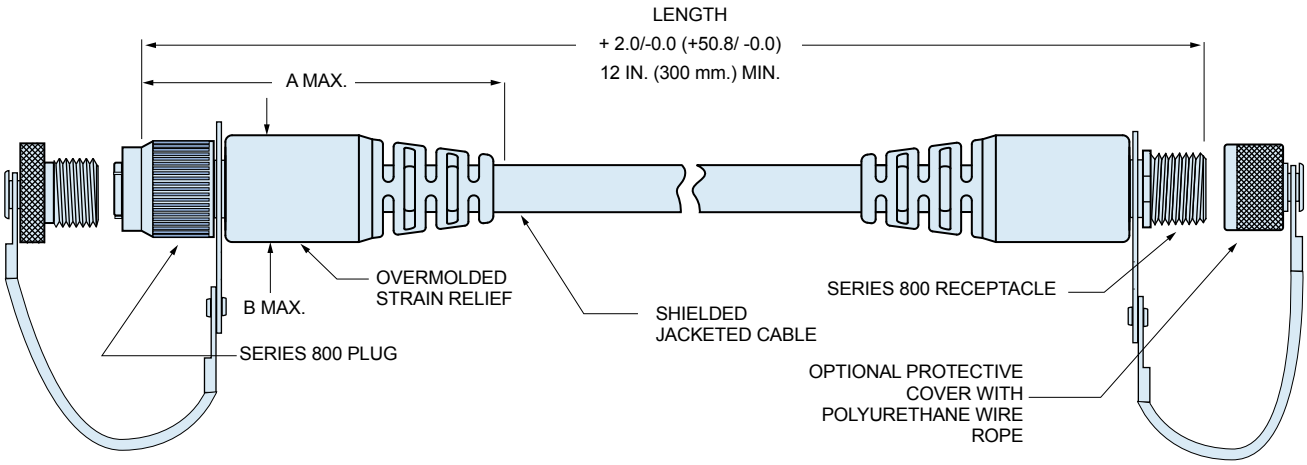

C

Dimensions				
Shell Size	A Max.		B Max.	
	In.	mm.	In.	mm.
5	2.30	12.70	0.50	12.70
6	2.40	13.97	0.55	13.97
7	2.50	16.51	0.65	16.51
8	2.55	18.03	0.71	18.03
9	2.75	19.81	0.78	19.81
10	2.71	20.83	0.82	20.83
12	2.90	22.86	0.9	22.86

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TFE insulation, 600V, in accordance with M22759/11.
3. Wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse with UN Mating Thread Overmolded Cordsets

800-034, -056, -041, and -057 Ordering Information

Series 800 Cordsets with #23 Contacts									
Sample Part Number									
800-034	-A	C	K	2	M	8-28	N	X	-36
Series	End A Connector	End B Connector	Plug Style	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
800-034 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **800-056** **Style 2** Rubber Cable Jacket and Rubber Overmold, #23 Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**K** Round Knurled Coupling Nut **KL** Round Knurled Coupling Nut, Self-Locking **H** Hex Coupling Nut **HL** Hex Coupling Nut, Self-Locking **N** Receptacle Cable	**2** #22 AWG **4** #24 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page C-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page C-3	Overall Length In Inches 12 Inch Min.

Series 800 Cordsets with #20HD Contacts									
Sample Part Number									
800-041	-A	C	K	0	M	8-28	N	X	-36
Series	End A Connector	End B Connector	Plug Style	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
800-041 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold, #20HD Contacts **800-057** **Style 2** Rubber Cable Jacket and Rubber Overmold,	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**K** Round Knurled Coupling Nut **KL** Round Knurled Coupling Nut, Self-Locking **H** Hex Coupling Nut **HL** Hex Coupling Nut, Self-Locking **N** Receptacle Cable	**0** #20 AWG **2** #22 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. page C-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page C-3	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse with UN Mating Thread Overmolded Cordsets

800-038, -058, -039, and -059 Ordering Information

Series 800 Cordsets with #16 Power Contacts									
Sample Part Number									
800-038	-A	C	K	6	M	8-2	N	X	-36
Series	End A Connector	End B Connector	Plug Style	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
800-038 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold, #16 Contacts **800-058** **Style 2** Rubber Cable Jacket and Rubber Overmold, #16 Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**K** Round Knurled Coupling Nut **KL** Round Knurled Coupling Nut, Self-Locking **H** Hex Coupling Nut **HL** Hex Coupling Nut, Self-Locking **N** Receptacle Cable	**6** #16 AWG **8** #18 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page C-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See Keyway pos page C-3 See page C-3	Overall Length In Inches 12 Inch Min.

Series 800 Cordsets with #12 Power Contacts									
Sample Part Number									
800-039	-A	C	K	2	M	8-2	N	X	-36
Series	End A Connector	End B Connector	Plug Style	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
800-039 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold, #12 Contacts **800-059** **Style 2** Rubber Cable Jacket and Rubber Overmold, #12 Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**K** Round Knurled Coupling Nut **KL** Round Knurled Coupling Nut, Self-Locking **H** Hex Coupling Nut **HL** Hex Coupling Nut, Self-Locking **N** Receptacle Cable	**2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page C-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See Keyway pos page C-3 See page C-3	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 800 Ultraflexible “Phantom Cable” Cordsets



Phantom Cable cordsets feature high-flex rubber-insulated wires, lightweight shield and overbraided jackets for maximum flexibility, reduced size and minimum weight. Flexible rubber overmold provides strain relief and environmental sealing. Available for all Mighty Mouse layouts with size #23 contacts, these cordsets are available with #24 through #28 AWG wire. EMI shield options include high-strength, ultralightweight **Amberstrand®** nickel-coated composite braid, **ArmorLite™** or lightweight, high flexibility tinned copper braid. Braid outer jackets are available with **NOMEX®**, **HALAR®** or PTFE-coated fiberglass.

C

Product Features

- Overbraided cable jacket for excellent flexibility
- Ultra-lightweight AmberStrand® EMI shield
- 100% electrically tested
- Flexible to -55ºC.
- Stainless steel shield termination band

Application Note

Overbraided textile jackets are ideal for applications where flexibility and weight are important. However, water can penetrate through the jacket and cable shield. Dust and contamination can also become entrapped in the braid. Braided jackets are prone to fraying damage caused by snagging on velcro closures and MOLLE vests. Extruded cable jackets are recommended if debris entrapment, moisture ingress or fraying damage are concerns.

Braid Shield Selection Guide			
Property	Amberstrand®	Armorlite®	Copper
Type	nickel-coated high-strength super fiber	Micro-filament nickel-coated stainless steel	Tin-coated copper
Weight/ft. (0.5 in. ID)	3.7 grams	4.4 grams	22.3 grams
Operating Temp(1)	-65º C to +200º C	-80º C to +260º C	-80º C to +150º C
Coverage	90% min.	90% min.	90% min.
Flexibility	Excellent	Excellent	Good
Cost Comparison	$$$	$$	$
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Jacket Selection Guide			
Property	NOMEX®	HALAR®	PTFE Coated Fiberglass
Color	Black or olive drab	Black	Tan
Operating Temp(1)	-55º C to +260º C	-73º C to +150º C	-75º C to +300º C
Chemical Resistance	Excellent	Excellent	Excellent
Flammability	Self-extinguishing, will not melt	Fire retardant UL VW-1	Self-extinguishing
Toxicity	Non-toxic	Non-toxic	Non-toxic
Flexibility	Excellent	Excellent	Excellent
Abrasion resistance	Excellent	Excellent	Excellent
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Specifications	
Cable jacket	NOMEX®, HALAR® or PTFE-coated fiberglass
Temperature Range	-55º C to +135º C
Overmold	Thermoplastic elastomer, black
Cable shield	AmberStrand®, ArmorLite® or tinned copper, 90% minimum coverage
Conductors	Silver coated stranded wire, rubber insulation
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	5 amps
Test voltage (DWV)	500 Vac
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 800 Mighty Mouse with UN Mating Thread
Flexible, Lightweight Phantom Cable Cordsets
800-052, -053, -054, -055 Ordering Information

Series 800 "Phantom Cable" Cordsets size #12 thru #23 Contacts										
Sample Part Number										
800-053	-B	N	0	Z1	5-3	N	X	-60	C	N
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length	Shield Option	Jacket Option
Size #23 Contacts **800-052** Phantom Cable Cordset **Size #20 HD Contacts** **800-053** Phantom Cable Cordset **Size #16 Contacts** **800-054** Phantom Cable Cordset **Size #12 Contacts** **800-055** Phantom Cable Cordset	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Rec. with Male Pin Contacts **-D** Rec. with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Rec. with Male Pin Contacts **D** Rec. with Female Socket Contacts **N** No Connector (Single-Ended)	**Size #23 Contacts** **2** #22 AWG **4** #24 AWG **Size #20 HD Contacts** **0** #20 AWG **2** #22 AWG **Size #16 Contacts** **6** #16 AWG **8** #18 AWG **Size #12 Contacts** **2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page C-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page C-3	Overall Length In Inches 12 Inch Min.	**A** Amberstrand **B** Armorlite **C** Tin-Coated Copper	**N** Nomex **H** Halar (Monofil) **P** Peek (Monofil)

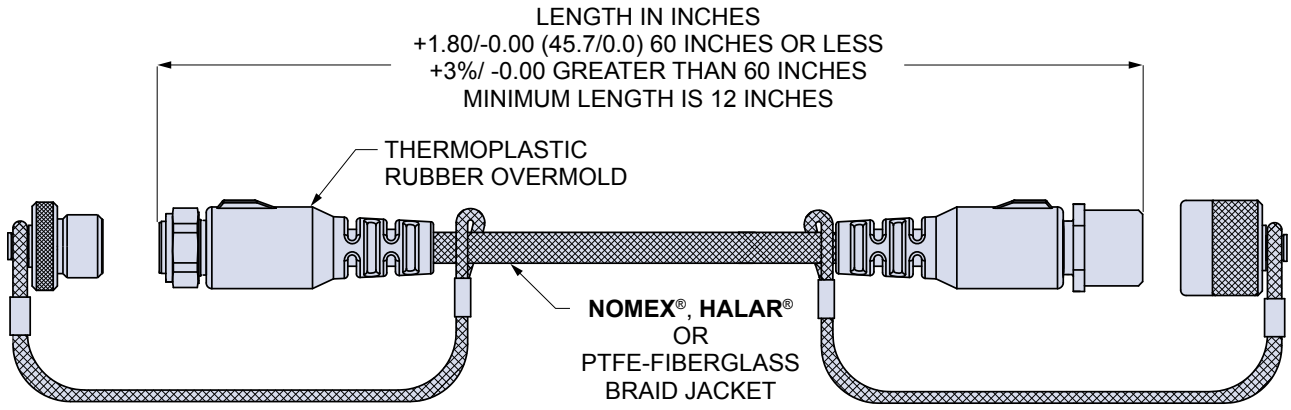

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TPE insulation, 600V, UL VW-1 rated.
3. Wires are white with color stripe per MIL-STD-681. Wire #1 is WHT/BLK, wire #2 is WHT/BRN, etc.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SERIES 80

MIGHTY MOUSE

Series 801 double start stub ACME thread, crimp rear-release contacts





Glenair series 801 Mighty Mouse Connectors are ideally suited for use in applications such as military air frames, tactical ground weaponry and dismounted soldier applications. These connectors feature double-start ACME threads with anti-decoupling spring or ratchet and provide faster mating requiring only 1½ turns to fully engage mate. Every connector incorporates crimp rear-release contacts and are available with integral band platform or with accessory threads for attachment of backshells or strain reliefs. Contact arrangements available from 1 up to 130 and are available with printed circuit board contacts.

Glenair, Inc.
1211 Air Way
Glendale, CA 91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



Series 801 Plugs
Connectors are supplied with crimp contacts. Available as in-line (page 9) or panel mount (page 11) versions. Plugs feature integral band platform or choose accessory threads for attachment of backshells or strain reliefs. **Page D-9**




Series 801 Racheting Cobra Style Plugs
Connectors feature an integrated backshell equipped with a removable rear cover and gasket providing an easy path to installing the supplied crimp contacts. **Page D-13**



Series 801 Crimp Receptacles
Jam nut, square flange and in-line versions. Integral shield termination platform or accessory threads. Contacts are crimp-type, and are packaged with the connector. **Page D-15**




Series 801 Receptacles with Solder Cup or PCB Termination
These panel mount connectors feature non-removeable contacts. Choose printed circuit terminals solder cup contacts. Connectors are potted with epoxy for general purpose applications, or choose silicone-sealed, leak-tested versions for 1 meter water immersion. **Page D-20**



Series 801 Twinax Receptacles with PC tails
PCB board level connectors are available in four mounting styles including, Square Flange with thru-holes, square flange with clinch nuts, square flange with locking clinch nuts, and jam nut. Offered with 16 insert arrangements with pin or socket PC tails. **Page D-23**



Series 801 Right Angle PCB Receptacles
Supplied with factory-installed, non-removable PC tail contacts for attachment to rigid boards or flex circuits. Epoxy-sealed, stainless steel threaded inserts. **Page D-26**



Series 801 Square Flange Receptacles
Series 801 Backpotted Receptacle features a choice of 304L stainless steel or aluminum alloy shells, fused vitreous glass insulators and gold plated copper alloy non-removable contacts. **Page D-31**



Series 801 Hermetic Receptacles
These stainless steel, glass-sealed connectors are available with solder cup or PC tail contacts. Choose jam nut, square flange or solder mount versions. Contacts are gold plated iron alloy. 100% tested to meet 1 X 10^{-7} cc/sec helium leakage. **Page D-33**



Series 801 Bulkhead Feed–Thru Receptacle Connector
Jam Nut mount, shell sizes 5 to 21. This connector mates with all quick coupling high densisty plug connectors with the same polarization and opposite contact genders (801-001, 801-002, 801-007, and 801-008). **Page D-37**



Series 801 Sav-Con® Connector Savers
Protect expensive test equipment and cables with Glenair Sav-Con® connector savers. These plug/receptacle adapters feature non-removable contacts and a ratcheting coupling mechanism to prevent loosening under vibration. **Page D-39**



Series 801 Cordsets
Choose overmolded or overbraided cordsets for your specific application. Overmolded sets are low smoke and offer excellent all-weather cable protection, overbraided sets are ultraflexible and available with Nomex®, Halar® or PTFE-coated fiberglass. **Page D-41**

D

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 801 Mighty Mouse
Double-Start ACME Thread
Contact Arrangements


Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12	#8*
5-3	3					
6-1				1		
6-23			3			
6-4	4					
6-6	6					
6-7	7					
7-1					1	
7-25			5			
7-10	10					
8-2				2		
8-200	4	2				
8-28			8			
8-13	13					
9-4				4		
9-200	4			2		
9-201	8	2				
9-210			10			
9-19	19					
10-2					2	
10-5				5		
10-26	26					
10-200	12				1	
10-201	4				2	
10-202	8			2		
11-31	31					
13-2					2	
13-3					3	
13-7				7		
13-220			20			
13-37	37					
13-200	6				2	
13-201	10				2	
13-202	20			2		
13-203	12			4		
13-204	12				2	
13-205	4				4	
16-4					4	
16-5					5	


*Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.


Contact Legend


#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕


Mating Face View of Pin Connector
(socket connector numbers are reversed)

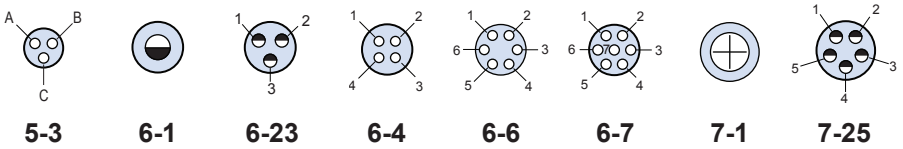

5-3 6-1 6-23 6-4 6-6 6-7 7-1 7-25

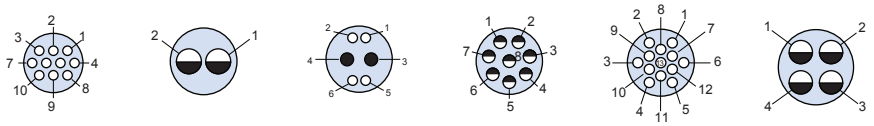

7-10 8-2 8-200 8-28 8-13 9-4

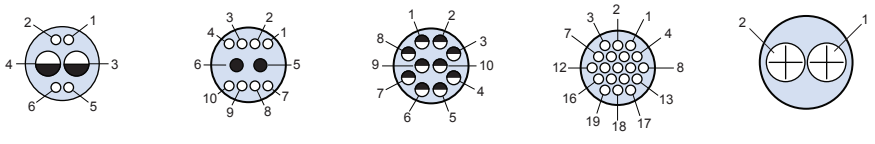
9-200 9-201 9-210 9-19 10-2

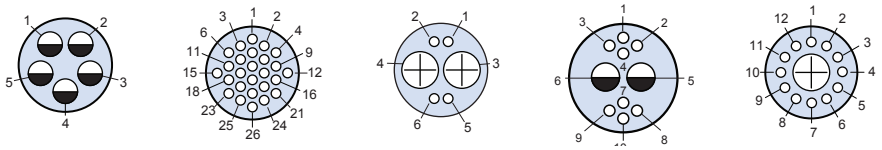
10-5 10-26 10-201 10-202 10-200

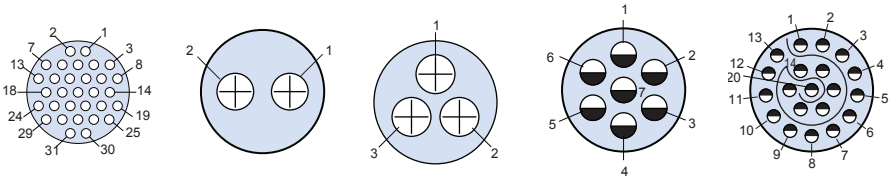
11-31 13-2 13-3 13-7 13-220

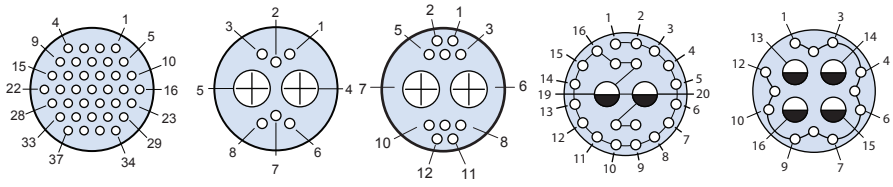
13-37 13-200 13-201 13-202 13-203

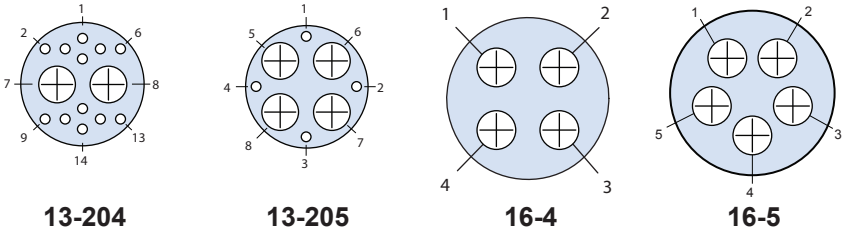
13-204 13-205 16-4 16-5

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12	#8*
16-12				12		
16-235			35			
16-55	55					
16-204	40			2		
16-205	32			4		
16-206	34				2	
16-207	20				4	
16-208	32					1
17-7					7	
17-14				14		
17-241			41			
17-85	85					
17-203	40			4		
17-204	28				4	
17-205	40					1

**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.


Contact Legend

#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕


Plug Key Positions		
	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Mating Face View of Pin Connector
(socket connector numbers are reversed)




16-12




16-235




16-55




16-204




16-205




16-206




16-207




16-208




17-7




17-14




17-241




17-85



17-203



17-204



17-205

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread
General Information


Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12	#8*
19-19				19		
19-201	44					2
19-202	12					4
19-255			55			
19-100	100					
21-12					12	
21-200	28					4
21-22				22		
21-269			69			
21-130	130					

*All arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688


**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.

Contact Legend


#23 ∘ #20HD ◒ #20 ● #16 ◒ #12 ⊕




19-19




19-201




19-202




19-255




19-100




21-12




21-200



21-22




21-269



21-130

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

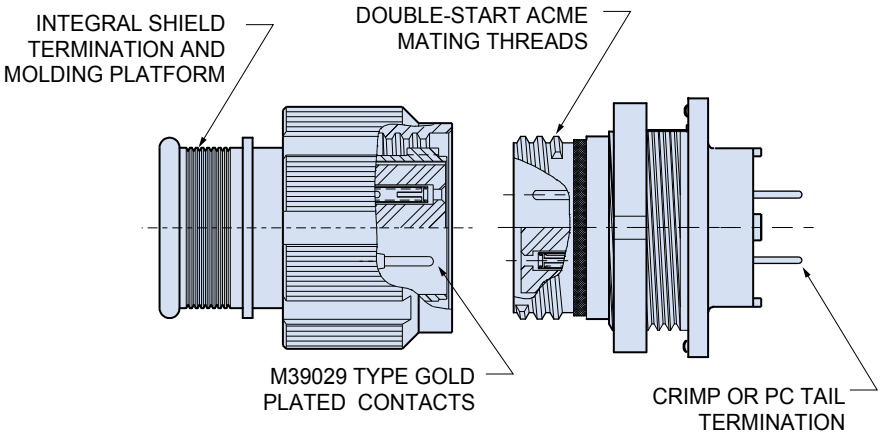

- **Double-Start ACME Thread with anti-decoupling spring or ratchet**
- **Crimp Rear Release Contacts**
- **Integral Band Platform**
- **Available with Size #12, #16, #20, #20HD and #23 Contacts**
- **Environmentally Sealed**

D

Glenair Series 801 Mighty Mouse Offers Mil-Spec Performance in a Lightweight, Ultraminiature Package

The 801 Series Mighty Mouse is ideal for use in high-density packaging applications where traditional military circular connectors are too large or too heavy. The double-start threads provide full mating in 1½ turns, and the plug features an anti-decoupling spring for vibration resistance. The unique integral molding/band platform allows direct shield attachment and cable overmolding. Receptacles are available with printed circuit board contacts. Plugs have anti-decoupling wave spring, or specify ratchet mechanism for added security.



Specifications	
Current Rating	#23–5 A, #20HD–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD–1000 VAC, #12 and #16–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum from 100MHz to 1000MHz.
Durability	2000 mating cycles
See Series 80 General Information for complete performance specs.	



Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	High-Grade Rigid Dielectric
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber
See Series 80 General Information for complete material and finish specs.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread
Connector Weight and Size Comparison



Series 801 D38999

Series 801 Connectors Offer Up To 71% Weight Savings and 52% Size Reduction When Compared to D38999 Series III Connectors.

The Comparison Tables on this page show the actual weight and size reductions that can be achieved by using Glenair Series 801 connectors instead of MIL-DTL-38999 Series III.

Weight Comparison: Series 801 Vs. D38999 Series III

Series 801 Layout	Number of Contacts	D38999 Layout	Number of Contacts	Series 801	D38999 Aluminum	% Weight Savings	D38999 Composite	% Weight Savings
5-3	3	9-98	3	7.8	27.2	71%	21.7	64%
6-7	7	9-35	6	9.5	25.6	63%	19.9	52%
9-19	19	13-35	22	18.0	45.9	61%	38.5	53%
13-37	37	15-35	37	32.5	65.3	50%	57.4	43%
16-55	55	17-35	55	47.1	78.5	40%	65.6	28%
17-85	85	21-35	79	51.3	112.4	54%	99.1	48%
21-130	130	25-35	128	75.6	159.3	53%	136.6	45%

Weights shown include contacts and represent a mated pair of plug and jam nut receptacle. Weights are in grams. D38999 weights are based on published data from a leading manufacturer.

Size Comparison: Series 801 Vs. D38999 Series III

Series 801 Layout	Number of Contacts	D38999 Layout	Number of Contacts	Cable Plug Diameter					Jam Nut Receptacle Diameter				
				Series 801		D38999		% Reduction	Series 801		D38999		% Reduction
				In.	mm.	In.	mm.		In.	mm.	In.	mm.	
5-3	3	9-98	3	.540	13.72	.859	21.82	37%	.575	14.61	1.204	30.58	52%
6-7	7	9-35	6	.600	15.24	.859	21.82	30%	.635	16.13	1.204	30.58	47%
9-19	19	13-35	22	.810	20.57	1.156	29.36	30%	.830	21.08	1.516	38.51	45%
13-37	37	15-35	37	1.050	26.67	1.281	32.54	18%	1.078	27.38	1.641	41.68	34%
16-55	55	17-35	55	1.240	31.50	1.406	35.71	12%	1.264	32.11	1.766	44.86	28%
17-85	85	21-35	79	1.300	33.02	1.641	41.68	21%	1.325	33.66	2.078	52.78	36%
21-130	130	25-35	128	1.550	39.37	1.890	48.01	18%	1.625	41.28	2.323	59.00	30%

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread
Connector Weights

Series 801 Connector Weights					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
5-3P	4.8	3.7	4	2.2	2.4
5-3S	5	3.9	4.1	2.2	2.6
6-1P	6.2	4.7	5.1	3	3.2
6-1S	6.5	5.1	5.4	3.3	3.5
6-4P	6.2	4.7	5.1	3	3.2
6-4S	6.4	5	5.2	3.1	3.3
6-6P	6.3	4.7	5.1	2.9	3.2
6-6S	6.5	5.1	5.4	3.1	3.5
6-7P	5.9	4.5	5.1	3.2	3.7
6-7S	6.2	4.8	5.2	3.5	3.9
6-23P	6.2	4.8	5.1	3	4
6-23S	6.6	5.2	5.4	3.2	4.3
7-1P	8.6	7.2	7.9	5	5.7
7-1S	9.1	7.7	8.5	5.5	6.3
7-10P	8.4	6.9	7.7	4.7	5.5
7-10S	8.8	7.4	7.9	5.2	5.7
7-25P	7.9	7.1	7.8	4.8	5.6
7-25S	8.3	7.7	8.3	5.5	6.1
8-1P	12.6	11.3	12.4	9	10.3
8-1S	15.1	13.6	15	11.4	13
8-2P	9.8	8.5	9.6	6.2	7.5
8-2S	10.6	9.2	10.3	6.9	8.3
8-28P	10	8.7	10.2	6.4	8.1
8-28S	11.1	9.7	10.9	7.4	8.9
8-13P	9.1	7.8	8.9	5.5	6.8
8-13S	9.8	8.4	9.4	6.2	7.2
8-200P	10.1	8.8	9.9	6.5	7.8
8-200S	10.8	9.5	10.6	7.2	8.5
9-4P	12	9.6	11.8	8.4	9.5
9-4S	13	11.7	12.8	9.4	10.5
9-19P	11.1	8.7	10.1	6.4	7.8
9-19S	12	9.6	10.7	7.3	8.4
9-200P	11.4	10.1	11.2	7.8	8.9
9-200S	12.5	11.2	12.3	8.9	10
9-201P	10.6	9.2	10.3	7.3	8.4
9-201S	12.7	11.3	12.4	9	10.1
9-210P	11.8	9.4	11.3	8.2	9
9-210S	13	11.7	12.5	9.4	10.2
10-2P	17.1	13.6	13.9	15.2	13.1
10-2S	18.4	14.9	15.5	16.5	14.7

Series 801 Connector Weights					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
10-5P	17.4	13.9	14.9	15.5	14.1
10-5S	18.8	15.3	16.3	16.9	15.5
10-26P	15.6	12.1	13.1	13.8	9.6
10-26S	16.8	13.3	13.8	18.4	10.1
10-200P	16.5	13	14	14.6	11
10-200S	17.9	14.4	15.4	16.1	12.4
10-201P	16.8	13.3	14.3	15	11.3
10-201S	18.4	14.9	15.8	16.5	12.9
10-202P	16.4	12.9	13.9	14.5	10.9
10-202S	17.9	14.4	15.4	16.1	12.4
11-31P	19.2	15	16.9	16.6	16.1
11-31S	21.5	16.9	18.3	18.5	17.5
13-2P	20.8	18.9	18.9	18.9	16.6
13-2S	22.4	20.6	20.6	20.6	18.3
13-3P	21.8	19.9	19.9	19.9	17.6
13-3S	23.5	21.7	21.7	21.7	19.4
13-7P	22	20.1	20.1	20.1	17.8
13-7S	24.6	22.8	22.8	22.8	20.5
13-37P	20.2	18.4	18.4	18.4	16.1
13-37S	21.9	19.4	19.4	19.4	17.1
13-200P	20.9	19	19	19	16.7
13-200S	23.2	21.3	21.3	21.3	19
13-201P	21	19.1	19.1	19.1	16.8
13-201S	23.4	21.6	21.6	21.6	19.3
13-202P	20.9	19	20.3	19	18
13-202S	22.8	21	21.9	21	19
13-203P	21.2	19.3	20.8	19.3	18.5
13-203S	23.1	21.3	22.3	21.3	20
13-204P	21.3	19.4	20.6	19.4	18.3
13-204S	23.1	21.3	22.3	21.3	20
13-205P	22.4	20.5	22.4	20.5	20.1
13-205S	24.2	22.4	24.4	22.4	22.1
13-220P	21.6	19.7	21.2	19.7	18.9
13-220S	23.9	22.1	23.1	22.1	20.8
16-2P	34.7	28.2	29.1	31.2	26.5
16-2S	40.7	34.2	35.6	37.3	33
16-5P	31.4	24.9	27.9	27.9	25.3
16-5S	34.3	27.8	30.9	30.9	28.3
16-12P	32.1	25.6	28.7	28.7	26.1
16-12S	35.8	29.3	32.3	32.3	29.7

Maximum connector weight in grams.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 801 Mighty Mouse Double-Start ACME Thread
Connector Weights and
Jam Nut Recommended Cutout Dimensions

Series 801 Connector Weights					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
16-204P	30.1	23.6	27.7	26.6	32.4
16-204S	33.5	27	30.2	30.1	35.5
16-205P	30.4	23.9	28.2	26.9	32.9
16-205S	33.8	26.4	30.6	30.4	35.9
16-206P	30.6	24.1	28.3	27.1	33
16-206S	33.9	26.5	30.9	30.5	36.2
16-207P	31.4	24.9	29.2	27.9	33.9
16-207S	34.7	27.3	32.1	31.3	37.4
16-208P	32.6	26.1	29.4	29.1	34.1
16-208S	37.5	30.1	33.8	34.1	39.1
16-235P	31.7	25.2	29.7	28.2	34.4
16-235S	35.7	28.3	32.8	32.3	38.1
16-55P	29.2	22.7	26.7	26.7	24.1
16-55S	32.1	25.6	28.7	28.7	26.1
17-3P	38.2	35.1	34.9	37.7	30.3
17-3S	46.4	43.3	43.8	46	39.1
17-7P	32.8	29.7	32.3	32.3	27.7
17-7S	36.3	33.2	35.9	35.9	31.2
17-14P	35.9	32.8	35.4	35.4	30.8
17-14S	35.5	32.5	35.1	35.1	30.5
17-203P	30.7	27.6	30.8	30.2	36.4
17-203S	34.8	31.7	33.6	34.4	39.9
17-204P	31.3	28.2	31.8	30.8	36.9
17-204S	35.7	32.6	35.1	35.3	41.4
17-205P	32.9	29.8	32	32.4	37.1
17-205S	38.5	35.4	36.8	38.1	43.1
17-241P	32.3	29.2	32.8	31.8	37.9
17-241S	37.1	34	36.4	36.7	42.7
17-85P	30.9	25.5	31.9	31.9	27.8
17-85S	34.1	28.8	33.7	33.7	29
19-4P	44.8	41.7	42.3	44.3	47.4
19-4S	54.7	51.6	53.3	54.3	59.6
19-19P	37.3	34.2	39.9	36.8	45
19-19S	41.1	38	42.8	40.7	49.2
19-201P	39.7	36.6	40	39.2	45.1
19-201S	47	43.9	46.9	46.6	53.2
19-202P	45.3	42.2	44	44.8	55.7
19-202S	55.4	52.3	55	55	62.5
19-255P	37.1	34	39.6	36.6	44.7
19-255S	42.4	39.3	43.5	42	49.8
19-100P	35	31.9	39.3	36.8	44.4
19-100S	40.1	37	42.1	40.7	48.4
21-5P	47.3	43.3	41.7	20.5	38.4
21-5S	60.2	56.2	55.7	24.9	52.4

Series 801 Connector Weights					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
21-12P	38.5	34.5	37.8	29	34.5
21-12S	43.6	39.6	42.9	34.1	39.6
21-22P	41	37.1	40.4	31.6	37.1
21-22S	48	44	47.3	38.5	44
21-200P	44.9	40.9	41.3	35.4	38
21-200S	56.7	52.7	53.2	47.2	49.9
21-269P	37.6	33.6	38.3	28.1	35
21-269S	44.8	40.8	43.4	35.3	40.1
21-130P	36.2	32.2	35.5	26.7	32.2
21-130S	43.3	39.4	42.7	33.9	39.4

Maximum connector weight in grams.

Series 801 Recommended Panel Cutout Dimensions



Shell Size	Ø A		B Flat	
	In.	mm	In	mm
5	.385	9.78	.358 .354	9.09 8.99
6	.448	11.38	.418 .414	10.62 10.52
7	.573	14.55	.544 .540	13.82 13.72
8	.573	14.55	.544 .540	13.82 13.72
9	.635	16.13	.604 .600	15.34 15.24
10	.698	17.73	.668 .664	16.97 16.87
11	.760	19.30	.728 .724	18.49 18.39
13	.885	22.48	.853 .849	21.67 21.56
16	1.075	27.31	1.030 1.026	26.16 26.06
17	1.135	28.83	1.104 1.100	28.04 27.94
19	1.260	32.00	1.235 1.231	31.37 31.27
21	1.385	35.18	1.355 1.351	34.42 34.32

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Plug
801-007 and 801-008 Ordering Information



Series 801 Mighty Mouse Connector features a double-start modified stub ACME mating thread for improved protection against cross-mating and thread damage. Connector shells are machined aluminum or stainless steel. Supplied with crimp contacts, packaged separately. Terminate contacts with standard M22520 tools. Metal clips inside the connector body lock contact into place. Contacts are removable. Fluorosilicone seals and rear grommet protect connector from water ingress. Terminate cable shield directly to connector body with Band-Master™ ATS strap, or choose rear accessory thread to attach optional cable clamp or backshell. Available in shell sizes 5 through 21 in 67 contact arrangements.

How To Order

Sample Part Number	801-007	-16	M	9-4	P	A

Series (See Table I)	**801-007** = With Banding Platform **801-008** = With Rear Accessory Thread
Shell Style	**-16** = Plug with Anti-Decoupling Spring **-26** = Self-Locking Plug with Ratchet Mechanism
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement	See Insert Arrangements page D-2
Contact Type	**Connector supplied with crimp contacts**: **P** = Pin, **S** = Socket **Connector supplied without contacts**: **A** = Pin Connector, **B** = Socket Connector **Connector supplied with 30 AWG crimp contacts**: **G** = #23 Pin, **H** = #23 Socket Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

Table I: Series




	
801-007 Banding Platform	**801-008** Rear Accessory Thread

Table II: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse
Double-Start ACME Thread Plug
801-007 and 801-008 Dimensions


Plug connector

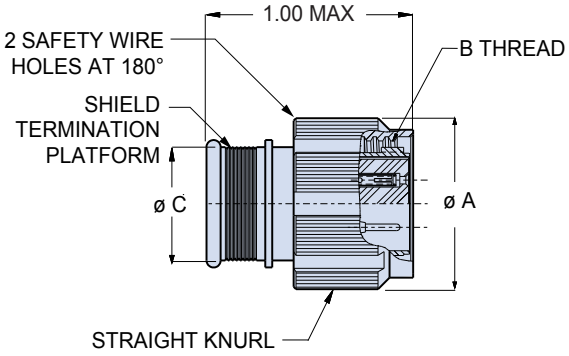

Integral Band Platform
801-007

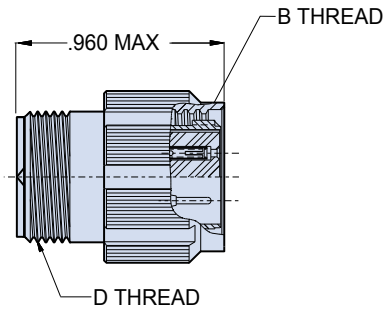

Accessory Thread
801-008



FACE VIEW OF PLUG AS VIEWED FROM ENGAING END.
SOCKET SIZE 9 SHOWN

D

Dimensions								
Shell Size	Ø A Style 16		Ø A Style 26		B Thread	Ø C		D Thread
	In.	mm.	In.	mm.		In.	mm.	
5	0.54	13.72	0.65	16.51	.3125-.05P-.1L-DS-2B	.245	6.22	.2500-32 UNEF-2A
6	0.60	15.24	0.69	17.53	.3750-.05P-.1L-DS-2B	.290	7.37	.3125-32 UNEF-2A
7	0.69	17.53	0.79	20.07	.4375-.05P-.1L-DS-2B	.390	9.91	.4375-28 UNEF-2A
8	0.75	19.05	0.83	21.08	.5000-.05P-.1L-DS-2B	.445	11.30	.5000-28 UNEF-2A
9	0.81	20.57	0.92	23.37	.5625-.05P-.1L-DS-2B	.500	12.70	.5625-24 UNEF-2A
10	0.88	22.35	0.98	24.89	.6250-.05P-.1L-DS-2B	.560	14.22	.6250-24 UNEF-2A
11	0.92	23.37	1.02	25.91	.6875-.05P-.1L-DS-2B	.605	15.37	.6875-24 UNEF-2A
13	1.05	26.67	1.10	27.94	.8125-.1P-.2L-DS-2B	.650	16.51	.6875-24 UNEF-2A
16	1.24	31.50	1.34	34.04	1.0000-.1P-.2L-DS-2B	.805	20.45	.9375-20 UNEF-2A
17	1.30	33.02	1.45	36.83	1.0625-.1P-.2L-DS-2B	.850	21.59	.9375-20 UNEF-2A
19	1.40	35.56	1.50	38.10	1.1875-.1P-.2L-DS-2B	1.003	25.48	1.0625-18 UNEF-2A
21	1.55	39.37	1.65	41.91	1.3125-.1P-.2L-DS-2B	1.110	28.19	1.1875-18 UNEF-2A

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse
Double-Start ACME Thread Panel Plug
801-113 and 801-114 Ordering Information



Series 801 Square Flange Mighty Mouse panel plugs feature a double-start modified stub ACME mating thread for improved protection against cross-mating and thread damage. Connector shells are machined aluminum or stainless steel. Available with crimp type rear-release or non-removable solder cup or PC tail contacts for attachment to flexible/rigid circuits or rigid boards. Available in shell sizes 5 through 21 in 61 contact arrangements.


How To Order

Sample Part Number	801-114	-26	ZNU	9-19	P	A

Series	**801-113** = Panel Plug Connector with Crimp Type Contacts **801-114** = Panel Plug Connector with Non-Removable Contacts
Shell Style	**-26** = Self Locking Plug with Ratchet Mechanisim
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement	See Insert Arrangements page D-2
Contact Type	**801-113 Options** **A** = Pin Connector, Less Contacts — **P** = Pin, Crimp **B** = Socket Connector, Less Contacts — **S** = Socket, Crimp **801-114 Options** **E** = Pin, Solder Cup — **P** = Pin, PC Tail **F** = Socket, Solder Cup — **S** = Socket, PC Tail (See Table II)
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F

Table I: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°





Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Panel Plug
801-113 and 801-114 Dimensions

Panel plug - shell size 26

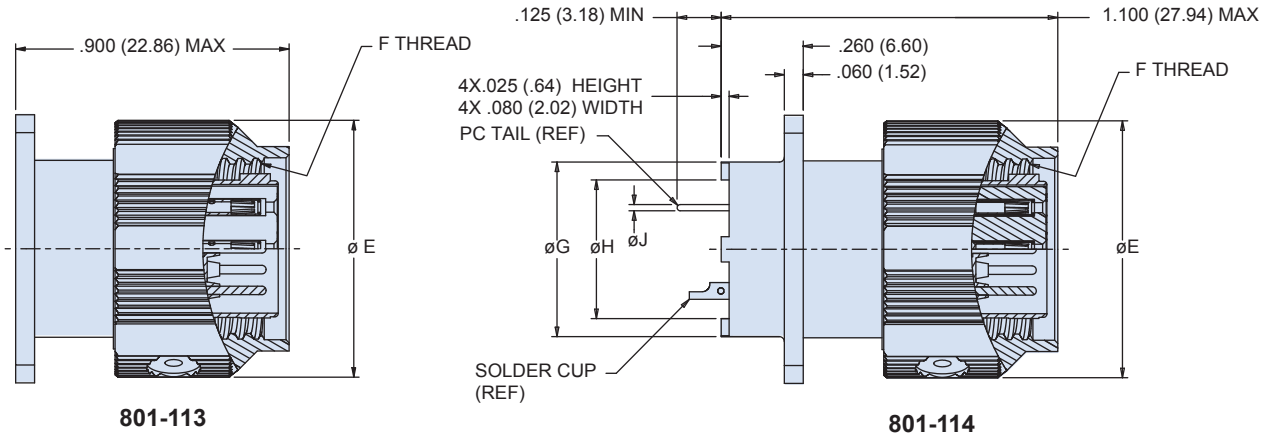

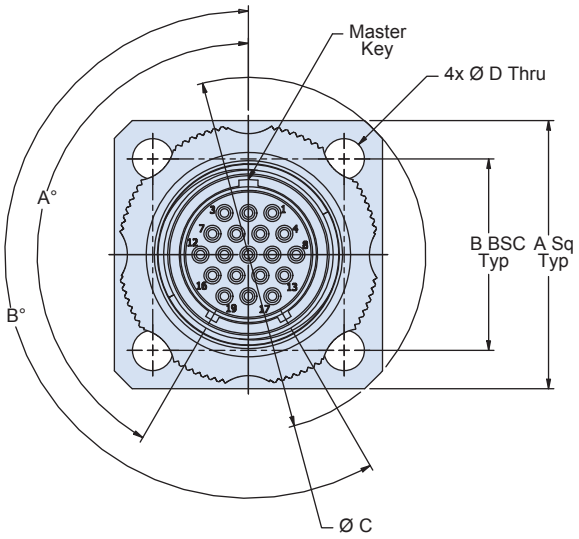

PC Tails Dimensions	
Contact Size	Ø J
#23	.018/.022
#16	.060/.064
#12	.092/.096

Dimensions															
Size	A Sq		B Bsc		Ø C		Ø D		Ø E		F Thread	Ø G		Ø H	
	in	mm	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm
5	0.590	14.99	0.423	10.74	0.750	19.05	0.093	2.36	0.65	16.51	.3125-.05P-.1L-2B	0.244	6.20	0.175	4.45
6	0.590	14.99	0.423	10.74	0.750	19.05	0.093	2.36	0.65	16.51	.3750-.05P-.1L-2B	0.330	8.38	0.238	6.05
7	0.650	16.51	0.483	12.27	0.850	21.59	0.093	2.36	0.69	17.53	.4375-.05P-.1L-2B	0.432	10.97	0.327	8.31
8	0.712	18.08	0.545	13.84	0.938	23.83	0.093	2.36	0.79	20.07	.5000-.05P-.1L-2B	0.493	12.52	0.388	9.86
9	0.850	21.59	0.607	15.42	1.125	28.58	0.128	3.25	0.83	21.08	.5625-.05P-.1L-2B	0.551	14.00	0.446	11.33
10	0.890	22.61	0.670	17.02	1.188	30.18	0.128	3.25	0.92	23.37	.6250-.05P-.1L-2B	0.620	15.75	0.516	13.11
11	0.935	23.75	0.715	18.16	1.250	31.75	0.128	3.25	--	--	.6875-.05P-.1L-2B	0.662	16.81	0.557	14.15
13	1.030	26.16	0.812	20.62	1.375	34.93	0.128	3.25	1.10	27.94	.8125-.1P-.2L-2B	0.703	17.86	0.599	15.21
16	1.219	30.96	0.981	24.92	1.625	41.28	0.128	3.25	1.34	34.04	1.0000-.1P-.2L-2B	0.863	21.92	0.759	19.28
17	1.280	32.51	1.060	26.92	1.700	43.18	0.128	3.25	1.45	36.83	1.0625-.1P-.2L-2B	0.912	23.16	0.808	20.52
19	1.432	36.37	1.191	30.25	1.900	48.26	0.128	3.25	1.50	38.10	1.1875-.1P-.2L-2B	1.018	25.86	0.910	23.11
21	1.565	39.75	1.322	33.58	2.100	53.34	0.128	3.25	1.65	41.91	1.3125-.1P-.2L-2B	1.170	29.72	1.061	26.95

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 801 Mighty Mouse
Double-Start ACME Thread Cobra™ Plug
801-069 Ordering Information





Series 801 Mighty Mouse Cobra Connector assemblies reduce clearance requirements without compromising ruggedness or shielding performance. Features a double-start self–locking plug with ratchet mechanism for improved protection against cross-mating and thread damage. Each Cobra assembly is equipped with a removable rear cover and gasket for easy crimp or solder contact termination of the connector. Both pin and socket versions are available for both crimp and solder terminated versions. Integrated low–profile backshell is equipped with an EMI/RFI shield termination platform and a shrink boot lip. The ultra-lightweight assembly may be clocked in eight different angle orientations for additional flexibility in cable routing. Fourteen contact arrangements are available, all with Size #23 contacts from shell size 5 to 21 with 3 to 130 contacts respectively. Connector shells are aluminum alloy or stainless steel.

How To Order

Sample Part Number	801-069-26	ZNU	8-13	P	A	1	05
Series	**801-069 -26** = Double-Start Self-Locking Plug with Ratchet Mechanism						
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement	**5-3**, **6-4**, **6-6**, **6-7**, **7-10**, **8-13**, **9-19**, **10-26**, **11-31**, **13-37**, **16-55**, **17-85**, **19-100**, **21-130** (See Insert Arrangements page D-2)						
Contact Type	**P** = Pin, Crimp **A** = Pin, Solder **S** = Socket, Crimp **B** = Socket, Solder						
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F						
Cable Exit Direction Code (See Table I)	**1**, **2**, **3**, **4**, **5**, **6**, **7**, **8**						
Cable Entry Size (See Table III)	**02**, **03**, **04**, **05**, **06**, **07**, **08**, **09**, **10**, **11**, **12**, **13**, **14**, **15**, **16**, **17**						



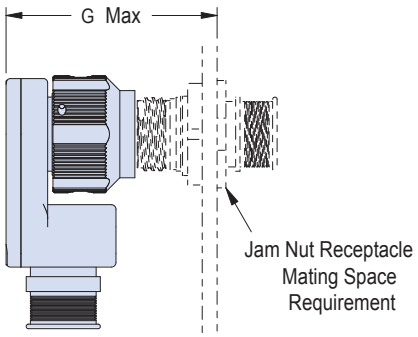



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse
Double-Start ACME Thread Cobra™ Plug
801-069 Dimensions

Right angle Cobra™ plug


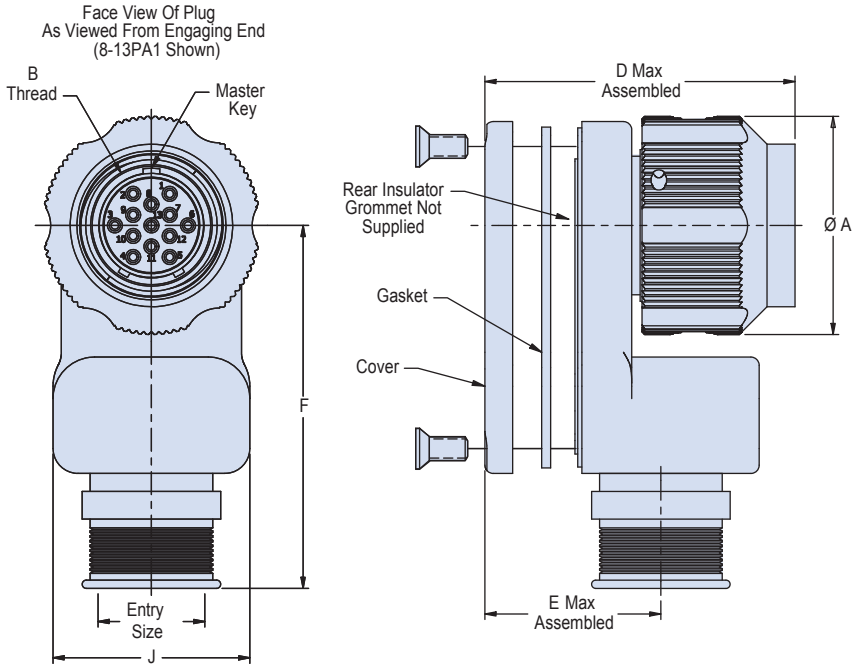


Table I: Cable Exit Direction

Cable Exit Direction Code	C°
1	0°
2	45°
3	90°
4	135°
5	180°
6	225°
7	270°
8	315°



Cable Exit Direction
(Direction 2 Shown)

Dimensions

Shell Size	Ø A	B Thread	D Max	E Max	F	G	H	J	Max Entry
5	.65(16.5)	.3125-.05P-.1L-2B	.84 (21.3)	.32 (8.1)	1.21 (30.7)	1.40 (35.6)	1.23 (31.2)	.500 (12.70)	03
6	.65(16.5)	.3750-.05P-.1L-2B	.86 (21.8)	.34 (8.6)	1.24 (31.5)	1.42 (36.1)	1.25 (31.8)	.560 (14.22)	04
7	.69(17.5)	.4375-.05P-.1L-2B	.88 (22.4)	.39 (9.9)	1.28 (32.5)	1.44 (36.6)	1.27 (32.3)	.650 (16.51)	05
8	.79(20.1)	.5000-.05P-.1L-2B	.89 (22.6)	.42 (10.7)	1.31 (33.3)	1.45 (36.8)	1.28 (32.5)	.710 (18.03)	06
9	.83(21.1)	.5625-.05P-.1L-2B	.92 (23.4)	.45 (11.4)	1.34 (34.0)	1.48 (37.6)	1.31 (33.3)	.770 (19.56)	07
10	.92(23.4)	.6250-.05P-.1L-2B	.96 (24.4)	.48 (12.2)	1.37 (34.8)	1.52 (38.6)	1.35 (34.3)	.835 (21.21)	08
11	.98 (24.9)	.6875-.05P-.1L-2B	.99 (25.1)	.50 (12.7)	1.40 (35.6)	1.55(39.4)	1.38 (35.1)	900 (22.86)	09
13	1.10(27.9)	.8125-.1P-.2L-2B	1.13 (28.7)	.52 (13.2)	1.48 (37.6)	1.80 (45.7)	1.63 (41.4)	.950 (24.13)	10
16	1.34(34.0)	1.0000-.1P-.2L-2B	1.21 (30.7)	.58 (14.7)	1.64 (41.7)	1.88 (47.8)	1.71 (43.4)	1.070 (27.18)	12
17	1.45(36.8)	1.0625-.1P-.2L-2B	1.28 (32.5)	.63 (16.0)	1.78 (45.2)	1.92 (48.8)	1.78 (45.2)	1.180 (29.97)	13
19	1.50(38.1)	1.1875-.1P-.2L-2B	1.40 (35.6)	.70 (17.8)	1.89 (48.0)	2.07 (52.6)	1.90 (48.3)	1.300 (33.02)	15
21	1.65(41.9)	1.3125-.1P-.2L-2B	1.51 (38.4)	.76 (19.3)	1.98 (50.3)	2.18 (55.4)	2.01 (51.1)	1.410 (35.81)	17

Table II: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Table III: Cable Entry Size

Code	Entry Size	Code	Entry Size
02	0.125 (3.18)	10	0.625 (15.88)
03	0.188 (4.78)	11	0.688 (17.48)
04	0.25 (6.35)	12	0.75 (19.05)
05	0.313 (7.95)	13	0.813 (20.65)
06	0.375 (9.53)	14	0.875 (22.23)
07	0.438 (11.13)	15	0.938 (23.83)
08	0.5 (12.70)	16	1.000 (25.40)
09	0.563 (14.30)	17	1.063 (27.00)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Receptacle
801-009 and 801-010 Ordering Information



Rear Panel Jam Nut Mount
Shell Style 07




Square Flange Mount
Shell Style 02/12/22




In-Line
Shell Style 01

How To Order						
Sample Part Number	**801-010**	**-02**	**Z1**	**16-55**	**S**	**A**
Series (See Table I)	**801-009** = Receptacle with Banding Platform **801-010** = Receptacle with Accessory Thread					
Shell Style (See Table III)	**-01** = In-Line Receptacle for Free-Hanging Cables **-02** = Thru Hole Square Flange Receptacle for Front or Rear Panel Mounting **-12** = Square Flange Receptacle for Rear Panel Mounting with "Non-Locking" Clinch Nuts **-22** = Square Flange Receptacle for Rear Panel Mounting with "Locking" Clinch Nuts **-07** = Jam Nut Receptacle for Rear Panel Mounting					
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arr	See Insert Arrangements page D-2					
Contact Type	**A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts **P** = Pin, Crimp **S** = Socket, Crimp **G** = #23 Pin with 30 AWG Crimp Barrel **H** = #23 Socket with 30 AWG Crimp Barrel					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series




800-009
Banding Platform






801-010
Rear Accessory Thread

Table II: Alternate Keyway Positions



	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Table III: Shell Style


		
Style -01 In-line	**Style -02/-12/-22** Square Flange	**Style -07** Jam Nut

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Receptacle
801-009-01 and 801-010-01 Dimensions

In-line receptacle - shell style 01

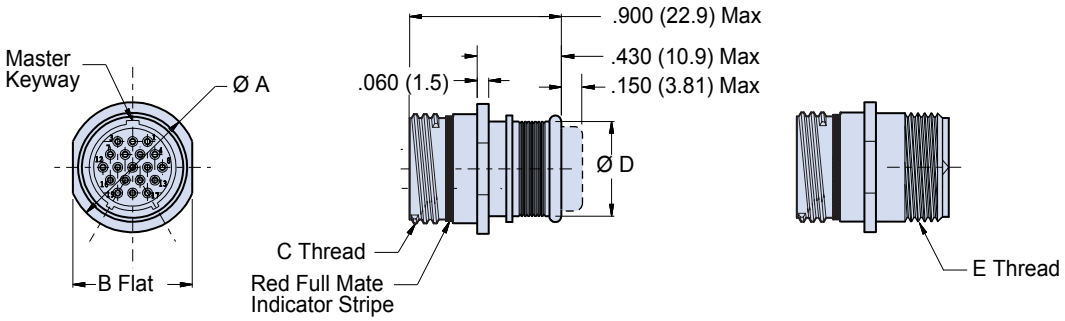

Integral Band Platform
801-009-01

Accessory Thread
801-010-01


D

Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread UNEF-2A
	In.	mm.	In.	mm.		In.	mm.	
5	.355	9.02	.325	8.13	.3125-.05P-.1L-DS-2A	.245	6.22	.2500-32
6	.415	10.54	.385	9.78	.3750-.05P-.1L-DS-2A	.290	7.37	.3125-32
7	.480	12.19	.445	11.30	.4375-.05P-.1L-DS-2A	.390	9.91	.4375-28
8	.540	13.72	.510	12.95	.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28
9	.605	15.37	.575	14.61	.5625-.05P-.1L-DS-2A	.500	12.70	.5625-24
10	.665	16.89	.635	16.13	.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24
11	.730	18.54	.700	17.78	.6875-.05P-.1L-DS-2A	.605	15.37	.6875-24
13	.855	21.72	.825	20.96	.8125-.1P-.2L-DS-2A	.650	16.51	.6875-24
16	1.040	26.42	1.010	25.65	1.0000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.110	28.19	1.070	27.18	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
19	1.243	31.57	1.191	30.25	1.1875-.1P-.2L-DS-2A	1.003	25.48	1.0625-18
21	1.375	34.93	1.312	33.32	1.3125-.1P-.2L-DS-2A	1.110	28.19	1.1875-18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Square flange, front or rear panel mount receptacle - shell style 02

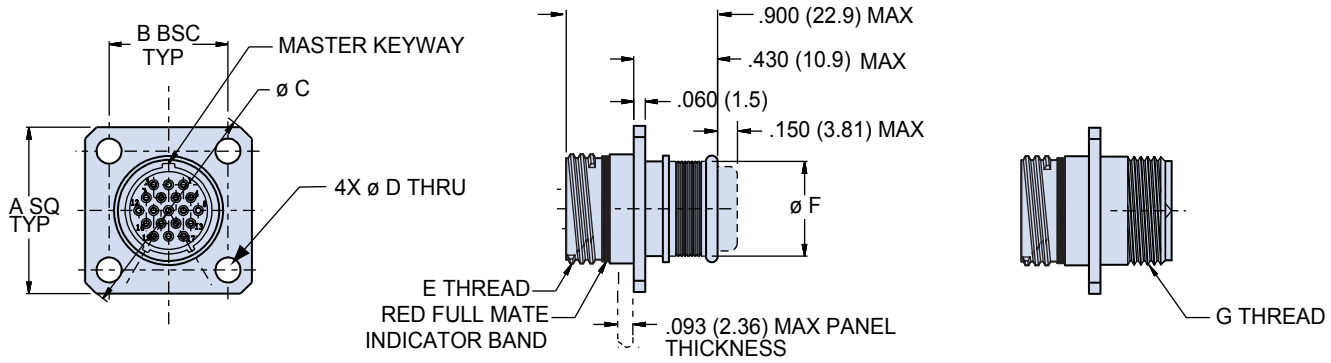


Integral Band Platform
801-009-02

Accessory Thread
801-010-02

Dimensions

Shell Size	A SQ		B BSC		Ø C		Ø D		E Thread	Ø F		G Thread UNEF-2A
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.	
5	.530	13.46	.363	9.22	.680	17.27	.096 .091	2.44 2.31	.3125-.05P-.1L-DS-2A	.245	6.22	.2500-32
6	.590	14.99	.423	10.74	.750	19.05			.3750-.05P-.1L-DS-2A	.290	7.37	.3125-32
7	.650	16.51	.483	12.27	.850	21.59			.4375-.05P-.1L-DS-2A	.390	9.91	.4375-28
8	.712	18.08	.545	13.84	.938	23.83			.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28
9	.850	21.59	.607	15.42	1.125	28.58	.130 .126	3.30 3.20	.5625-.05P-.1L-DS-2A	.500	12.70	.5625-24
10	.890	22.61	.670	17.02	1.188	30.18			.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24
11	.935	23.75	.715	18.16	1.250	31.75			.6875-.05P-.1L-DS-2A	.605	15.37	.6875-24
13	1.030	26.16	.812	20.62	1.375	34.93			.8125-.1P-.2L-DS-2A	.650	16.51	.6875-24
16	1.219	30.96	.981	24.92	1.625	41.28			1.0000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.280	32.51	1.060	26.92	1.700	43.18			1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
19	1.432	36.37	1.191	30.25	1.900	48.26			1.1875-.1P-.2L-DS-2A	1.003	25.48	1.0625-18
21	1.565	39.75	1.322	33.58	2.100	53.34			1.3125-.1P-.2L-DS-2A	1.110	28.19	1.1875-18

Series 801 Panel Cutout




Shell Size	Ø A		B BSC		Ø C	
	In	mm.	In	mm.	In	mm.
5	.328	8.33	.363	9.22	.096 .091	2.44 2.31
6	.390	9.91	.423	10.74		
7	.453	11.51	.483	12.27		
8	.515	13.08	.545	13.84		
9	.578	14.68	.607	15.42	.130 .126	3.30 3.20
10	.640	16.26	.670	17.02		
11	.703	17.86	.715	18.16		
13	.828	21.03	.812	20.62		
16	1.015	25.78	.981	24.92		
17	1.078	27.38	1.060	26.92		
19	1.203	30.56	1.191	30.25		
21	1.328	33.73	1.322	33.58		

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Receptacle
801-009-07 and 801-010-07 Dimensions

Jam nut, rear panel mount receptacle - shell style 07

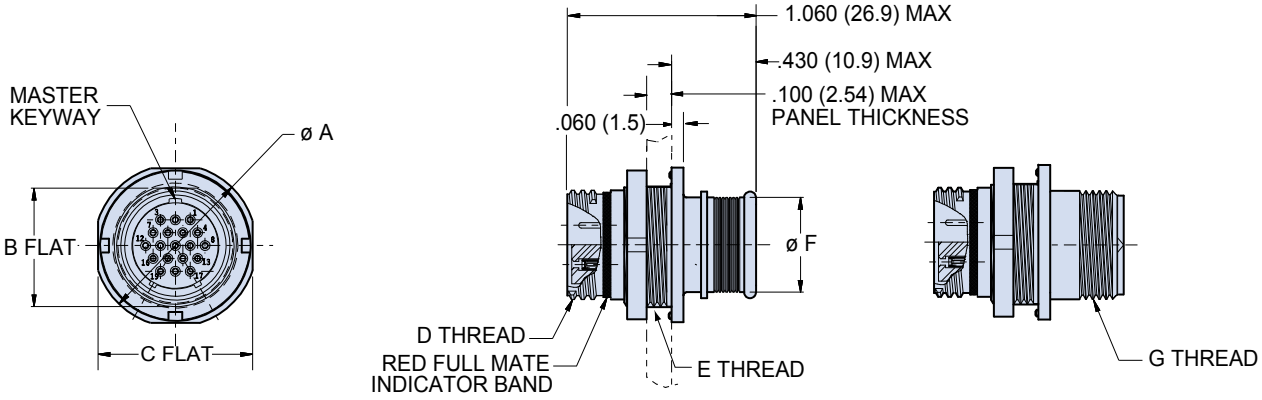


Integral Band Platform
801-009-07

Accessory Thread
801-010-07

Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread UN-2A	Ø F		G Thread UN-2A
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
5	.575	14.61	.350	8.89	.545	13.84	.3125-.05P-.1L-2A	.375-28	.245	6.22	.250-32
6	.635	16.13	.410	10.41	.595	15.11	.375-.05P-.1L-2A	.4375-28	.290	7.37	.3125-32
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-1L2A	.5625-32	.390	9.91	.4375-28
8	.755	19.18	.536	13.61	.723	18.36	.5000-.05P-.1L-2A	.5625-32	.445	11.30	.5000-28
9	.830	21.08	.596	15.14	.790	20.07	.5625-.05P-.1L-2A	.625-28	.500	12.70	.5625-24
10	.890	22.61	.658	16.71	.855	21.72	.6250-.05P-.1L-2A	.6875-28	.560	14.22	.6250-24
11	.960	24.38	.718	18.24	.925	23.50	.6875-.05P-.1L-2A	.7500-28	.605	15.37	.6875-24
13	1.078	27.38	.845	21.46	1.044	26.52	.8125-.1P-.2L-2A	.875-28	.650	16.51	.6875-24
16	1.264	32.11	1.022	25.96	1.230	31.24	1.000-.1P-.2L-2A	1.0625-20	.805	20.45	.9375-20
17	1.325	33.66	1.096	27.84	1.290	32.77	1.062-.1P-.2L-2A	1.125-28	.850	21.59	.9375-20
19	1.450	36.83	1.227	31.17	1.415	35.94	1.1875-.1P-.2L-2A	1.2500-28	1.003	25.48	1.0625-18
21	1.625	41.28	1.347	34.21	1.577	40.06	1.3125-.1P-.2L-2A	1.375-28	1.110	28.19	1.1875-18

Series 801 Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
5	.356	9.04	.385	9.78
6	.416	10.57	.447	11.35
7	.542	13.77	.572	14.53
8	.542	13.77	.572	14.53
9	.602	15.29	.635	16.13
10	.666	16.92	.697	17.70
11	.730	18.54	.760	18.44
13	.851	21.62	.885	22.48
16	1.028	26.11	1.075	27.31
17	1.102	27.99	1.135	28.83
19	1.243	31.57	1.260	32.00
21	1.354	34.39	1.385	35.18


NOTES

1. Grommet protrudes for power/ combo/#8 arrangements.
2. For all #8 arrangements, add .100" to length of banding platform.
3. For all #8 arrangements, add .340" to overall length.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Rear panel mount receptacle - shell style 12 and 22

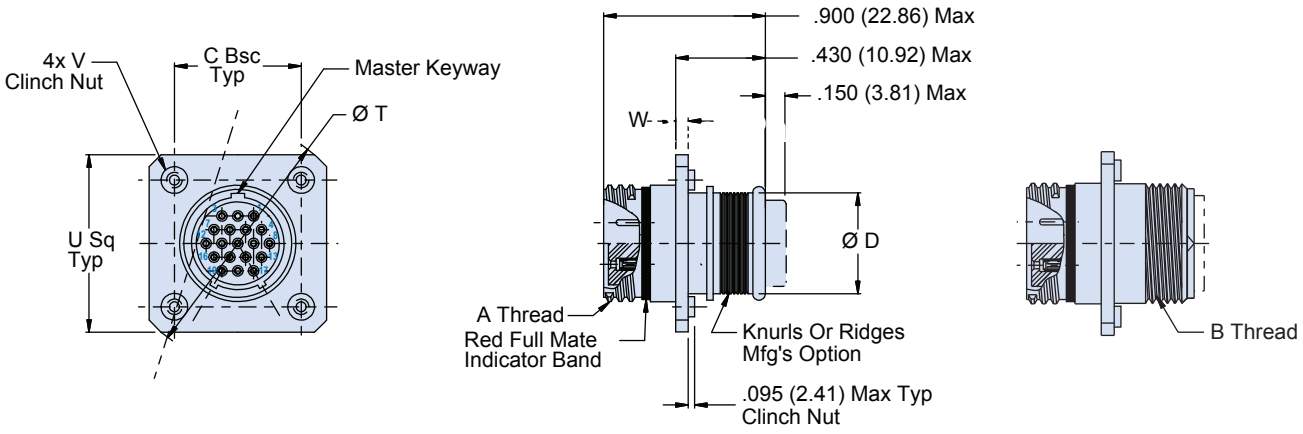


Integral Band Platform
801-009-12 and 801-009-22

Accessory Thread
801-010-12 and 801-010-22

D

	Dimensions						
Shell Size	A Thread	B Thread	C BSC	Ø T	U SQ	V Clinch Nut	W
5	.3125-.05P-.1L-DS-2A	.2500-32 UNEF-2A	0.363	0.774	0.623	2-56	0.030
6	.3750-.05P-.1L-DS-2A	.3125-32 UNEF-2A	0.423	0.860	0.683		
7	.4375-.05P-.1L-DS-2A	.4375-28 UNEF-2A	0.483	0.944	0.743		
8	.5000-.05P-.1L-DS-2A	.5000-28 UNEF-2A	0.545	1.032	0.805		
9	.5625-.05P-.1L-DS-2A	.5625-24 UNEF-2A	0.607	1.180	0.927	4-40	0.060
10	.6250-.05P-.1L-DS-2A	.6250-24 UNEF-2A	0.670	1.268	0.990		
11	.6875-.05P-.1L-DS-2A	.6875-24 UNEF-2A	0.715	1.331	1.035		
13	.8125-.1P-.2L-DS-2A	.6875-24 UNEF-2A	0.812	1.470	1.132		
16	1.0000-.1P-.2L-DS-2A	.9375-20 UNEF-2A	0.981	1.708	1.301		
17	1.0625-.1P-.2L-DS-2A	.9375-20 UNEF-2A	1.060	1.822	1.382		
19	1.1875-.1P-.2L-DS-2A	1.0625-18 UNEF-2A	1.191	2.006	1.511		
21	1.3125-.1P-.2L-DS-2A	1.1875-18 UNEF-2A	1.322	2.190	1.642		

Series 801 Front and Rear Mount Panel Cutout



G Bsc	H Holes	Ø R
0.363	0.096 0.091	0.328
0.423		0.390
0.483		0.453
0.545		0.515
0.607	0.130 0.126	0.578
0.670		0.640
0.715		0.703
0.812		0.828
0.981		1.015
1.060		1.078
1.191		1.203
1.322		1.328


NOTES

1. Grommet protrudes for power/ combo/#8 arrangements.
2. For all #8 arrangements, add .100" to length of banding platform.
3. For all #8 arrangements, add .340" to overall length.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread PCB Receptacle
801-011 and 801-033 Ordering Information



Printed Circuit Board Receptacles feature low profile shells for minimum protrusion inside enclosures and integral standoffs for board washout. Contacts are non-removable.

Water Immersion, Unmated Specify 801-011 connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify 801-033 watertight connectors . These 801-033 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40C to +70C.

How To Order						
Sample Part Number	**801-011**	**-02**	**M**	**6-7**	**P**	**A**
Series	**801-011** = Receptacle for Solder Cup or PCB Termination, with Standard Epoxy **801-033** = Receptacle for Solder Cup or PCB Termination, With Special "MOD-518" Sealing For Open Face (unmated) Water Immersion Requirements. 100% Leak Tested.					
Shell Style (See Table I)	**-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut					
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements page D-2					
Contact Type	**E** = Pin, Solder Cup **P** = Pin, PC Tail **F** = Socket, Solder Cup **S** = Socket, PC Tail					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Shell Style



	
Style -02/-12/-22 Square Flange	**Style -07** Jam Nut

Table II: Alternate Keyway Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



PC Tail Dimensions


Contact Size	Ø S
#23	Ø .018/.022
#20	Ø .028/.024
#16	Ø .060/.064
#12	Ø .092/.096

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Jam nut mount receptacle - shell style 07

Jam Nut
801-011-07

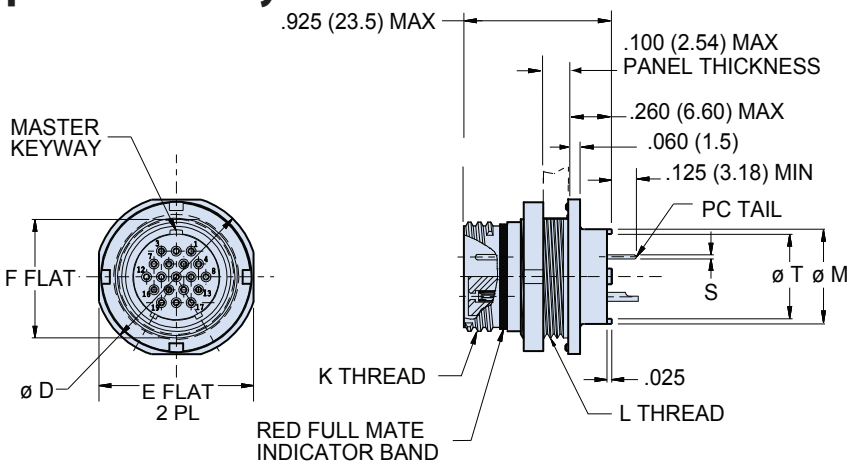


Square flange mount receptacle - shell style 02

Square Flange
801-011-02

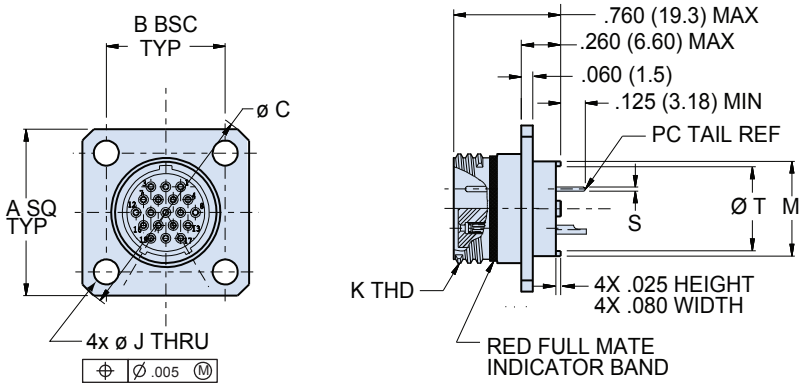

Square flange mount receptacle - shell style 12 and 22

Square Flange
801-011-12 and **-22**

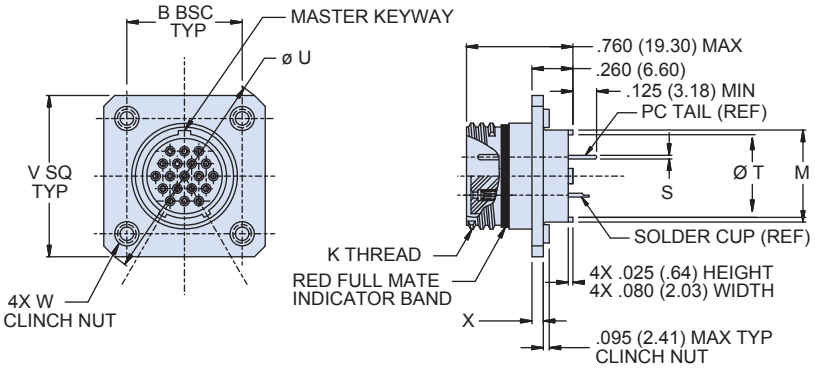

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 801 Mighty Mouse
Double-Start ACME Thread PCB Receptacle
801-011 and 801-033 Dimensions

Dimensions													
Shell Size	A Sq		B Bsc		Ø C		Ø D		E Flat		F Flat		J Holes	K Threead
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.		
5	.530	13.46	0.363	9.22	0.680	17.27	0.575	14.61	.545	13.84	0.350	8.89	.096 (2.44) .091 (2.31)	.3125-.05P-.1L-2A
6	.590	14.99	0.423	10.74	0.750	19.05	0.635	16.13	.595	15.11	0.410	10.41		.3750-.05P-.1L-2A
7	.650	16.51	0.483	12.27	0.850	21.59	0.755	19.18	.723	18.36	0.536	13.61		.4375-.05P-.1L-2A
8	.712	18.08	0.545	13.84	0.938	23.83	0.755	19.18	.723	18.36	0.536	13.61		.5000-.05P-.1L-2A
9	.850	21.59	0.607	15.42	1.125	28.58	0.830	21.08	.790	20.07	0.596	15.14	.130 (3.30) .126 (3.11)	.5625-.05P-.1L-2A
10	.890	22.61	0.670	17.02	1.188	30.18	0.890	22.61	.855	21.72	0.658	16.71		.6250-.05P-.1L-2A
11	.935	23.75	0.715	18.16	1.250	31.75	0.960	24.38	.925	23.50	0.718	18.24		.6875-.05P-.1L-2A
13	1.030	26.16	0.812	20.62	1.375	34.92	1.078	27.38	1.044	26.52	0.845	21.46		.8125-.1P-.2L-2A
16	1.219	30.96	0.981	24.92	1.625	41.28	1.265	32.13	1.230	31.24	1.022	25.96		1.0000-.1P-.2L-2A
17	1.280	32.51	1.060	26.92	1.700	43.18	1.325	33.66	1.290	32.77	1.096	27.84		1.0625-.1P-.2L-2A
19	1.432	36.37	1.191	30.25	1.900	48.26	1.450	36.83	1.415	35.94	1.225	31.12		1.1875-.1P-.2L-2A
21	1.565	39.75	1.322	33.58	2.100	53.34	1.625	41.28	1.577	40.06	1.345	34.16		1.3125-.1P-.2L-2A


D

Dimensions (Continued)																		
Shell Size	L Thread	Ø M		Ø T		N Flat ± .002		Ø P		Ø R		Ø U		V Sq		W Clinch Nuts	X	Y Flat ± .002	
		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.			In.	mm.
5	.3750-28 UN-2A	.244	6.20	.175	4.45	.360	9.14	.385	9.78	.330	8.38	.774	19.66	.623	15.82	2-56	.030 (.76)	.356	9.04
6	.4375-28 UNEF-2A	.330	8.38	.238	6.05	.420	10.67	.448	11.38	.390	9.91	.860	21.84	.683	17.35			.416	10.57
7	.5625-32 UN-2A	.432	10.97	.327	8.31	.551	14.00	.573	14.55	.450	11.43	.944	23.98	.743	18.87			.542	13.77
8	.5625-32 UN-2A	.493	12.52	.388	9.86	.551	14.00	.573	14.55	.510	12.95	1.032	26.21	.805	20.45			.542	13.77
9	.6250-28 UN-2A	.551	14.00	.446	11.33	.609	15.47	.635	16.13	.575	14.61	1.180	29.97	.927	23.55	4-40	.060 (1.52)	.600	15.24
10	.6875-28 UN-2A	.620	15.75	.516	13.11	.671	17.04	.698	17.73	.640	16.26	1.268	32.21	.990	25.15			.666	16.92
11	.7500-28 UN-2A	.662	16.81	.557	14.15	.726	18.44	.760	19.30	.700	17.78	1.331	33.81	1.035	26.29			.726	18.44
13	.8750-28 UN-2A	.703	17.86	.599	15.21	.859	21.82	.885	22.48	.825	20.96	1.470	37.34	1.132	28.75			.851	21.62
16	1.0625-20 UN-2A	.863	21.92	.759	19.28	1.038	26.37	1.075	27.31	1.015	25.78	1.708	43.38	1.301	33.05			1.028	26.11
17	1.1250-28 UN-2A	.912	23.16	.808	20.52	1.111	28.22	1.135	28.83	1.075	27.31	1.822	46.28	1.382	35.10			1.102	27.99
19	1.2500-28 UN-2A	1.018	25.86	.910	23.11	1.233	31.32	1.260	32.00	1.200	30.48	2.006	50.95	1.511	38.38			1.233	31.32
21	1.3750-28 UN-2A	1.170	29.72	1.061	26.95	1.354	34.39	1.385	35.18	1.330	33.78	2.190	55.63	1.642	41.71			1.351	34.32


Series 801 Recommended Panel Cutouts



801-033 and 801-011
-02 SQUARE FLANGE
-12 & 22 SQUARE FLANGE

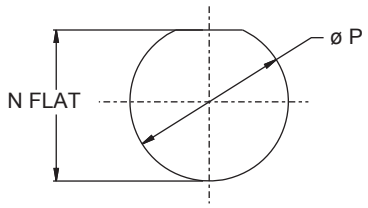

801-033
-07 JAM NUT

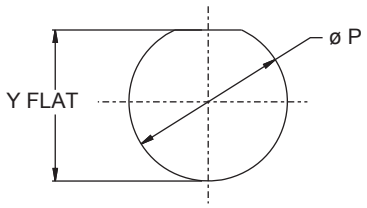

801-011
-07 JAM NUT

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Twin-Ax PC Tail, Panel Mount Receptacle

Connectors offer military grade performance in a small, lightweight package. Mounting options include rear panel mount wall mount and rear panel mount jam-nut. Style 02, wall mount connector can also be mounted front or rear depending on your application. 6 shell sizes available in 17 insert arrangements including 8 size #12 contact arrangements or 9 combination arrangements with size #12 and #23 contacts. Connectors are environmentally sealed. Contacts are non-removable and back potted.


How To Order

Sample Part Number	801-123	-07	M	7-1	P	A

Series	**801-123** = TwinAx PCB Receptacle
Shell Style	**-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut
Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement	**7-1**, **10-2**, **13-2**, **13-3**, **16-4**, **16-5**, **17-7**, **21-12**, **10-200**, **10-201**, **13-200**, **13-201**, **13-204**, **13-205**, **16-206**, **16-207**, **17-204**
Contact Type	**P** = Pin, PC Tail **S** = Socket, PC Tail
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F

Table I: Alternate Keyway Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




D


Dimensions in Inches (millimeters) are subject to change without notice.

Series 801 Mighty Mouse
Double-Start ACME Thread, TwinAx PCB Receptacle
801-123 Dimensions


Jam nut mount receptacle - shell style 07

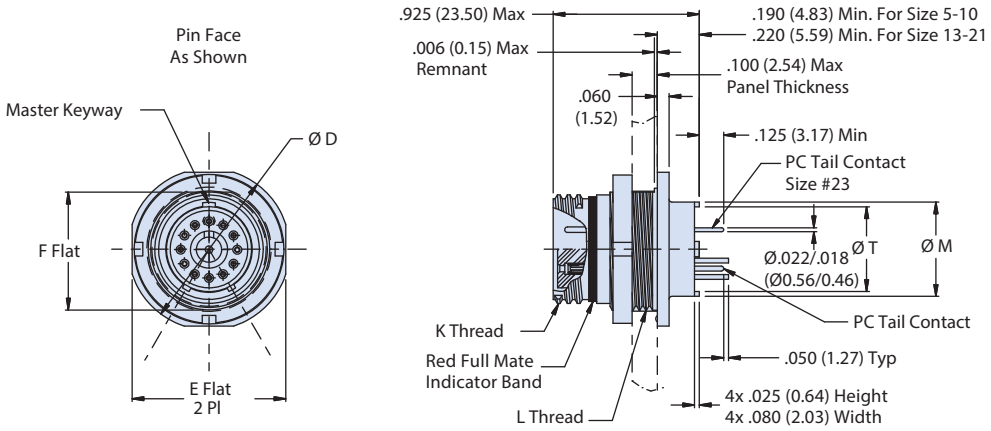

Square flange mount receptacle - shell style 02

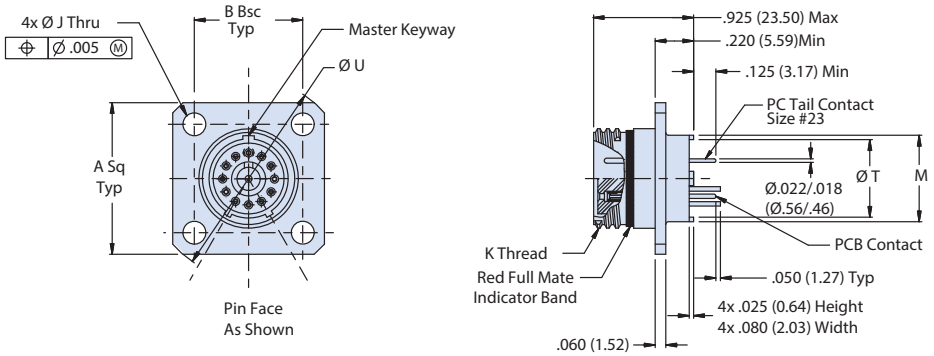


Square flange mount receptacle - shell style 12 and 22

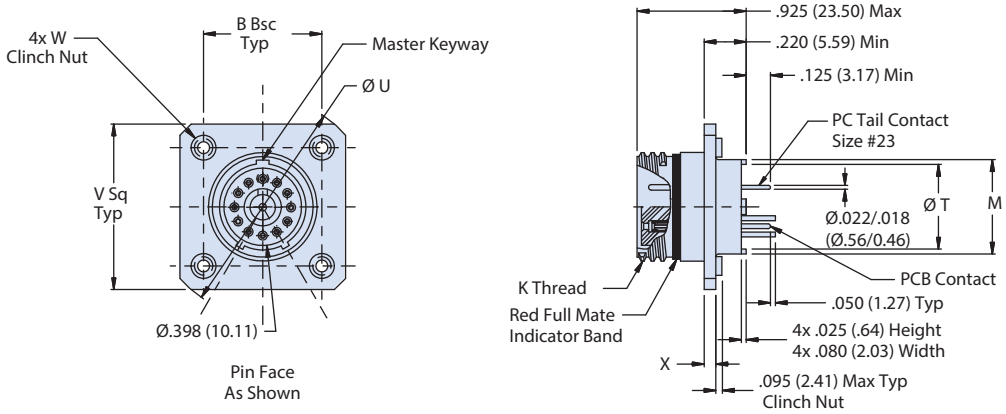


Dimensions in Inches (millimeters) are subject to change without notice.

Series 801 Mighty Mouse
Double-Start ACME Thread, TwinAx PCB Receptacle
801-123 Dimensions

Recommended Panel Cutouts




-02 Flange
-12 & 22 Flange

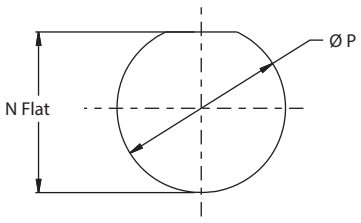

-07 Flange

#12 TwinAx PCB
Footprint Detail

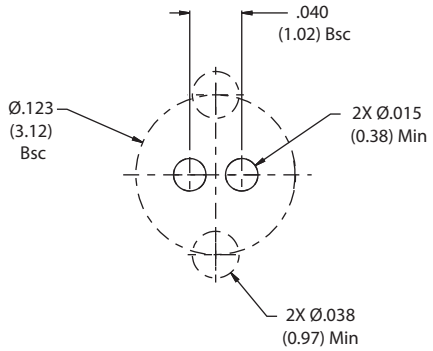

D

Dimensions											
Shell Size	A Sq	B BSC	Ø C	Ø D	E Flat	F Flat	J Holes	K Thread	L Thread	Ø M	Ø T
7	0.650 (16.51)	0.483 (12.27)	0.850 (21.59)	0.755 (19.18)	0.723 (18.36)	0.536 (13.61)	.096 (2.44) .091 (2.31)	.4375-.05P-.1L-2A	.5625-32 UN-2A	0.432 (10.97)	0.327 (8.31)
10	0.890 (22.61)	0.670 (17.02)	1.188 (30.18)	0.890 (22.61)	0.855 (21.72)	0.658 (16.71)	0.130 (3.30) 0.126 (3.20)	.6250-.05P-.1L-2A	.6875-28 UN-2A	0.620 (15.75)	0.516 (13.11)
13	1.030 (26.16)	0.812 (20.62)	1.375 (34.92)	1.078 (27.38)	1.044 (26.52)	0.845 (21.46)		.8125-.1P-.2L-2A	.8750-28 UN-2A	0.703 (17.86)	0.599 (15.21)
16	1.219 (30.96)	0.981 (24.92)	1.625 (41.28)	1.265 (32.13)	1.230 (31.24)	1.022 (25.96)		1.0000-.1P-.2L-2A	1.0625-20 UN-2A	0.863 (21.92)	0.759 (19.28)
17	1.280 (32.51)	1.060 (26.92)	1.700 (43.18)	1.325 (33.65)	1.290 (32.77)	1.096 (27.84)		1.0625-.1P-.2L-2A	1.1250-28 UN-2A	0.912 (23.16)	0.808 (20.52)
21	1.565 (39.75)	1.322 (33.58)	2.100 (53.34)	1.625 (41.28)	1.577 (40.06)	1.345 (34.16)		1.3125-.1P-.2L-2A	1.3750-28 UN-2A	1.170 (29.72)	1.061 (26.95)


	Dimensions (continued)						
Shell Size	N Flat	Ø P	Ø R	Ø U	V SQ	W Clinch Nuts	X
7	0.553 (14.05) 0.549 (13.94)	0.573 (14.55)	0.450 (11.43)	0.944 (23.98)	0.743 (18.87)	2-56	0.030 (0.76)
10	0.673 (17.09) 0.669 (16.99)	0.698 (17.73)	0.640 (16.26)	1.268 (32.21)	0.990 (25.15)	4-40	0.060 (1.52)
13	0.861 (21.87) 0.857 (21.77)	0.885 (22.48)	0.825 (20.96)	1.470 (37.34)	1.132 (28.75)		
16	1.040 (26.42) 1.036 (26.31)	1.075 (27.30)	1.015 (25.78)	1.708 (43.38)	1.301 (33.05)		
17	1.113 (28.27) 1.109 (28.17)	1.135 (28.83)	1.075 (27.30)	1.822 (46.28)	1.382 (35.10)		
21	1.356 (34.44) 1.352 (34.34)	1.385 (35.18)	1.330 (33.78)	2.190 (55.63)	1.642 (41.71)		

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Rev. 6.30.17 Printed in U.S.A.

Series 801 Mighty Mouse Double-Start ACME Thread Right Angle PCB Receptacle

801-023 Ordering Information

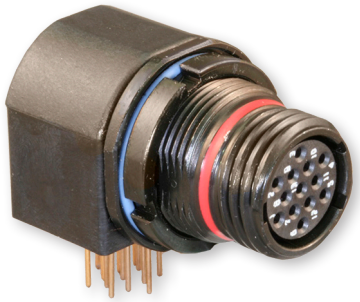

Right Angle PCB Receptacle connectors offer military grade performance in a small, lightweight package. These connectors are rated for MIL-STD-810 Method 512 immersion. High temperature thermoplastic housing withstands soldering temperatures. Stainless steel threaded inserts simplify attachment to printed circuit board.


- Double-Start ACME Thread
- Right Angle Contacts
- High Temperature Housing
- Threaded Inserts
- Environmentally Sealed

How To Order

Sample Part Number	801-023	-07	M	7-10	P	A
Series	**801-023** = PCB Right Angle Receptacle					
Shell Style	**-07** = Jam Nut					
Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	**5-3**, **6-1**, **6-23**, **6-4**, **6-6**, **6-7**, **7-1**, **7-25**, **7-10**, **8-2**, **8-28**, **8-13**, **9-4**, **9-210**, **9-19**, **9-200**, **10-2**, **10-5**, **10-201**					
Contact Type	**P** = Pin **S** = Socket					
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Alternate Keyway Positions


	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam nut, rear panel mount - shell style 07

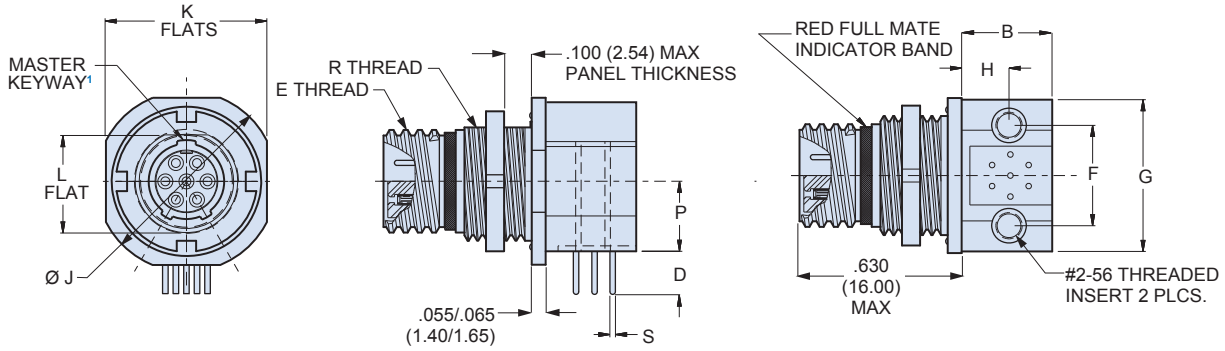

Recommended Panel Cutout



Shell Size/ Contact Arrangement	Ø A		B Flat		Shell Size/ Contact Arrangement	Ø A		B Flat	
	In. ± .005	mm. ± 0.13	In. ± .002	mm. ± 0.05		In. ± .005	mm. ± 0.13	In. ± .002	mm. ± 0.05
5-3	.385	9.78	.356	9.07	8-28	.572	14.55	.540	13.82
6-1	.447	11.37	.416	10.62	8-13	.572	14.55	.540	13.82
6-23	.447	11.37	.416	10.62	9-4	.635	16.13	.602	15.32
6-4	.447	11.37	.416	10.62	9-210	.635	16.13	.602	15.32
6-6, 6-7	.447	11.37	.416	10.62	9-19	.635	16.13	.602	15.32
7-1	.572	14.55	.540	13.82	9-200	.635	17.70	.602	15.32
7-25	.572	14.55	.540	13.82	10-2	.697	17.70	.664	16.87
7-10	.572	14.55	.540	13.82	10-5	.697	17.70	.664	16.87
8-2	.572	14.55	.540	13.82	10-201	.697	17.70	.664	16.87

NOTES

1. Master keyway is located at top dead center for all arrangements except for the 8-13, which is 90° counter clockwise from top center.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse Double-Start ACME Thread Right Angle PCB Receptacle

801-023 Dimensions

Jam nut, rear panel mount - shell style 07

Dimensions															
Shell Size/ Contact Arrangement	B		D		E Thread	F		G		H		Ø J		K Flat	
			In.	mm.								In.	mm.	In.	mm.
	In.	mm.	±.035	±0.89		In.	mm.	In.	mm.	In.	mm.				
5-3	.260	6.60	.275	6.99	.3125-.05P-.1L-DS- 2A	.310	7.87	.490	12.45	.165	4.19	.580	14.73	.545	13.84
6-1	.345	8.76	.292	7.42	.3750-.05P-.1L-DS- 2A	.385	9.78	.589	14.96	.224	5.69	.635	16.13	.602	15.29
6-23	.345	8.76	.305	7.75	.3750-.05P-.1L-DS- 2A	.385	9.78	.589	14.96	.224	5.69	.635	16.13	.602	15.29
6-4	.345	8.76	.292	7.42	.3750-.05P-.1L-DS-2A	.385	9.78	.589	14.96	.224	5.69	.635	16.13	.602	15.29
6-6, 6-7	.345	8.76	.265	6.73	.3750-.05P-.1L-DS-2A	.408	10.36	.589	14.96	.187	4.75	.635	16.13	.602	15.29
7-1	.345	8.76	.273	6.93	.4375-.05P-.1L-DS- 2A	.452	11.48	.710	18.03	.170	4.32	.755	19.18	.723	.723
7-25	.345	8.76	.266	6.76	.4375-.05P-.1L-DS- 2A	.452	11.48	.710	18.03	.170	4.32	.755	19.18	.723	.723
7-10	.345	8.76	.273	6.93	.4375-.05P-.1L-DS-2A	.452	11.48	.710	18.03	.170	4.32	.755	19.18	.723	.723
8-2	.490	12.45	.305	7.75	.5000-.05P-.1L-DS- 2A	.490	12.45	.710	18.03	.230	5.84	.755	19.18	.723	.723
8-28	.490	12.45	.289	7.34	.5000-.05P-.1L-DS- 2A	.490	12.45	.710	18.03	.230	5.84	.755	19.18	.723	.723
8-13	.490	12.45	.305	8.03	.5000-.05P-.1L-DS-2A	.490	12.45	.710	18.03	.230	5.84	.755	19.18	.723	.723
9-4	.490	12.45	.240	6.096	.5625-.05P-.1L-DS- 2A	.600	15.24	.800	20.32	.342	8.69	.830	21.08	.790	20.01
9-210	.490	12.45	.245	6.22	.5625-.05P-.1L-DS- 2A	.600	15.24	.800	20.32	.342	8.69	.830	21.08	.790	20.01
9-19	.490	12.45	.275	6.99	.5625-.05P-.1L-DS-2A	.600	15.24	.800	20.32	.342	8.69	.830	21.08	.790	20.01
9-200	.490	12.45	.255	6.48	.5625-.05P-.1L-DS- 2A	.600	15.24	.800	20.32	.342	8.69	.830	21.08	.790	20.01
10-2	.570	14.48	.299	7.59	.6250-.05P-.1L-DS- 2A	.640	16.26	.840	21.34	.362	9.19	.890	22.06	.855	21.72
10-5	.570	14.48	.255	6.48	.6250-.05P-.1L-DS- 2A	.640	16.26	.840	21.34	.362	9.19	.890	22.06	.855	21.72
10-201	.570	14.48	.294	7.47	.6250-.05P-.1L-DS- 2A	.640	16.26	.840	21.34	.362	9.19	.890	22.06	.855	21.72

Dimensions (Continued)					
Shell Size/ Contact Arrangement	L Flat		P		R Thread
	In.	mm.	In.	mm.	
5-3	.355/.346	9.02/8.79	.225	5.72	.375-28 UN-2A
6-1	.415/.406	10.54/10.31	.225	5.72	.4375-28 UNEF-2A
6-23	.415/.406	10.54/10.31	.225	5.72	.4375-28 UNEF-2A
6-4	.415/.406	10.54/10.31	.225	5.72	.4375-28 UNEF-2A
6-6, 6-7	.415/.406	10.54/10.31	.225	5.72	.4375-28 UNEF-2A
7-1	.539/.530	13.69/13.46	.296	7.52	.5625-32 UN-2A
7-25	.539/.530	13.69/13.46	.296	7.52	.5625-32 UN-2A
7-10	.539/.530	13.69/13.46	.296	7.52	.5625-32 UN-2A
8-2	.539/.530	13.69/13.46	.320	8.10	.5625-32 UN-2A
8-28	.539/.530	13.69/13.46	.320	8.10	.5625-32 UN-2A
8-13	.539/.530	13.69/13.46	.320	8.10	.5625-32 UN-2A
9-4	.601/.592	15.27/15.04	.362	9.19	.6250-28 UN-2A
9-210	.601/.592	15.27/15.04	.362	9.19	.6250-28 UN-2A
9-19	.601/.592	15.27/15.04	.362	9.19	.6250-28 UN-2A
9-200	.601/.592	15.27/15.04	.362	9.19	.6250-28 UN-2A
10-2	.663/.654	16.84/16.61	.397	10.08	.6875-28 UN-2A
10-5	.663/.654	16.84/16.61	.397	10.08	.6875-28 UN-2A
10-201	.663/.654	16.84/16.61	.397	10.08	.6875-28 UN-2A


PC Tail Dimensions	
Contact Size	Ø S
#23	Ø .018/.022
#20	Ø .028/.024
#16	Ø .060/.064
#12	Ø .092/.096

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

RIGHT ANGLE PCB FOOTPRINTS: SOCKET CONNECTORS


Patterns shown are for component mounting side of PCB.
#23=.022 max **#20**=.028 **#16**=.064 **#12**=.096, mounting holes are .093 (2.36) diameter




ARRANGEMENT NO. 5-3
(3 #23 CONTACTS)




ARRANGEMENT NO. 6-1
(1 #16 CONTACT)




ARRANGEMENT NO. 6-23
(3 #20HD CONTACTS)




ARRANGEMENT NO. 6-4
(4 #23 CONTACTS)

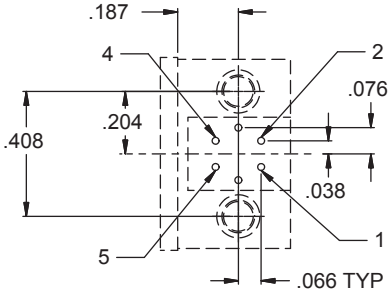


ARRANGEMENT NO. 6-6
(6 #23 CONTACTS)

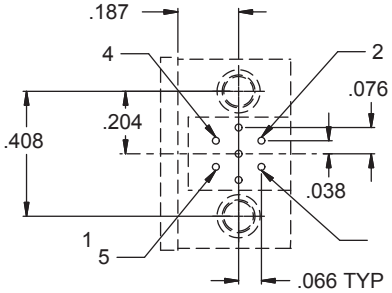


ARRANGEMENT NO. 6-7
(7 #23 CONTACTS)




ARRANGEMENT NO. 7-1
(1 #12 CONTACT)

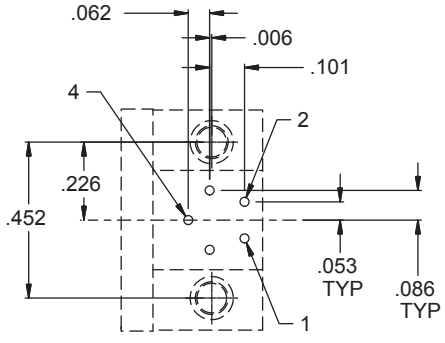

ARRANGEMENT NO. 7-25
(5 #20HD CONTACTS)

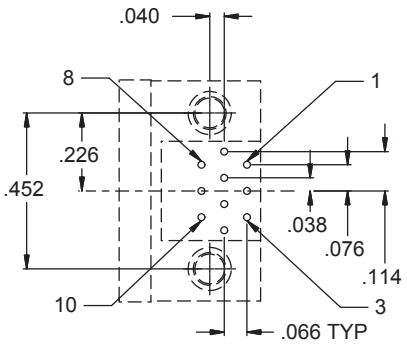

ARRANGEMENT NO. 7-10
(10 #23 CONTACTS)

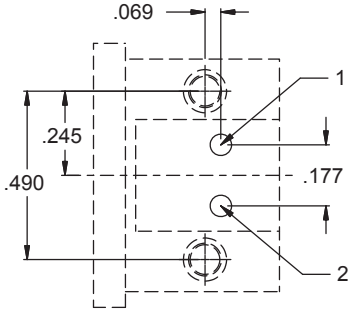

ARRANGEMENT NO. 8-2
(2 #16 CONTACTS)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 801 Mighty Mouse Double-Start ACME Thread Right Angle PCB Receptacle

801-023 PCB Footprint: Socket Connectors


RIGHT ANGLE PCB FOOTPRINTS: SOCKET CONNECTORS

Patterns shown are for component mounting side of PCB.


#23=.022 max **#20**=.028 **#16**=.064 **#12**=.096, mounting holes are .093 (2.36) diameter

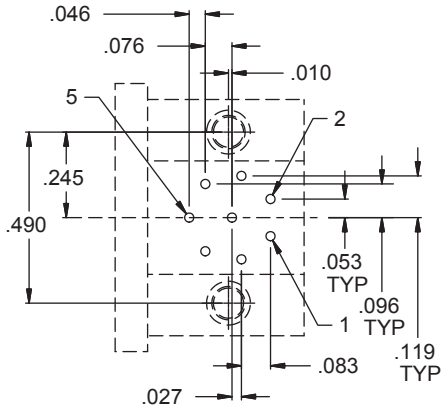


ARRANGEMENT NO. 8-28
(8 #20HD CONTACTS)

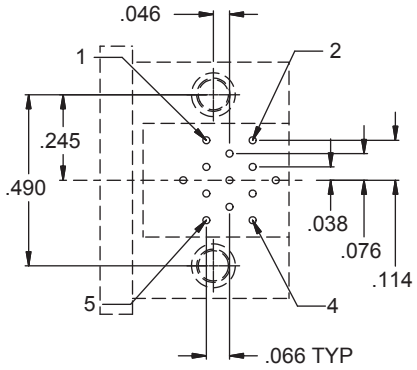


ARRANGEMENT NO. 8-13
(13 #23 CONTACTS)

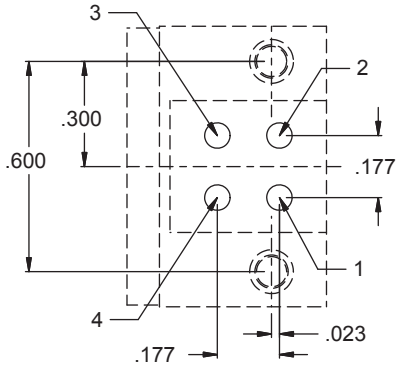


ARRANGEMENT NO. 9-4
(4 #16 CONTACTS)

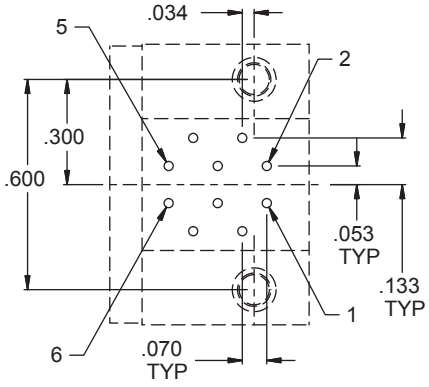


ARRANGEMENT NO. 9-210
(10 #2OHD CONTACTS)

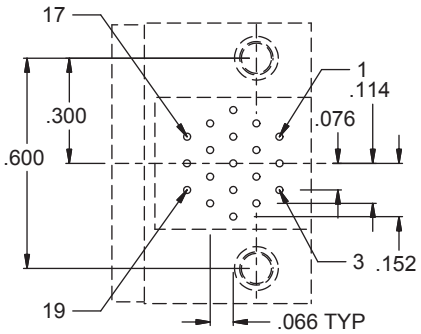


ARRANGEMENT NO. 9-19
(19 #23 CONTACTS)

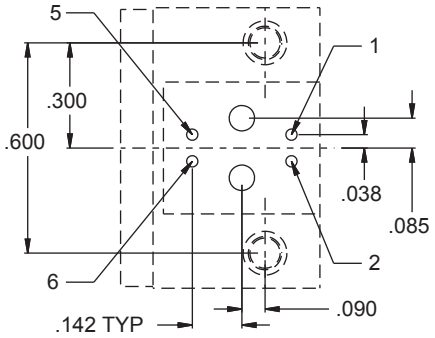


ARRANGEMENT NO. 9-200
(2#16, 4 #23 CONTACTS)

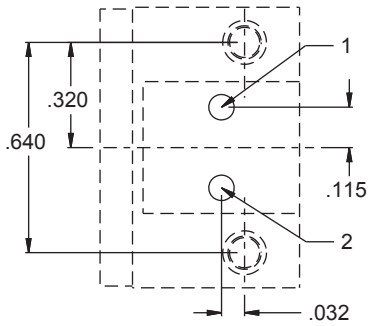

ARRANGEMENT NO. 10-2
(2 #12 CONTACTS)

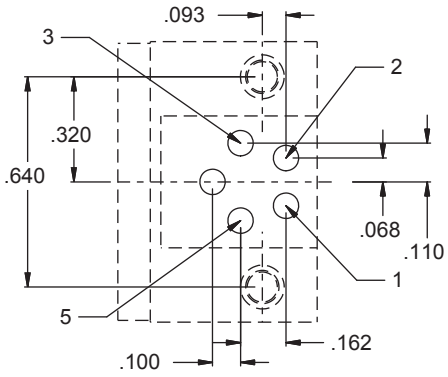

ARRANGEMENT NO. 10-5
(5 #16 CONTACTS)

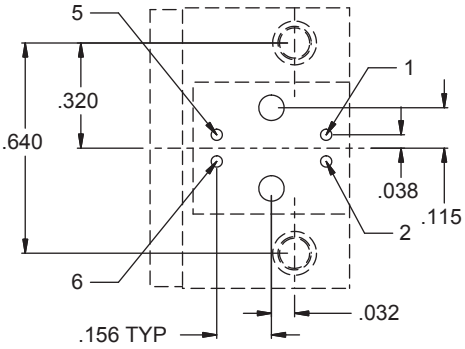


ARRANGEMENT NO. 10-201
(2 #12, 4 #23 CONTACTS)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Thread Jam Nut PCB Receptacle with Threaded Standoff

801-075 Ordering Information




Rear Panel mount jam nut receptacle features square flange for secure attachement of rigid boards or flex circuits. Flange has #2-56 stainless steel helicoils and integral standoffs. PC tail contacts are facotry installed, potte with epoxy and are non-removable. Gold–plated copper alloy contacts, aluminum or stainless steel shell, fluorosilicone seals and LCP insulators

How To Order							
Sample Part Number		**801-075**	**-07**	**M**	**6-7**	**P**	**A**
Series	**801-075** = Receptacle with Printed Circuit Board Contacts or Solder Cup Contacts						
Shell Style	**-07** = Jam Nut						
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement	See Contact Arrangements page D-2						
Contact Type	**P** = Pin, PC Tail **S** = Socket, PC Tail						
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F						

Table I: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse Double-Start ACME Thread Jam Nut PCB Receptacle with Threaded Standoff

801-075-07 Dimensions

Jam nut PCB receptacle with threaded heli-coil standoff - shell style 07

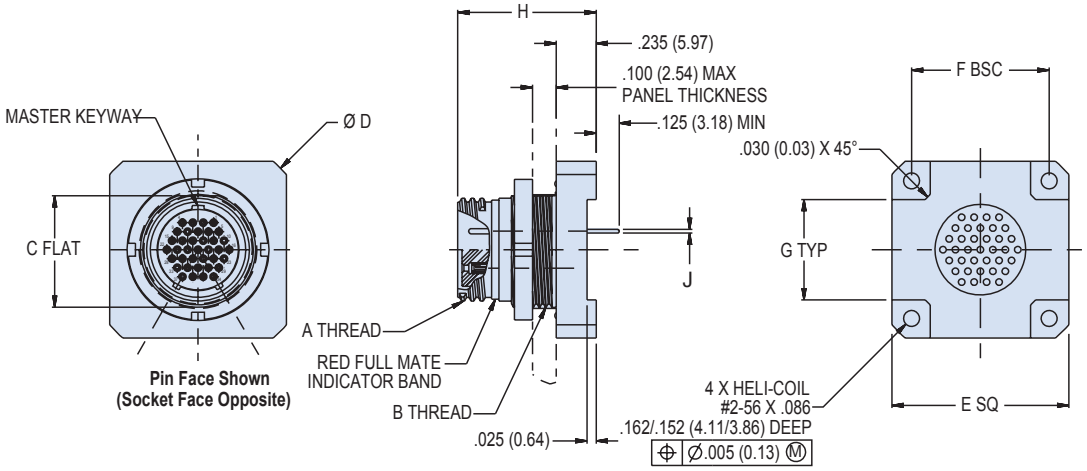

D

Dimensions														
Shell Size	A Thread	B Thread	C Flat		Ø D		E SQ		F BSC		G Typ		H	
			In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	.3125-.05P-.1L-2A	.3750-28 UN-2A	.348	8.84	.720	18.29	.545	13.84	.363	9.22	.143	3.63	.772	19.61
6	.375-.05P-.1L-2A	.4375-28 UNEF-2A	.408	10.36	.800	20.32	.595	15.11	.423	10.74	.203	3.63	.772	19.61
7	.4375-.05P-1L2A	.5625-32 UN-2A	.534	13.56	.900	22.86	.723	18.36	.483	12.27	.263	3.63	.772	19.61
8	.5000-.05P-1L-2A	.5625-32 UN-2A	.534	13.56	.980	24.89	.723	18.36	.545	13.84	.325	3.63	.772	19.61
9	.5625-.05P-.1L-2A	.6250-28 UN-2A	.594	15.09	1.080	27.43	.790	20.06	.607	15.42	.387	3.63	.772	19.61
10	.6250-.05P-1L-2A	.6875-28 UN-2A	.656	16.66	1.160	29.46	.855	21.72	.670	17.02	.450	11.43	.772	19.61
11	.6875-.05P-1L-2A	.7500-28 UN-2A	.716	18.19	1.220	30.99	.925	21.72	.715	18.16	.495	12.57	.772	19.61
13	.8125-.1P-.2L-2A	.8750-28 UN-2A	.843	21.41	1.370	34.80	1.044	26.52	.812	20.62	.592	15.04	.881	22.38
16	1.0000-.1P-.2L-2A	1.0625-20 UN-2A	1.020	25.91	1.620	41.15	1.230	31.24	.981	24.92	.751	19.08	.881	22.38
17	1.0625-.1P-.2L-2A	1.1250-28 UN-2A	1.094	27.79	1.720	43.69	1.290	32.77	1.060	26.92	.840	21.34	.881	22.38
19	1.1875-.1P-.2L-2A	1.2500-28 UN-2A	1.225	31.16	1.920	48.77	1.415	35.94	1.191	30.25	.971	24.66	.881	22.38
21	1.3125-.1p-.2l-2a	1.3750-28 UN-2A	1.345	34.16	2.100	53.34	1.577	40.06	1.322	33.58	1.102	27.99	.881	22.38


PC Tails Dimensions	
Contact Size	Ø J
#23	Ø .018/.022
#20	Ø .028/.024
#16	Ø .060/.064
#12	Ø .092/.096

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Thread Hermetic Receptacle

801-012 Ordering Information



Series 801 Hermetic Receptacles feature 304L stainless steel shells, fused vitreous glass insulators and Alloy 52 iron alloy contacts.

1 X 10^{-7} cc/second maximum helium leak rate.

Three Shell Styles: solder mount, jam nut or square flange.

Solder Cup Contacts or PC Tail Contacts for attachment to flexible or rigid circuits or rigid boards.

How To Order

Sample Part Number	801-012	-03	Z1	7-10	P	A
Series	**801-012** = Hermetic Receptacles					
Shell Style (See Table I)	**-02** = Front or Rear, Square Flange Mount **-03** = Solder Mount **-07** = Jam Nut Mount **-13** = Weld Mount					
Material and Finish	**Z1** = Stainless Steel / Passivated RoHS Compliant **ZL** = Stainless Steel / Nickel Plated					
Shell Size - Insert Arrangement	See Contact Arrangements page D-2					
Contact Type	**P** = Pin, Solder Cup **C** = Pin, PC Tail **S** = Socket, Solder Cup **D** = Socket, PC Tail					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Shell Style






			
Style -02 Square Flange	**Style -03** Solder Mount	**Style -07** Jam Nut	**Style -13** Weld Mount

Table II: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



D


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Thread Hermetic Receptacle

801-012-07 Dimensions

Jam nut mount receptacle - shell style 07

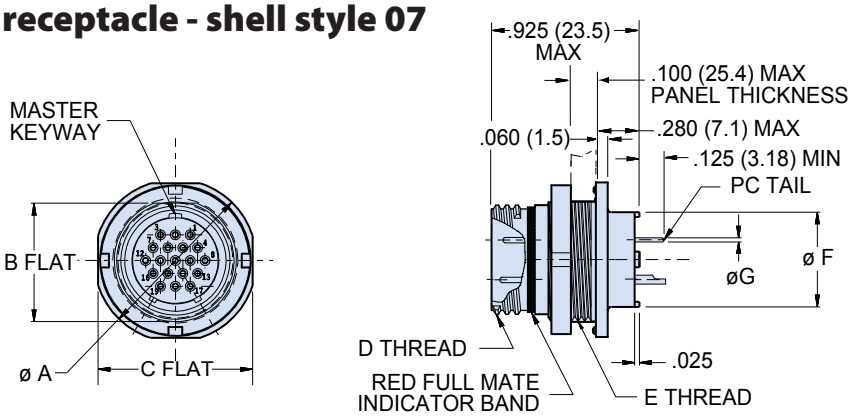


Jam Nut Mount Hermetic
801-012-03

D

Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread UN-2A	Ø F		Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
5	.575	14.61	.350	8.89	.545	13.84	.3125-.05P-.1L-2A	.3750-28	.244	6.20	#23 .018/.022 (0.46/0.56) #20 .024/.028 (0.61/0.71) #16 .060/.064 (1.52/1.63) #12 .092/.096 (2.34/2.44)
6	.635	16.13	.410	10.41	.595	15.11	.3750-.05P-.1L-2A	.4375-28	.330	8.38	
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-1L-2A	.5625-32	.432	10.97	
8	.755	19.18	.536	13.61	.723	18.36	.5000-.05P-1L-2A	.5625-32	.493	12.52	
9	.830	21.08	.596	15.14	.790	20.07	.5625-.05P-.1L-2A	.6250-28	.551	14.00	
10	.890	22.61	.658	16.71	.855	21.72	.6250-.05P-1L-2A	.6875-28	.620	15.75	
11	.960	24.38	.718	18.24	.925	23.50	.6878-.05P-.1L-2A	7500-28	.662	16.81	
13	1.078	27.38	.845	21.46	1.044	26.52	.8125-.1P-.2L-2A	.8750-28	.703	17.86	
16	1.265	32.13	1.022	25.96	1.230	31.24	1.0000-.1P-.2L-2A	1.0625-20	.863	21.92	
17	1.325	33.66	1.096	27.84	1.290	32.77	1.0625-.1P-.2L-2A	1.1250-28	.912	23.16	
19	1.450	36.83	1.225	31.115	1.415	35.94	1.1875-.1p-.2L-2A	1.2500-28	1.018	25.86	
21	1.625	41.28	1.346	34.16	1.577	40.06	1.3125-.1P-.2L-2A	1.3750-28	1.170	29.72	

Series 801 Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
5	.358/.354	9.09/8.99	.385	9.78
6	.418/.414	10.62/10.52	.448	11.38
7	.544/.540	13.82/13.72	.573	14.55
8	.544/.540	13.82/13.72	.573	14.55
9	.604/.600	15.34/15.24	.635	16.13
10	.668/.664	16.97/16.87	.698	17.73
11	.728/.724	18.49/18.39	.760	19.30
13	.853/.849	21.67/21.56	.885	22.48
16	1.030/1.026	26.16/26.06	1.075	27.31
17	1.104/1.100	28.04/27.94	1.135	28.83
19	1.235/1.231	31.37/31.27	1.260	32.00
21	1.353/1.349	34.37/34.26	1.385	35.18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Front or Rear, Square Flange Mount - shell style 02

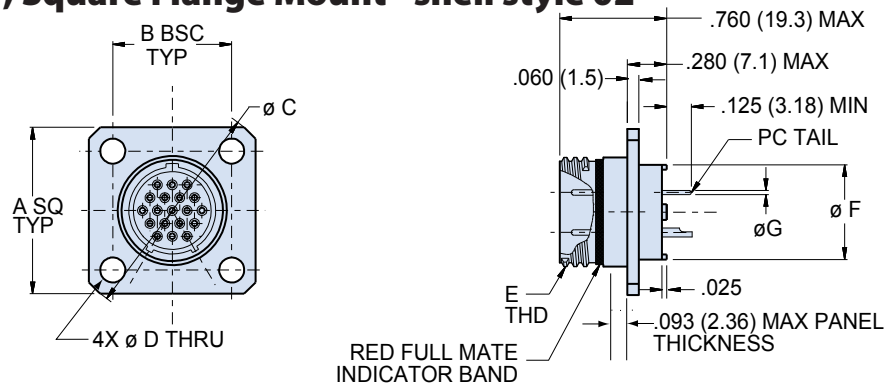

Square Flange Mount Hermetic
801-012-03

Dimensions												
Shell Size	A Sq		B BSC		Ø C		Ø D		E Thread	Ø F		Ø G Tail Dia
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.	
5	.530	13.46	.363	9.22	.680	17.27	.096/.091	2.44/2.31	.3125-.05P-.1L-2A	.244	6.20	#23 .018/.022 (0.46/0.56)
6	.590	14.99	.423	10.74	.750	19.05			.3750-.05P-.1L-2A	.330	8.38	
7	.650	16.51	.483	12.27	.850	21.59			.4375-.05P-.1L-2A	.432	10.97	
8	.712	18.08	.545	13.84	.938	23.83			.5000-.05P-.1L-2A	.493	12.52	#20 .024/.028 (0.61/0.71)
9	.850	21.59	.607	15.42	1.125	28.58	.130/.126	3.30/3.20	.5625-.05P-.1L-2A	.551	14.00	
10	.890	22.61	.670	17.02	1.188	30.18			.6250-.05P-.1L-2A	.620	15.75	
11	.935	23.75	.715	18.16	1.250	31.75			.6875-.05P-.1L-2A	.662	16.81	#16 .060/.064 (1.52/1.63)
13	1.030	26.16	.812	20.62	1.375	34.93			.8125-.1P-.2L-2A	.703	17.86	
16	1.219	31.96	.981	24.92	1.625	41.28			1.0000-.1P-.2L-2A	.863	21.92	
17	1.280	32.51	1.060	26.92	1.700	43.18			1.0625-.1P-.2L-2A	.912	23.16	#12 .092/.096 (2.34/2.44)
19	1.432	36.37	1.191	30.25	1.900	48.26			1.1875-.1P-.2L-2A	1.018	25.86	
21	1.565	39.75	1.322	33.58	2.100	53.34			1.3125-.1p-.2l-2a	1.170	29.72	

Series 801 Panel Cutout



Shell Size	B BSC		Ø C	
	In	mm.	In	mm.
5	.363	9.22	.096/.091	2.44/2.31
6	.423	10.74		
7	.483	12.27		
8	.545	13.84		
9	.607	15.42	.130/.126	3.30/3.20
10	.670	17.02		
11	.715	18.16		
13	.812	20.62		
16	.981	24.92		
17	1.060	26.92		
19	1.171	29.74		
21	1.322	33.58		


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Thread Hermetic Receptacle

801-012 Shell Style -03 and -13 Dimensions


Solder Mount receptacle - shell style 03

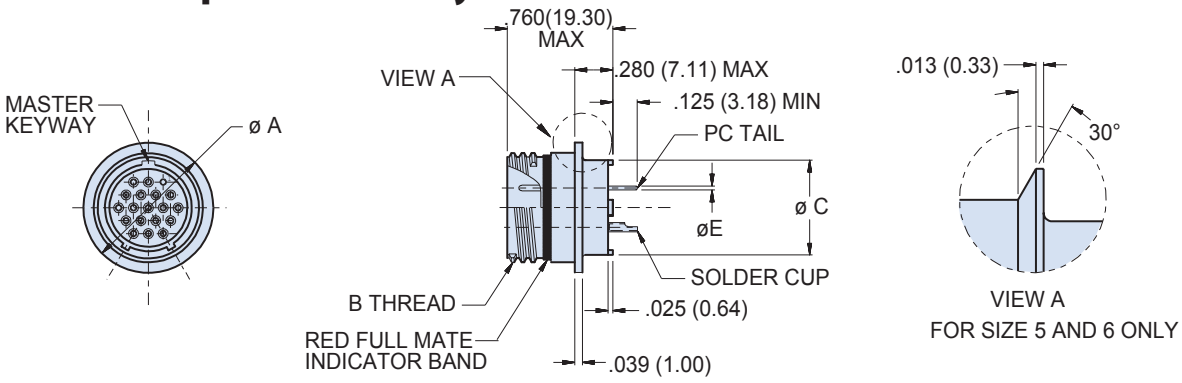

Solder Mount Hermetic
801-012-03


Dimensions											
Shell Size	Ø A		B Thread	Ø C		Shell Size	Ø A		B Thread	Ø C		Ø E Tail Dia.
	In.	mm.		In.	mm.		In.	mm.		In.	mm.	
5	.395	10.03	.3125-.05P-.1L-2A	.244	6.20	11	.770	19.56	.6875-.05P-1L-2A	.662	16.81	#23 .018/.022 (0.46/0.56) #16 .060/.064 (1.52/1.63) #20 .024/.028 (0.61/0.71) #12 .092/.096 (2.34/2.44)
6	.455	11.56	.375-.05P-.1L-2A	.330	8.38	13	.895	22.73	.8125-.1P-.2L-2A	.703	17.86	
7	.520	13.21	.4375-.05P-1L-2A	.432	11.97	16	1.080	27.43	1.000-.1P-.2L-2A	.863	21.92	
8	.580	14.73	.5000-.05P-1L-2A	.493	12.52	17	1.145	29.08	1.062-.1P-.2L-2A	.912	23.16	
9	.645	16.38	.5625-.05P-.1L-2A	.551	14.00	19	1.270	32.26	1.1875-.1p-.2L-2A	1.018	25.86	
10	.705	18.01	.6250-.05P-1L-2A	.620	15.75	21	1.395	35.43	1.3125-.1p-.2L-2A	1.170	29.72	

Weld Mount receptacle - shell style 13

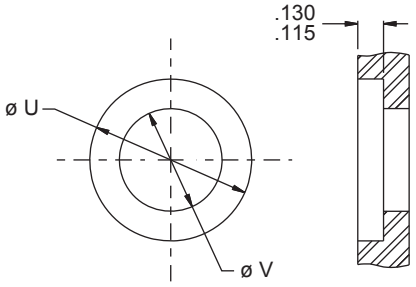

Recommended Panel Cutout

Weld Mount Hermetic
801-012-13

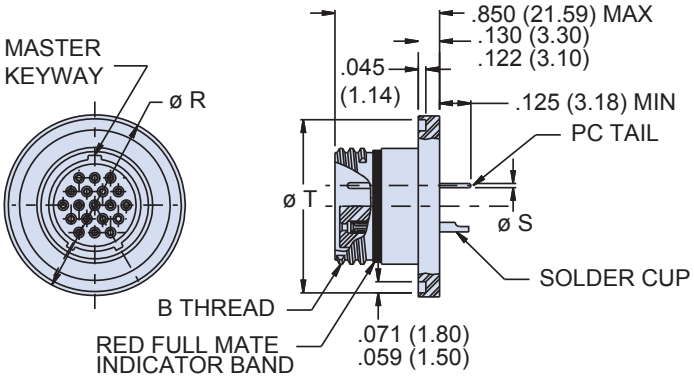

Dimensions												
SHELL SIZE	B THREAD	ø R ±.002	ø T	ø U	ø V	SHELL SIZE	B THREAD	ø R ±.002	ø T	ø U	ø V	ø S
5	.3125-.05P-.1L-2A	0.600 (15.24)	0.555 (14.10)	.606 (15.39	.180 (4.57	11	.6875-.05P-.1L-2A	1.062 (26.97)	1.019 (25.88)	1.068 (27.13	.580 (14.73)	#23 .018/.022 (0.46/0.56) #16 .060/.064 (1.52/1.63) #20 .024/.028 (0.61/0.71) #12 .092/.096 (2.34/2.44)
6	.3750-.05P-.1L-2A	0.665 (16.89)	0.620 (15.75)	.671 (17.04	.240 (8.38	13	.8125-.1P-.2L-2A	1.162 (29.51)	1.119 (28.42)	1.168 (29.67	.610 (15.49)	
7	.4375-.05P-.1L-2A	0.730 (18.54)	0.685 (17.40)	.736 (18.69	.330 (6.10	16	1.0000-.1P-.2L-2A	1.288 (32.72)	1.245 (31.62)	1.294 (32.87	.775 (19.69)	
8	.5000-.05P-.1L-2A	0.788 (20.02)	0.745 (18.92)	.794 (20.17	.390 (9.91	17	1.0625-.1P-.2L-2A	1.360 (34.54)	1.315 (33.40)	1.366 (34.70	.825 (20.96)	
9	.5625-.05P-.1L-2A	0.912 (23.16)	0.869 (22.07)	.918 (23.32	.455 (11.56	19	1.1875-.1P-.2L-2A	1.495 (37.97)	1.452 (36.88)	1.501 (38.13	.930 (23.62)	
10	.6250-.05P-.1L-2A	0.975 (24.77)	0.933 (23.70)	.981 (24.92	.520 (13.21	21	1.3125-.1P-.2L-2A	1.625 (41.28)	1.580 (40.13)	1.631 (41.43	1.080 (27.43)	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse Double-Start ACME Thread Bulkhead Feed–Thru Receptacle

801-074 Ordering Information




Series 801 Bulkhead Feed–Thru Receptacle is available in shell sizes 5 to 21 and mates with all high density plug connectors with the same polarization and opposite contact genders. Copper alloy gold-plated contacts, pin to pin, pin to socket or socket to socket. Your choice of standard aluminum alloy or stainless steel and seven standard finishes (see below). Please contact the factory for other materials and finishes.

How To Order

Sample Part Number	801-074	-07	M	6-7	P	P	A
Series	**801-074** = Feed–Thru Receptacle						
Shell Style	**-07** = Jam Nut						
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement	See Contact Arrangements page D-2						
Contact Type Jam Nut Side	**P** = Pin **S** = Socket						
Contact Type Other Side	**P** = Pin **S** = Socket						
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F						

Table I: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Thread Bulkhead Feed–Thru Receptacle


801-074 Dimensions

Jam nut mount receptacle - shell style 07

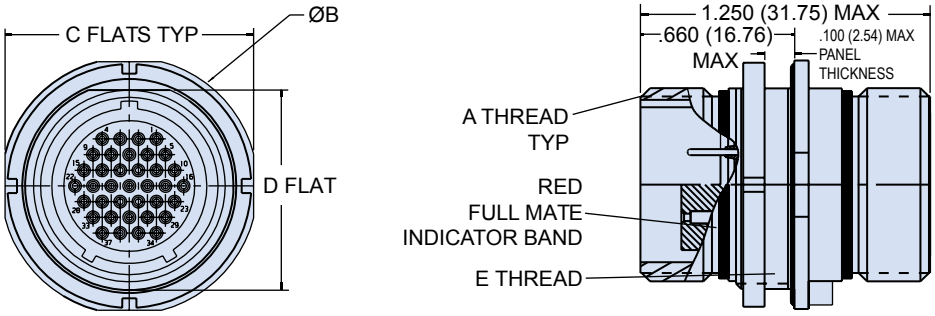

D

Dimensions								
Shell Size	A Thread	E Thread	Ø B		C Flat		D Flat	
			In.	mm.	In.	mm.	In.	mm.
5	.3125-.05P-.1L-2A	.3750-28 UN-2A	.575	14.61	.545	13.84	.350	8.89
6	.3750-.05P-.1L-2A	.4375-28 UNEF-2A	.635	16.13	.595	15.11	.410	10.41
7	.4375-.05P-.1L-2A	.5625-32 UN-2A	.755	19.18	.723	18.36	.536	13.61
8	.5000-.05P-.1L-2A	.5625-32 UN-2A	.755	19.18	.723	18.36	.536	13.61
9	.5625-.05P-.1L-2A	.6250-28 UN-2A	.830	21.08	.790	20.07	.596	15.14
10	.6250-.05P-.1L-2A	.6875-28 UN-2A	.890	22.61	.855	21.72	.658	16.71
11	.6875-.05P-.1L-2A	.7500-28 UN-2A	.960	24.38	.925	23.50	.718	18.24
13	.8125-.1P-.1L-2A	.8750-28 UN-2A	1.078	27.38	1.044	26.52	.845	21.46
16	1.0000-.1P-.1L-2A	1.0625-20 UN-2A	1.264	32.11	1.230	31.24	1.022	25.96
17	1.0625-.1P-.1L-2A	1.1250-28 UN-2A	1.325	33.66	1.290	32.77	1.096	27.84
19	1.0625-.1P-.1L-2A	1.2500-28 UN-2A	1.450	36.83	1.415	35.94	1.227	31.17
21	1.3125-.1P-.1L-2A	1.3750-28 UN-2A	1.625	41.28	1.577	40.06	1.347	34.21

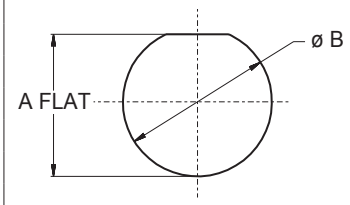Series 801 Jam Nut Panel Cutout				
	Shell Size	A Flat		Ø B	
		In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
	5	.356	9.04	.385	9.78
	6	.416	10.57	.448	11.38
	7	.542	13.77	.573	14.55
	8	.542	13.77	.573	14.55
	9	.602	15.29	.635	16.13
	10	.666	16.92	.698	17.73
	11	.724	18.39	.760	19.30
	13	.851	21.62	.885	22.48
	16	1.028	26.11	1.075	27.31
	17	1.102	27.99	1.135	28.83
	19	1.233	31.32	1.260	32.00
	21	1.351	34.32	1.385	35.18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Sav-Con® Saver
801-017 Ordering Information



Glenair Sav-Con® Connector Savers are designed to protect connectors that are subject to repeated mating and unmating cycles. Sav-Con® Connector Savers prevent costly repair or replacement of expensive connectors while preserving the quality and integrity of the connector by absorbing connect and disconnect abuse.


Protect Equipment. Equipment connectors that are mated frequently during manufacturing, test, check-out phases and environmental test programs can be protected by Glenair Sav-Con® Connector Savers.

Prolong the Service Life of Test Cables. Glenair Sav-Con® Connector Savers mated to test-cable connectors take the punishment of repetitive matings and unmatings.

How To Order						
Sample Part Number		**801-017**	**M**	**6-7**	**P**	**A**
Series	**801-017** = Series 801 Connector Saver					
Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements page D-2					
Contact Type	**P** = Pin Contact on Plug Side, Socket Contact on Receptacle Side **S** = Socket Contact on Plug Side, Pin Contact on Receptacle Side					
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Sav-Con® Saver
801-017 Dimensions

Sav-Con® connector Saver

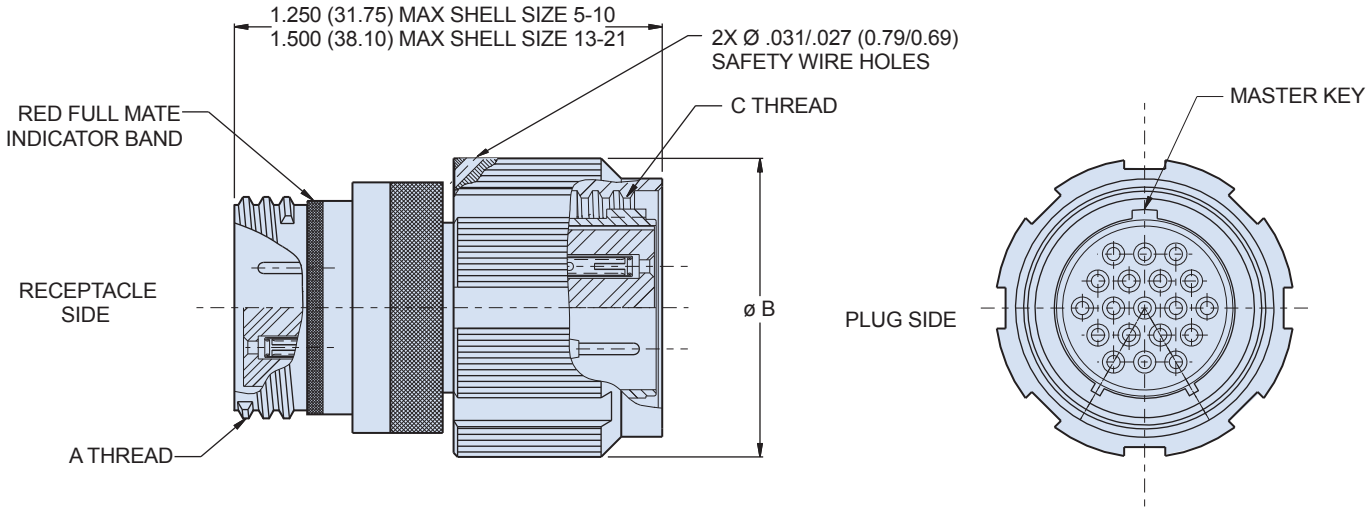

Dimensions				
Shell Size	A Threads	B Threads	Ø C	
			In.	mm.
5	.3125-.05P-.1L-2A	.3125-.05P-.1L-2B	.540	13.72
6	.375-.05P-.1L-2A	.375-.05P-.1L-2B	.600	15.24
7	.4375-.05P-1L-2A	.4375-.05P-1L-2B	.680	17.27
8	.5000-.05P-1L-2A	.5000-.05P-1L-2B	.750	19.05
9	.5625-.05P-.1L-2A	.5625-.05P-.1L-2B	.810	20.57
10	.6250-.05P-1L-2A	.6250-.05P-1L-2B	.880	22.35
11	.6875-.05P-1L-2A	.6875-.05P-1L-2B	.920	23.37
13	.8125-.1P-.2L-2A	.8125-.1P-.2L-2B	1.050	26.67
16	1.000-.1P-.2L-2A	1.000-.1P-.2L-2B	1.240	31.50
17	1.062-.1P-.2L-2A	1.062-.1P-.2L-2B	1.300	33.02
19	1.1875-.1P-.2L-2A	1.1875-.1P-.2L-2B	1.400	35.56
21	1.3125-.1p-.2l-2A	1.3125-.1P-.2l-2B	1.550	39.37

NOTES

Materials and Finishes

- Shells, jam nuts: aluminum alloy or stainless steel
- Contacts: copper alloy, 50 µinch gold plated
- Insulators: high-grade rigid dielectric
- Seal: fluorosilicone rubber

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Harsh Environment Shielded Cordsets



High performance Mighty Mouse cordsets feature easy ordering and fast delivery. These fully shielded and watertight assemblies withstand abrasion, temperature extremes and chemicals. Flexible overmolding provides rugged, watertight protection to wire and shield. Two styles are available: ***Style 1*** polyamide overmold and polyurethane cable jacket, and ***Style 2*** improved temperature range, high flexibility thermoplastic rubber overmold and cable jacket. Overmolded Mighty Mouse cordsets are suitable for military gear and other hostile environments where interconnect reliability and survivability is essential.

Product Features

- Single-ended or double-ended
- Rugged, watertight construction
- 100% electrically tested
- Flexible to -55ºC. (Style 2)
- Stainless steel shield termination band
- Resistant to chemicals
- Withstands UV and ozone

Harsh Environment Cordset Selection Guide		
Property	Style 1 Polyurethane Jacket Polyamide Overmold	Style 2 Rubber Jacket Rubber Overmold
Cable jacket	Thermoplastic polyurethane (TPU), black	Thermoplastic elastomer (TPV), black
Overmold	Polyamide, black	Thermoplastic elastomer (TPV), black
Operating temperature	-30° C. to +105° C.	-55° C. to +135° C.
Flexibility	Good	Excellent
Water Resistance	Waterproof	Waterproof
Solvent Resistance, Cable Jacket	Excellent	Good
Solvent Resistance, Overmold	Fair (1)	Good
Weatherability	Excellent	Excellent
Abrasion Resistance	Excellent	Good
Flammability	Flame retardant UL 94 V-0	Flame retardant UL 94 HB
Low Smoke, Zero Halogen Cable Jacket	Yes	No
(1) Excellent resistance to most solvents, fuels, and oils; poor resistance to strong acids and bipolar solvents (alcohol)		

Specifications	
Cable jacket	Style 1: thermoplastic polyurethane, black, low-smoke, zero-halogen Style 2: thermoplastic elastomer, black
Overmold	Style 1: polyamide Style 2: thermoplastic elastomer, black
Cable shield	Tin-coated copper braid, 90% minimum coverage
Conductors	Silver coated stranded wire, TFE insulated, per M22759/11
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	#23 5 amps, #20 7.5 amps, #16 13 amps, #12 23 amps
Test voltage (DWV)	#23 500 Vac, #20 500 vac, #16 and #12 500 VAC sea level
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

High-Speed Cordsets


Controlled impedance twisted pair cordsets for Ethernet, USB and other protocols are available. Please refer to Section U

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double Start ACME Thread Overmolded Harsh Environment Cordsets

Dimensions

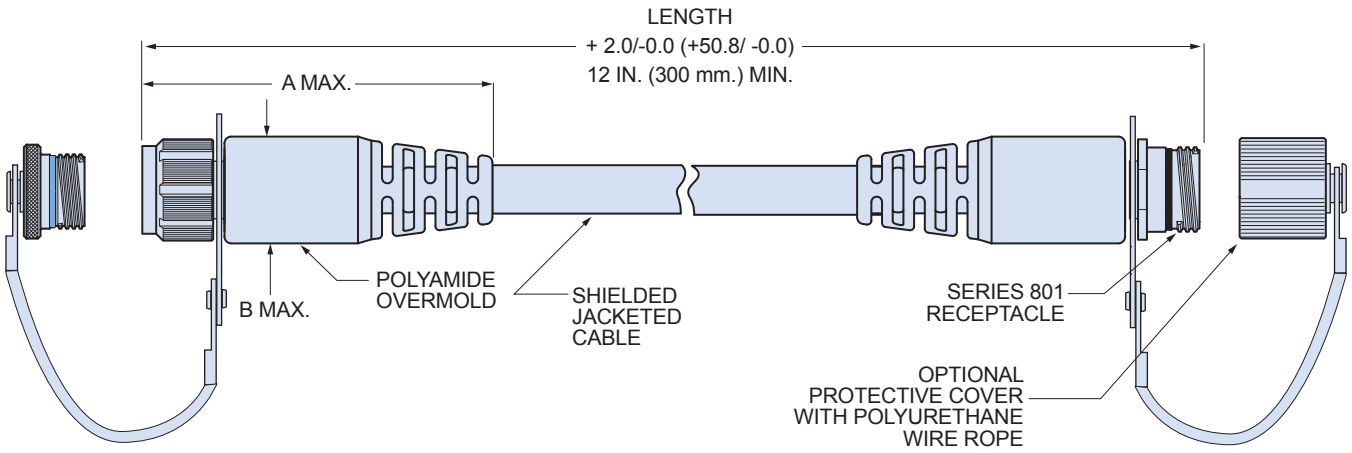

D

Dimensions				
Shell Size	A Max.		B Max.	
	In.	mm.	In.	mm.
5	2.31	58.67	0.50	12.70
6	2.4	60.96	0.55	13.97
7	2.5	63.50	0.65	16.51
8	2.52	64.01	0.71	18.03
9	2.8	71.12	0.78	19.81
10	2.75	69.85	0.82	20.83
11	2.85	72.39	0.87	22.10
13	3.1	78.74	0.90	22.86
16	3.4	86.36	1.10	27.94
17	3.4	86.36	1.20	30.48

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TFE insulation, 600V, in accordance with M22759/11.
3. Wire color is IAW MIL-STD-681 for cables containing 10 wires or less. For cable containing more than 10 wires, wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double Start ACME Thread Overmolded Harsh Environment Cordsets

801-026, -070, -034, and -071 Ordering Information

Series 801 Cordsets with #23 Contacts								
Sample Part Number								
801-026	**-A**	**C**	**4**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
801-026 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold #23 Contacts **801-070** **Style 2** Rubber Cable Jacket and Rubber Overmold #23 Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #22 AWG **4** #24 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page D-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page D-2	Overall Length In Inches 12 Inch Min.

Series 801 Cordsets with #20HD Contacts								
Sample Part Number								
801-034	**-A**	**C**	**0**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
801-034 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold #20HD Contacts **801-071** **Style 2** Rubber Cable Jacket and Rubber Overmold #20HD Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**0** #20 AWG **2** #22 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page D-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page D-2	Overall Length In Inches 12 Inch Min.

D

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double Start ACME Thread Overmolded Harsh Environment Cordsets

801-031, -072, -032, and -073 Ordering Information

Series 801 Cordsets with #16 Power Contacts								
Sample Part Number								
801-031	**-A**	**C**	**6**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
801-031 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold #16 contacts **801-072** **Style 2** Rubber Cable Jacket and Rubber Overmold #16 Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**6** #16 AWG **8** #18 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page D-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page D-2	Overall Length In Inches 12 Inch Min.

Series 801 Cordsets with #12 Power Contacts								
Sample Part Number								
801-032	**-A**	**C**	**2**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
801-032 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold #12 contacts **801-073** **Style 2** Rubber Cable Jacket and Rubber Overmold #12 Contacts	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page D-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page D-2	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Ultraflexible “Phantom Cable” Cordsets



Phantom Cable cordsets feature high-flex rubber-insulated wires, lightweight shield and overbraided jackets for maximum flexibility, reduced size and minimum weight. Flexible rubber overmold provides strain relief and environmental sealing. EMI shield options include high-strength, ultralightweight Amberstrand® nickel-coated composite braid, ArmorLite™ or lightweight, high flexibility tinned copper braid. Braid outer jackets are available with NOMEX®, HALAR® or PTFE-coated fiberglass.

Product Features

- Overbraided cable jacket for excellent flexibility
- Ultra-lightweight AmberStrand® EMI shield
- 100% electrically tested
- Flexible to -55ºC.
- Stainless steel shield termination band

Application Note

Overbraided textile jackets are ideal for applications where flexibility and weight are important. However, water can penetrate through the jacket and cable shield. Dust and contamination can also become entrapped in the braid. Braided jackets are prone to fraying damage caused by snagging on velcro closures and MOLLE vests. Extruded cable jackets are recommended if debris entrapment, moisture ingress or fraying damage are concerns.

Braid Shield Selection Guide			
Property	Amberstrand®	Armorlite®	Copper
Type	nickel-coated high-strength super fiber	Micro-filament nickel-coated stainless steel	Tin-coated copper
Weight/ft. (0.5 in. ID)	3.7 grams	4.4 grams	22.3 grams
Operating Temp(1)	-65º C to +200º C	-80º C to +260º C	-80º C to +150º C
Coverage	90% min.	90% min.	90% min.
Flexibility	Excellent	Excellent	Good
Cost Comparison	$$$	$$	$
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Jacket Selection Guide			
Property	NOMEX®	HALAR®	PTFE Coated Fiberglass
Color	Black or olive drab	Black	Tan
Operating Temp(1)	-55º C to +260º C	-73º C to +150º C	-75º C to +300º C
Chemical Resistance	Excellent	Excellent	Excellent
Flammability	Self-extinguishing, will not melt	Fire retardant UL VW-1	Self-extinguishing
Toxicity	Non-toxic	Non-toxic	Non-toxic
Flexibility	Excellent	Excellent	Excellent
Abrasion resistance	Excellent	Excellent	Excellent
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Specifications	
Cable jacket	NOMEX®, HALAR® or PTFE-coated fiberglass
Temperature Range	-55º C to +135º C
Overmold	Thermoplastic elastomer, black
Cable shield	AmberStrand®, ArmorLite® or tinned copper, 90% minimum coverage
Conductors	Silver coated stranded wire, rubber insulation
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	5 amps
Test voltage (DWV)	500 Vac
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double Start ACME Thread Flexible, Lightweight Phantom Cable Cordsets

801-065, -066, -067, -068 Ordering Information

Series 801 "Phantom Cable" Cordsets size #12 thru #23 Contacts										
Sample Part Number										
801-065	**-B**	**N**	**2**	**Z1**	**5-3**	**N**	**A**	**-60**	**C**	**N**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length	Shield Option	Jacket Option
Size #23 Contacts **801-065** Phantom Cable Cordset Size #20 HD Contacts **801-066** Phantom Cable Cordset Size #16 Contacts **801-067** Phantom Cable Cordset Size #12 Contacts **801-068** Phantom Cable Cordset	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Rec. with Male Pin Contacts **-D** Rec. with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Rec. with Male Pin Contacts **D** Rec. with Female Socket Contacts **N** No Connector (Single-Ended)	Size #23 Contacts **4** #24 AWG 6 #26 AWG 8 #28 AWG Size #20 HD Contacts **0** #20 AWG **2** #22 AWG Size #16 Contacts **6** #16 AWG **8** #18 AWG Size #12 Contacts **2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page D-2 Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page D-2	Overall Length In Inches 12 Inch Min.	**A** Amberstrand **B** Armorlite **C** Tin-Coated Copper	**D** Nomex, Olive Drab **N** Nomex, Black **H** Halar (Monofil) **P** Peek (Monofil)

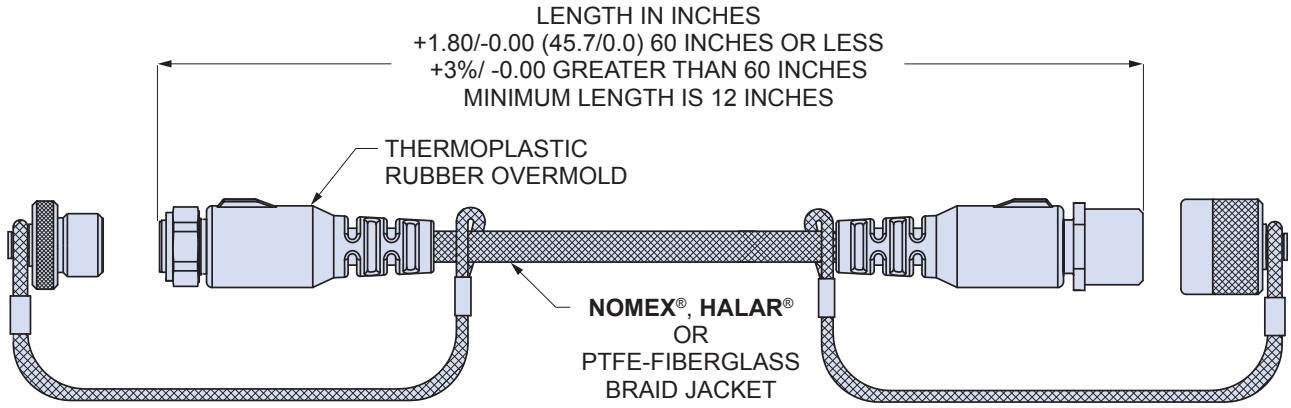

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TPE insulation, 600V, UL VW-1 rated.
3. Wires are white with color stripe per MIL-STD-681. Wire #1 is WHT/BLK, wire #2 is WHT/BRN, etc.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

SERIES 80

MIGHTY MOUSE

Series 802 “Aqua Mouse” delivers high–pressure sealing and rugged design in a miniature package



Originally developed for petroleum pipeline inspection equipment. Series 802 connectors are available in ten sizes from 1 to 130 contacts and equipped with Viton® O-rings to withstand exposure to corrosive chemicals and high temperature environments. These connectors feature high density crimp Mighty Mouse inserts, 316 stainless steel or marine bronze shells and a “piston” O–ring for hydrostatic sealing. Series 802 insulated wire, panel mount receptacles can be ordered as square flange, in–line or jam–nut versions. Choose integral shield termination platform or accessory thread for use with a variety of strain relief options. Crimp style gold–plated crimp contacts accept #12–30 wire. Printed circuit board receptacles come with factory installed solder cup contacts (non-removable) or PC tails. Connectors are backfilled with epoxy potting compound. Hermetic glass–sealed connectors come with solder cup contacts (non-removable) or PC tails. Choose Jam–nut, square flange or weld mount versions. 100% tested to meet 1 x 10^{-7} cc/sec helium leakage. Open face pressure rating 1000 PSI.

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



Series 802 Plugs
AquaMouse™ plugs are available in two versions. Select integral molding/banding platform for direct attachment of cable shield and overmolds without the need for an adapter. Or choose plugs with rear accessory thread for attachment of cable sealing backshells. Crimp contacts are packaged with connectors.

Page E-6



Series 802 Receptacles
Available jam nut, square flange and in-line versions make it easy to find a style for every application. The integral shield termination platform can be used for overmolding, or select accessory threads for attachment of backshells or strain reliefs. Contacts are crimp-type and are packaged with the connector.

Page E-8



Series 802 Receptacles for PCB or Solder Cup Termination
These panel mount connectors feature gold plated, factory-installed PC tail contacts or solder cup contacts. Contacts are non-removable. Connectors are backfilled with epoxy potting compound.

Page E-12



Series 802 Hermetic Receptacles
These stainless steel, glass-sealed connectors are available with solder cup or PC tail contacts. Choose jam nut, square flange or weld mount versions. Contacts are gold plated iron alloy. 100% tested to meet 1 X 10^{-7} cc/sec helium leakage. Open face pressure rating 1000 PSI.

Page E-16



Series 802 Bulkhead Feed–Thru
These stainless steel, glass-sealed connectors are available with solder cup or PC tail contacts. Choose jam nut, square flange or weld mount versions. Contacts are gold plated iron alloy. 100% tested to meet 1 X 10^{-6} cc/sec helium leakage. Open face pressure rating 1000 PSI.

Page E-21



Series 802 Cordsets
Specify overmolded cordsets for optimum convenience and performance. Low smoke zero-halogen polyurethane offers excellent abrasion and chemical resistance. Choose polyamide overmold for medium duty low pressure applications, or select thermoset polyurethane overmold for maximum performance and 2500 PSI rating.

Page E-23

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 802 AquaMouse™ 3500 PSI Submersibles

Contact Arrangements


Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
5-3	3				
6-1				1	
6-23			3		
6-4	4				
6-6	6				
6-7	7				
7-25			5		
7-10	10				
8-2				2	
8-28			8		
8-13	13				
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
12-2					2
12-3					3
12-7				7	
12-220			20		
12-37	37				
12-200	6				2
12-201	10				2
12-202	20			2	
12-203	23			4	
12-204	12				2
12-205	4				4
14-5					5
14-12				12	
14-235			35		
14-55	55				

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend

#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕

Mating Face View of Pin Connector
(socket connector numbers are reversed)

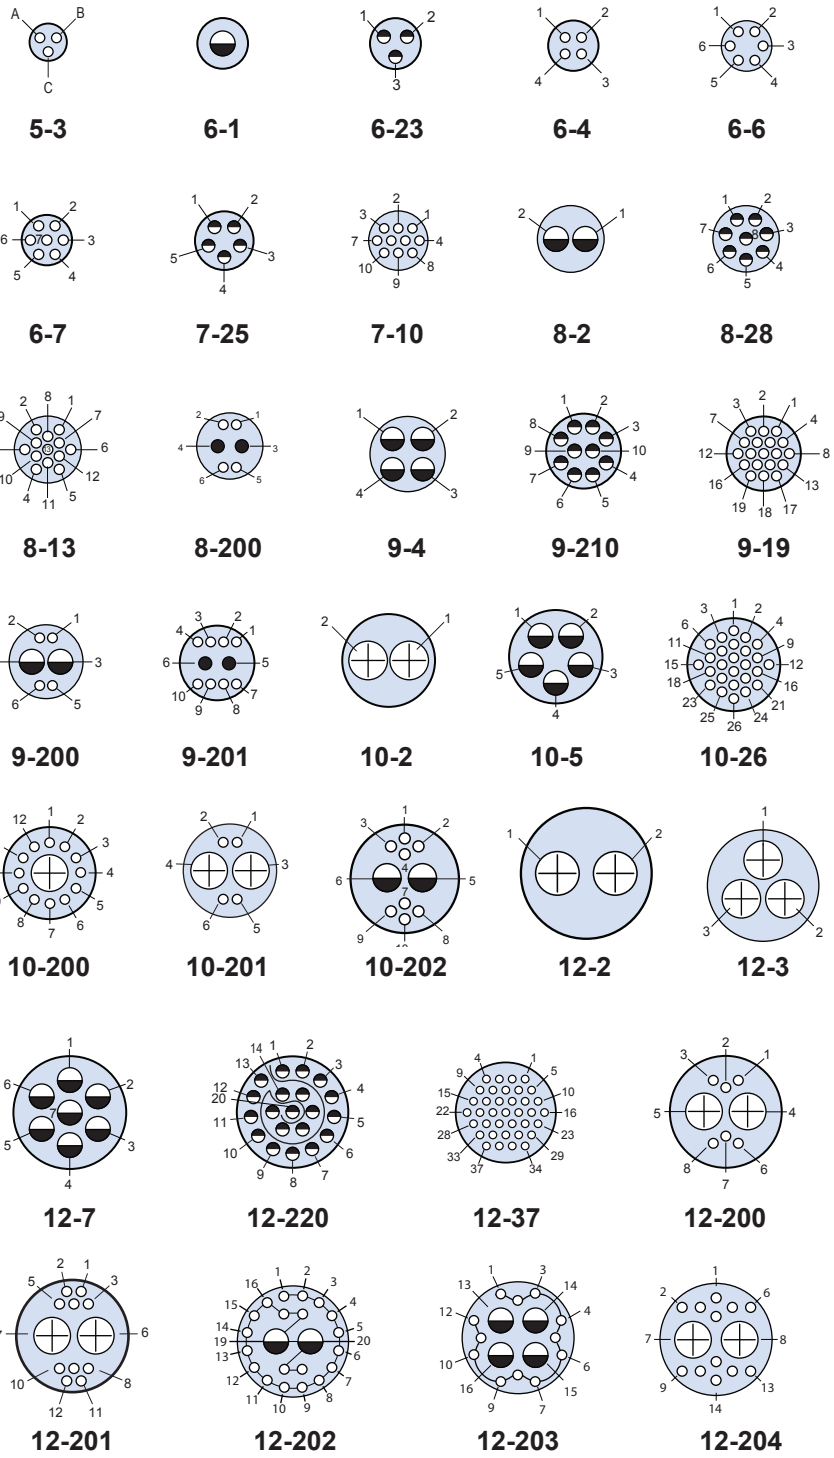

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-2 E-Mail: sales@glenair.com


Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
14-204	40			2	
14-205	32			4	
14-206	34				2
14-207	20				4
15-7					7
15-14				14	
15-241			41		
15-85	85				
15-203	40			4	
15-204	28				4

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend


#23 ○ #20HD ◓ #20 ● #16 ◒ #12 ⊕


Series 802 Plug Key Positions





Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	9°	210°


Mating Face View of Pin Connector
(socket connector numbers are reversed)



12-205



14-5



14-12



14-235



14-55



14-204



14-205



14-206



14-207


15-7


15-14


15-241


15-85


15-203


15-204

Shell size 21 continued on following page

E

© 2014 Glenair, Inc.

Series 802 AquaMouse™ 3500 PSI Submersibles


Contact Arrangements

Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
21-12					12
21-22				22	
21-269			69		
21-130	30				


*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend


#23 ∘ #20HD ⊖ #20 ● #16 ◒ #12 ⊕




21-12



21-22




21-269




21-130

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

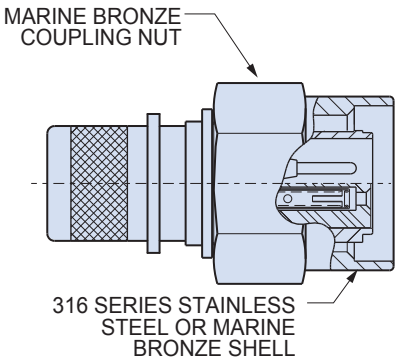

Series 802 Plug

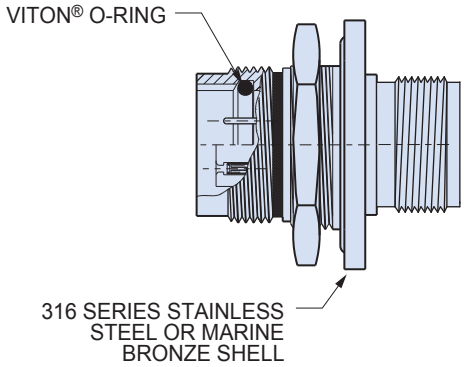

Series 802 Receptacle

Stainless Steel or Marine Bronze

Available in ten sizes from 1 to 130 contacts, Series 802 connectors feature 316 stainless steel or marine bronze shells. Viton® o-rings resist high temperature and corrosive chemicals.


3500 psi

These connectors withstand up to 3500 PSI hydrostatic pressure in a mated condition. Hermetic versions withstand 1000 PSI open face pressure.

Glenair Series 802 AquaMouse™ Delivers High-Pressure Sealing and Rugged Design in a Miniature Package

Originally developed for petroleum pipeline inspection equipment, Series 802 connectors withstand exposure to corrosive environments and high pressure. These connectors feature high density crimp Mighty Mouse inserts, 316 stainless steel or marine bronze shells and a "piston" O-ring for hydrostatic sealing. Gold-plated contacts accept #12-30 AWG wire. Printed circuit board receptacles are available, along with hermetic receptacles.





Specifications	
Current Rating	#23–5 A, #20–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD–1000VAC, #16 and #12–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Hydrostatic Pressure	3500 PSI mated, 1000 PSI open face (hermetic)
Shock	300 g.
Vibration	37 g.
Durability	2000 mating cycles

Materials and Finishes	
Shells, Jam Nuts	316 stainless steel or marine bronze
Coupling Nuts	Marine bronze, unplated
Contacts	Copper alloy, 50 µInch gold plated. Socket hood: stainless steel, passivated. Hermetic pin contacts: Nickel-Iron alloy per ASTM-F-30, 50 µInch gold plated.
Insulators	High grade rigid dielectric
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings	Viton Rubber
Interfacial seal, rear grommet	Fluorosilicone rubber, blue
O-rings	Viton®

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 802 AquaMouse™ Submersible Plug
802-008 and 802-009 Ordering Information



Stainless Steel or **Marine Bronze Shell** withstands corrosion in the most hostile environments. Rated for 3500 PSI when mated, these connectors are suitable for the most demanding geophysical and underwater applications.

Gold-Plated Contacts attach to wire with standard mil spec crimp tools. Contacts are packaged with connectors.


Two Shell Styles: Integral platform for direct shield attachment using Band-Master™ ATS termination system, or accessory thread for attaching accessories.

How To Order

Sample Part Number	802-009	-06	Z1	9-19	S	A


Series (See Table I)	**802-008** = Plug with Banding/ Molding Platform **802-009** = Plug with Accessory Thread
Shell Style	**-06** = Plug
Shell Material and Finish	**Z1** = Stainless Steel/Passivated RoHS Compliant **ZM** = Stainless Steel/ Electroless Nickel Plated **AB** = Marine Bronze
Shell Size - Insert Arrangement	See Contact Arrangements page E-2
Contact Type	**Connector supplied with contacts** **P** = Pin **S** = Socket **Connector supplied without contacts** **A** = Pin Connector, less contacts **B** = Socket Connector, less contacts Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

Table I: Series

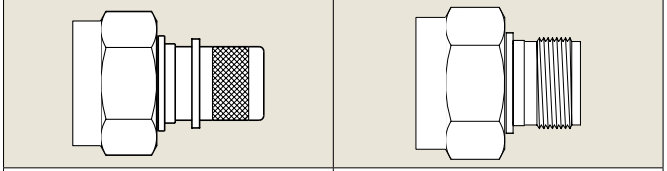

802-008	802-009
Hex Plug with Banding/Molding Platform	Hex Plug with Accessory Thread

Table II: Key Positions




Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Plug connector

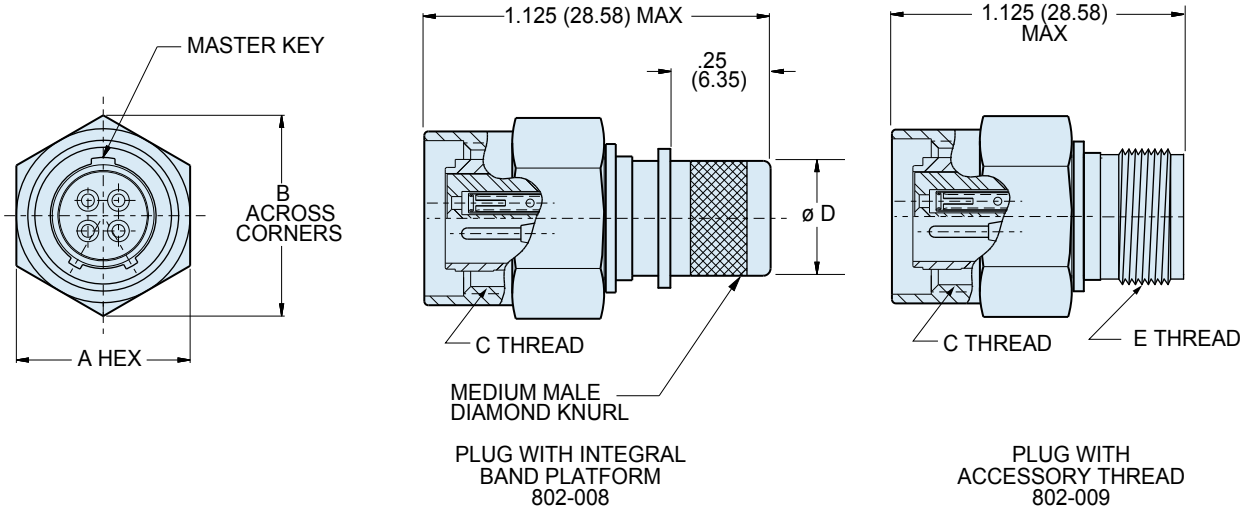

PLUG WITH INTEGRAL BAND PLATFORM 802-008

PLUG WITH ACCESSORY THREAD 802-009

Dimensions								
Shell Size	A Hex		B.		C Thread	Ø D		E Threads Accessory
	In.	mm.	In.	mm.		In.	mm.	
5	.500	12.70	.56	14.2	.438-28 UNEF	.232	5.9	.2500-32 UNEF
6	.625	15.88	.72	18.3	.562-20 UN	.312	7.9	.3125-32 UNEF
7	.688	17.48	.78	19.8	.625-20 UN	.375	9.5	.4375-28 UNEF
8	.750	19.05	.86	21.8	.687-20 UN	.438	11.1	.5000-28 UNEF
9	.812	20.62	.93	23.6	.750-20 UNEF	.500	12.7	.5625-24 UNEF
10	.875	22.23	1.00	25.4	.812-20 UNEF	.562	14.3	.6250-24 UNEF
12	.938	23.83	1.06	26.9	.875-20 UNEF	.656	16.7	.6875-24 UNEF
14	1.125	28.58	1.25	31.8	1.062-20 UN	.812	20.6	.8750-20 UNEF
15	1.188	30.18	1.32	33.5	1.125-20 UN	.885	22.4	.9375-20 UNEF
21	1.562	39.67	1.70	43.2	1.438-20 un	1.188	30.2	1.250-18 UNEF

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 802 AquaMouse™ Submersible Receptacle

802-010 and 802-011 Ordering Information



Jam Nut, Rear Mount



Square Flange

Three Shell Mounting Options: Jam nut with o-ring for rear panel mounting, square flange for front panel mounting, or in-line receptacles for free-hanging cables.

Two Shell Styles: Choose the integral band platform for direct attachment of a cable shield. Install a boot, or overmold a boot over the band platform. An accessory thread is available for attaching strain reliefs and backshells.

How To Order

Sample Part Number	802-011	-02	Z1	10-26	P	B

Series (See Table I)	**802-010** = Receptacle with Banding Platform **802-011** = Receptacle with Accessory Thread
Shell Style (See Table II)	**-01** = In-Line **-02** = Square Flange for Front Panel Mounting **-07** = Jam Nut for Rear Panel Mounting
Shell Material and Finish	**Z1** = Stainless Steel/Passivated RoHS Compliant **ZM** = Stainless Steel/Electroless Nickel Plated **AB** = Marine Bronze/Unplated
Shell Size - Insert Arrangement	See Contact Arrangements Page E-2
Contact Type	**Connector supplied with contacts** — **Connector supplied without contacts** **P** = Pin — **A** = Pin Connector, less contacts **S** = Socket — **B** = Socket Connector, less contacts Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F See Keyway Positions Page E3

Table I: Series






	
802-010 Receptacle with Banding Platform	**802-011** Receptacle with Accessory Thread


Table II: Shell Style

		
-01 In-Line	**-02** Square Flange	**-07** Jam Nut for Rear Panel Mounting

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount - Shell style 07

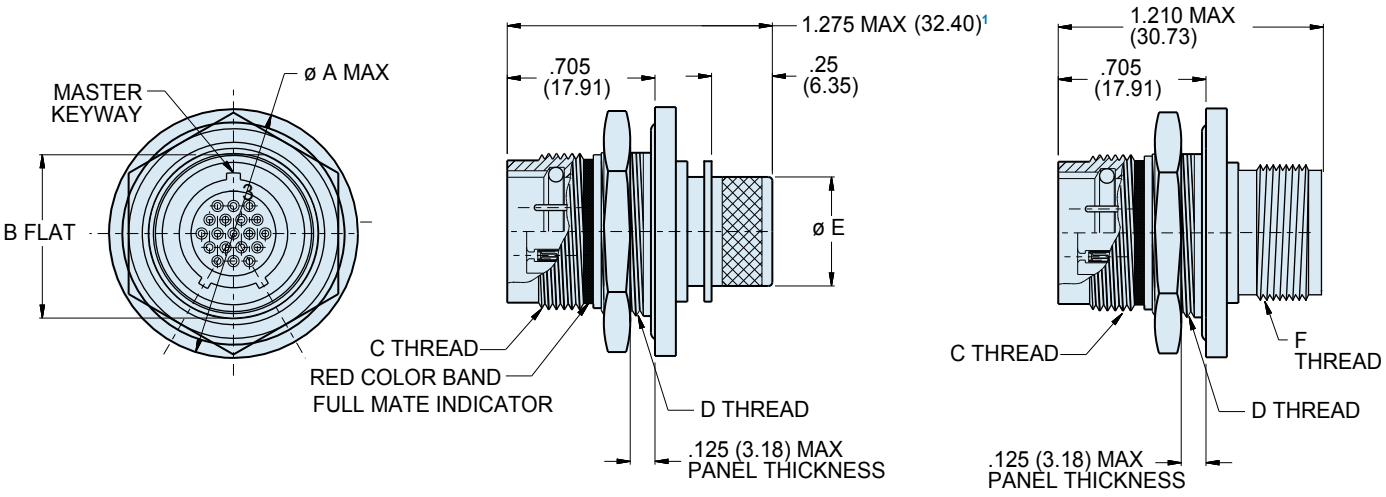

Intergral Band Platform
802-010

Accessory Thread
802-011

Dimensions										Panel Cutout Dimensions			
Shell Size	A Max.		B Flat		C Mating Threads	D Jam Nut Threads	Ø E		F Accessory Threads	G Flat		Ø H	
	In.	mm.	In. ± .003	mm. ±0.08			In.	mm.		In. ± .003	mm. ±0.08	In.	mm.
5	.885	22.48	.466	11.84	.4375-28 UNEF	.5000-32 UN-2A	.232	5.90	.2500-32 UNEF-2A	0.479/0.474	12.17/12.04	.510	12.95
6	1.010	25.65	.591	15.01	.5625-20 UN	.6250-28 UN-2A	.312	7.92	.3125-32 UNEF-2A	0.604/0.599	15.34/15.21	.635	16.13
7	1.072	27.23	.653	16.59	.6250-20 UN	.6875-28 UN-2A	.375	9.53	.4375-28 UNEF-2A	0.666/0.661	16.92/16.79	.697	17.70
8	1.135	28.83	.729/.725	18.52/18.41	.6875-20 UN	.7500-28 UN-2A	.438	11.13	.5000-28 UNEF-2A	0.737/0.733	18.72/18.62	.760	19.30
9	1.195	30.35	.778	19.76	.7500-20 UNEF	.8125-28 UN-2A	.500	12.70	.5625-24 UNEF-2A	0.791/0.786	20.09/19.96	.822	20.88
10	1.260	32.00	.827	21.01	.8125-20 UNEF	.8750-28 UN-2A	.562	14.27	.6250-24 UNEF-2A	0.84/0.835	21.34/21.21	.885	22.48
12	1.322	33.58	.890	22.61	.8750-20 UNEF	.9375-28 UN-2A	.656	16.66	.6875-24 UNEF-2A	0.903/0.898	22.94/22.81	.948	24.08
14	1.510	38.25	1.077	27.36	1.0625-20 UN	1.1250-28 UN-2A	.812	20.62	.8750-20 UNEF-2A	1.09/1.085	27.69/27.56	1.135	28.83
15	1.572	39.93	1.140	28.96	1.1250-20 UN	1.1875-28 UN-2A	.885	22.40	.9375-20 UNEF-2A	1.153/1.148	29.29/29.16	1.198	30.43
21	1.940	49.28	1.467/1.463	37.26/37.16	1.4375-20 UN	1.5000-28 UN-2A	1.188	30.18	1.2500-20 UNEF-2A	1.478/1.471	37.54/37.36	1.510	39.12

NOTES


1. Grommet protrudes for power/combo/#8 arrangements.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Receptacle
802-010-02 and 802-011-02 Dimensions

Square flange front panel mount receptacle - shell style 02

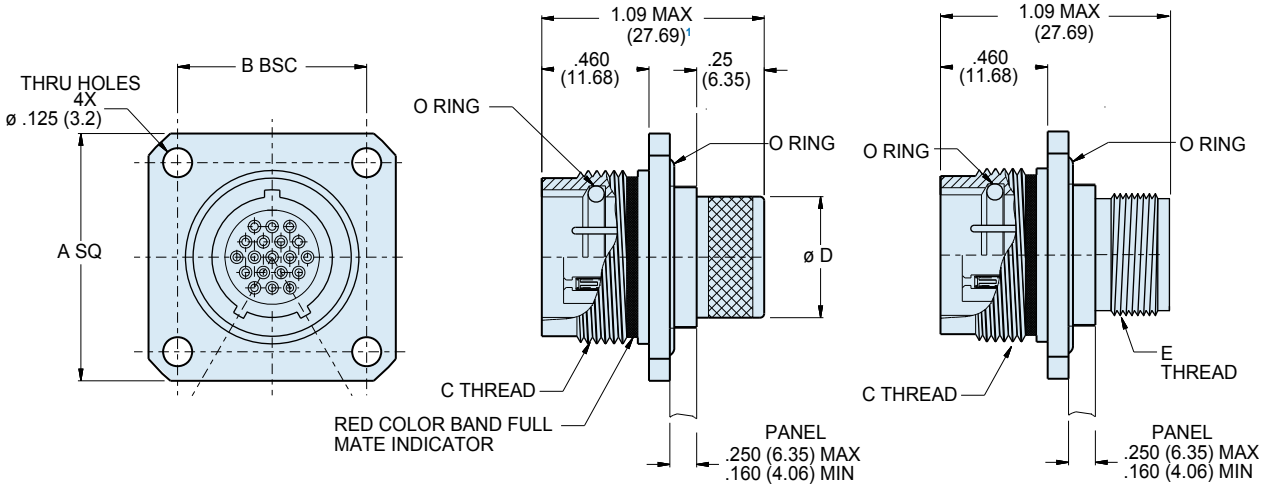

Intergral Band Platform
802-010

Accessory Thread
802-011

E


Dimensions										
Shell Size	A Square		B Bsc.		C Mating Threads	Ø D		E Accessory Threads	Ø F	
	In.	mm.	In.	mm.		In.	mm.		In.	mm.
5	.885	22.48	.500	12.70	.4375-28 UNEF	.232	5.90	.250-32 UNEF-2A	.327	8.31
6	1.010	25.65	.625	15.88	.5625-20 UN	.312	7.92	.312-32 UNEF-2A	.390	9.91
7	1.072	27.23	.688	17.48	.6250-20 UN	.375	9.53	.438-28 UNEF-2A	.515	13.08
8	1.135	28.83	.750	19.05	.6875-20 UN	.438	11.13	.500-28 UNEF-2A	.577	14.66
9	1.195	30.35	.812	20.62	.7500-20 UNEF	.500	12.70	.562-24 UNEF-2A	.640	16.26
10	1.260	32.00	.875	22.23	.8125-20 UNEF	.562	14.27	.625-24 UNEF-2A	.702	17.83
12	1.323	33.60	.938	23.83	.8750-20 UNEF	.656	16.66	.688-24 UNEF-2A	.765	19.43
14	1.510	38.25	1.125	28.58	1.0625-20 UN	.812	20.62	.875-20 UNEF-2A	.953	24.21
15	1.573	39.95	1.188	30.18	1.1250-20 UN	.885	22.40	.938-20 UNEF-2A	1.015	25.78
21	1.750	44.45	1.375	34.93	1.4375-20 UN	1.188	30.18	1.250-20 UNEF-2A	1.312	33.32

Piston O-ring replacement	
Shell size	Flange Style 02 O-ring P/N
5	2-012
6	2-014
7	2-015
8	2-016
9	2-017
10	2-018
12	2-019
14	2-022
15	2-023
21	2-028

NOTES

1. Grommet protrudes for power/ combo/#8 arrangements.


Series 802 Sq Flange Panel Cutout

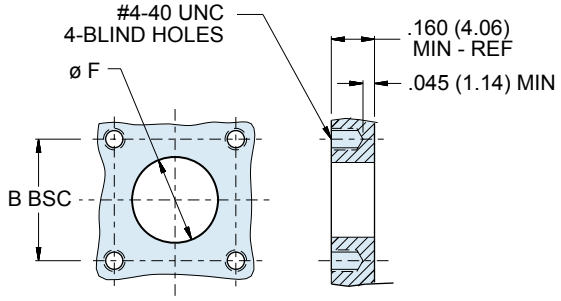

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

In-line receptacle - shell style 01

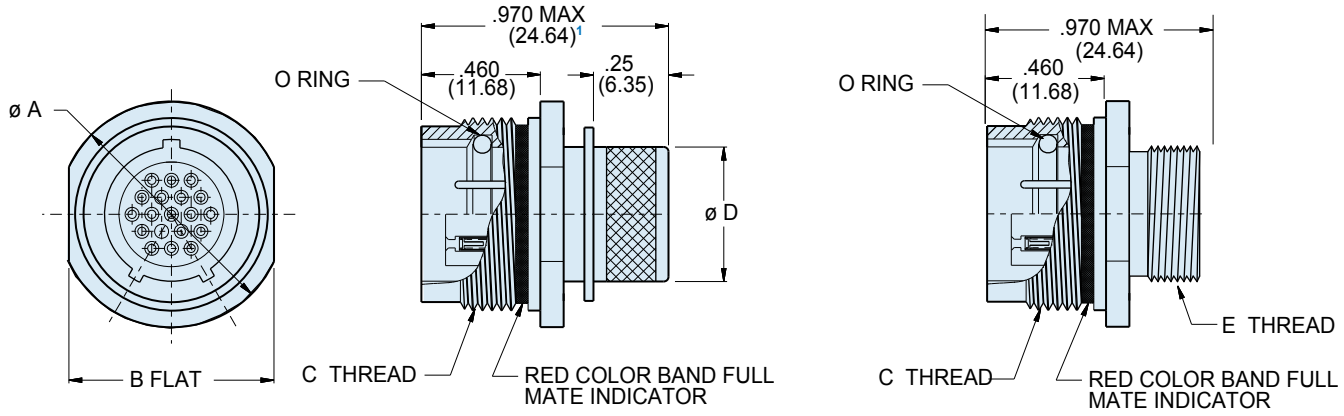

Intergral Band Platform
802-010

Accessory Thread
802-011

Dimensions								
Shell Size	Ø A		B Flats		C Mating Threads	Ø D		E Accessory Threads
	In.	mm.	In.	mm.		In.	mm.	
5	.560	14.22	.500	12.70	.4375-28 UNEF	.232	5.90	.250-32 UNEF-2A
6	.720	18.29	.625	15.88	.5625-20 UN	.312	7.92	.312-32 UNEF-2A
7	.780	19.81	.688	17.48	.6250-20 UN	.375	9.53	.438-28 UNEF-2A
8	.860	21.84	.750	19.05	.6875-20 UN	.438	11.13	.500-28 UNEF-2A
9	.930	23.62	.812	20.62	.7500-20 UNEF	.500	12.70	.562-24 UNEF-2A
10	1.000	25.40	.875	22.23	.8125-20 UNEF	.562	14.27	.625-24 UNEF-2A
12	1.060	26.92	.938	23.83	.8750-20 UNEF	.656	16.66	.688-24 UNEF-2A
14	1.250	31.75	1.125	28.58	1.0625-20 UN	.812	20.62	.875-20 UNEF-2A
15	1.320	33.53	1.188	30.18	1.1250-20 UN	.885	22.40	.938-20 UNEF-2A
21	1.690	42.93	1.562	39.67	1.4375-20 UN	1.188	30.18	1.250-20 UNEF-2A

Piston O-ring replacement	
Shell size	Piston O-ring P/N
5	2-009
6	5-052
7	5-012
8	5-212
9	2-014
10	2-015
12	2-016
14	2-019
15	2-020
21	2-023

E

NOTES

1. Grommet protrudes for power/ combo/#8 arrangements.
2.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Solder Cup or PCB Receptacle

802-012 and 802-030 Ordering Information



Printed Circuit Board/ Solder Cup Receptacles feature low profile shells for minimum protrusion inside enclosures and integral standoffs for board washout. Contacts are non-removable.

Water Immersion, Unmated

Specify ***802-012*** connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify ***802-030*** watertight connectors . These 802-030 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40C to +70C.

How To Order						
Sample Part Number	**802-012**	**-00**	**Z1**	**9-200**	**P**	**A**
Series	**802-012** = Receptacle for Solder Cup or PCB Termination, with Standard Epoxy Potting **802-030** = Receptacle for Solder Cup or PCB Termination, with Special "MOD-518" Sealing for Open Face (Unmated) Water Immersion Requirements. 100% Leak Tested.					
Shell Style (See Table I)	**-00** = Jam Nut for Front Panel Mounting **-02** = Square Flange for Front Panel Mounting **-07** = Jam Nut for Rear Panel Mounting					
Shell Material and Finish	**Z1** = Stainless Steel / Passivated RoHS Compliant **ZM** = Stainless Steel/Electroless Nickel Plated **AB** = Marine Bronze/Unplated					
Shell Size - Insert Arrangement	See Contact Arrangements page E-2 See Section B for PCB Footprints					
Contact Type	**P** = Pin, PC Tail **E** = Pin, Solder Cup **S** = Socket, PC Tail **F** = Socket, Solder Cup					
Shell Key Position (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Shell Style




		
-00 Jam Nut for Front Panel Mounting	**-02** Square Flange	**-07** Jam Nut for Rear Panel Mounting

Table II: Key Positions


Key Position	Key Rotation A°	Key Rotation B°
A Normal	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	9°	210°



Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Square flange front panel mount receptacle - shell style 02

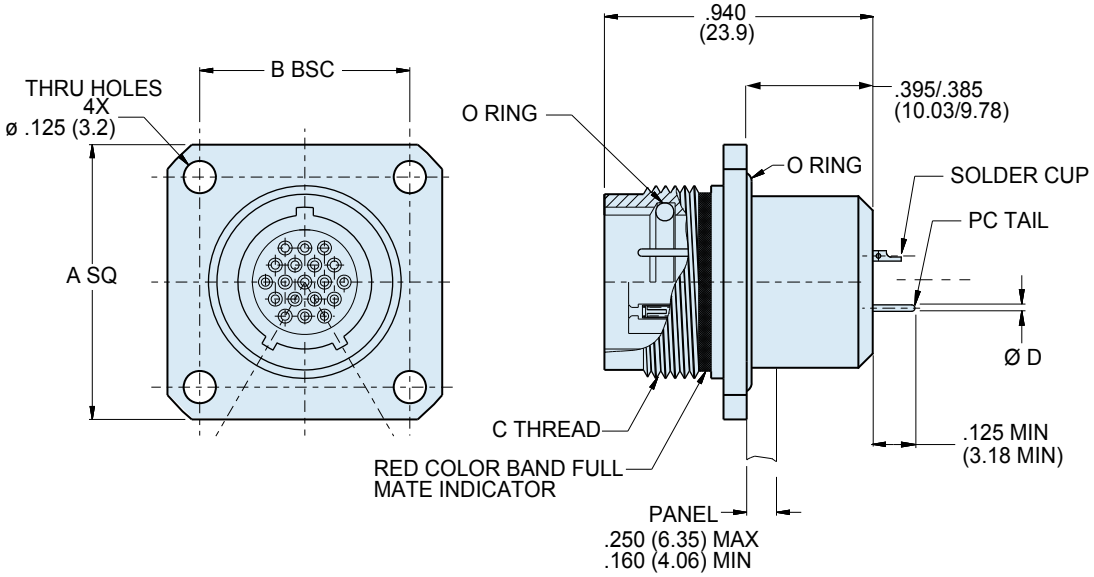

Dimensions								
Shell Size	A Square		B Bsc.		C Mating Threads	Ø D Tail Dia.	Ø E	
	In.	mm.	In.	mm.			In.	mm.
5	.885	22.48	.500	12.70	.4375-28 UNEF	**#23** .018/.022 (0.46/0.56)	.327	8.31
6	1.010	25.65	.625	15.88	.5625-20 UN		.390	9.91
7	1.072	27.23	.688	17.48	.6250-20 UN		.515	13.08
8	1.135	28.83	.750	19.05	.6875-20 UN	**#20** .024/.028 (0.61/0.71)	.577	14.66
9	1.195	30.35	.812	20.62	.7500-20 UNEF		.640	16.26
10	1.260	32.00	.875	22.23	.8125-20 UNEF		.702	17.83
12	1.323	33.60	.938	23.83	.8750-20 UNEF	**#16** .060/.064 (1.52/1.63)	.765	19.43
14	1.510	38.25	1.125	28.58	1.0625-20 UN		.953	24.21
15	1.573	39.95	1.188	30.18	1.1250-20 UN	**#12** .092/.096 (2.34/2.44)	1.015	25.78
21	1.750	44.45	1.375	34.93	1.4375-20 UN		1.312	33.32

Series 802 Sq Flange Panel Cutout

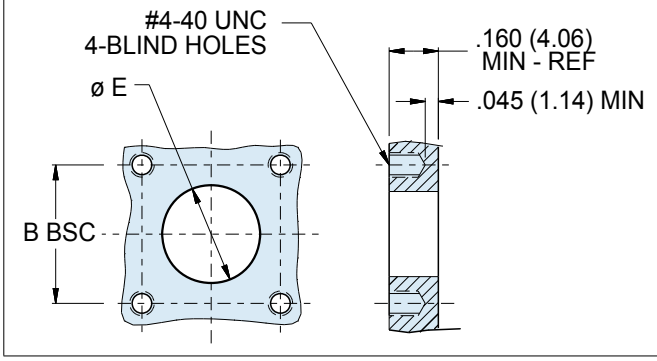


Dimensions in Inches (millimeters) are subject to change without notice.


Series 802 AquaMouse™ Submersible Solder Cup or PCB Receptacle

802-012-07 and 802-030-07 Dimensions

Rear panel mount jam nut receptacle - shell style 07

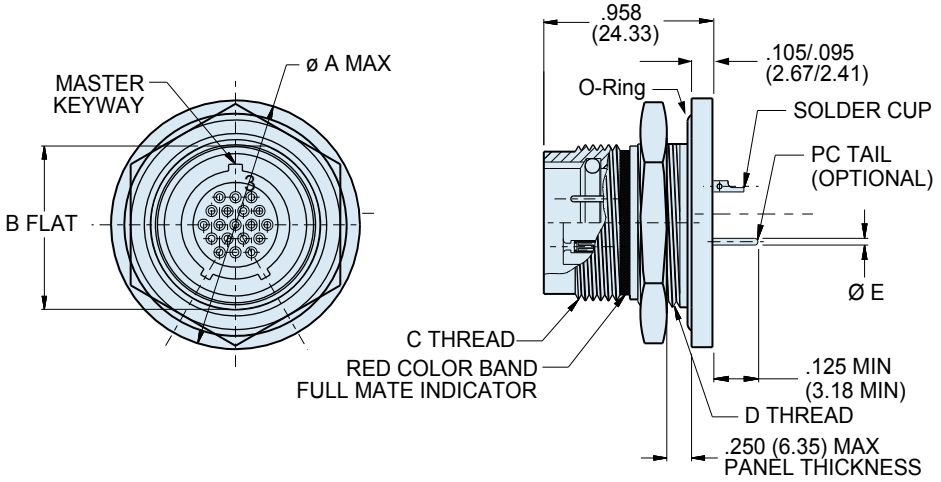

SHELL STYLE 07
REAR MOUNT JAM NUT

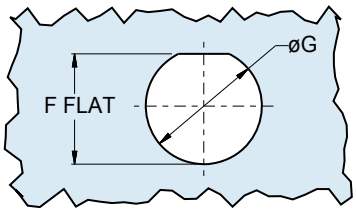


RECOMMENDED PANEL CUTOUT
FOR STYLE 07 REAR MOUNT JAM NUT

Dimensions											
Shell Size	Ø A Max.		B Flat		C Mating Threads	D Threads	Ø E Tail Dia.	F Flat		Ø G	
	In.	mm.	In. ± .003	mm. ±0.08				In. ± .003	mm. ±0.08	In.	mm.
5	.885	22.48	.466	11.84	.4375-28 UNEF	.5000-32 UN-2A	**#23** .018/.022 (0.46/0.56)	.477	12.12	.510	12.95
6	1.010	25.65	.591	15.01	.5625-20 UN	.6250-28 UN-2A		.602	15.29	.635	16.13
7	1.072	27.23	.653	16.59	.6250-20 UN	.6875-28 UN-2A		.664	16.87	.697	17.70
8	1.135	28.83	.716	18.19	.6875-20 UN	.7500-28 UN-2A	**#20** .024/.028 (0.61/0.71)	.727	18.47	.760	19.30
9	1.195	30.35	.778	19.76	.7500-20 UNEF	.8125-28 UN-2A		.789	20.04	.822	20.88
10	1.260	32.00	.827	21.01	.8125-20 UNEF	.8750-28 UN-2A	**#16** .060/.064 (1.52/1.63)	.838	21.29	.885	22.48
12	1.322	33.58	.890	22.61	.8750-20 UNEF	.9375-28 UN-2A		.901	22.89	.948	24.08
14	1.510	38.25	1.077	27.36	1.0625-20 UN	1.1250-28 UN-2A		1.088	27.64	1.135	28.83
15	1.572	39.93	1.140	28.96	1.1250-20 UN	1.1875-28 UN-2A	**#12** .092/.096 (2.34/2.44)	1.151	29.24	1.198	30.43
21	1.940	49.28	1.463/1.467	37.16/37.26	1.4375-20 UN	1.500-28 UN-2A		1.473	37.41	1.510	39.12

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Front panel mount jam nut receptacle - shell style 00

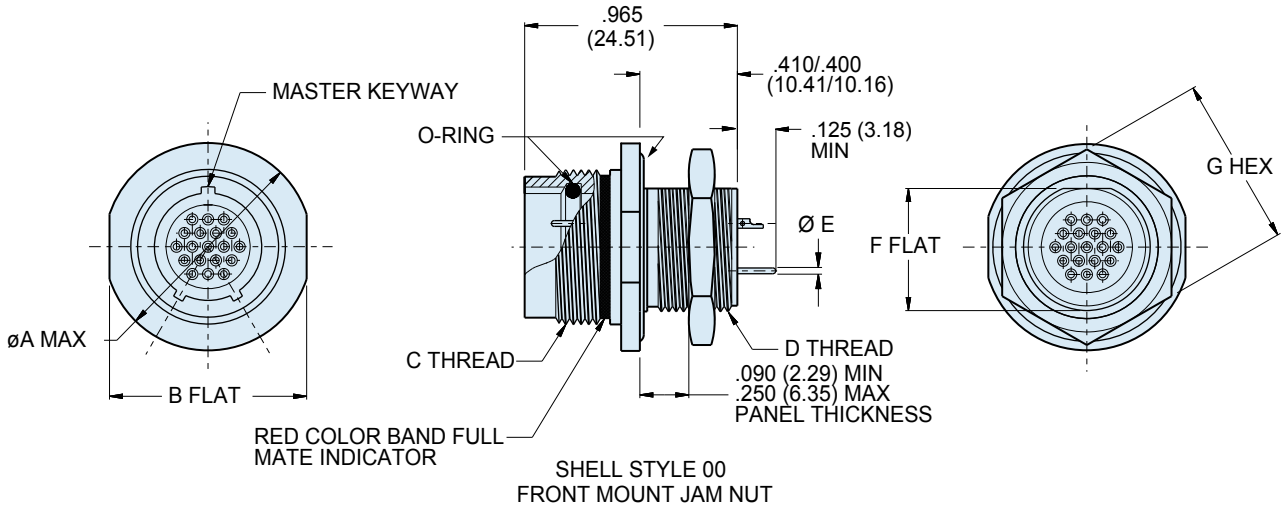

Dimensions										
Shell Size	Ø A Max.		B Flat		C Mating Threads	D Threads	Ø E Tail Dia.	F Flat		G Hex	
	In.	mm.	In.	mm.				In.	mm.	In.	mm.
5	.72	18.29	.625	15.88	.4375-28 UNEF-2A	.312-28 UN-2A	**#23** .018/.022 (0.46/0.56)	.281	7.14	.500	12.70
6	.78	19.81	.750	19.05	.5625-20 UN-2A	.438-28 UN-2A		.344	8.74	.625	15.88
7	.91	23.11	.812	20.62	.6250-20 UN-2A	.500-32 UN-2A		.469	11.91	.688	17.48
8	.96	24.38	.875	22.23	.6875-20 UN-2A	.562-28 UN-2A	**#20** .024/.028 (0.61/0.71)	.531	13.49	.750	19.05
9	1.03	26.16	.937	23.80	.7500-20 UNEF-2A	.625-28 UN-2A		.594	15.09	.812	20.62
10	1.09	27.69	1.000	25.40	.8125-20 UNEF-2A	.687-28 UN-2A	**#16** .060/.064 (1.52/1.63)	.656	16.66	.875	22.23
12	1.16	29.46	1.062	26.97	.8750-20 UNEF-2A	.750-28 UN-2A		.719	18.26	.938	23.83
14	1.34	34.04	1.250	31.75	1.0625-20 UN-2A	.938-28 UN-2A		.893	22.68	1.125	28.58
15	1.41	35.18	1.312	33.32	1.1250-20 UN-2A	1.000-28 UN-2A	**#12** .092/.096 (2.34/2.44)	.955	24.26	1.188	30.18
21	1.70	43.18	1.562	39.67	1.4375-20 UN-2A	1.312-28 UN		1.257	31.93	1.500	38.10

Cutout Dimensions



RECOMMENDED PANEL CUTOUT
FOR STYLE 00
FRONT MOUNT JAM NUT

Shell Size	H Flat		Ø J	
	In.	mm.	In.	mm.
5	291/.286	7.4/7.3	.322	8.2
6	.417/.412	10.6/10.5	.448	11.4
7	.479/.474	12.2/12.0	.510	13.0
8	.541/.536	13.7/13.6	.572	14.5
9	.604/.599	15.3/15.2	.635	16.1
10	.666/.661	16.9/16.8	.697	17.7
12	.729/.724	18.5/18.4	.760	19.3
14	.903/.898	22.9/22.8	.948	24.1
15	.965/.960	24.5/24.4	1.010	25.7
21	1.267/1.263	32.2/32.1	1.322	33.6

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 802 AquaMouse™ Submersible Hermetic Receptacle

802-013 Ordering Information



Series 802 Hermetic Receptacles feature gold plated iron alloy contacts and compression glass dielectric material. The 316 series stainless steel connector shell provides excellent corrosion protection and is suitable for e-beam welding. Viton® o-rings offer improved resistance to high temperature and harsh chemicals.

1 x 10^{-7} cc/Second Maximum Helium Leak Rate. Open face (unmated) pressure rating is 1000 PSI. When mated, Series 802 connectors withstand 3500 PSI hydrostatic pressure.

How To Order						
Sample Part Number	**802-013**	**-00**	**Z1**	**9-200**	**P**	**A**
Series	**802-013** = Hermetic Receptacle					
Shell Style (See Table I)	**-00** = Jam Nut for Front Panel Mounting **-02** = Square Flange Front Panel Mount **-03** = Weld Mount **-07** = Jam Nut Rear Panel Mount					
Shell Material and Finish	**Z1** = Stainless Steel / Passivated RoHS Compliant **ZL** = Stainless Steel / Nickel Plated					
Shell Size - Insert Arrangement	See Contact Arrangements page E-2					
Contact Type	**P** = Pin, PC Tail **D** = Socket, PC Tail **E** = Pin, Solder Cup **S** = Socket, Solder Cup					
Shell Key Position (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Shell Style





			
-00 Jam Nut for Front Panel Mounting	**-02** Square Flange	**-03** Weld Mount	**-07** Jam Nut for Rear Panel Mounting

Table II: Key Positions


Key Position	Key Rotation A°	Key Rotation B°
A Normal	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	9°	210°



Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Front panel mount jam nut receptacle - shell style 00

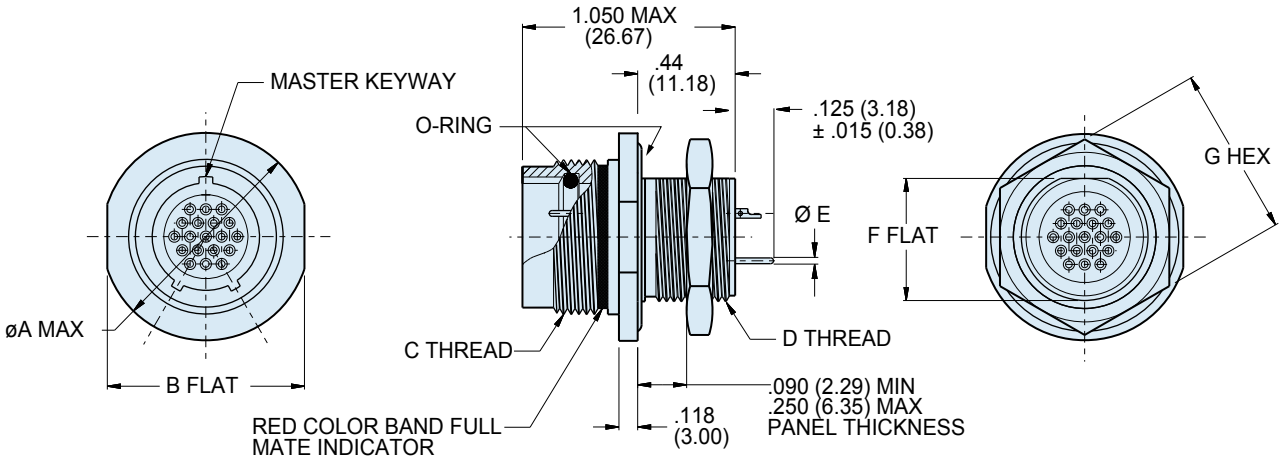

SHELL STYLE 00
FRONT MOUNT JAM NUT

Dimensions															
Shell Size	Ø A Max.		B Flat		C Threads	D Threads	Ø E Tail Dia.	F Flat		G Hex		H Flat		Ø J	
	In.	mm.	In.	mm.				In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	.72	18.29	.625	15.88	.4375-28 UNEF-2A	.312-28 UN-2A	**#23** .018/.022 (0.46/0.56) #20 .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)	.281	7.14	.500	12.70	291/.286	7.4/7.3	.322	8.2
6	.78	19.81	.750	19.05	.5625-20 UN-2A	.438-28 UN-2A		.406	10.31	.625	15.88	.417/.412	10.6/10.5	.448	11.4
7	.91	23.11	.812	20.62	.6250-20 UN-2A	.500-32 UN-2A		.469	11.91	.688	17.48	.479/.474	12.2/12.0	.510	13.0
8	.96	24.38	.875	22.23	.6875-20 UN-2A	.562-28 UN-2A		.531	13.49	.750	19.05	.541/.536	13.7/13.6	.572	14.5
9	1.03	26.16	.937	23.80	.7500-20 UNEF-2A	.625-20 UN-2A		.594	15.09	.812	20.62	.604/.599	15.3/15.2	.635	16.1
10	1.09	27.69	1.000	25.40	.8125-20 UNEF-2A	.687-28 UN-2A		.656	16.66	.875	22.23	.666/.661	16.9/16.8	.697	17.7
12	1.16	29.46	1.062	26.97	.8750-20 UNEF-2A	.750-28 UN-2A		.719	18.26	.938	23.83	.729/.724	18.5/18.4	.760	19.3
14	1.34	34.04	1.250	31.75	1.0625-20 UN-2A	.938-28 UN-2A		.893	22.68	1.125	28.58	.903/.898	22.9/22.8	.948	24.1
15	1.41	35.18	1.312	33.32	1.1250-20 UN-2A	1.000-28 UN-2A		.955	24.26	1.188	30.18	.965/.960	24.5/24.4	1.010	25.7
21	1.70	43.18	1.562	39.67	1.4375-20 UN-2A	1.312-28 UN-2A		1.257	31.93	1.500	38.10	1.267/1.263	32.2/32.1	1.322	33.6

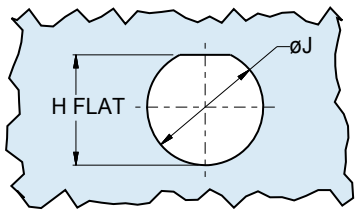

RECOMMENDED PANEL CUTOUT
FOR STYLE 00
FRONT MOUNT JAM NUT


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 802 AquaMouse™ Submersible Hermetic Receptacle

802-013-07 Dimensions


Rear panel mount jam nut receptacle - shell style 07

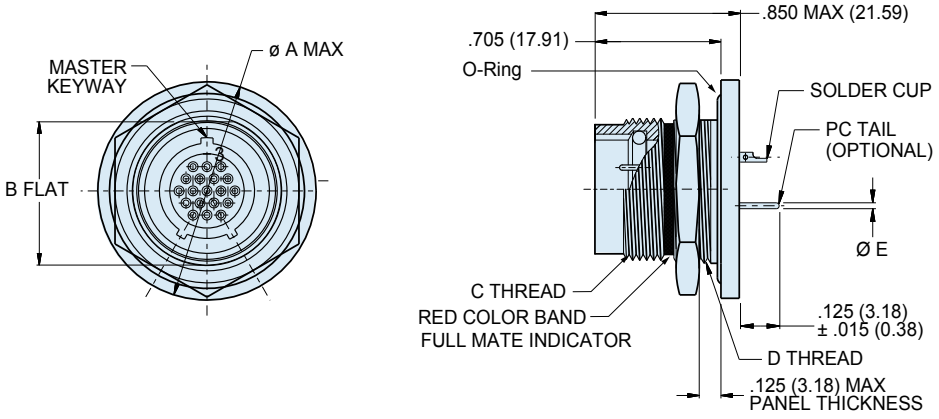

SHELL STYLE 07
REAR MOUNT JAM NUT

E

Dimensions											
Shell Size	A Max.		B Flat		C Threads	D Threads	Ø E Tail Dia.	F Flat		Ø G	
	In.	mm.	In. ± .003	mm. ±0.08				In. ± .003	mm. ±0.08	In.	mm.
5	.885	22.48	.466	11.84	.438-28 UNEF	.500-32 UN-2A	**#23** .018/.022 (0.46/0.56)	.479/.474	12.2/12.0	.510	12.95
6	1.010	25.65	.591	15.01	.562-20 UN	.625-20 UN-2A		.604/.599	15.3/15.2	.635	16.13
7	1.072	27.23	.653	16.59	.625-20 UN	.687-28 UN-2A		.666/.661	16.9/16.8	.697	17.70
8	1.135	28.83	.729/.725	18.52/18.42	.687-20 UN	.750-28 UN-2A	**#20** .024/.028 (0.61/0.71)	.737/.733	18.7/18.6	.760	19.30
9	1.195	30.35	.778	19.76	.750-20 UNEF	.812-28 UN-2A		.791/.786	20.1/20.0	.822	20.88
10	1.260	32.00	.827	21.01	.812-20 UNEF	.875-28 UN-2A	**#16** .060/.064 (1.52/1.63)	.840/.835	21.3/21.2	.885	22.48
12	1.322	33.58	.890	22.61	.875-20 UNEF	.938-28 UN-2A		.903/.898	22.9/22.8	.948	24.08
14	1.510	38.25	1.077	27.36	1.062-20 UN	1.125-28 UN-2A		1.090/1.085	27.7/27.6	1.135	28.83
15	1.572	39.93	1.140	28.96	1.125-20 UN	1.188-28 UN-2A	**#12** .092/.096 (2.34/2.44)	1.153/1.148	29.3/29.2	1.198	30.43
21	1.940	49.28	1.467/1.463	37.26/37.16	1.4375-20 UN	1.500-28 UN-2A		1.475/1.471	37.5/37.4	1.510	39.12

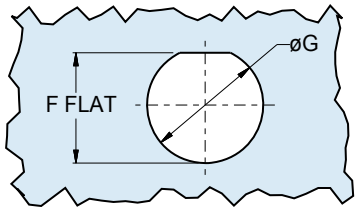


RECOMMENDED PANEL CUTOUT
FOR STYLE 07 REAR MOUNT JAM NUT

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Weld mount receptacle - shell style 03

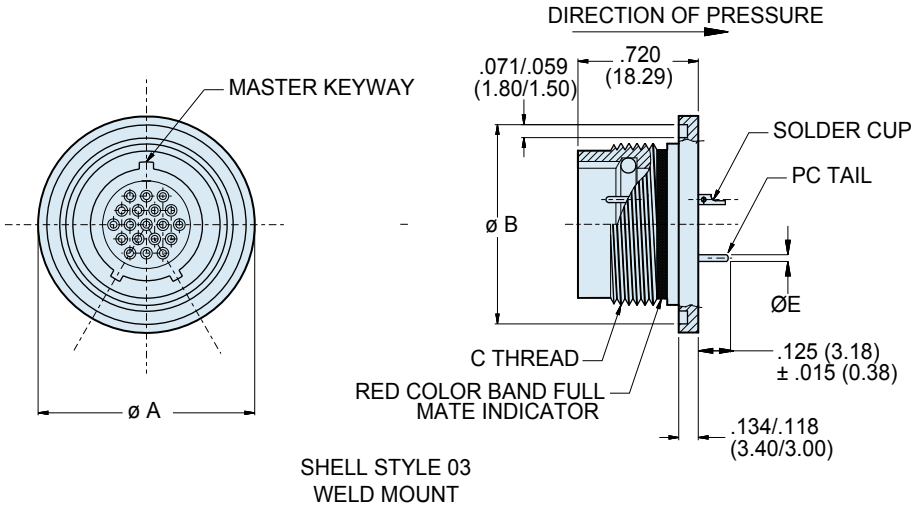

Dimensions						
Shell Size	Ø A		Ø B		C Mating Threads	Ø E Tail Dia.
	In. ± .006	mm. ± 0.15	In. ± .006	mm. ± 0.15		
5	.788	20.02	.745	18.92	.438-28 UNEF	**#23** .018/.022 (0.46/0.56)
6	.912	23.16	.869	22.07	.562-20 UN	
7	.975	24.77	.933	23.70	.625-20 UN	
8	1.038	26.37	.995	25.27	.687-20 UN	**#20** .024/.028 (0.61/0.71)
9	1.100	27.94	1.057	26.85	.750-20 UNEF	
10	1.162	29.53	1.119	28.42	.812-20 UNEF	**#16** .060/.064 (1.52/1.63)
12	1.225	31.12	1.182	30.02	.875-20 UNEF	
14	1.412	35.86	1.369	34.77	1.062-20 UN	
15	1.475	37.47	1.432	36.37	1.125-20 UN	**#12** .092/.096 (2.34/2.44)
21	1.795	45.59	1.750/1.744	44.45/44.30	1.4375-20 UN	

E


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 802 AquaMouse™ Submersible Hermetic Receptacle


802-013-02 Dimensions

Square flange front panel mount receptacle - shell style 02

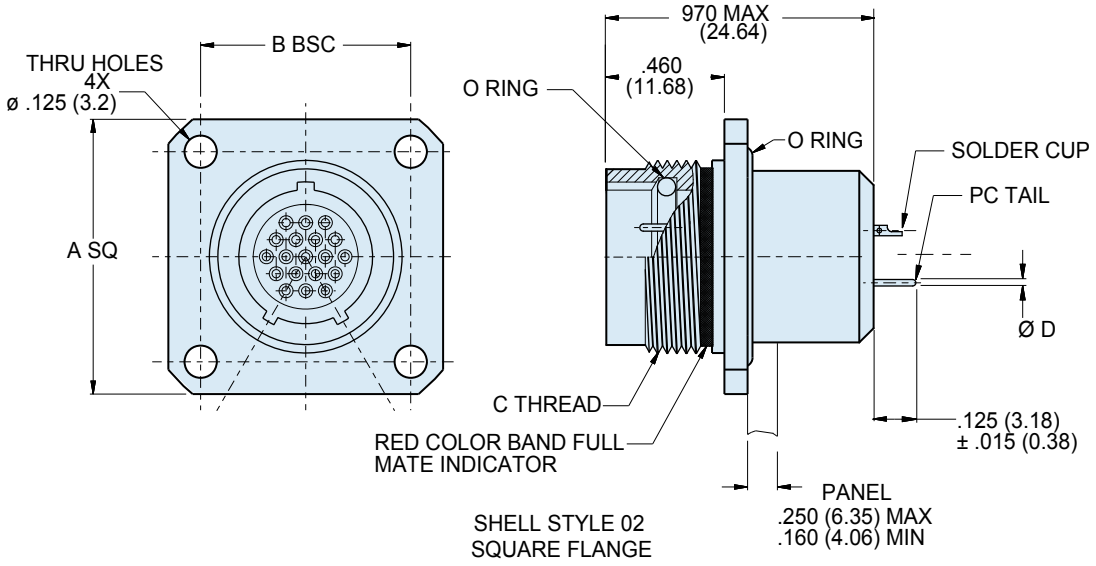

Dimensions								
Shell Size	A Square		B Bsc.		C Mating Threads	Ø D Tail Dia.	Ø E	
	In.	mm.	In.	mm.			In.	mm.
5	.885	22.48	.500	12.70	.438-28 UNEF	**#23** .018/.022 (0.46/0.56)	.327	8.31
6	1.010	25.65	.625	15.88	.562-20 UN		.390	9.91
7	1.072	27.23	.688	17.48	.625-20 UN		.515	13.08
8	1.135	28.83	.750	19.05	.687-20 UN	**#20** .024/.028 (0.61/0.71)	.577	14.66
9	1.195	30.35	.812	20.62	.750-20 UNEF		.640	16.26
10	1.260	32.00	.875	22.23	.812-20 UNEF		.702	17.83
12	1.323	33.60	.938	23.83	.875-20 UNEF	**#16** .060/.064 (1.52/1.63)	.765	19.43
14	1.510	38.25	1.125	28.58	1.062-20 UN		.953	24.21
15	1.573	39.95	1.188	30.18	1.125-20 UN	**#12** .092/.096 (2.34/2.44)	1.015	25.78
21	1.750	44.45	1.375	34.93	1.4375-20 UN		1.312	33.32

Square Flange Panel Cutout

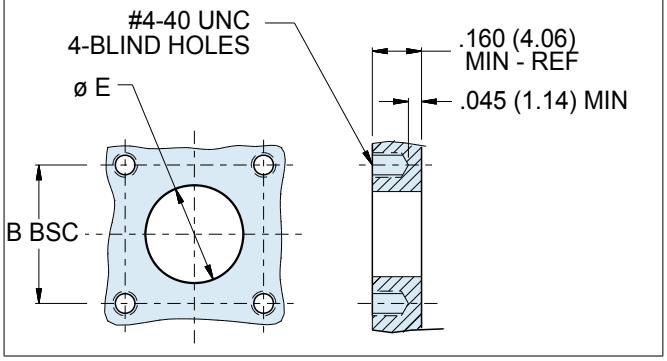

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Hermetic Receptacle with Removable Crimp Termination

802-056 Ordering Information

Series 802 Hermetic Receptacles feature gold plated iron alloy contacts and compression glass dielectric material. The 316 series stainless steel connector shell provides excellent corrosion protection and is suitable for e-beam welding. Viton® O-rings offer improved resistance to high temperature and harsh chemicals.

Hermeticity less than 1 x 10^{-7} cc/Second at 1 ATM. Open face (unmated) pressure rating is 1000 PSI. When mated, Series 802 connectors withstand 3500 PSI hydrostatic pressure.




How To Order						
Sample Part Number	**802-056**	**-07**	**Z1**	**6-7**	**P**	**A**
Series	**802-056** = Hermetic Receptacle					
Shell Style (See Table I)	**-00** = Jam Nut for Front Panel Mounting **-02** = Box Mont **-07** = Jam Nut Rear Panel Mount					
Shell Material and Finish	**Z1** = Stainless Steel / Passivated (RoHS) **ZL** = Stainless Steel / Nickel Plated					
Shell Size - Insert Arrangement	See Contact Arrangements page E-2					
Contact Type	**P** = Pin, Face **S** = Socket, Face					
Shell Key Position (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					


NOTES

1. Material/Finish
   - Shell, jam nut: 316 SST, see part number development
   - Insulator, hermetic: full glass
   - Insulator, socket: hi-grade rigid dielectric
   - Seals, grommet: fluorosilicone
   - Contact, hermetic: alloy 52/gold plate
   - Contact, socket: copper alloy/gold plate
   - O-rings: viton/90 shore
2. Socket contacts for termination are shipped loose with parts
3. Mates to 802 series plugs
4. Performance capabilities:
   - Hydrostatic pressure rating: 1000 PSI open face, 3500 PSI fully mated and properly molded
   - Insulation resistance (test): 5,000 megohms @ 500 VDC minimum
   - Dielectric withstanding voltage (test): per contact rating table
   - Hermeticity: less than 1 x 10^-7 cc/sec @ 1 ATM delta P
5. Parker O-ring compound V709-90 or equivalent


E

Table I: Shell Style


		
-00 Jam Nut for Front Panel Mounting	**-02** Square Flange	**-07** Jam Nut for Rear Panel Mounting



Style 00




Style 07

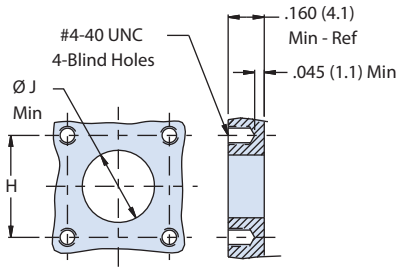

Style 02

Table II: Key Positions

Key Position	Key Rotation A°	Key Rotation B°
A Normal	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Contact Rating	
23	500 VAC
23 HD	750 VAC
20, 16, 12	1800 VAC

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Hermetic Receptacle with Removable Crimp Termination
802-056 Ordering Information


Jam nut, rear panel mount receptacle - shell style 07

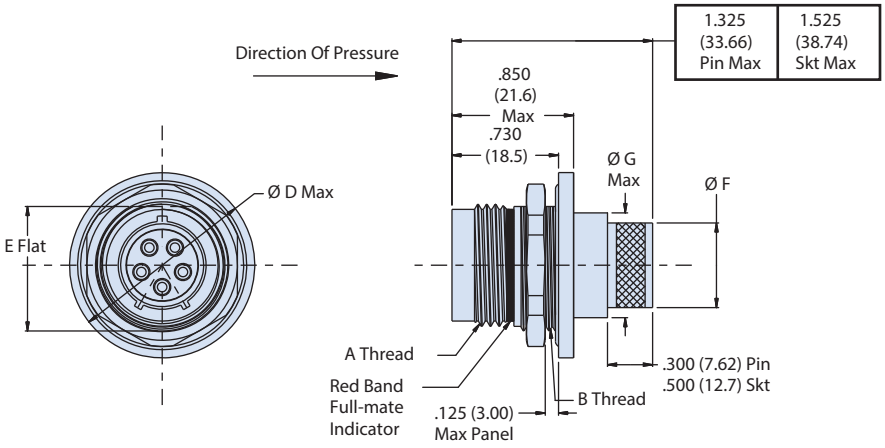

Square flange, front panel mount, thru-hole receptacle - shell style 02

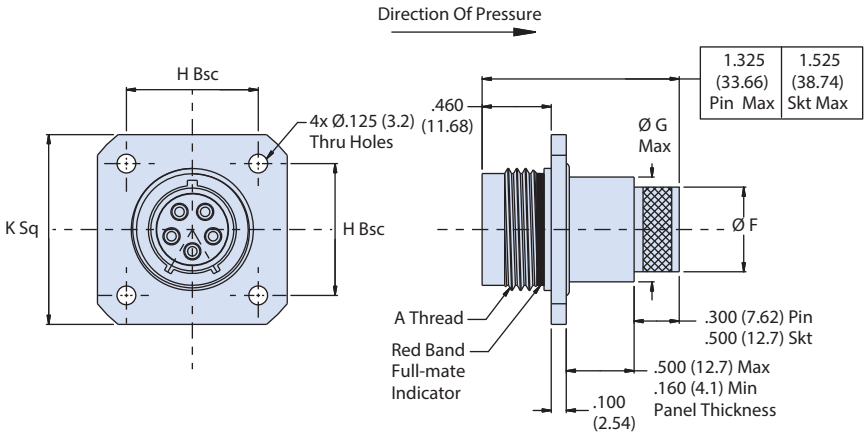

Jam nut, front panel mount receptacle - shell style 00

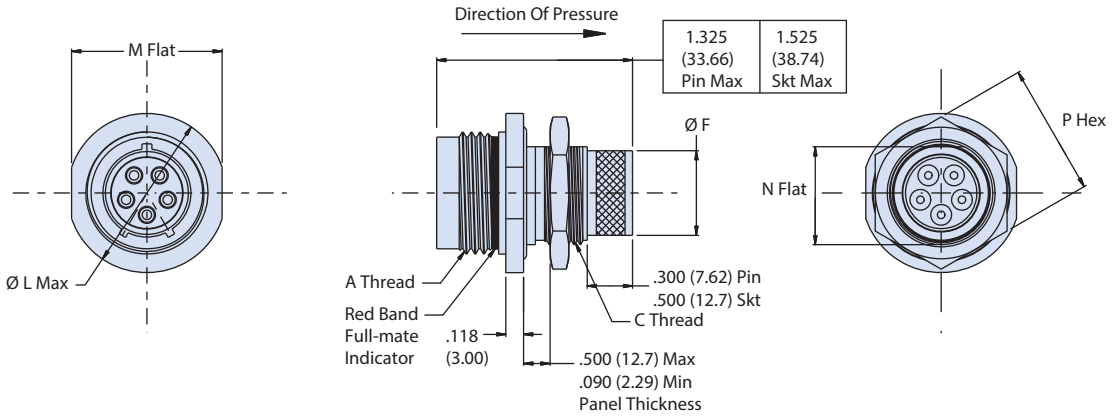

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Rev. 090117 Printed in U.S.A.

Dimensions										
Shell Size	A Thread	B Thread	C Thread	Ø D	E Flat	Ø F	Ø G	H Dim	Ø J	K Dim
5	.4375-28 UNEF	.5000-32 UN	.312-28 UN	0.885 (22.50)	.469/.463 (11.9/11.8)	0.232 (5.90)	0.320 (8.10)	0.500 (12.70)	0.327 (8.30)	0.885 (22.50)
6	.5625-20 UN	.6250-20 UN	.438-28 UN	1.010 (25.70)	.594/.588 (15.1/14.9)	0.312 (7.90)	0.380 (9.60)	0.625 (15.90)	0.390 (9.90)	1.010 (25.70)
7	.6250-20 UN	.6875-28 UN	.500-32 UN	1.072 (27.20)	.656/.650 (16.7/16.5)	0.375 (9.50)	0.510 (12.90)	0.688 (17.50)	0.515 (13.10)	1.072 (27.20)
8	.6875-20 UN	.7500-28 UN	.562-28 UN	1.135 (28.80)	.729/.725 (18.5/18.4)	0.438 (11.10)	0.560 (14.20)	0.750 (19.10)	0.577 (14.70)	1.135 (28.80)
9	.7500-20 UNEF	.8125-28 UN	.625-20 UN	1.195 (30.40)	.781/.775 (19.8/19.7)	0.500 (12.70)	0.635 (16.10)	0.812 (20.60)	0.640 (16.30)	1.195 (30.40)
10	.8125-20 UNEF	.8750-28 UN	.687-28 UN	1.260 (32.00)	.830/.824 (21.1/20.9)	0.562 (14.30)	0.695 (17.70)	0.875 (22.20)	0.702 (17.80)	1.260 (32.00)
12	.8750-20 UNEF	.9375-28 UN	.750-28 UN	1.322 (33.60)	.893/.887 (22.7/22.5)	0.656 (16.70)	0.755 (19.20)	0.938 (23.80)	0.765 (19.40)	1.323 (33.60)
14	1.0625-20 UN	1.1250-28 UN	.938-28 UN	1.510 (38.40)	1.080/1.074 (27.4/27.3)	0.812 (20.60)	0.945 (24.00)	1.125 (28.60)	0.953 (24.20)	1.510 (38.40)
15	1.1250-20 UN	1.1875-28 UN	1.000-28 UN	1.572 (39.90)	1.143/1.137 (29.0/28.9)	0.885 (22.40)	1.005 (25.50)	1.188 (30.20)	1.015 (25.80)	1.573 (40.00)
21	1.4375-20 UN	1.5000-28 UN	1.312-28 UN	1.940 (49.30)	1.467/1.463 (37.3/37.2)	1.188 (30.20)	1.305 (33.10)	1.375 (34.90)	1.312 (33.30)	1.750 (44.50)

Dimensions (continued)											
Shell Size	Ø L	M Flat	N Flat	P Hex	Ø R	S Flat	Ø T	W Flat	Piston O-ring*	Flange O-ring Stlye 00 & 02*	Flange O-ring Style 07*
5	0.72 (18.30)	0.625 (15.90)	0.281 (7.10)	0.500 (12.70)	0.510 (13.00)	.479/.474 (12.2/12.0)	0.322 (8.20)	.291/.286 (7.4/7.3)	2-009	2-012	2-015
6	0.78 (19.80)	0.750 (19.10)	0.406 (10.30)	0.625 (15.90)	0.635 (16.10)	.604/.599 (15.3/15.2)	0.448 (11.40)	.417/.412 (10.6/10.5)	5-052	2-014	2-017
7	0.91 (23.10)	0.812 (20.60)	0.469 (11.90)	0.688 (17.50)	0.697 (17.70)	.666/.661 (16.9/16.8)	0.510 (13.00)	.479/.474 (12.2/12.0)	2-012	2-015	2-019
8	0.96 (24.40)	0.875 (22.20)	0.531 (13.50)	0.750 (19.10)	0.760 (19.30)	.737/.733 (18.7/18.6)	0.572 (14.50)	.541/.536 (13.7/13.6)	5-212	2-016	2-019
9	1.03 (26.20)	0.937 (23.80)	0.594 (15.10)	0.812 (20.60)	0.822 (20.90)	.791/.786 (20.1/20.0)	0.635 (16.10)	.604/.599 (15.3/15.2)	2-014	2-017	2-020
10	1.09 (27.70)	1.000 (25.40)	0.656 (16.70)	0.875 (22.20)	0.885 (22.50)	.840/.835 (21.3/21.2)	0.697 (17.70)	.666/.661 (16.9/16.8)	2-015	2-018	2-021
12	1.16 (29.50)	1.062 (27.00)	0.719 (18.30)	0.938 (23.80)	0.948 (24.10)	.903/.898 (22.9/22.8)	0.760 (19.30)	.729/.724 (18.5/18.4)	2-016	2-019	2-022
14	1.34 (34.00)	1.250 (31.80)	0.893 (22.70)	1.125 (28.60)	1.135 (28.80)	1.090/1.085 (27.7/27.6)	0.948 (24.10)	.903/.898 (22.9/22.8)	2-019	2-022	2-025
15	1.41 (35.80)	1.312 (33.30)	0.955 (24.30)	1.188 (30.20)	1.198 (30.40)	1.153/1.148 (29.3/29.2)	1.010 (25.70)	.965/.960 (24.5/24.4)	2-020	2-023	2-026
21	1.70 (43.20)	1.562 (39.70)	1.257 (31.90)	1.500 (38.10)	1.510 (38.40)	1.475/1.471 (37.5/37.4)	1.322 (33.60)	1.267/1.263 (32.2/32.1)	2-023	2-028	2-030

*See note 5

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Rev. 090117 Printed in U.S.A.

Series 802 AquaMouse™ Hermetic Jam Nut Mount Bulkhead Feed–Thru Receptacle


802-050 Ordering Information



Series 802 Hermetic Jam Nut Mount Bulkhead Feed–Thru Receptacles feature gold plated iron alloy contacts and compression glass dielectric material. The 316 series stainless steel connector shell provides excellent corrosion protection. Available with pin to pin contacts. Power applied to a given contact on one end will result in power to contact directly opposite, regardless of contact identification letter. Contact DWV ratings are as follows and measured pin to pin and pin to shell without breakdown: size #23 @ 750 VAC, size #20 @ 1000 VAC, size #16 and #12 @ 1800 VAC. Insulation resistance is rated at 20,000 megohms (test) @ 500 VDC minimum. Hermeticity is rated at: 5 x 10^{-8} sccHe/sec @ 1 atmosphere differential. 802-050 is designed to mate with Glenair 802 Series plugs

How To Order								
Sample Part Number	**802-050**	**Z1**	**12-37**	**P**	**P**	**A**	**01**	**N**
Series	**802-050** = Bulkhead Feed–Thru Hermetic Receptacle							
Shell Material and Finish	**Z1** = 316 Stainless Steel / Passivated RoHS Compliant							
Shell Size - Insert Arrangement	See Table III							
Contact Type Jam Nut Side	**P** = Pin							
Contact Type Opposite Side	**P** = Pin							
Keyway Position (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F							
Panel Thickness (See Table II)	**-01** = .500/1.000 **-02** = 1.000/1.500 **-03** = 1.500/2.000 **-04** = 2.000/2.500 **-05** = 2.500/3.000 **-06** = 3.000/3.500 **-07** = 3.500/4.000							
O-ring Material	**V** = Viton **N** = Nitrile **NA** = No external o-rings supplied (suggested material: Nitrile)							

Table I: Key Positions



Key Position	Key Rotation	
	A°	B°
A Normal	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Table II: Panel Thickness

Panel Thickness Code	H Panel Thickness	J Maximum Length
-01	.500/1.000	2.450
-02	1.000/1.500	2.950
-03	1.500/2.000	3.450
-04	2.000/2.500	3.950
-05	2.500/3.000	4.450
-06	3.000/3.500	4.950
-07	3.500/4.000	5.450

Table III: Insert Arrangements

Shell Size	Insert Arrangement(s)
5	-3
6	-1, -4, -6, -7, -23
7	-1, -10, -25
8	-1, -2, -13, -28, -200
9	-4, -19, -200, -201, -210
10	-2, -5, -26, -200, -201, -202
12	-2, -3, -7, -37, -200, -201, -220
14	-5, -12, -55, -235
15	-3, -7, -14, -85, -241
21	-12, -22, -130, -269

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-21 E-Mail: sales@glenair.com


Series 802 AquaMouse™ Hermetic Jam Nut Mount Bulkhead Feed–Thru

802-050 Dimensions

Jam nut mount bulkhead Feed–Thru

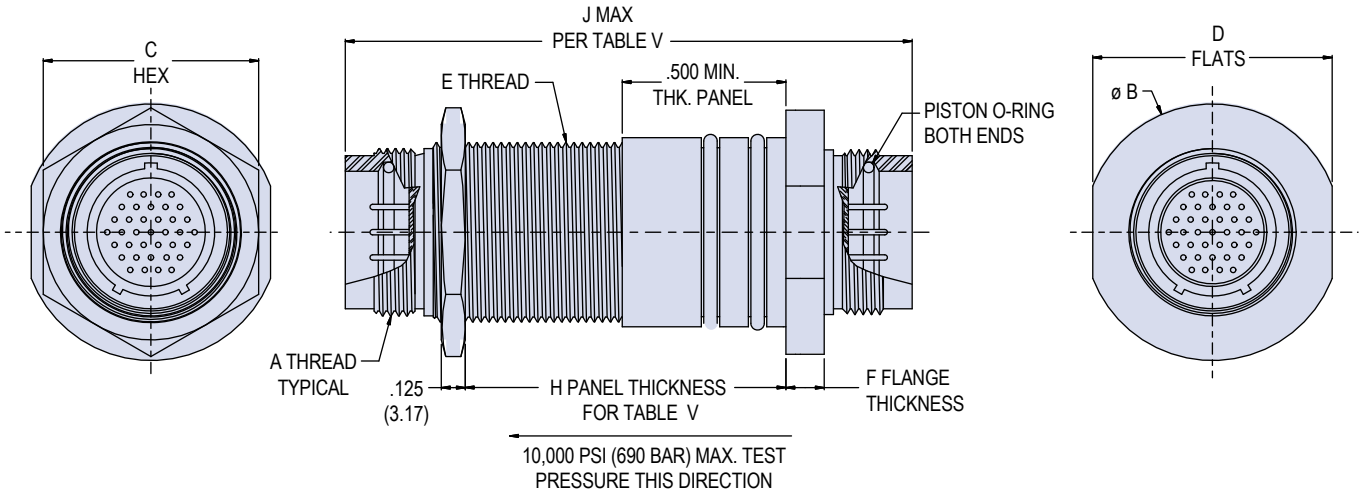

Dimensions													
Shell Size	A Thread	Ø B Max		C Hex		D Flat		E Thread	Panel Cutout Ø G		Ext. O-Ring	F	
		in	mm	in	mm	in	mm		in	mm		in	mm
5	.4375-28 UNEF	0.950	24.13	0.688	17.48	0.880 0.870	22.35 22.10	.5000-32 UN-2A	.562	14.27	2-013	.260	6.60
6	.5625-20 UN	1.150	29.21	0.812	20.62	1.010 1.000	25.65 25.40	.6250-20 UN-2A	.687	17.45	2.-015	.260	6.60
7	.6250-20 UN	1.225	31.12	0.875	22.23	1.080 1.070	27.43 27.18	.6875-28 UN-2A	.750	19.05	2-016	.260	6.60
8	.6875-20 UN	1.275	32.39	0.938	23.83	1.140 1.130	28.96 28.70	.7500-28 UN-2A	.812	20.62	2-017	.260	6.60
9	.7500-20 UNEF	1.325	33.66	1.000	25.40	1.205 1.195	30.61 30.35	.8125-28 UN-2A	.875	22.22	2-018	.260	6.60
10	.8125-20 UNEF	1.380	35.05	1.000	25.40	1.270 1.260	32.26 32.00	.8750-28 UN-2A	.937	23.80	2-019	.260	6.60
12	.8750-20 UNEF	1.462	37.13	1.125	28.58	1.330 1.320	33.78 33.53	.9375-28 UN-2A	1.000	25.40	2-020	.260	6.60
14	1.0625-20 UN	1.650	41.91	1.312	33.32	1.520 1.510	38.61 38.35	1.1250-28 UN-2A	1.187	30.15	2-023	.325	8.25
15	1.1250-20 UN	1.700	43.18	1.375	34.93	1.580 1.570	40.13 39.88	1.1875-28 UN-2A	1.250	31.75	2-024	.325	8.25
21	1.4375-20 UN	2.165	54.99	1.700	43.18	2.015 2.005	51.18 50.93	1.5000-28 UN-2A	1.625	41.27	2-029	.325	8.25



RECOMMENDED PANEL CUTOUT FOR DOUBLE O-RING ONLY

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 Harsh Environment Shielded Cordsets



Overmolded AquaMouse™ cordsets are used in oil and gas pipeline equipment and other hostile environments where interconnect reliability and survivability is essential. High performance cordsets feature easy ordering and fast delivery. These fully shielded and watertight assemblies withstand abrasion, temperature extremes and chemicals. Flexible overmolding provides rugged, watertight protection to wire and shield. Two styles are available. For oil and gas equipment or continuous water immersion, choose ***Style 1*** with thermoplastic polyurethane cable jacket and thermoset polyurethane overmolding. For non-critical general purpose applications, ***Style 2*** cordsets with polyurethane jackets and polyamide overmolds are a good choice if cost is a concern.

Product Features

- 2500 PSI (Style 1)
- Rugged, watertight construction
- 100% electrically tested
- BandMaster ATS Shield Termination
- Abrasion Resistance
- Resistant to chemicals
- Withstands UV and ozone

Harsh Environment Cordset Selection Guide		
Property	Style 1 Polyurethane Jacket Polyurethane Overmold	Style 2 Polyurethane Jacket Polyamide Overmold
Cable jacket	Thermoplastic polyurethane (TPU), black	Thermoplastic polyurethane (TPU), black
Overmold	Thermoset polyurethane, black	Polyamide, black
Operating temperature	-40° C. to +105° C.	-30° C. to +105° C.
Flexibility	Good	Good
Water Resistance	2500 PSI (mated)	1 meter immersion
Solvent Resistance, Cable Jacket	Excellent	Good
Solvent Resistance, Overmold	Excellent	Fair
Weatherability	Excellent	Excellent
Abrasion Resistance	Excellent	Good
Flammability	Flame retardant UL 94 V-0	Flame retardant UL 94 V-0
Cost	$$$$	$$


Specifications	
Cable jacket	Thermoplastic polyurethane, black, low-smoke, zero-halogen
Overmold	Style 1: thermoset polyurethane Style 2: polyamide
Cable shield	Tin-coated copper braid, 90% minimum coverage
Conductors	Silver coated stranded wire, TFE insulated, per M22759/11
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	#23–5 amps, #20–7.5 amps, #16–13 amps, #12–23 amps
Test voltage (DWV)	#23–750 Vac, #20–1000 vac, #16 and #12–1800 VAC sea level
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Shielded Overmolded Harsh Environment Cordsets

Dimensions

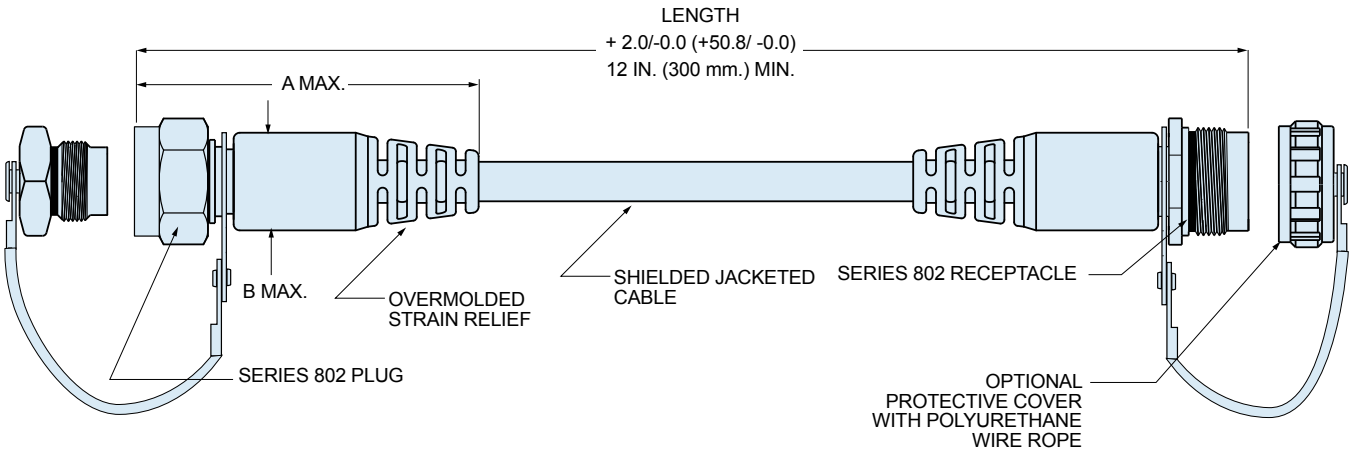

Dimensions				
Shell Size	A Max.		B Max.	
	In.	mm.	In.	mm.
5	2.31	58.67	0.5	12.70
6	2.40	60.96	0.55	13.97
7	2.50	63.50	0.65	16.51
8	2.52	64.01	0.71	18.03
9	2.80	71.12	0.78	19.81
10	2.75	69.85	0.82	20.83
11	2.85	72.39	0.87	55.10
12	3.10	78.74	0.9	22.86
14	3.40	86.36	1.1	27.94
15	3.40	86.36	1.2	30.48

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TFE insulation, 600V, in accordance with M22759/11.
3. Wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Shielded Overmolded Harsh Environment Cordsets

802-019, -022, -032 and -033 Ordering Information

Series 802 Cordsets with #23 Contacts								
Sample Part Number								
802-019	**-A**	**C**	**4**	**M**	**9-19**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
802-022 **Style 1** Polyurethane Cable Jacket, Thermoset Polyurethane Overmold, 2500 PSI **802-019** **Style 2** Polyurethane Cable Jacket, Polyamide Overmold, 1 Meter Immersion	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #22 AWG **4** #24 AWG	**Z1** Stainless Steel Shell / Passivated **ZM** Stainless Steel Shell / Electroless Nickel Plated **AB** Marine Bronze Shell Unplated	See page E-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D See page E-2	Overall Length In Inches 12 Inch Min.

Series 802 Cordsets with #20HD Contacts								
Sample Part Number								
802-032	**-A**	**C**	**0**	**M**	**9-19**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
802-033 **Style 1** Polyurethane Cable Jacket, Thermoset Polyurethane Overmold, 2500 PSI Rated **802-032** **Style 2** Polyurethane Cable Jacket, Polyamide Overmold, 1 Meter Immersion	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**0** #20 AWG **2** #22 AWG	**Z1** Stainless Steel Shell / Passivated **ZM** Stainless Steel Shell / Electroless Nickel Plated **AB** Marine Bronze Shell Unplated	See page E-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D See page E-2	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible Shielded Overmolded Harsh Environment Cordsets

802-026, -027, -028, and -029 Ordering Information

Series 802 Cordsets with #16 Contacts								
Sample Part Number								
802-026	**-A**	**C**	**6**	**Z1**	**9-4**	**N**	**A**	**-48**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
802-028 **Style 1** Polyurethane Cable Jacket, Thermoset Polyurethane Overmold, 2500 PSI Rated **802-026** **Style 2** Polyurethane Cable Jacket, Polyamide Overmold, 1 Meter Immersion	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**6** #16 AWG **8** #18 AWG	**Z1** Stainless Steel Shell / Passivated **ZM** Stainless Steel Shell / Electroless Nickel Plated **AB** Marine Bronze Shell Unplated	See page E-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D See page E-2	Overall Length In Inches 12 Inch Min.

E

Series 802 Cordsets with #12 Contacts								
Sample Part Number								
802-027	**-A**	**C**	**0**	**M**	**10-2**	**N**	**A**	**-48**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
802-029 **Style 1** Polyurethane Cable Jacket, Thermoset Polyurethane Overmold, 2500 PSI Rated **802-027** **Style 2** Polyurethane Cable Jacket, Polyamide Overmold, 1 Meter Immersion	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #12 AWG **4** #14 AWG	**Z1** Stainless Steel Shell / Passivated **ZM** Stainless Steel Shell / Electroless Nickel Plated **AB** Marine Bronze Shell Unplated	See page E-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D See page E-2	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

PRODUCT SELECTION GUIDE



Series 803 Bayonet Plugs
Available in aluminum or stainless steel. The integral shield termination platform accepts heat-shrink boots, or select accessory threads for use with a variety of strain relief and backshell accessory options.

Page F-6



Series 803 Receptacles for Insulated Wire
Jam nut, square flange and in-line versions make it easy to find a style for every application. The integral shield termination platform accepts heat-shrink boots (ordered separately), or select accessory threads for use with a variety of strain relief and backshell accessory options. Contacts are crimp-type and are packaged with the connector.

Page F-8



Series 803 Receptacles with Solder Cup or PCB Termination
These panel mount connectors feature gold plated, factory-installed non–removable contacts. Choose printed circuit terminals, or choose solder cup contacts. Connectors are potted with epoxy for general purpose applications, or choose silicone-sealed, leak-tested versions for 1 meter water immersion in unmated condition.

Page F-12



Series 803 Hermetic Receptacles
Need a miniaturized hermetic for a sealed box or instrument? These stainless steel, glass-sealed connectors are available with solder cup or PC tail contacts. Choose jam nut or flange mount versions. Contacts are gold plated iron alloy. 100% tested to meet 1 X 10^{-7} cc/sec helium leakage. Open face pressure rating 1000 PSI.

Page F-14



Series 803 Bulkhead Feed–Thru Receptacles
Miniaturized Mighty Mouse bulkhead Feed–Thrus available as jam nut rear panel mount or elliptical flange for front or rear panel mounting. Contacts available as pin to pin, pin to socket, socket to pin or socket to socket.

Page F-16



Series 803 Shielded Overmolded Cordsets
Overmolded cordsets offer optimum convenience and performance. Low-smoke, zero halogen polyurethane jackets withstand abrasion and harsh environments or choose lightweight shield and overbraided jackets for maximum flexibility.

Page F-18

F

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 803 Mighty Mouse
¼ Turn Bayonet Coupling
Contact Arrangements


Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
5-3	3				
6-1				1	
6-23			3		
6-4	4				
6-6	6				
6-7	7				
7-1					1
7-25			5		
7-10	10				
8-2				2	
8-28			8		
8-13	13				
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
12-2					2
12-3					3
12-7				7	
12-220			20		
12-37	37				
12-200	6				2
12-201	10				2
12-202	20			2	
12-203	12			4	
12-204	12				2
12-205	4				4
14-5					5
14-12				12	

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend

#23 ○ #20HD ◓ #20 ● #16 ◒ #12 ⊕

Mating Face View of Pin Connector
(Socket connector numbers are reversed)

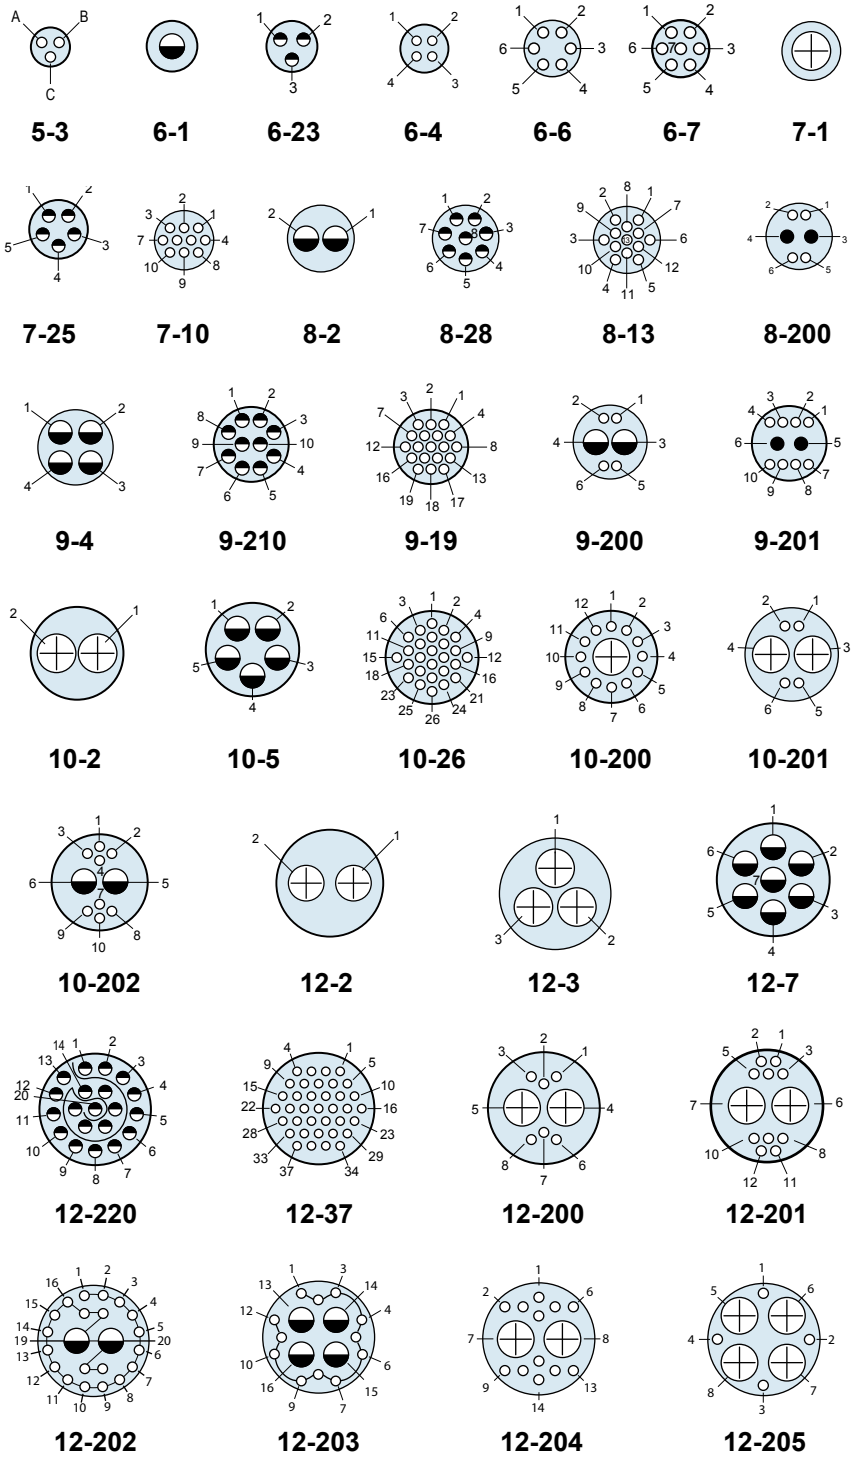

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com

E-Mail: sales@glenair.com


Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
14-235			35		
14-55	55				
14-204	40			2	
14-205	32			4	
14-206	34				2
14-207	20				4

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688


Contact Legend

#23 ∘ #20HD ◒ #20 ● #16 ◒ #12 ⊕


Mating Face View of Pin Connector
(Socket connector numbers are reversed)




14-5




14-12




14-235




14-204




14-205



14-206




14-55




14-207

Series 803 Plug Key Positions



Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°

Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.355	9.02	.382	9.70
6	.415	10.54	.445	11.30
7	.541	13.74	.572	14.53
8	.601	15.27	.635	16.13
9	.601	15.27	.643	16.33
10	.729	18.52	.760	18.29
12	.850	21.59	.885	22.48
14	1.031	26.19	1.072	27.23

F

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 803 Mighty Mouse
¼ Turn Bayonet Coupling
General Information

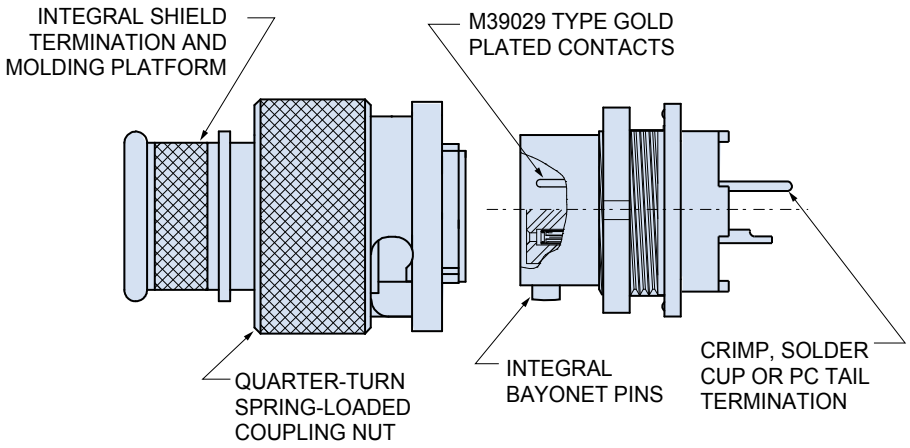

Bayonet Coupling Mechanism
Push-To-Mate, ¼ turn for locking.

1 up to 55 contacts
available in crimp, solder cup or printed circuit board versions. Aluminum or stainless steel shell.

Now with Power Contacts.
Choose any one of 43 contact arrangements with size #23, size #20HD, size #16, or size #12 contacts.

Bayonet Mighty Mouse Offers ¼ Turn Locking, Rugged Design and Ultraminiature Size

Ideal for tactical handheld radios, sensors, test equipment and autosport equipment, the Series 803 connector adds quick bayonet coupling to the Glenair Series 80 product line. Key features are small size, light weight, environmental protection, and crimp-and-poke contacts. These features make the Series 803 Bayonet connector suitable for a wide range of quick-disconnect applications. Fluorosilicone seals resist most chemicals and provide splash protection.
Not rated for water immersion.

F



Specifications	
Current Rating	#23–5 A, #20–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD–1000 VAC, #12 and #16–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	40 dB minimum from 100MHz to 1000MHz.
Durability	100 mating cycles (aluminum), 250 mating cycles (stainless steel)
See Series 80 General Information for complete performance specs.	



Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	High-grade rigid dielectric
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber
See Series 80 General Information for complete material and finish specs.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 803 maximum Connector Weight in grams					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Flange Recep Crimp	Flange Recep PCB
5-3P	3.6	3.6	3.9	2.9	3.3
5-3S	3.7	3.7	4.0	3.1	3.4
6-1P	4.4	4.4	4.6	3.1	3.5
6-1S	4.5	4.5	4.7	3.2	3.6
6-4P	4.7	3.7	4.1	3.1	3.6
6-4S	4.7	4.0	4.2	3.2	3.7
6-6P	4.3	3.8	4.6	3.4	3.6
6-6S	4.5	4.1	4.7	3.6	3.7
6-7P	5.1	4.8	5.3	3.3	4.4
6-7S	5.1	5.1	5.5	3.6	4.4
7-1P	5.7	5.9	5.8	4.4	4.7
7-1S	5.9	6.2	5.9	4.7	5.1
7-10P	6.9	7.4	8.1	5.0	6.5
7-10S	7.4	7.8	8.4	5.4	6.6
7-25P	5.6	5.8	5.7	4.2	4.6
7-25S	5.9	6.2	5.8	4.7	5
8-2P	8.6	8.9	9.9	6.6	8.6
8-2S	9.4	9.7	10.7	7.4	9.4
8-13P	7.9	8.3	9.2	5.9	7.9
8-13S	8.7	8.9	9.7	6.6	8.1
8-28P	8.8	9.1	10.5	6.8	9.2
8-28S	9.9	10.2	11.3	7.9	10
8-200P	8.9	9.2	10.2	6.9	8.9
8-200S	9.6	9.9	10.9	6.9	9.6
9-4P	9.2	9.6	10.6	6.6	9.2
9-4S	9.6	9.9	10.9	6.9	9.6
9-19P	9.2	9.1	10.6	7.0	9.9
9-19S	10.2	10.1	11.2	8.1	10.2
9-200P	9.1	9.5	10.5	7.2	9.1
9-200S	10.2	10.6	11.6	8.3	10.2
9-201P	9.2	9.6	10.6	7.3	10.3
9-201S	9.8	10.1	11.7	8.4	10.3
9-210P	9	9.4	10.1	6.4	8.7
9-210S	9.6	9.9	10.7	6.9	9.3
10-2P	13.1	13.8	14.1	10.4	13
10-2S	14.5	15.1	16.7	11.7	14.5
10-5P	13.4	14.1	15.0	10.6	13.9
10-5S	14.9	15.5	17.5	12.0	15.3
10-26P	11.7	12.3	14.3	8.8	12.8
10-26S	13.4	13.6	15.1	10.1	13.1
10-200	12.5	13.2	15.2	9.7	13.0
10-200	14.0	14.6	16.6	11.1	14.4

Series 803 maximum Connector Weight in grams					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Flange Recep Crimp	Flange Recep PCB
10-201P	12.9	13.5	15.5	10.0	13.3
10-201S	14.4	15.1	17.1	11.6	14.9
10-202P	12.4	13.1	15.1	9.6	11.8
10-202S	14.0	14.6	16.6	11.1	14.4
12-2P	15.5	16.4	19.1	11.4	16.9
12-2S	17.2	18.0	20.8	13.1	18.6
12-3P	16.5	17.4	20.1	12.4	17.9
12-3S	18.3	19.1	21.9	14.2	19.7
12-7P	16.7	17.6	20.4	12.7	18.2
12-7S	19.4	20.2	23.0	15.3	20.8
12-37P	15.0	15.8	18.6	10.9	16.4
12-37S	16.6	17.5	19.6	12.4	16.7
12-200P	15.6	16.5	19.3	11.6	17.1
12-200S	17.9	18.8	21.6	13.9	19.4
12-201P	15.7	16.6	19.4	11.7	17.2
12-201S	18.2	19.0	21.8	14.1	19.6
12-202P	15.6	16.4	20.5	12.2	18.3
12-202S	17.6	18.4	22.1	14.2	19.9
12-203P	15.9	16.8	21	12.5	18.8
12-203S	17.9	18.7	22.5	14.5	20.3
12-204P	16	16.2	21	12.6	18.6
12-204S	18	18.8	22.5	14.6	20.3
12-205P	17.1	18	22.6	13.7	20.4
12-205S	19	19.8	24.5	15.6	22.3
12-220P	16.3	17.2	21.4	12.9	19.2
12-220S	18.7	19.5	23.3	15.3	21.1
14-5P	22.2	23.5	27.7	17.3	25.5
14-5S	24.8	26.1	29.3	19.8	25.1
14-12P	22.7	24	29.7	17.6	27.5
14-12S	25.4	26.7	30.9	20.4	26.7
14-204P	21	22.3	27.6	15.9	25.4
14-204S	24.1	25.4	28.7	19.1	24.5
14-205P	21.3	22.6	28.1	16.2	25.9
14-205S	24.4	25.7	29.1	19.4	24.9
14-206P	21.5	22.8	28.2	16.4	26
14-206S	24.6	25.9	29.4	19.6	25.2
14-207P	22.3	23.6	29.1	17.2	26.9
14-207S	25.3	26.6	30.6	20.3	26.4
14-235P	22.6	23.9	29.6	17.5	27.4
14-235S	26.3	27.6	31.3	21.3	27.1
14-55P	19.6	20.9	25.1	14.6	22.9
14-55S	22.6	23.9	27.1	17.6	23.9

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 803 Mighty Mouse ¼ Turn Bayonet Plug



803-001 and 803-002 Ordering Information



Series 803 compact size and rugged design make them suitable for light-to-medium duty applications where water immersion is not a consideration. Splashproof design withstands exposure to rain and condensation. Bayonet coupling mechanism uses a rotating coupling nut on the plug and three integral bayonet pins on the receptacle. Push to mate, then rotate the coupling nut 90º to lock. Connector shells are machined aluminum or stainless steel. Supplied with crimp contacts, packaged separately. Terminate contacts with standard M22520 tools. Metal clips inside the connector body lock contact into place. Contacts are removable. Fluorosilicone seals and rear grommet protect connector from water ingress. Terminate cable shield directly to connector body with Band-Master™ ATS strap, or choose rear accessory thread to attach optional cable clamp or backshell. Available in shell sizes 5 through 14 in 46 contact arrangements.

How To Order						
Sample Part Number	**803-001**	**-06**	**NF**	**9-19**	**P**	**N**
Series (See Table I)	**803-001** = Plug with Banding Platform **803-002** = Plug with Accessory Thread					
Shell Style	**-06** = Plug					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant **UCR** = Aluminum / Zinc-Cobalt with Black Chromate; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page F-2					
Contact Type	Connector supplied with contacts **P** = Pin **S** = Socket	Connector supplied without contacts **A** = Pin Connector, less contacts **B** = Socket Connector, less contacts				
	Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed.					
	Coaxial contacts and non-standard signal contacts are ordered separately.					
Shell Key Positions (See Table II)	**N** = Normal **X** = Pos. X **Y** = Pos. y **Z** = Pos. Z					


Table I: Series

	
803-001 Plug with Banding Platform	**803-002** Plug with Accessory Thread


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Plug connector



Intergral Band Platform
803-001






Accessory Thread
803-002

Dimensions					
Shell Size	A Thread UNEF-2A	Ø B Max		Ø C	
		In.	mm.	In.	mm.
5	.2500-32	.500	12.70	.245	6.22
6	.3125-32	.565	14.35	.290	7.37
7	.4375-28	.650	16.51	.390	9.91
8	.5000-28	.750	19.05	.440	11.18
9	.5625-24	.790	20.07	.500	12.70
10	.6250-24	.875	22.23	.562	14.27
12	.6875-24	.944	23.98	.650	16.51
14	.9375-20	1.095	27.81	.805	20.45

Table II: Keyway Positions		
Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°



F

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse
¼ Turn Bayonet Receptacle
803-003 and 803-004 Ordering Information



In-Line



Jam Nut



Flange Mount

Push-To-Mate, ¼ Turn to Lock. These quick-mating connectors feature bayonet pins on the receptacle. Simply push the connectors together, then rotate the plug coupling nut 90° to lock the connectors together.

Three Shell Mounting Options: Jam nut with O-ring for rear panel mounting, elliptical flange for front or rear panel mounting, or in-line receptacles for free-hanging cables.

Two Shell Styles: Choose the integral band platform for direct attachment of a cable shield. Install a heat-shrink boot, or overmold directly onto the band platform. An accessory thread is available for attaching strain reliefs and backshells.

How To Order

Sample Part Number	803-003	-07	NF	6-7	S	N

Series (See Table I)	**803-003** = Receptacle with Banding Platform **803-004** = Receptacle with Accessory Thread
Shell Style (See Table II)	**-01** = In-Line **-02** = Flange Mount **-07** = Jam Nut
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant
Shell Size - Insert Arrangement	See Contact Arrangements Page F-2
Contact Type	Connector supplied with contacts: **P** = Pin, **S** = Socket Connector supplied without contacts: **A** = Pin Connector, less contacts, **B** = Socket Connector, less contacts Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table III)	**N** = Normal **X** = Pos. X **Y** = Pos. y **Z** = Pos. Z

Table I: Series





	
803-003 Plug with Banding Platform	**803-004** Plug with Accessory Thread


Table II: Shell Style

		
-01 In-line	**-02** Flange Mount	**-07** Jam Nut

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam nut rear panel mount receptacle - shell style 07

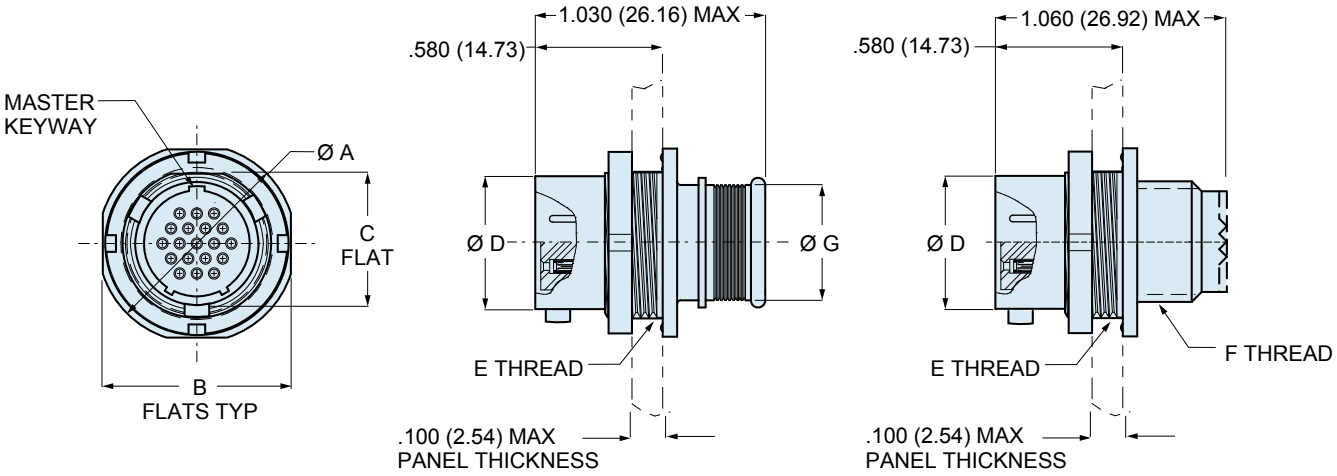


Integral Band Platform
803-003-07

Accessory Thread
803-004-07

Dimensions


Shell Size	Ø A		B Flats		C Flat		Ø D		E Thread	F Thread	Ø G	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.			In.	mm.
5	.575	14.61	.545	13.84	.350	8.89	.300	7.62	.3750-32 UNEF-2A	.2500-32 UNEF-2A	.230	5.84
6	.635	16.13	.595	15.11	.410	10.41	.362	9.19	.4375-28 UNEF-2A	.3125-32 UNEF-2A	.286	7.26
7	.755	19.18	.723	18.36	.536	13.61	.436	11.07	.5625-32 UN-2A	.4375-28 UNEF-2A	.390	9.91
8	.755	19.18	.790	20.11	.593	15.10	.508	12.91	.6250-28 UN-2A	.5000-28 UNEF-2A	.440	11.18
9	.830	21.08	.790	20.07	.596	15.14	.561	14.25	.6250-28 UN-2A	.5625-24 UNEF-2A	.500	12.70
10	.890	22.61	.925	23.51	.721	18.31	.635	16.13	.7500-28 UN-2A	.6250-24 UNEF-2A	.562	14.27
12	1.078	27.38	1.044	26.52	.845	21.46	.714	18.14	.8750-28 UN-2A	.6875-24 UNEF-2A	.650	16.51
14	1.264	32.11	1.230	31.24	1.022	25.96	.865	21.97	1.0625-20 UN-2A	.9375-20 UNEF-2A	.805	20.45

Table III: Alternate Key Positions

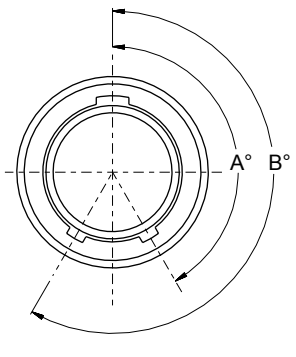

Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°

Jam Nut Panel Cutout Dimensions



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.355	9.02	.382	9.70
6	.415	10.54	.445	11.30
7	.541	13.74	.572	14.53
8	.601	15.27	.635	16.13
9	.601	15.27	.643	16.33
10	.729	18.52	.760	18.29
12	.850	21.59	.885	22.48
14	1.031	26.19	1.072	27.23


F


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 803 Mighty Mouse
¼ Turn Bayonet Receptacle
803-004-02 and 803-003-02 Dimensions

Flange mount front or rear panel mount receptacle - shell style 02

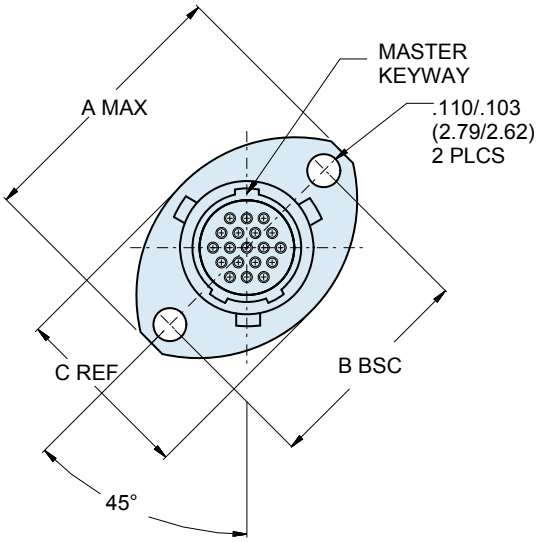

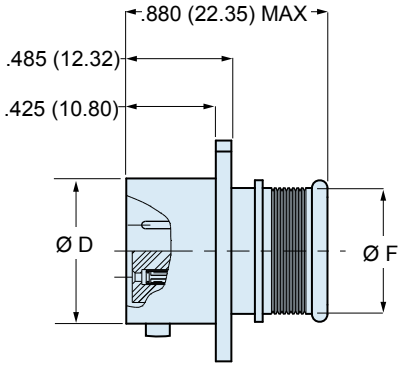


Integral Band Platform
803-003-02

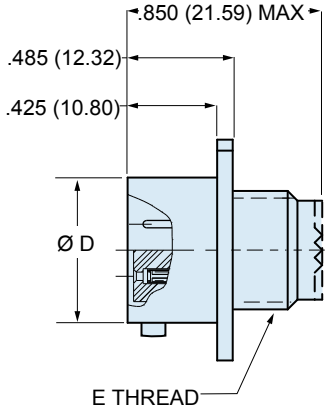

Accessory Thread
803-004-02

Dimensions											
Shell Size	A Max.		B Bsc.		C Ref.		Ø D		E Thread	Ø F	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.
5	.703	17.86	.513	13.03	.460	11.68	.300	7.62	.2500-32 UNEF-2A	.230	5.84
6	.788	20.02	.598	15.19	.522	13.26	.362	9.19	.3125-32 UNEF-2A	.286	7.26
7	.890	22.61	.708	17.98	.590	14.99	.436	11.07	.4375-28 UNEF-2A	.390	9.91
8	1.154	29.31	.964	24.49	.668	16.97	.508	12.91	.5000-28 UNEF-2A	.440	11.18
9	1.207	30.66	1.017	25.83	.721	18.31	.561	14.25	.5625-24 UNEF-2A	.500	12.70
10	1.291	32.79	1.101	27.97	.795	20.19	.635	16.13	.6250-24 UNEF-2A	.562	14.27
12	1.394	35.41	1.204	30.58	.874	22.20	.714	18.14	.6875-24 UNEF-2A	.650	16.51
14	1.545	39.24	1.280	32.51	1.050	26.67	.865	21.97	.9375-20 UNEF-2A	.805	20.45

Flange Mount Panel Cutout Dimensions




Flange Mount

Shell Size	A		Ø B	
	In.	mm.	In.	mm.
5	.513	13.03	.365	9.25
6	.598	15.19	.430	10.92
7	.708	17.98	.520	13.21
8	.964	17.98	.592	15.04
9	1.017	25.83	.645	16.38
10	1.101	27.97	.726	18.44
12	1.204	30.58	.832	21.13
14	1.280	32.51	.945	24.00

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In-line cable receptacle - shell style 01

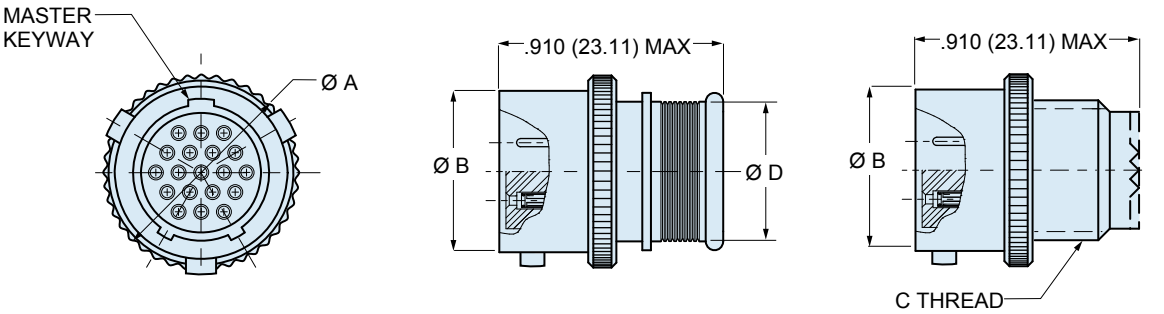

Integral Band Platform
803-003-01

Accessory Thread
803-004-01

Dimensions							
Shell Size	Ø A Max.		Ø B		C Thread	Ø D	
	In.	mm.	In.	mm.		In.	mm.
5	.402	10.21	.300	7.62	.2500-32 UNEF-2A	.230	5.84
6	.465	11.81	.362	9.19	.3125-32 UNEF-2A	.286	7.26
7	.500	12.70	.436	11.07	.4375-28 UNEF-2A	.390	9.91
8	.570	14.48	.508	12.90	.5000-28 UNEF-2A	.440	11.18
9	.652	16.56	.561	14.25	.5625-24 UNEF-2A	.500	12.70
10	.715	18.15	.635	16.13	.6250-24 UNEF-2A	.562	14.27
12	.805	20.45	.714	18.14	.6875-24 UNEF-2A	.650	16.51
14	.915	23.24	.865	21.97	.9375-20 UNEF-2A	.805	20.45

F

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse ¼ Turn Bayonet PC Tail and Solder Cup Receptacle

803-005 and 803-015 Ordering Information



Printed Circuit Board/ Solder Cup Receptacles feature low profile shells for minimum protrusion inside enclosures and integral standoffs for board washout. Contacts are non-removable.

Water Immersion, Unmated Specify 803-005 connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify 803-015 watertight connectors . These 803-015 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40°C to +70°C. ***NOTE: mated connectors are not submersible.***

How To Order						
Sample Part Number	**803-005**	**-02**	**ZN**	**6-7**	**S**	**N**
Series	**803-005** = Receptacle, Solder Cup or PCB Contacts **803-015** = Receptacle, Solder Cup or PCB Contacts; Watertight					
Shell Style (See Table I)	**-02** = Flange Mount **-07** = Jam Nut (See Page					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page F-2					
Contact Type	**P** = Pin, PC Tail **E** = Pin, Solder Cup **S** = Socket PC Tail **F** = Socket, Solder Cup					
Shell Key Positions (See Table II)	**N** = Normal **X** = Pos. X **Y** = Pos. y **Z** = Pos. Z					

Table I: Shell Style



	
-02 Flange Mount	**-07** Jam Nut

Table II: Alternate Key Positions




Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Flange mount front or rear panel mount receptacle - shell style 02

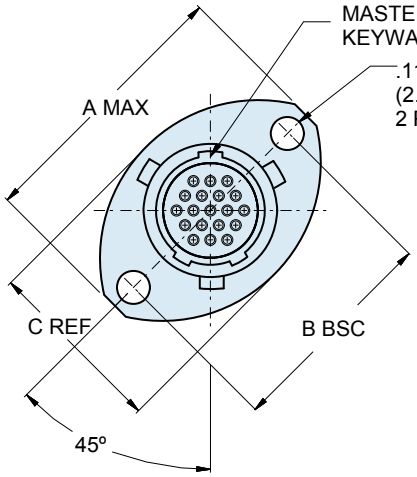


Flange Mount
Receptacle
803-005-02

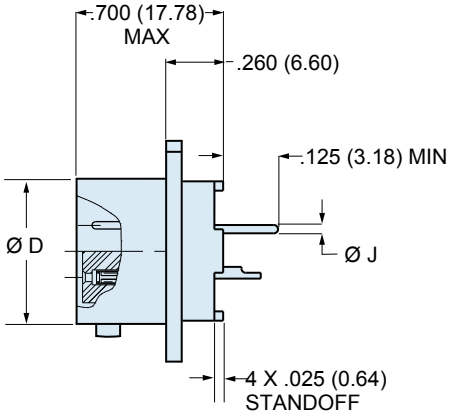

Jam nut rear panel mount receptacle - shell style 01

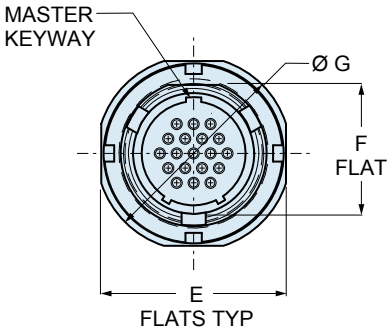

Jam Nut
Receptacle
803-005-07

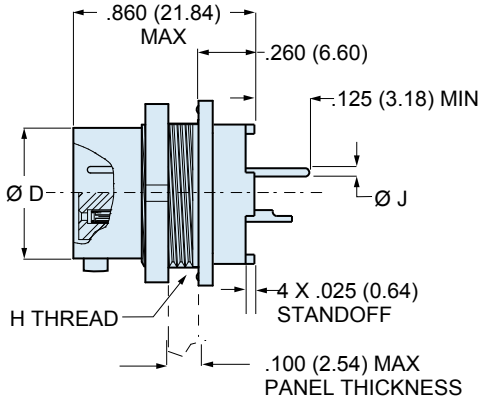

Dimensions																
Shell Size	A Max.		B Bsc.		C Ref.		Ø D		E Flats		F Flat		Ø G		H Thread	Ø J Tail Dia.
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.		
5	.703	17.86	.513	13.03	.460	11.68	.300	7.62	.545	13.84	.350	8.89	.575	14.61	.3750-32 UNEF-2A	#23 .018/.022 (0.46/0.56)
6	.788	20.02	.598	15.19	.522	13.26	.362	9.19	.595	15.11	.410	10.42	.635	16.13	.4375-28 UNEF-2A	
7	.890	22.61	.708	17.98	.590	14.99	.436	11.07	.723	18.36	.536	13.61	.755	19.18	.5625-32 UN-2A	#20 .024/.028 (0.61/0.71)
8	1.154	29.31	.964	24.49	.668	16.97	.508	12.91	.790	18.36	.593	14.53	.755	19.18	.6250-28 UN-2A	
9	1.207	30.66	1.017	25.83	.721	18.31	.561	14.25	.790	20.07	.596	15.14	.830	21.08	.6250-28 UN-2A	#16 .060/.064 (1.52/1.63)
10	1.291	32.79	1.101	27.97	.795	20.19	.635	16.13	.925	21.72	.721	18.31	.890	22.61	.7500-28 UN-2A	
12	1.394	35.41	1.204	30.58	.874	22.20	.714	18.14	1.044	26.52	.845	21.46	1.078	27.38	.8750-28 UN-2A	#12 .092/.096 (2.34/2.44)
14	1.545	39.24	1.280	32.51	1.050	26.67	.865	21.97	1.230	31.24	1.022	25.96	1.264	32.11	1.0625-20 UN-2A	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse ¼ Turn Bayonet Coupling Hermetic Receptacle

803-006 Ordering Information



Series 803 Hermetic Receptacles feature 304L stainless steel shells, fused vitreous glass insulators and gold-plated Alloy 52 iron alloy contacts.

1 X 10^{-7} cc/second maximum helium leak rate when tested at 1 atmosphere vacuum.

Two Shell Styles are available:
Jam Nut and Flange Mount.

1000 PSI Pressure Rating in open face (unmated) condition.


How To Order

Sample Part Number	803-006	-07	Z1	9-19	P	N
Series	**803-006** = Hermetic Receptacle, Solder Cup or PCB Contacts					
Shell Style (See Table I)	**-02** = Flange Mount **-07** = Jam Nut					
Shell Material and Finish	**Z1** = Stainless Steel / Passivated; RoHS Compliant **ZL** = Stainless Steel/Nickel Plated					
Shell Size - Insert Arrangement	See Contact Arrangements Page F-2					
Contact Type	**P** = Pin, PC Tail **C** = Pin, Solder Cup **S** = Socket PC Tail **D** = Socket, Solder Cup					
Shell Key Positions (See Table II)	**N** = Normal **X** = Pos. X **Y** = Pos. y **Z** = Pos. Z					

Table I: Shell Style




-02
Flange Mount



-07
Jam Nut


Table II: Alternate Key Positions



Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°

Panel Cut-Out Dimensions


Shell Size	Ø M		B Bsc.		H Flat ± .002		Ø J	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	.382	9.70	0.513	13.03	.353	8.97	.382	9.70
6	.445	11.30	0.598	15.19	.415	10.54	.445	11.30
7	.520	13.21	0.708	17.98	.541	13.74	.572	14.53
8	.592	15.04	0.964	24.49	.601	15.27	.635	16.13
9	.645	16.38	1.017	25.83	.601	15.27	.643	16.33
10	.726	18.44	1.101	27.97	.729	18.52	.760	19.30
12	.832	21.13	1.204	30.58	.850	21.59	.885	22.48
14	.950	24.13	1.280	32.51	1.031	26.19	1.072	27.23

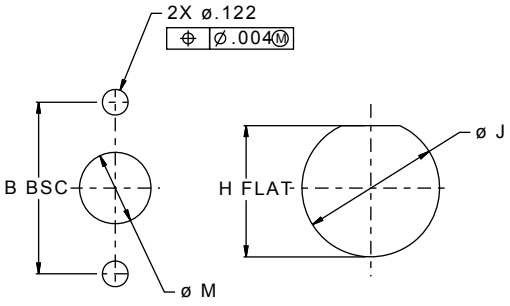


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Flange mount front or rear panel mount receptacle - shell style 02

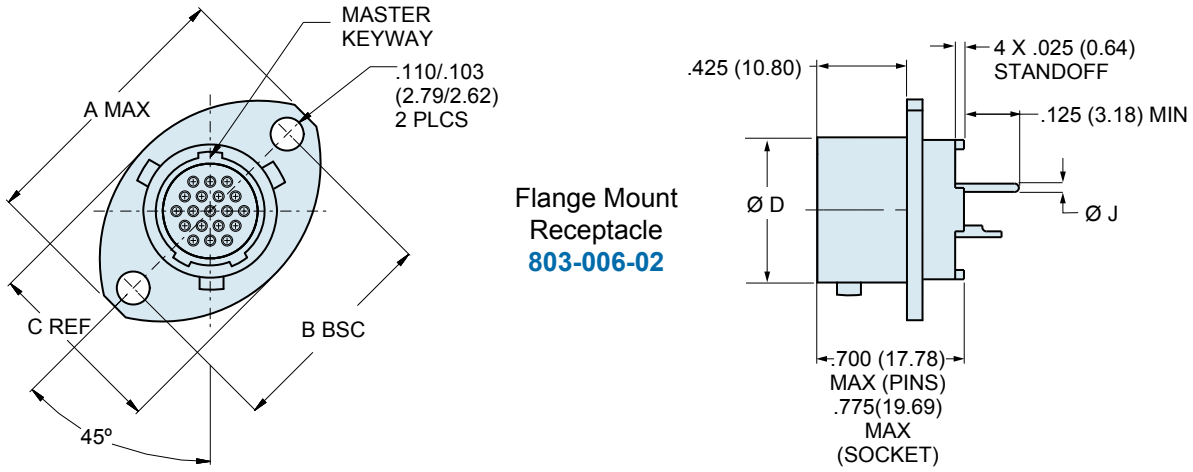

Jam nut rear panel mount receptacle - shell style 07

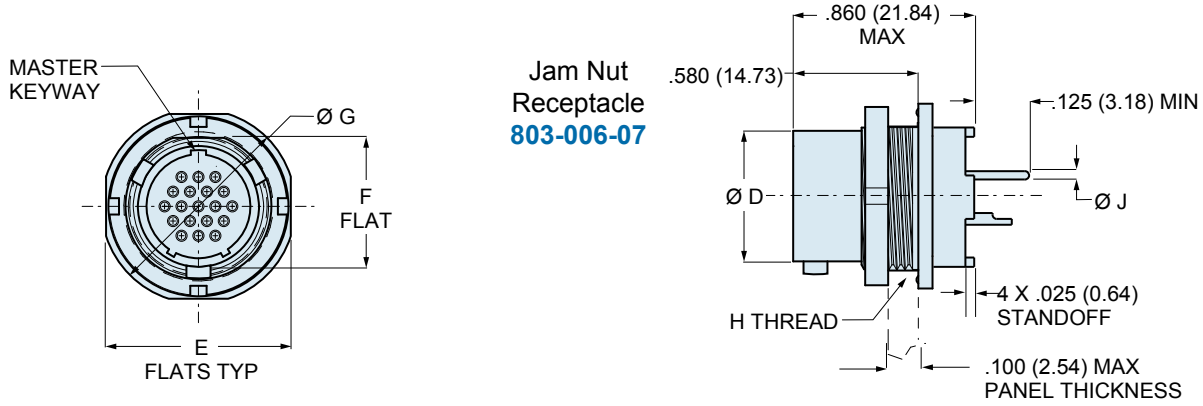

F

Dimensions																
Shell Size	A Max.		B Bsc.		C Ref.		Ø D		E Flats		F Flat		Ø G		H Thread	Ø J Tail Dia.
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.		
5	.703	17.86	.513	13.03	.460	11.68	.300	7.62	.545	13.84	.350	8.89	.575	14.61	.3750-32 UNEF-2A	#23 .018/.022 (0.46/0.56) #20 .024/.028 (0.61/0.71) #16 .060/.064 (1.52/1.63) #12 .092/.096 (2.34/2.44)
6	.788	20.02	.598	15.19	.522	13.26	.362	9.19	.595	15.11	.410	10.42	.635	16.13	.4375-28 UNEF-2A	
7	.890	22.61	.708	17.98	.590	14.99	.436	11.07	.723	18.36	.536	13.61	.755	19.18	.5625-32 UN-2A	
8	1.154	29.31	.964	24.49	.668	16.97	.508	12.91	.790	20.07	.593	15.10	.830	19.18	.6250-32 UN-2A	
9	1.207	30.66	1.017	25.83	.721	18.31	.561	14.25	.790	20.07	.593	15.10	.830	21.08	.6250-28 UN-2A	
10	1.291	32.79	1.101	27.97	.795	20.19	.635	16.13	.925	23.51	.721	18.31	.955	24.26	.7500-28 UN-2A	
12	1.394	35.41	1.204	30.58	.874	22.20	.714	18.14	1.044	26.52	.845	21.46	1.078	27.38	.8750-28 UN-2A	
14	1.545	39.24	1.280	32.51	1.050	26.67	.865	21.97	1.230	31.24	1.022	25.96	1.264	32.11	1.0625-20 UN-2A	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse ¼ Turn Bayonet Coupling Bulkhead Feed–Thru Receptacle

803-010 Ordering Information



Series 803 Bulkhead Feed–Thru Receptacles feature quarter turn bayonet coupling in two shell options, jam nut with o-ring for rear panel mounting, or elliptical flange mount for rear panel mounting. Gold plated contacts and LCP insulators. Available in aluminum or stainless steel shell.


How To Order

Sample Part Number	803-010	-07	M	6-7	P		N
Series	**803-010** = Solder Cup or PCB Contacts						
Shell Style (See Table I)	**-02** = Flange Mount **-07** = Jam Nut						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant						
Shell Size - Insert Arrangement	Available in Shell Sizes 5 Thru 15 – See Contact Arrangements Page F-2						
Contact Type, Jam Nut Side	**P** = Pin, PC Tail **S** = Socket PC Tail						
Contact Type, Opposite Side	**P** = Pin, PC Tail **S** = Socket PC Tail						
Shell Key Positions (See Table III)	**N** = Normal **X** = Pos. X **Y** = Pos. y **Z** = Pos. Z						

Table I: Shell Style




-02
Flange Mount




-07
Jam Nut

Table II: Alternate Key Positions



Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°

Jam Nut Panel Cutout Dimensions




Shell Size	A Flat		Ø B	
	In.	mm.	In.	mm.
5	.353	8.97	.382	9.70
6	.416	10.57	.445	11.30
7	.539	13.69	.572	14.53
8	.539	13.69	.583	14.81
9	.599	15.21	.643	16.33
10	.669	16.99	.720	18.29
12	.848	21.54	.885	22.48
14	1.029	26.14	1.072	27.23

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Jam nut rear panel mount receptacle - shell style 07

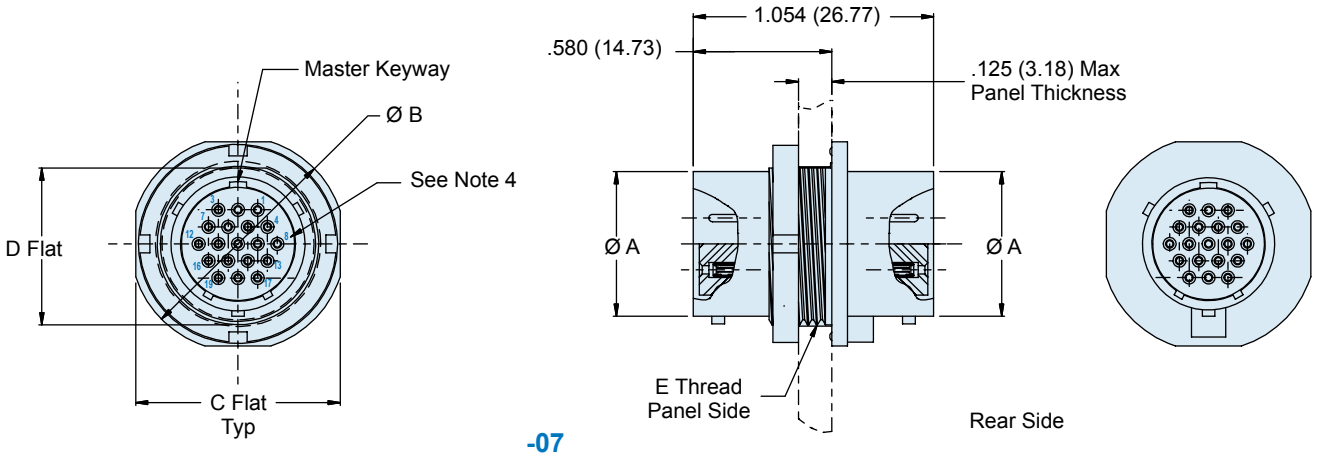

-07
Jam Nut

Flange mount front or rear panel mount receptacle - shell style 02

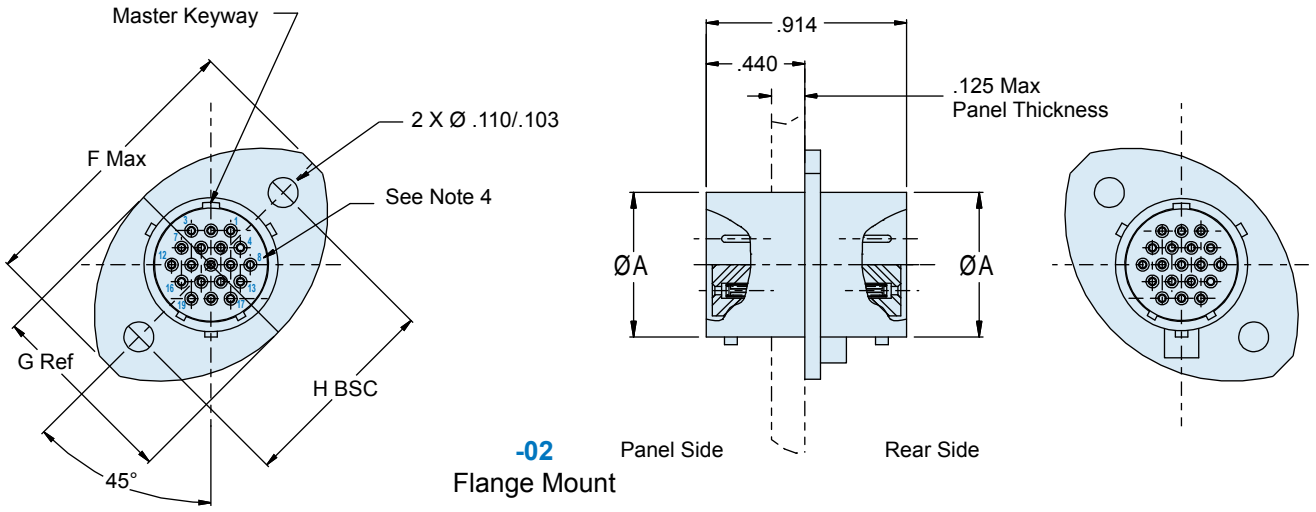

-02
Flange Mount

Table I: Dimensions

Shell Size	Ø A	Ø B	C Flat	D Flat	E Thread	F Max	G Ref	H Bsc	J Flat +.004 -.000	Ø K ±.005
5	0.300	0.575	0.545	0.350	.3750-32 UNEF-2A	0.703	0.460	0.513	0.353	0.382
6	0.362	0.635	0.595	0.410	.4375-28 UNEF-2A	0.788	0.522	0.598	0.413	0.445
7	0.436	0.755	0.723	0.536	.5625-32 UN-2A	0.890	0.590	0.708	0.539	0.572
8	0.508	0.755	0.723	0.534	.5625-32 UN-2A	1.154	0.668	0.964	0.539	0.583
9	0.561	0.830	0.790	0.596	.6250-28 UN-2A	1.207	0.721	1.017	0.599	0.643
10	0.635	0.890	0.855	0.663	.6875-28 UN-2A	1.291	0.795	1.101	0.669	0.720
12	0.714	1.078	1.044	0.845	.875-28 UN-2A	1.394	0.874	1.204	0.848	0.885
14	0.865	1.264	1.230	1.022	1.0625-20 UN-2A	1.545	1.050	1.280	1.029	1.072
15	0.925	1.325	1.290	1.096	1.125-28 UN-2A	1.630	1.150	1.370	1.099	1.135

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 803 Harsh Environment Shielded Cordsets



High performance Mighty Mouse cordsets feature easy ordering and fast delivery. These fully shielded and watertight assemblies withstand abrasion, temperature extremes and chemicals. Flexible overmolding provides rugged, watertight protection to wire and shield. Two styles are available: ***Style 1*** polyamide overmold and polyurethane cable jacket, and ***Style 2*** improved temperature range, high flexibility thermoplastic rubber overmold and cable jacket. Overmolded Mighty Mouse cordsets are suitable for military gear and other hostile environments where interconnect reliability and survivability is essential.

Product Features

- Single-ended or double-ended
- Rugged, watertight construction
- 100% electrically tested
- Flexible to -55ºC. (Style 2)
- Stainless steel shield termination band
- Resistant to chemicals
- Withstands UV and ozone

High-Speed Cordsets


Controlled impedance twisted pair cordsets for Ethernet, USB and other protocols are available. Please refer to Section U

Harsh Environment Cordset Selection Guide		
Property	Style 1 Polyurethane Jacket Polyamide Overmold	Style 2 Rubber Jacket Rubber Overmold
Cable jacket	Thermoplastic polyurethane (TPU), black	Thermoplastic elastomer (TPV), black
Overmold	Polyamide, black	Thermoplastic elastomer (TPV), black
Operating temperature	-30° C. to +105° C.	-55° C. to +135° C.
Flexibility	Good	Excellent
Water Resistance	Waterproof	Waterproof
Solvent Resistance, Cable Jacket	Excellent	Good
Solvent Resistance, Overmold	Fair (1)	Good
Weatherability	Excellent	Excellent
Abrasion Resistance	Excellent	Good
Flammability	Flame retardant UL 94 V-0	Flame retardant UL 94 HB
Low Smoke, Zero Halogen Cable Jacket	Yes	No
(1) Excellent resistance to most solvents, fuels, and oils; poor resistance to strong acids and bipolar solvents (alcohol)		

Specifications	
Cable jacket	Style 1: thermoplastic polyurethane, black, low-smoke, zero-halogen Style 2: thermoplastic elastomer, black
Overmold	Style 1: polyamide Style 2: thermoplastic elastomer, black
Cable shield	Tin-coated copper braid, 90% minimum coverage
Conductors	Silver coated stranded wire, TFE insulated, per M22759/11
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	#23–5 amps, #20–7.5 amps, #16–13 amps, #12–23 amps
Test voltage (DWV)	#23 750 Vac, #20 750 vac, #16 and #12 1800 VAC sea level
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

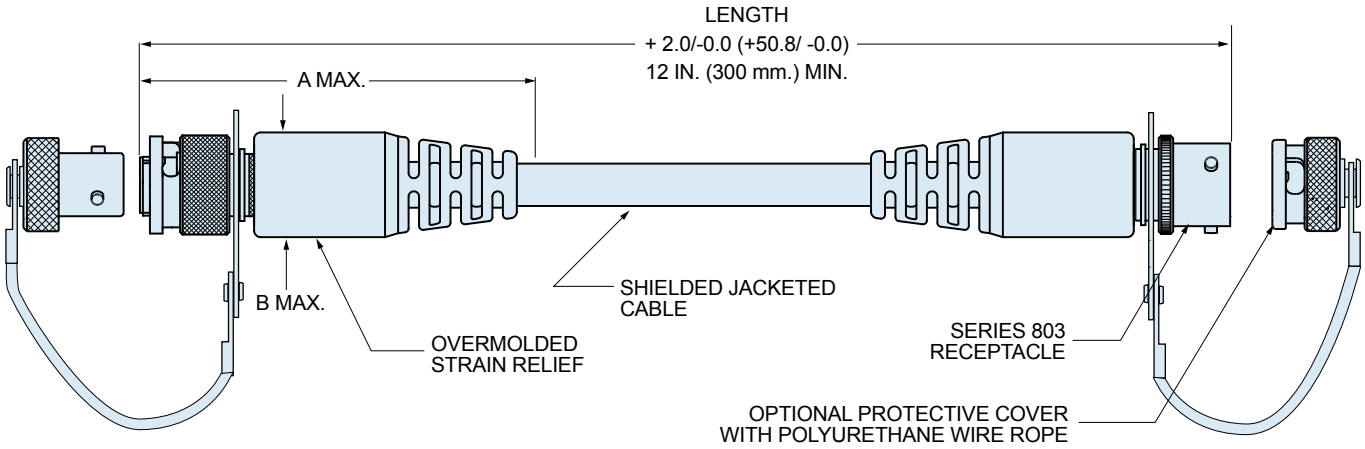

Dimensions				
Shell Size	A Max.		B Max.	
	In.	mm.	In.	mm.
5	2.38	60.45	0.50	12.70
6	2.48	62.99	0.55	13.97
7	2.58	65.53	0.65	16.51
8	2.65	67.31	0.71	18.03
9	2.85	72.39	0.78	19.81
10	2.82	71.63	0.82	20.83
12	3.00	76.20	0.9	22.86
14	3.20	81.28	1.10	27.94

F

NOTES

- Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
- Wires are silver-coated stranded copper with TFE insulation, 600V, in accordance with M22759/11.
- Wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse ¼ Turn Bayonet Coupling Shielded Overmolded Harsh Environment Cordsets

803-009, 030, -016, and -031 Ordering Information

Series 803 Cordsets with #23 Contacts								
Sample Part Number								
803-009	-A	C	2	M	8-28	N	X	-36
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
803-009 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **803-030** **Style 2** Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #22 AWG **4** #24 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See page F-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page F-3	Overall Length In Inches 12 Inch Min.

Series 803 Cordsets with #20HD Contacts								
Sample Part Number								
803-041	-A	C	0	M	8-28	N	X	-36
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
803-016 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **803-031** **Style 2** Rubber Cable Jacket and Overmold,	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**0** #20 AWG **2** #22 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See page F-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page F-3	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse ¼ Turn Bayonet Coupling Shielded Overmolded Harsh Environment Cordsets

803-013, -032, -014 and -033 Ordering Information

Series 803 Cordsets with #16 Contacts								
Sample Part Number								
803-013	-A	C	6	M	8-28	N	X	-36
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
803-013 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **803-032** **Style 2** Rubber Cable Jacket and Rubber Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**6** #16 AWG **8** #18 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See page F-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page F-3	Overall Length In Inches 12 Inch Min.

Series 803 Cordsets with #20HD Contacts								
Sample Part Number								
803-014	-A	C	0	M	8-28	N	X	-36
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
803-014 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold, **803-033** **Style 2** Rubber Cable Jacket and Rubber Overmold,	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**0** #20 AWG **2** #22 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See page F-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page F-3	Overall Length In Inches 12 Inch Min.

F

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 803 Ultraflexible "Phantom Cable" Cordsets



Phantom Cable cordsets feature high-flex rubber-insulated wires, lightweight shield and overbraided jackets for maximum flexibility, reduced size and minimum weight. Flexible rubber overmold provides strain relief and environmental sealing. EMI shield options include high-strength, ultralightweight Amberstrand® nickel-coated composite braid, ArmorLite™ or lightweight, high flexibility tinned copper braid. Braid outer jackets are available with NOMEX®, HALAR® or PTFE-coated fiberglass.

Product Features

- Overbraided cable jacket for excellent flexibility
- Ultra-lightweight AmberStrand® EMI shield
- 100% electrically tested
- Flexible to -55ºC.
- Stainless steel shield termination band

F

Application Note

Overbraided textile jackets are ideal for applications where flexibility and weight are important. However, water can penetrate through the jacket and cable shield. Dust and contamination can also become entrapped in the braid. Braided jackets are prone to fraying damage caused by snagging on velcro closures and MOLLE vests. Extruded cable jackets are recommended if debris entrapment, moisture ingress or fraying damage are concerns.

Braid Shield Selection Guide			
Property	Amberstrand®	Armorlite®	Copper
Type	Nickel-coated high-strength super fiber	Micro-filament nickel-coated stainless steel	Tin-coated copper
Weight/ft. (0.5 in. ID)	3.7 grams	4.4 grams	22.3 grams
Operating Temp(1)	-65º C to +200º C	-80º C to +260º C	-80º C to +150º C
Coverage	90% min.	90% min.	90% min.
Flexibility	Excellent	Excellent	Good
Cost Comparison	$$$	$$	$
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Jacket Selection Guide			
Property	NOMEX®	HALAR®	PTFE Coated Fiberglass
Color	Black or olive drab	Black	Tan
Operating Temp(1)	-55º C to +260º C	-73º C to +150º C	-75º C to +300º C
Chemical Resistance	Excellent	Excellent	Excellent
Flammability	Self-extinguishing, will not melt	Fire retardant UL VW-1	Self-extinguishing
Toxicity	Non-toxic	Non-toxic	Non-toxic
Flexibility	Excellent	Excellent	Excellent
Abrasion resistance	Excellent	Excellent	Excellent
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			


Specifications	
Cable jacket	NOMEX®, HALAR® or PTFE-coated fiberglass
Temperature Range	-55º C to +135º C
Overmold	Thermoplastic elastomer, black
Cable shield	AmberStrand®, ArmorLite® or tinned copper, 90% minimum coverage
Conductors	Silver coated stranded wire, rubber insulation
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	5 amps
Test voltage (DWV)	500 Vac
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse with UN Mating Thread
Flexible, Lightweight Phantom Cable Cordsets
803-026, 803-027, 803-028, 803-029 Ordering Information

Series 803 "Phantom Cable" Cordsets size #12 thru #23 Contacts										
Sample Part Number										
803-027	**-B**	**N**	**2**	**Z1**	**5-3**	**N**	**X**	**-60**	**C**	**N**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length	Shield Option	Jacket Option
Size #23 Contacts **803-026** Phantom Cable Cordset Size #20 HD Contacts **803-027** Phantom Cable Cordset Size #16 Contacts **803-028** Phantom Cable Cordset Size #12 Contacts **803-029** Phantom Cable Cordset	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Rec. with Male Pin Contacts **-D** Rec. with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Rec. with Male Pin Contacts **D** Rec. with Female Socket Contacts **N** No Connector (Single-Ended)	Size #23 Contacts **4** #24 AWG **6** #26 AWG **8** #28 AWG Size #20 HD Contacts **0** #20 AWG **2** #22 AWG Size #16 Contacts **6** #16 AWG **8** #18 AWG Size #12 Contacts **2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See page F-2 for insert arr. Consult Factory for Combo Arr.	**P** Metal Protective Covers Included **N** No Covers Supplied	**N** Normal **X** Pos. X **Y** Pos. Y **Z** Pos. Z See page F-3	Overall Length In Inches 12 Inch Min.	**A** Amberstrand **B** Armorlite **C** Tin-Coated Copper	**D** Nomex, Olive Drab **N** Nomex, Black **H** Halar (Monofil) **P** Peek (Monofil)

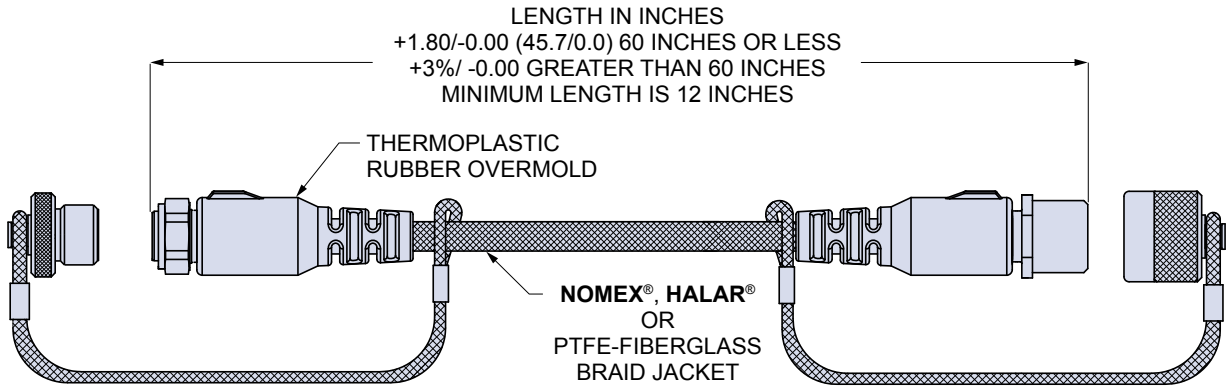

NOTES

- Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
- Wires are silver-coated stranded copper with TPE insulation, 600V, UL VW-1 rated.
- Wires are white with color stripe per MIL-STD-681. Wire #1 is WHT/BLK, wire #2 is WHT/BRN, etc.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SERIES 80

MIGHTY MOUSE

New Series 824 quick disconnect locking push–pull connector





Introducing the new Mighty Mouse Series 824 Locking Push-Pull Connector: all the familiar size, weight and performance advantages of the industry-standard Mighty Mouse 804 push-pull connector with a revolutionary low-profile locking coupling mechanism. Glenair's primary design goal in the development of the locking 824 was to bring mil-spec caliber connector performance to locking push-pull applications. The Series 824 Locking Push-Pull provides superior sealing, excellent EMI protection, low-profile ergonomic mating and de-mating, and easy crimp contact termination. The locking push-pull mechanism delivers visual, tactile, and audible mating confirmation under even the most extreme field conditions. Built for long-term durability and reduced size and weight, the high-density Series 824 Locking Push-Pull connector far surpasses commercial caliber push-pull connectors.

Glenair®

Glenair, Inc.
1211 Air Way
Glendale, CA 91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

Series 804 Push-Pull Mighty Mouse Quick-Disconnect Connectors

Table of Contents and Introduction

PRODUCT SELECTION GUIDE



Series 804 Cable Plugs
Cable plugs are available with an integral shield termination platform for use with **Band-Master™ ATS** microbands sold separately, or with accessory threads for backshell attachment. Contacts are crimp-type, and are packaged with the connector. **Page G-7**



Series 804 Cobra Style Plug
These connectors feature an integrated backshell equipped with a removable rear cover and gasket, providing an easy path to installing the supplied crimp contacts. **Page G-9**



Series 804 Panel Mount Plugs with PCB or Solder Cup Terminals
These panel mount plugs offer reduced profiles inside the box compared to panel mount receptacles. Connector bodies are sealed with epoxy to assure a water-tight open face seal. **Page G-12**




Series 804 Panel Mount Plugs with Banding Porch
These panel mount plugs offer reduced profiles inside the box compared to panel mount receptacles. Connector bodies are sealed with epoxy to assure a water-tight open face seal. **Page G-16**




Series 804 Receptacles with Crimp Terminals
Choose in-line or jam nut versions for panel mounting. Crimp receptacles are available with an integral shield termination platform or with accessory threads for backshell attachment. Contacts are crimp-type, and are packaged with the connector. **Page G-20**



Series 804 Receptacles with PCB or Solder Cup Terminals
These panel mount connectors feature gold plated, factory-installed contacts. Connector bodies are sealed with epoxy to assure a water-tight open face seal. **Page G-24**



Series 804 Hermetic Receptacles
Need a miniaturized hermetic for a sealed box or instrument? These stainless steel, glass-sealed connectors are available with solder cup or PC tail contacts. 100% tested to meet 1 X 10^{-7} cc/sec helium leakage. Open face pressure rating 1000 PSI. **Page G-27**



Series 804 Bulkhead Feed–Thru Receptacle Connector
Jam Nut mount, shell sizes 5 to 15. This connector mates with all push/pull plug connectors with the same polarization and opposite contact genders. Copper alloy gold-plated contacts, pin to pin, pin to plug or plug to plug. **Page G-30**

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 804 Push-Pull Mighty Mouse Quick-Disconnect Connectors

Table of Contents and Introduction

PRODUCT SELECTION GUIDE




Series 804 with Lanyard
Connector plug with lanyard and crimp release contacts, shell size 5-15 — **Page G-32**
Connector receptacle with lanyard and crimp release contacts, shell size 5-15 — **Page G-34**




Series 804 Cordsets
Select standard polyurethane cable for general purpose applications, or specify low smoke/ zero halogen polyurethane for applications where low toxicity is mandated. Select Phantom Cable for increased flexibility — **Page G-36**



Series 804 USB Cordset Hub
The Mighty Mouse USB Cordset Hub regulates 5V USB power from a 16V source while providing power management — **Page G-42**



Series 804 USB Tactical Patch Cable
These ruggedized cordsets are available as single or double ended or right angle. Polyurethane jacket is suitable for general purpose applications or select Nomex® jacket for increased flexibility. — **Page G-43**



Series 804 Radio Connectors
Choose AN/PRC or RF7800T radio connectors with 804 quick disconnect connectors. Select un-cabled, cabled or pigtail versions — **Page G-46**



Series 804 USB Flash Drive
Mighty Mouse Series 804 USB 3.0 flash drive featuring a push/pull 804 series ruggedized interface and available in 8GB, 16GB, 32GB, or 64GB storage capacities. — **Page G-48**



Series 824 Locking Push Pull
The New Mighty Mouse Series 824 locking push-pull connectors provides superior sealing, excellent EMI protection, low-profile ergonomic mating and demating, and easy crimp contact termination. Finally mil-spec performance in a push-pull shell. — **Page G-49**

New locking push-pull with ***SpeedMaster*** 10G contacts — **Page G-49**

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
5-3	3				
6-1				1	
6-4	4				
6-6	6				
6-7	7				
6-23			3		
7-1					1
7-25			5		
7-10	10				
8-2				2	
8-28			8		
8-13	13				
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
11-31	31				
12-2					2
12-3					3
12-7				7	
12-220			20		
12-37	37				
12-200	6				2
12-201	10				2
12-202	20			2	

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688


Contact Legend

#23 ◦ #20HD ◓ #20 ● #16 ◒ #12 ⊕


Mating Face View of Pin Connector
(socket connector numbers are reversed)

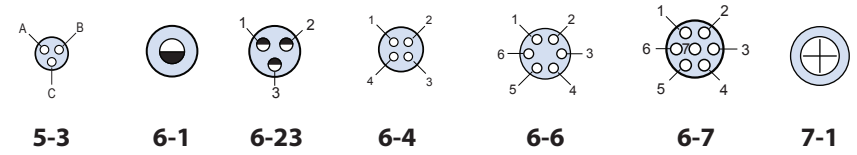


5-3 6-1 6-23 6-4 6-6 6-7 7-1

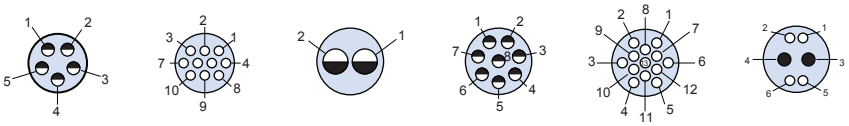


7-25 7-10 8-2 8-28 8-13 8-200

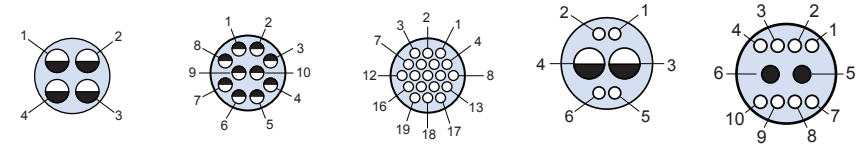


9-4 9-210 9-19 9-200 9-201

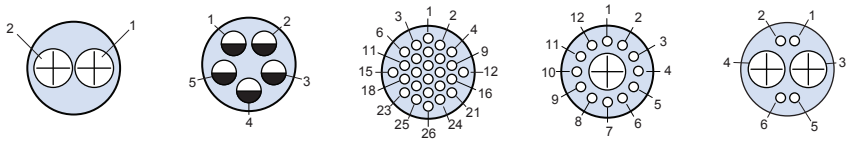

10-2 10-5 10-26 10-200 10-201

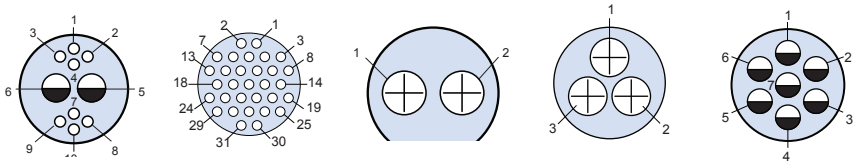

10-202 11-31 12-2 12-3 12-7

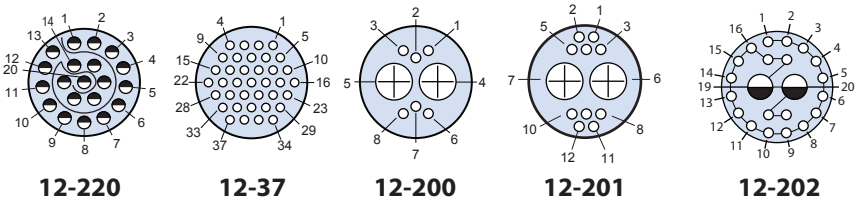

12-220 12-37 12-200 12-201 12-202

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 804 Push-Pull Mighty Mouse Quick-Disconnect Connectors

Contact Arrangements

Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
12-203	12			4	
12-204	12			2	
12-205	4				4
14-5					5
14-12				12	
14-235			35		
14-204	40			2	
14-205	32			4	
14-206	34				2
14-207	20				4
14-55	55				

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Mating Face View of Pin Connector
(socket connector numbers are reversed)

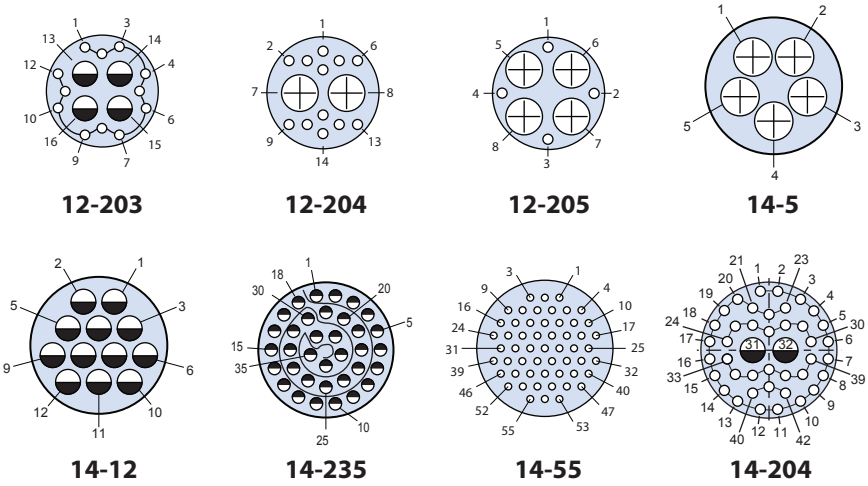


12-203 12-204 12-205 14-5



12-12 14-235 14-55 14-204

Contact Legend

#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕

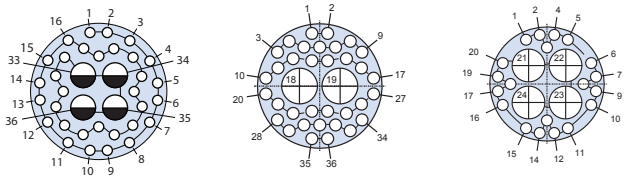

14-205 14-206 14-207

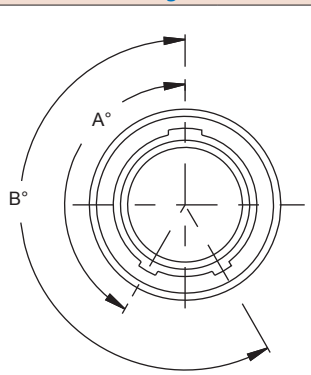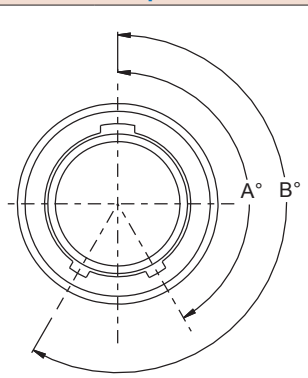Alternate Key Positions		
Plug	Receptacle	
		
Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°

Series 804 Demate Force		
Layout	Average Force	
	Pounds	Newtons
5-3	11	48
6-4	11	48
6-7	12	51
7-10	12	54
8-13	13	56
9-19	14	62
10-26	16	68
12-37	18	78
14-55	21	94

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com G-4 E-Mail: sales@glenair.com

Series 804 Push-Pull Mighty Mouse Connector
Quick-Disconnect Connectors
Connector Maximum Weights

Series 804 Weights Maximum Weight In Grams				
Layout	Plug	Jam Nut Receptacle		In-Line Recep.
		Rear Mount	Front Mount	
5-3P	2.2	8	9.7	4
5-3S	2.4	8.3	9.8	4.1
6-1P	3.1	7.2	11.8	5.2
6-1S	3.4	7.5	12.1	5.5
6-4P	2.8	8.8	11.4	4.8
6-4S	3	9	11.6	5.1
6-6P	2.8	8.8	11.4	4.8
6-6S	3.1	9.2	11.8	5.2
6-7P	3	9.1	11.7	5.3
6-7S	3.2	9.5	12	5.5
6-23P	2.9	8.9	11.5	4.9
6-23S	3.6	9.3	11.9	5.3
7-1P	3.7	11.1	16.4	10.1
7-1S	4.3	11.7	16.9	10.7
7-25P	3.5	11	16.3	10
7-25S	4.2	11.7	16.9	10.7
7-10P	3.7	10.9	16.2	10
7-10S	4.2	11.3	16.5	10.3
8-1P	7.7	13.6	12.8	10.8
8-1S	10.1	10.1	11	13.5
8-2P	5	10.9	13.5	8
8-2S	5.7	5.7	11.7	9
8-28P	5.2	11.1	14.4	8.2
8-28S	6.2	6.2	12.9	9.5
8-13P	4.3	10.6	12.4	7.4
8-13S	4.8	11	13	8.1
8-200P	5.3	11.2	13.9	8.4
8-200S	6.1	12	14.6	9.1
9-4P	5.7	15.2	21.1	11
9-4S	6.7	16.2	22.1	12
9-210P	5.9	15	20.9	10.3
9-210S	6.7	16.2	22.1	12
9-19P	4.6	14.1	20	9.9
9-19S	4.8	14.9	21.1	9.8
9-200P	5.2	14.6	20.6	10.5
9-200S	6.3	15.7	21.7	11.6
9-201P	5.8	15.3	21.2	11.1
9-201S	6.9	16.4	22.3	12.2
10-2P	7	15.2	23	11.6
10-2S	8.3	16.5	24.4	12.9
10-5P	7.3	15.5	23.3	11.9
10-5S	8.7	16.9	24.8	13.3
10-26P	5.4	13.6	20.5	10.1
10-26S	6.2	13.9	21.1	10.5
10-200P	6.2	14.4	22.2	10.8
10-200S	7.6	15.8	23.7	12.2
10-201P	6.3	14.5	22.3	10.9


Series 804 Weights Maximum Weight In Grams				
Layout	Plug	Jam Nut Receptacle		In-Line Recep.
		Rear Mount	Front Mount	
10-201S	7.7	16	23.8	12.3
10-202P	6.3	14.5	22.3	10.9
10-202S	7.8	16.1	23.9	12.4
11-31P	10.1	16.6	26.1	13.4
11-31S	12.4	18.5	28.3	14.9
12-2P	10.7	21.5	26.1	20.8
12-2S	12.3	23.1	27.7	22.4
12-3P	11.7	22.4	27.1	21.8
12-3S	13.4	24.2	28.8	23.4
12-7P	11.9	22.7	27.3	22
12-7S	14.5	25.3	29.9	24.6
12-200P	10.3	21.1	25.7	20.5
12-200S	12.5	23.3	27.9	22.7
12-201P	10.7	21.5	26.1	22.8
12-201S	13	23.8	28.4	23.1
12-202P	10.8	21.6	26.2	20.9
12-202S	12.7	23.5	28.1	22.8
12-203P	11.6	21.9	26.5	21.2
12-203P	13	23.8	28.4	23.1
12-204P	11.2	22	26.6	21.3
12-204P	13	23.8	28.4	23.1
12-205P	12.3	23.1	27.7	22.4
12-205S	14.1	24.9	29.5	24.2
12-220	11.5	22.3	26.9	21.6
12-220	13.8	24.6	29.2	23.9
12-37P	10.1	21.5	25.5	22.4
12-37S	11.8	23.1	27.2	22.1
14-2P	18.7	31.6	36.9	29.6
14-2S	24.8	37.6	42.9	35.7
14-5P	15.4	28.3	33.6	26.3
14-5S	18.4	31.2	36.5	29.3
14-12P	16.2	29	34.3	27.1
14-12S	19.8	32.7	38	30.7
14-204P	14.1	27	32.3	25
14-204S	17.6	30.4	35.7	28.5
14-205P	14.4	27.3	32.6	25.3
14-205S	17.9	30.7	36	28.8
14-206P	14.6	27.5	32.8	25.5
14-206S	18	30.8	36.1	28.9
14-207P	15.4	28.3	33.6	26.3
14-207S	18.8	31.6	36.9	29.7
14-208P	16.6	29.5	34.8	27.5
14-208S	21.6	34.4	39.7	32.5
14-235P	15.7	28.6	33.9	26.6
14-235S	19.8	32.6	37.9	30.7
14-55P	12.8	25.6	30.9	23.7
14-55S	15.6	28.3	33.8	26.5

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Quick-Disconnect Connectors

General Information

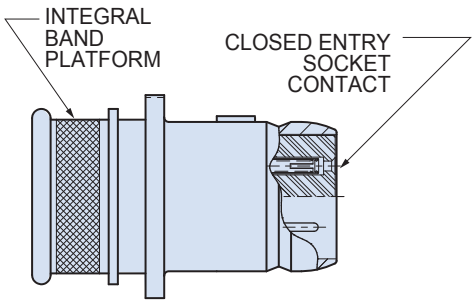

SERIES 804 PLUG

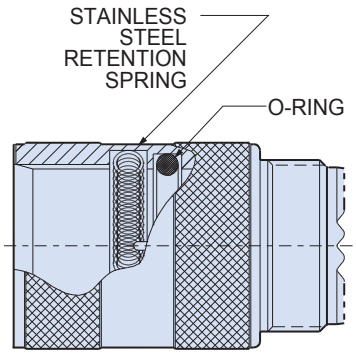

SERIES 804 RECEPTACLE

- **Push-to-Mate, Pull-to-Unmate**
- **Gold-Plated tainless Steel Spring**
- **Crimp Rear Release Contacts**
- **Integral Band Platform**
- **Available with Size #12, #16, #20, #20HD and #23 Contacts**
- **Environmentally Sealed**

Series 804 Quick-Disconnect Offers Environmental Sealing and Rugged Design in a Lightweight, Push-Pull Package

Ideal for breakaway connections, the Series 804 QDC connector features a stainless steel spring in the receptacle and a detent on the plug body. Used for headsets, radios, weapons and other applications, the QDC Mighty Mouse meets immersion requirements and provides excellent durability. The gold-plated spring provides low shell-to-shell resistance for excellent EMI shielding. A fluorosilicone o-ring provides a watertight seal when mated.



Specifications	
Current Rating	#23–5 A, 20HD–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD–1000 VAC, #12 and #16–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness [1]	60 dB minimum from 100MHz to 1000MHz.
Durability	2000 mating cycles
1. Tested with electroless nickel plating See Series 80 General Information for complete performance specs.	



Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	Liquid crystal polymer (LCP)
Contact Retention Clip	Beryllium copper alloy
Seal, O-rings, Grommet	Fluorosilicone rubber
Spring	Gold plated stainless steel
See Series 80 General Information for complete material and finish specs.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Plug Connector

804-001 & 804-002 Ordering Information





Quick Disconnect
These plugs snap securely into receptacle housings and release with a simple pull.

Two Keying Styles
A single master key provides fast mating in low-light situations, or specify three keys for more polarizing options.

Two Shell Styles
Integral platform for shield attachment using the Band–Master™ ATS termination system, or an accessory thread for attaching a strain relief.

How To Order						
Sample Part Number	**804-001**	**-06**	**NF**	**9-19**	**S**	**A**
Series (See Table I)	**804-001** = Plug with Banding Platform **804-002** = Plug with Accessory Thread					
Shell Style	**-06** = Plug					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page G-2					
Contact Type	**Connector supplied without Crimp contacts** **A** = Pin, less contacts **B** = Socket, less contacts	**Connector supplied with contacts** **P** = Pin Connector **S** = Socket Connector	**Connector Supplied with 30 AWG Crimp Barrel** **G** = Pin, Crimp **H** = Socket, Crimp			
	Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed.					
	Coaxial contacts and non-standard signal contacts are ordered separately.					
Shell Key Positions (See Table II)	**Omit** = Single Master Key **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series

	
804-001 Plug with Banding Platform	**804-002** Plug with Accessory Thread

G


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Plug Connector

804-001-06 and 804-002-06 Dimensions

Plug connector

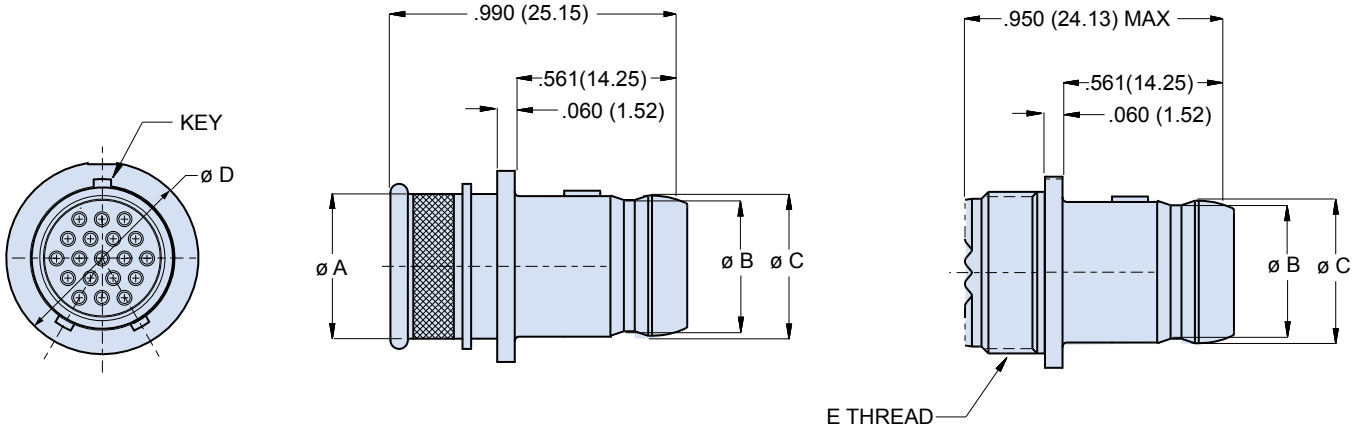


Integral Band Platform
804-001-06

Accessory Thread
804-002-06

Dimensions									
Shell Size	Ø A		Ø B		Ø C		Ø D Max.		E Threads
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	
5	.246	6.25	.219	5.56	.250	6.35	.427	10.85	.2500-32 UNEF-2A
6	.286	7.26	.282	7.16	.313	7.95	.495	12.57	.3125-32 UNEF-2A
7	.390	9.91	.351	8.92	.383	9.73	.575	14.61	.4375-28 UNEF-2A
8	.442	11.23	.398	10.11	.429	10.90	.614	15.60	.5000-28 UNEF-2A
9	.500	12.70	.454	11.53	.486	12.34	.670	17.02	.5625-24 UNEF-2A
10	.564	14.33	.529	13.44	.563	14.30	.745	18.92	.6250-24 UNEF-2A
11	.608	15.44	.587	14.91	.618	15.70	.795	20.19	.6875-24 UNEF-2A
12	.650	16.51	.646	16.41	.676	17.17	.865	21.97	.6875-24 UNEF-2A
14	.805	20.45	.768	19.51	.800	20.32	.985	25.02	.9375-20 UNEF-2A
15	.850	21.59	.828	21.03	.860	21.84	1.041	26.44	.9375-20 UNEF-2A

Table II: Alternate Keyway Positions



Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Cobra™ Plug with Integral Cobra Backshell

804-066-06 Ordering Information




Series 804 plug with integral Cobra™ style ultra–low profile right angle banding backshell reduces clearance requirements without compromising ruggedness, environmental protection or shielding performance. Rear cover allows easy access for soldering wires or installing snap–in crimp pins. Cover gasket prevents moisture intrusion. Cover has lip for finger grip release. Eight clocking positions. Aluminum or stainless steel housing, gold–plated copper alloy contacts, fluorosilicone gasket. Crimp version features snap–in rear release contacts, high-grade rigid dielectric insulators and fluorosilicone wire seal. Solder version features factory–installed, epoxy potted solder cup contacts.

Available with 3 to 55 contacts, these 804 Cobra™ plugs feature size #23 contacts for AWG 22-28 wire.

How To Order							
Sample Part Number	**804-066-06**	**ZNU**	**8-13**	**P**	**A**	**1**	**05**
Series	**804-066-06** = Push Pull Plug						
Shell Material and Finish	**M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant						
Shell Size - Insert Arrangement	**5-3**, **6-4**, **6-6**, **6-7**, **7-10**, **8-13**, **9-19**, **10-26**, **12-37**, **14-55**						
Contact Type	**A** = Pin, Solder Cup **P** = Pin, Crimp **B** = Socket, Solder Cup **S** = Socket, Crimp						
Shell Key Positions (See Table I)	**Omit** = Single Master Key **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F						
Cable Exit Direction (See Table III)	**1** through **8** See Exit Direction Table						
Cable Entry Size (See Table II)	**2** through **12**						

Table I: Alternate Keyway Positions

Code	A°	B°	Code	A°	B°
A	150°	210°	D	140°	275°
B	75°	210°	E	75°	275°
C	95°	230°	F	95°	210°



G

Rev 1120117


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Cobra Plug with Integral Cobra Backshell

804-066-06 Dimensions


Right angle low profile cable plug

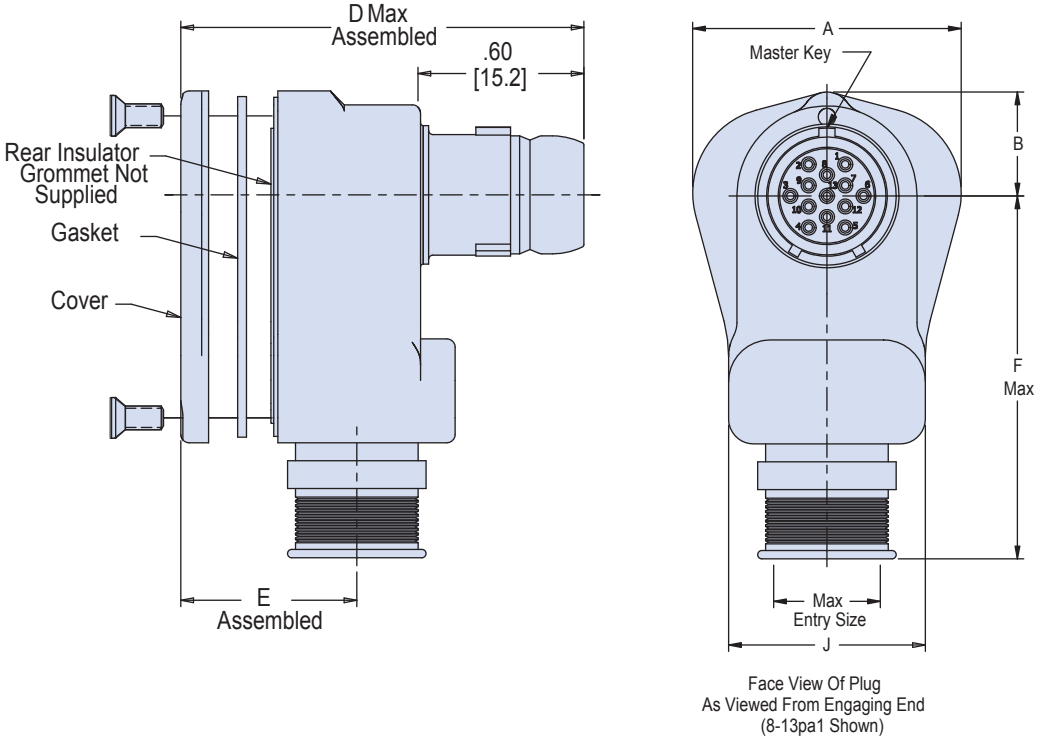

Face View Of Plug
As Viewed From Engaging End
(8-13pa1 Shown)

Dimensions									
Shell Size	Ø A	B	D Max	E Max	F	G Max	H Max	J	Max Entry Size
5	.67(17.0)	.27(6.9)	1.03(26.2)	.32 (8.1)	1.21 (30.7)	1.34 (34.0)	1.16(29.5)	.500(12.7)	03
6	.75(19.1)	.30(7.6)	1.08(27.4)	.34 (8.6)	1.24 (31.5)	1.39 (35.3)	1.21(30.7)	.560(14.2)	04
7	.88(22.4)	.34(8.6)	1.20(30.5)	.39 (9.9)	1.28 (32.5)	1.50 (38.1)	1.32(33.5)	.650(16.5)	05
8	.97(24.6)	.38(9.7)	1.24(31.5)	.42 (10.7)	1.31 (33.3)	1.54 (39.1)	1.36(34.5)	.710(18.0)	06
9	1.06(26.9)	.41(10.4)	1.30(33.0)	.45 (11.4)	1.34 (34.0)	1.61 (40.9)	1.43(36.3)	.770(19.6)	07
10	1.15(29.2)	.44(11.2)	1.35(34.3)	.48 (12.2)	1.37 (34.8)	1.66 (42.2)	1.47(37.3)	.835(21.2)	08
12	1.33(33.8)	.50(12.7)	1.44(36.6)	.52 (13.2)	1.48 (37.6)	1.75 (44.5)	1.56(39.6)	.950(24.1)	10
14	1.46 (37.1)	56 (14.2)	1.53 (38.9)	.58 (14.7)	1.64 (41.7)	1.84 (46.7)	1.69 (42.9)	1.070 (27.18)	12

Table II: Exit Direction	
Direction	C°
1	0°
2	45°
3	90°
4	135°
5	180°
6	225°
7	270°
8	315°

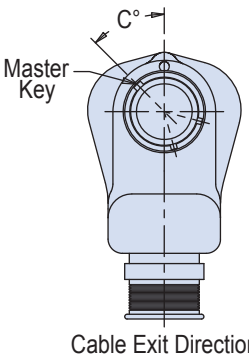

Cable Exit Direction
(Direction 2 Shown)


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Arrangements Per Shell Size	
Shell Size	Contact Arrangement*
5	5-3
6	6-4,6-6,6-7
7	7-10
8	8-13
9	9-19
10	10-26
12	12-37
14	14-55
* Number Following Dash = Number Of Contacts	

Table III: Cable Entry	
Code	**Entry Size**
02	0.125
03	0.188
04	0.250
05	0.313
06	0.375
07	0.438
08	0.500
09	0.563
10	0.625
11	0.688
12	0.750

Mating Space Requirements

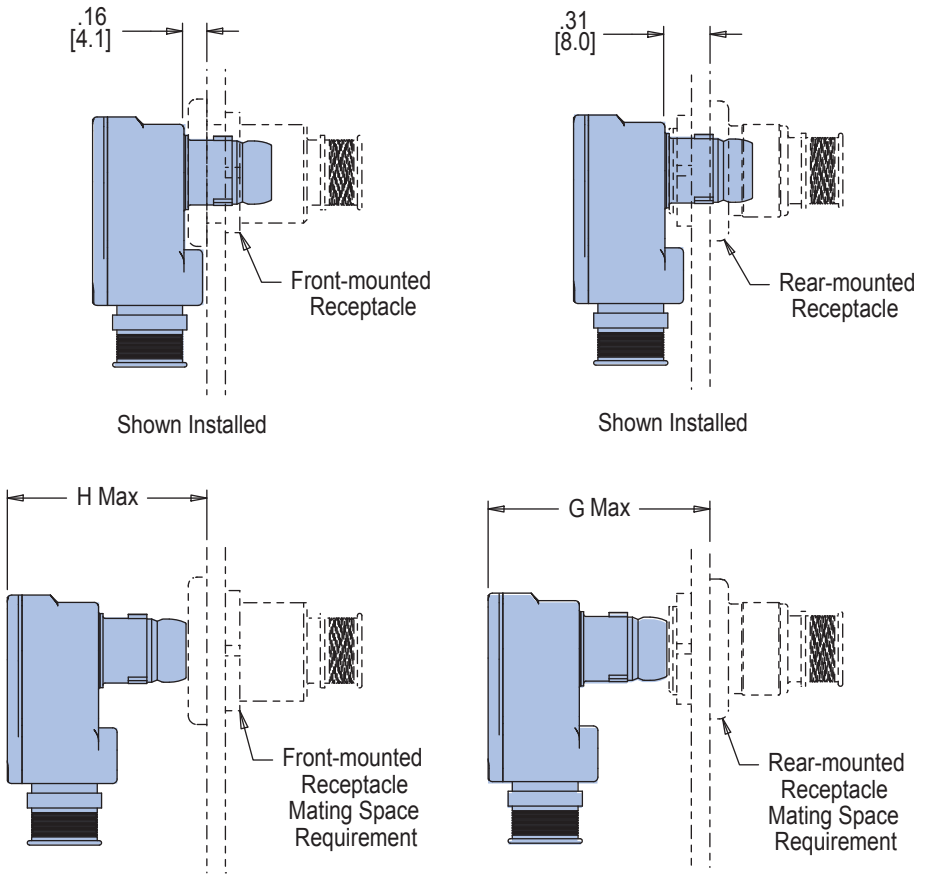

Dimensions in Inches (millimeters) are subject to change without notice.

Series 804 Push-Pull Mighty Mouse
PC Tail or Solder Cup Panel Mount Plug
804-009, 804-021 Ordering Information



Panel Mount Plugs save space inside the box compared to Series 804 removable contact receptacles. Factory-installed non-removable contacts. Solder cup or printed circuit board terminals. Available in front or rear panel and flange mount versions.

Ingress Protection, Unmated Specify ***804-009*** connectors for applications where open face water immersion is not a requirement. For IP67 ingress protection and MIL-STD-810 Method 512 immersion requirements, specify ***804-021*** watertight connectors certified to meet one atmosphere pressure differential in open face condition from -40° to +70°C.

"Push-Pull" Quick-Disconnect Canted spring securely retains the mating plug.

How To Order

Sample Part Number	804-009	-07	NF	10-26	E	A
Series	**804-009** = Panel Mount Plug, Standard Potting **804-021** = Panel Mount Plug,Resilient Silicone Potting for Watertight Seal from -40° to +70°C (1 ATM Pressure Differential)					
Shell Style (See Table I)		**-00** = Front Panel Mount Jam Nut (See Table IV) **-02** = Flange Mount **-07** = Rear Panel Mount Jam Nut (See Table III)				
Shell Material and Finish			**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant			
Shell Size - Insert Arrangement				See Contact Arrangements Page G-2		
Contact Type					**P** = Pin, PC Tail **S** = Socket, PC Tail	**E** = Pin, Solder Cup **F** = Socket, Solder Cup
Shell Key Positions (See Table II)	**Omit** = Single Master Key	**A** = Normal	**B** = Pos. B	**C** = Pos. C	**D** = Pos. D	**E** = Pos. E **F** = Pos. F

Table I: Shell Style




		
-00 Jam Nut, Front Panel Mount	**-07** Jam Nut, Rear Panel Mount	**-02** Flange Mount

Table II: Alternate Keyway Positions




Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount plug - shell style 07

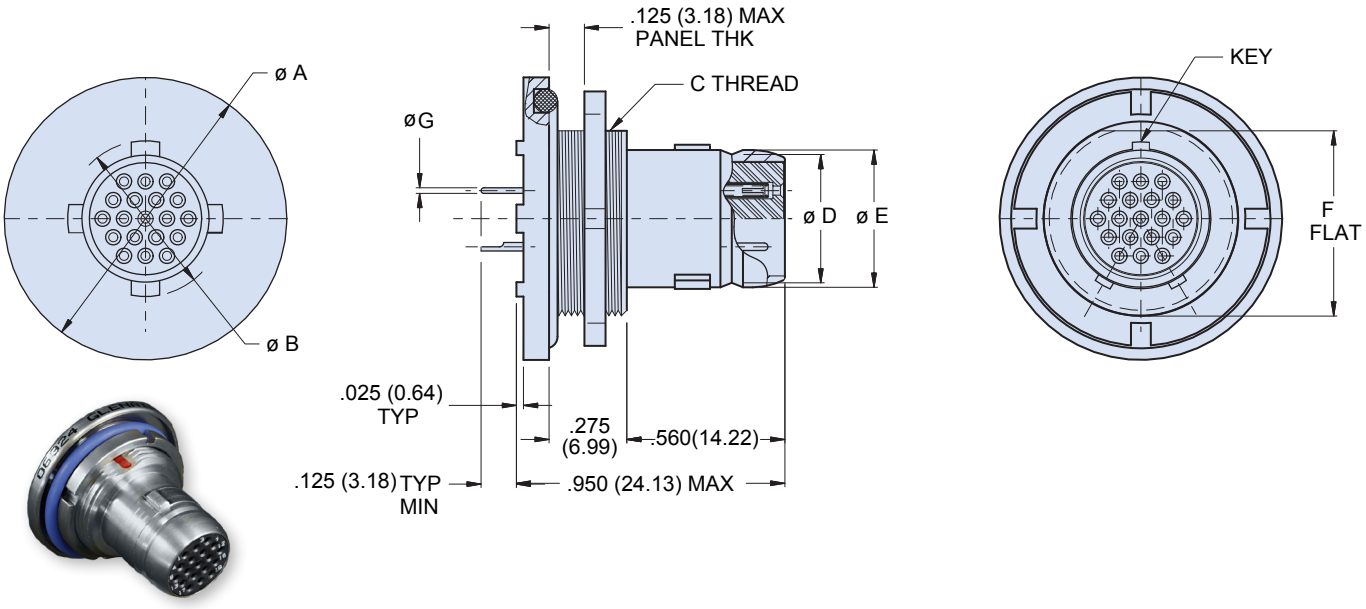

Dimensions												
Shell Size	Ø A		Ø B		C Threads	Ø D		Ø E		F Flat		Ø G Tail Dia.
	In.	mm.	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.790	20.07	.244	6.20	.4375-32 UN-2A	.219	5.56	.250	6.35	.415	10.54	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)
6	.830	21.08	.330	8.38	.5000-32 UN-2A	.282	7.16	.313	7.95	.467	11.86	
7	.910	23.11	.432	10.97	.6250-28 UN-2A	.351	8.92	.383	9.73	.594	15.09	
8	.955	24.26	.493	12.52	.6250-28 UN-2A	.398	10.11	.429	10.90	.594	15.09	
9	1.000	25.40	.551	14.00	.6875-28 UN-2A	.454	11.53	.486	12.34	.655	16.64	
10	1.085	27.56	.620	15.75	.7500-28 UN-2A	.529	13.44	.563	14.30	.721	18.31	
11	1.135	28.83	.662	16.81	.8125-28 UN-2A	.587	14.91	.618	15.70	.790	20.07	
12	1.180	29.97	.703	17.86	.8750-28 UN-2A	.646	16.41	.676	17.17	.843	21.41	
14	1.325	33.66	.863	21.92	1.0000-28 UN-2A	.768	19.51	.800	20.32	.968	24.59	

Rear Mount Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	.423	10.74	.448	11.38
6	.475	12.07	.510	12.95
7	.588	14.94	.635	16.13
8	.602	15.29	.635	16.13
9	.663	16.84	.695	17.65
10	.729	18.82	.760	19.30
11	.798	20.27	.822	20.88
12	.851	21.62	.885	22.48
14	.976	24.79	1.010	25.65


G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 804 Push-Pull Mighty Mouse
PC Tail or Solder Cup Panel Mount Plug
804-009-00, 804-021-00 Dimensions

Jam nut, front panel mount plug - style 00

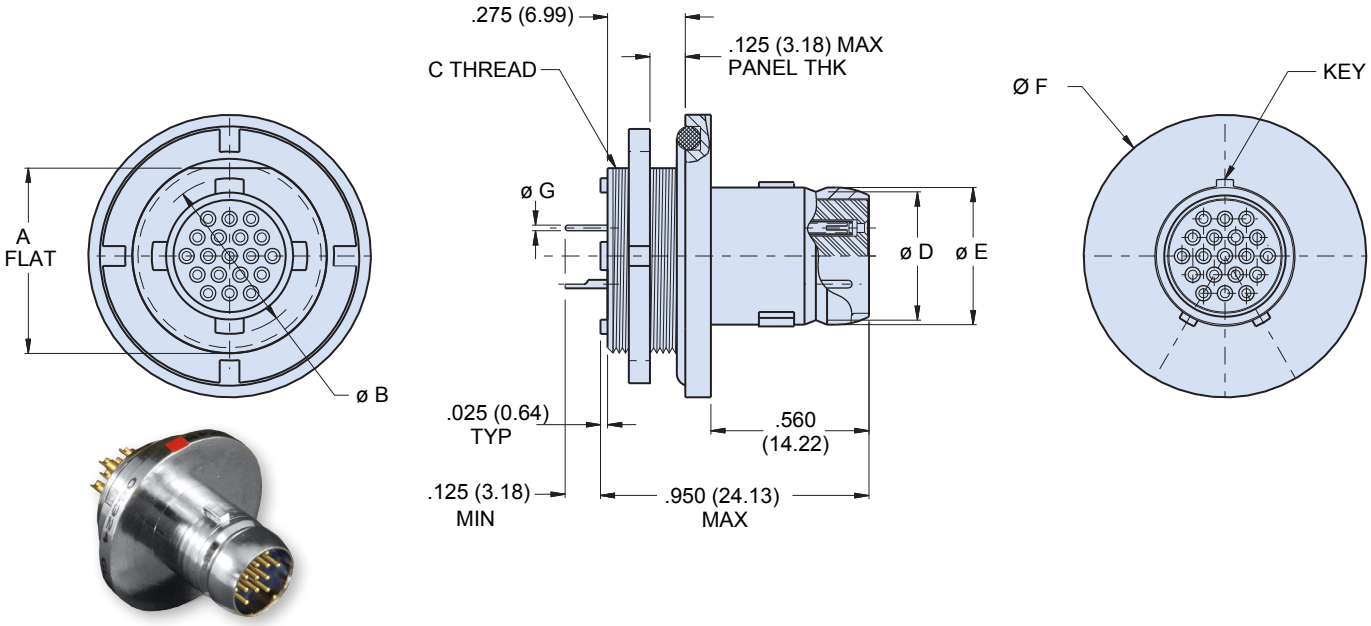

Dimensions												
Shell Size	A Flat		Ø B		C Threads	Ø D		Ø E		Ø F		Ø G Tail Dia.
	In.	mm.	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.415	10.54	.244	6.20	.4375-32 UN-2A	.219	5.56	.250	6.35	.790	20.07	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)
6	.467	11.86	.330	8.38	.5000-32 UN-2A	.282	7.16	.313	7.95	.830	21.08	
7	.594	15.09	.432	10.97	.6250-28 UN-2A	.351	8.92	.383	9.73	.910	23.11	
8	.594	15.09	.493	12.52	.6250-28 UN-2A	.398	10.11	.429	10.90	.955	24.26	
9	.655	16.64	.551	14.00	.6875-28 UN-2A	.454	11.53	.486	12.34	1.000	25.40	
10	.721	18.31	.620	15.75	.7500-28 UN-2A	.529	13.44	.563	14.30	1.085	27.56	
11	.790	20.07	.662	16.81	.8125-28 UN-2A	.587	14.91	.618	15.70	1.135	28.83	
12	.843	21.41	.703	17.86	.8750-28 UN-2A	.646	16.41	.676	17.17	1.180	29.97	
14	.968	24.59	.863	21.92	1.0000-28 UN-2A	.768	19.51	.800	20.32	1.325	33.66	

Front Mount Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.423	10.74	.448	11.38
6	.475	12.07	.510	12.95
7	.588	14.94	.635	16.13
8	.602	15.29	.635	16.13
9	.663	16.84	.698	17.73
10	.729	18.82	.760	19.30
11	.798	20.27	.823	20.90
12	.851	21.62	.885	22.48
14	.976	24.79	1.010	25.65

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Flange mount receptacle - style 02

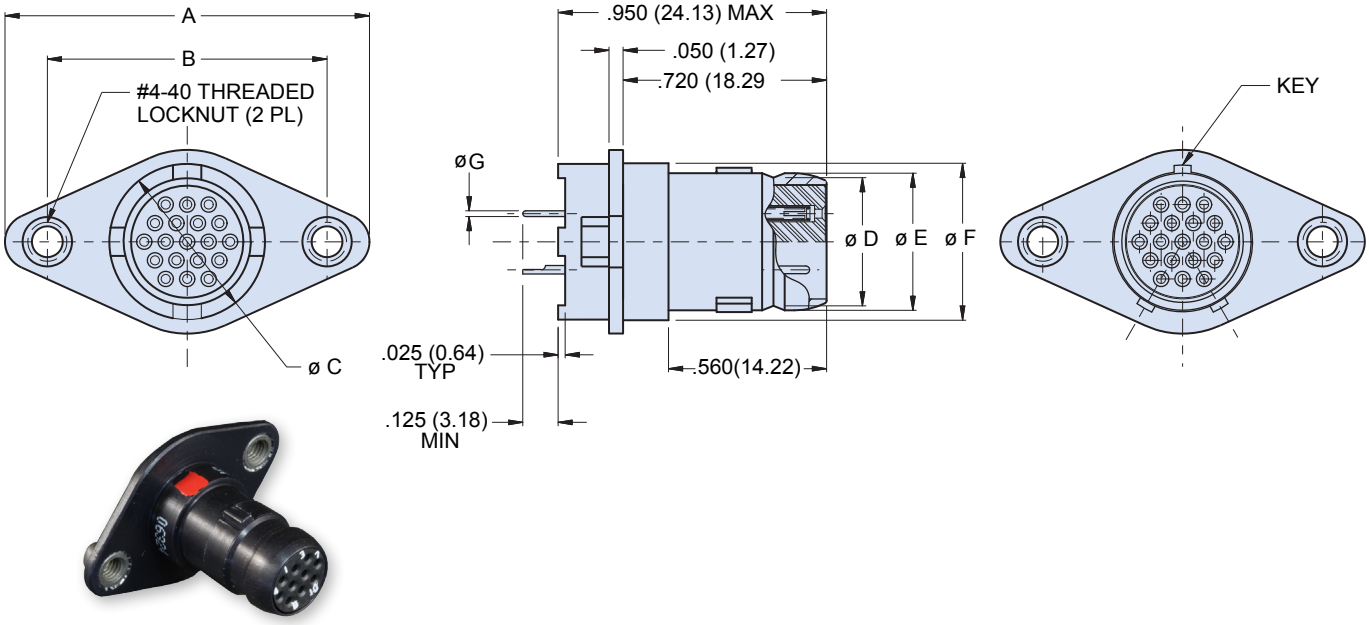

Dimensions													
Shell Size	A		B		Ø C		Ø D		Ø E		Ø F		Ø G Tail Dia.
			In.	mm.									
	In.	mm.	±.005	±0.13	In.	mm.	In.	mm.	In.	mm.	In.	mm.	
5	1.055	26.80	.755	19.18	.244	6.20	.219	5.56	.250	6.35	.320	8.13	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)
6	1.120	28.45	.820	20.83	.330	8.38	.282	7.16	.313	7.95	.385	9.78	
7	1.185	30.10	.885	22.48	.432	10.97	.351	8.92	.383	9.73	.450	11.43	
8	1.230	31.24	.930	23.62	.493	12.52	.398	10.11	.429	10.90	.495	12.57	
9	1.290	32.77	.990	25.15	.551	14.00	.454	11.53	.486	12.34	.555	14.10	
10	1.360	34.54	1.060	26.92	.620	15.75	.529	13.44	.563	14.30	.625	15.88	
11	1.420	36.07	1.120	28.45	.662	16.81	.587	14.91	.618	15.70	.690	17.53	
12	1.485	37.72	1.185	30.10	.703	17.86	.646	16.41	.676	17.17	.750	19.05	
14	1.600	40.64	1.300	33.02	.863	21.92	.768	19.51	.800	20.32	.865	21.97	
15	1.665	42.29	1.365	34.67	.912	23.16	.828	21.03	.860	21.84	.930	23.62	

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse
Crimp Contact, Panel Mount Plug
804-116 Ordering Information



Panel Mount Plugs with push/pull action for quick mating and demating of connectors used for interfacing with peripheral equipment, such as laptops or GPS systems. These small form factor connectors save panel space and come with removable, rear release crimp contacts. Each contact is securely held in place by metal clips locking the contact in place. Crimp contacts can be replaced and serviced. Integral banding porch allows for termination of shielding braid material using Band-Master® ATS bands. Mastes with all push/pull high density receptacle connectors with same polartization and opposite conact gender (804-003, 804-004, 804-005 and 804-006). Red stripe indicator aides in alignment during mating.

How To Order						
Sample Part Number	**804-116**	**-07**	**NF**	**10-26**	**E**	**A**
Series	**804-116** = Panel Mount Plug, Crimp Contacts and Banding Porch					
Shell Style (See Table I)	**00** = Front Panel Mount, Jam Nut **02** = Flange Mount **07** = Rear Panel Mount, Jam Nut					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page G-2					
Contact Type	**A** = Pin Connectror, Less Contacts **P** = Pin **G** = #23 Pin with 30 AWG Crimp Barrel **B** = Socket Connectors, Less Contacts **S** = Socket **H** = #23 Socket with 30 AWG Crimp Barrel					
Shell Key Positions (See Table II)	**Omit Characoer** = Single Key (non polarized) **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

G

Table I: Shell Style




		
-07 Jam Nut, Rear Panel Mount	**-02** Flange Mount	**-00** Jam Nut, Front Panel Mount

Table II: Alternate Keyway Positions




Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Rear panel mount plug - style 07

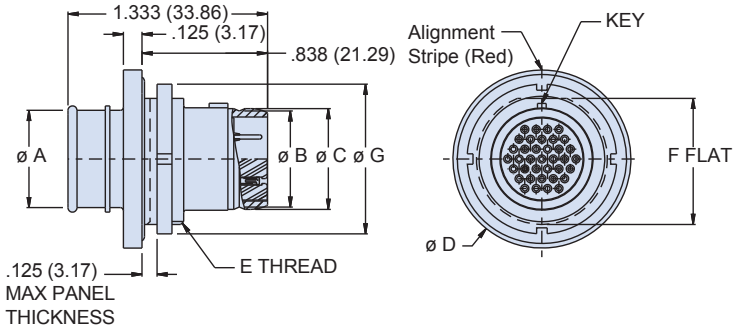

Dimensions							
Shell Size	Ø A	ØB	Ø C	ØD	E Thread	F Flat	Ø G
5	0.245 (6.22)	0.219 (5.56)	0.250 (6.35)	0.730 (18.54)	.4375-32 UN-2A	0.415 [0.02]	0.562 [0.02]
6	0.290 (7.37)	0.282 (7.16)	0.313 (7.95)	0.730 (18.54)	.5000-32 UN-2A	0.467 [0.02]	0.625 [0.02]
7	0.390 (9.91)	0.351 (8.92)	0.382 (9.70)	0.910 (23.11)	.6250-28 UN-2A	0.594 [0.02]	0.750 [0.03]
8	0.445 (11.30)	0.398 (10.11)	0.429 (10.90)	0.955 (24.26)	.6250-28 UN-2A	0.594 [0.02]	0.750 [0.03]
9	0.500 (12.70)	0.454 (11.53)	0.486 (12.34)	1.000 (25.40)	.6875-28 UN-2A	0.655 [0.03]	0.812 [0.03]
10	0.560 (14.22)	0.529 (13.44)	0.562 (14.27)	1.085 [0.04]	.7500-28 UN-2A	0.721 [0.03]	0.875 [0.03]
12	0.650 (16.51)	0.646 (16.41)	0.677 (17.20)	1.180 [0.05]	.8750-28 UN-2A	0.843 [0.03]	1.000 [0.04]
14	0.805 (20.45)	0.768 (19.51)	0.800 (20.32)	1.325 [0.05]	1.0000-28 UN-2A	0.968 [0.04]	1.125 [0.04]

Recommended Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
5	.423	10.74	.448	11.38
6	.475	12.07	.510	12.95
7	.588	14.94	.635	16.13
8	.602	15.29	.635	16.13
9	.663	16.84	.698	17.73
10	.729	18.82	.760	19.30
12	.851	21.62	.885	22.48
14	.976	24.79	1.010	25.65


G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 804 Push-Pull Mighty Mouse
Crimp Contact, Panel Mount Plug
804-116-02 Dimensions

Flange mount plug - style 02

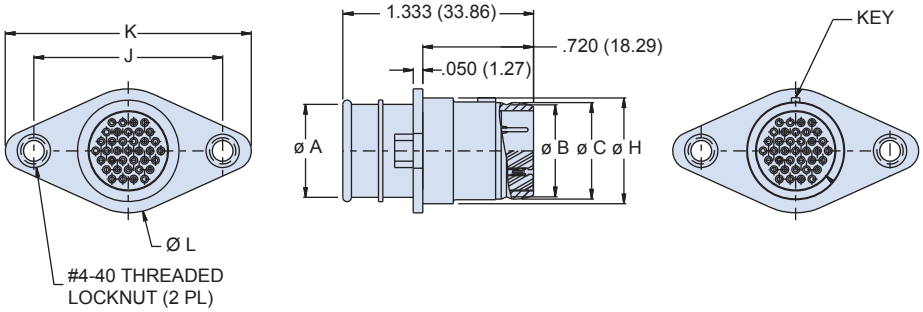

Dimensions							
Shell Size	Ø A	ØB	Ø C	H	J	K	Ø L
5	0.245 (6.22)	0.219 (5.56)	0.250 (6.35)	0.320 [0.01]	0.755 [0.03]	1.055 [0.04]	0.420 [0.02]
6	0.290 (7.37)	0.282 (7.16)	0.313 (7.95)	0.385 [0.02]	0.820 [0.03]	1.120 [0.04]	0.445 [0.02]
7	0.390 (9.91)	0.351 (8.92)	0.382 (9.70)	0.450 [0.02]	0.885 [0.03]	1.185 [0.05]	0.550 [0.02]
8	0.445 (11.30)	0.398 (10.11)	0.429 (10.90)	0.495 [0.02]	0.930 [0.04]	1.230 [0.05]	0.593 [0.02]
9	0.500 (12.70)	0.454 (11.53)	0.486 (12.34)	0.555 [0.02]	0.990 [0.04]	1.290 [0.05]	0.651 [0.03]
10	0.560 (14.22)	0.529 (13.44)	0.562 (14.27)	0.625 [0.02]	1.060 [0.04]	1.360 [0.05]	0.741 [0.03]
12	0.650 (16.51)	0.646 (16.41)	0.677 (17.20)	0.750 [0.03]	1.185 [0.05]	1.485 [0.06]	0.850 [0.03]
14	0.805 (20.45)	0.768 (19.51)	0.800 (20.32)	0.865 [0.03]	1.300 [0.05]	1.600 [0.06]	0.975 [0.04]

Front Mount Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ±0.05	In.	mm.
5	.423	10.74	.448	11.38
6	.475	12.07	.510	12.95
7	.588	14.94	.635	16.13
8	.602	15.29	.635	16.13
9	.663	16.84	.698	17.73
10	.729	18.82	.760	19.30
12	.851	21.62	.885	22.48
14	.976	24.79	1.010	25.65

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Front panel mount, plug - style 00

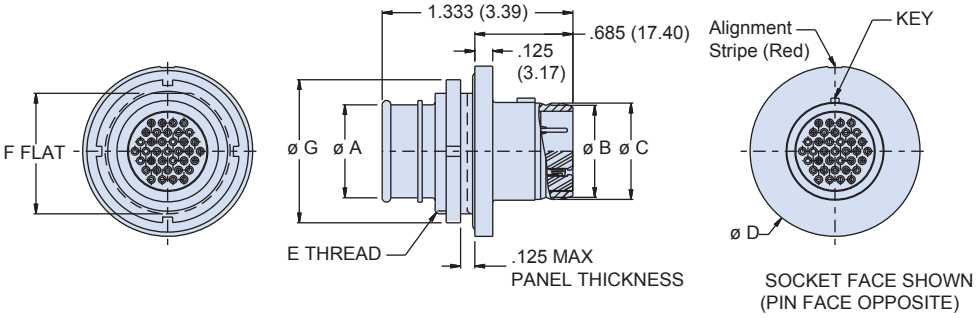

Dimensions								
Shell Size	Ø A	ØB	Ø C	ØD	E Thread	F Flat	Ø G	H
5	0.245 (6.22)	0.219 (5.56)	0.250 (6.35)	0.730 (18.54)	.4375-32 UN-2A	0.415 [0.02]	0.562 [0.02]	0.320 [0.01]
6	0.290 (7.37)	0.282 (7.16)	0.313 (7.95)	0.730 (18.54)	.5000-32 UN-2A	0.467 [0.02]	0.625 [0.02]	0.385 [0.02]
7	0.390 (9.91)	0.351 (8.92)	0.382 (9.70)	0.910 (23.11)	.6250-28 UN-2A	0.594 [0.02]	0.750 [0.03]	0.450 [0.02]
8	0.445 (11.30)	0.398 (10.11)	0.429 (10.90)	0.955 (24.26)	.6250-28 UN-2A	0.594 [0.02]	0.750 [0.03]	0.495 [0.02]
9	0.500 (12.70)	0.454 (11.53)	0.486 (12.34)	1.000 (25.40)	.6875-28 UN-2A	0.655 [0.03]	0.812 [0.03]	0.555 [0.02]
10	0.560 (14.22)	0.529 (13.44)	0.562 (14.27)	1.085 [0.04]	.7500-28 UN-2A	0.721 [0.03]	0.875 [0.03]	0.625 [0.02]
12	0.650 (16.51)	0.646 (16.41)	0.677 (17.20)	1.180 [0.05]	.8750-28 UN-2A	0.843 [0.03]	1.000 [0.04]	0.750 [0.03]
14	0.805 (20.45)	0.768 (19.51)	0.800 (20.32)	1.325 [0.05]	1.0000-28 UN-2A	0.968 [0.04]	1.125 [0.04]	0.865 [0.03]

Front Mount Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ±0.05	In.	mm.
5	.423	10.74	.448	11.38
6	.475	12.07	.510	12.95
7	.588	14.94	.635	16.13
8	.602	15.29	.635	16.13
9	.663	16.84	.698	17.73
10	.729	18.82	.760	19.30
12	.851	21.62	.885	22.48
14	.976	24.79	1.010	25.65

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse Receptacle Connector

804-003 and 804-004 Ordering Information



In-Line



Rear Panel Mount Jam Nut



Front Panel Mount Jam Nut

Integral Band Platform

for direct attachment of a cable shield. Install a boot, or overmold directly onto the band platform. Or, choose an accessory thread for attaching strain reliefs and backshells.

Three Shell Styles

Jam nut with O-ring for front or rear panel mounting, or in-line receptacles for free-hanging cables.

Watertight, Shielded

O-ring inside the receptacle provides a dynamic seal when mated. Gold-plated spring provides secure mechanical retention and low shell-to-shell resistance for excellent EMI shielding.

How To Order

Sample Part Number	804-003	-01	M	7-10	P	

Series (See Table I)	**804-003** = Receptacle with Banding Platform **804-004** = Receptacle with Accessory Thread
Shell Style (See Table II)	**-00** = Front Panel Mount Jam Nut (See Table V) **-01** = In-Line **-07** = Rear Panel Mount Jam Nut (See Table IV)
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant
Shell Size - Insert Arrangement	See Contact Arrangements Page G-2
Contact Type	**Connector supplied without contacts**: **A** = Pin, Crimp; **B** = Socket, Crimp **Connector supplied Crimp contacts**: **P** = Pin Connector; **S** = Socket Connector **Connector Supplied with 30 AWG Crimp Barrel**: **G** = Pin, Crimp; **H** = Socket, Crimp Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table III)	**Omit** = Single Master Key **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

Table I: Series






	
804-003 Receptacle with Banding Platform	**804-004** Receptacle with Accessory Thread


Table II: Shell Style

		
-00 Jam Nut for Front Panel Mounting	**-01** In-Line for Free-Hanging Cable	**-07** Jam Nut for Rear Panel Mounting

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount receptacle - shell style 07

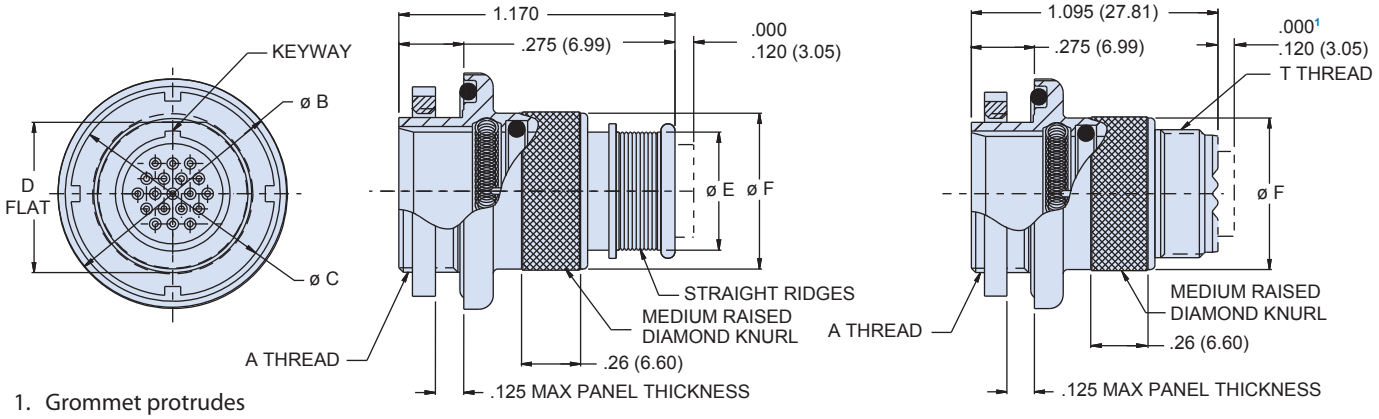


1. Grommet protrudes for power/combo arrangements

Integral Band Platform
804-003-07

Accessory Thread
804-004-07


Dimensions												
Shell Size	A Thread	Ø B		Ø C		D Flat		Ø E		Ø F		T Threads
		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	
5	.4375-32 UN-2A	.790	20.07	.562	14.27	.415	10.54	.246	6.25	.450	11.43	.2500-32 UNEF-2A
6	.5000-32 UN-2A	.830	21.08	.625	15.87	.467	14.40	.286	7.26	.480	12.19	.3125-32 UNEF-2A
7	.6250-28 UN-2A	.900	22.86	.750	19.05	.594	15.09	.390	9.91	.580	14.73	.4375-28 UNEF-2A
8	.6250-28 UN-2A	.900	22.86	.750	19.05	.594	15.09	.442	11.23	.603	15.32	.5000-28 UNEF-2A
9	.6875-28 UN-2A	1.000	25.40	.812	20.62	.655	16.64	.500	12.70	.695	17.65	.5625-24 UNEF-2A
10	.7500-28 UN-2A	1.085	27.48	.875	22.22	.721	18.31	.564	14.33	.735	18.67	.6250-24 UNEF-2A
11	.8125-28 UN-2A	1.135	28.83	.938	23.83	.788	20.02	.608	15.44	.810	20.57	.6875-24 UNEF-2A
12	.8750-28 UN-2A	1.180	29.97	1.000	25.40	.843	21.41	.650	16.51	.880	22.35	.6875-24 UNEF-2A
14	1.0000-28 UN-2A	1.325	33.66	1.125	28.57	.968	24.59	.805	20.45	1.010	25.65	.9375-20 UNEF-2A

Table III: Alternate Key Positions

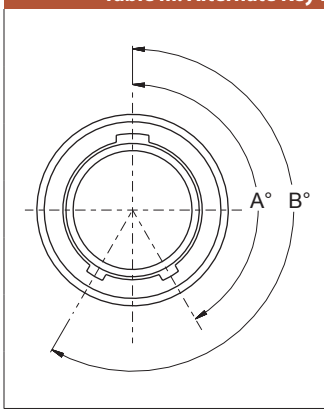

Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Rear Mount Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	.427/.423	10.85/10.74	.448	11.38
6	.479/.475	12.17/12.07	.510	12.95
7	.606/.602	15.39/15.29	.635	16.13
8	.606/.602	15.39/15.29	.635	16.13
9	.667/.663	16.94/16.84	.695	17.65
10	.734/.729	18.64/18.52	.760	19.30
11	.801/.796	20.35/20.22	.822	20.88
12	.855/.851	21.72/21.62	.885	22.48
14	.980/.976	24.89/24.79	1.010	25.65

G


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse Receptacle Connector

804-004-00 and 804-003-00 Dimensions

Jam nut, front panel mount receptacle - shell style 00

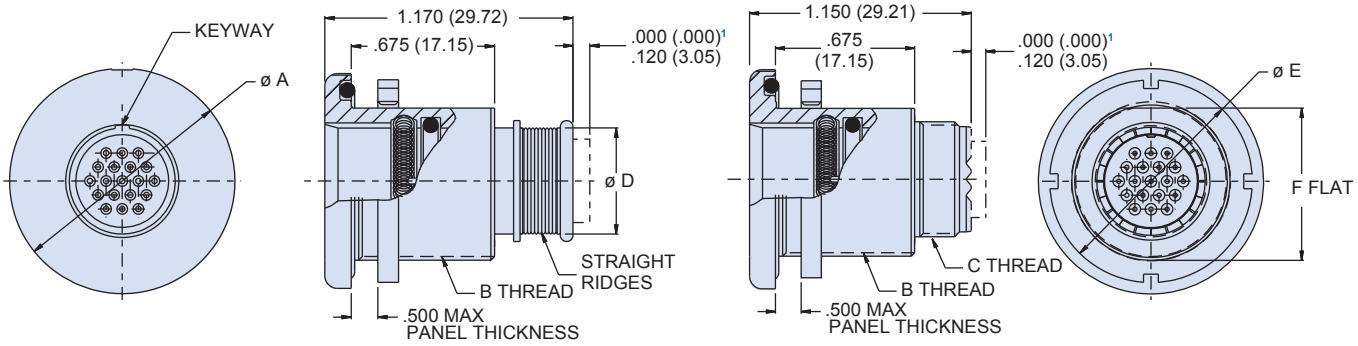


1. Grommet protrudes for power/combo arrangements

Integral Band Platform
804-003-00

Accessory Thread
804-004-00

Dimensions										
Shell Size	Ø A		B Threads	C Threads	Ø D		Ø E		F Flat	
	In.	mm.			In.	mm.	In.	mm.	In.	mm.
5	.830	21.08	.5000-32 UN-2A	.2500-32 UNEF-2A	.246	6.25	.625	15.87	.470	11.94
6	.885	22.48	.5625-32 UN-2A	.3125-32 UNEF-2A	.286	7.26	.688	17.47	.530	13.46
7	.995	25.27	.6875-28 UN-2A	.4375-28 UNEF-2A	.390	9.91	.812	20.62	.663	16.84
8	.995	25.27	.6875-28 UN-2A	.5000-28 UNEF-2A	.442	11.23	.812	20.62	.663	16.84
9	1.075	27.31	.7500-28 UN-2A	.5625-24 UNEF-2A	.500	12.70	.875	22.22	.720	18.29
10	1.140	28.95	.8125-28 UN-2A	.6250-24 UNEF-2A	.564	14.33	.938	23.82	.788	20.02
11	1.190	30.23	.8750-28 UN-2A	.6875-24 UNEF-2A	.608	15.44	1.000	25.4	.843	21.41
12	1.340	34.04	1.0000-28 UN-2A	.6875-24 UNEF-2A	.650	16.51	1.125	28.57	.970	24.64
14	1.390	35.31	1.0620-20 UN-2A	.9375-20 UNEF-2A	.805	20.45	1.162	29.51	1.020	25.91

Front Mount Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	.482 .478	12.24 12.14	.510	12.95
6	.542 .538	13.77 13.67	.575	14.61
7	.676 .671	17.17 17.04	.698	17.73
8	.676 .671	17.17 17.04	.698	17.73
9	.732 .728	18.59 18.49	.760	19.30
10	.801 .796	20.35 20.22	.822	20.88
11	.855 .851	21.72 21.62	.885	22.48
12	.982 .978	24.94 14.84	1.010	25.65
14	1.032 1.028	26.21 26.11	1.075	27.31

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Cable receptacle - shell style 01

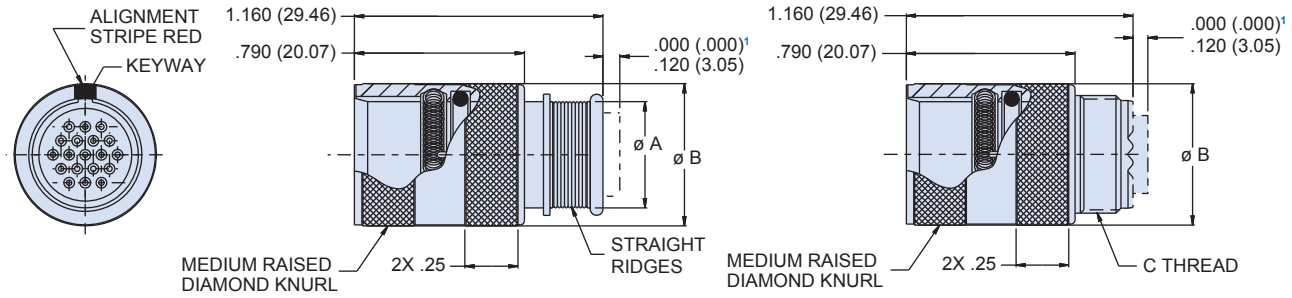

1. Grommet protrudes for power/combo arrangements

Integral Band Platform
804-003-01

Accessory Thread
804-004-01

Dimensions					
Shell Size	Ø A		Ø B		C Threads
	In.	mm.	In.	mm.	
5	.246	6.25	.450	11.43	.2500-32 UNEF-2A
6	.286	7.26	.480	12.19	.3125-32 UNEF-2A
7	.390	9.91	.580	14.73	.4375-28 UNEF-2A
8	.442	11.23	.603	15.32	.5000-28 UNEF-2A
9	.500	12.70	.695	17.65	.5625-24 UNEF-2A
10	.564	14.33	.735	18.67	.6250-24 UNEF-2A
11	.608	15.44	.810	20.57	.6875-24 UNEF-2A
12	.650	16.51	.880	22.35	.6875-24 UNEF-2A
14	.805	20.45	1.010	25.65	.9375-20 UNEF-2A

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse
PC Tail or Solder Cup Receptacle
804-005, 804-020 Ordering Information



Panel Mount Receptacles feature factory-installed non-removable contacts. Choose solder cup or PC Tail terminals. Available in front or rear panel mount versions.

Water Immersion, Unmated

Specify ***804-005*** connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify ***804-020*** watertight connectors . These 804-020 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40C to +70C.

How To Order						
Sample Part Number	**804-005**	**-07**	**NF**	**9-4**	**E**	**A**
Series	**804-005** = Solder Cup or PCB Receptacle with Standard Potting **804-020** = Solder Cup or PCB Receptacle with Special "MOD-518" Sealing for Open Face (Unmated) Water Immersion Requirements. 100% Leak Tested.					
Shell Style (See Table I)	**-00** = Front Panel Mount Jam Nut (See Table IV) **-07** = Rear Panel Mount Jam Nut (See Table III)					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page G-2					
Contact Type	**P** = Pin, PC Tail **E** = Pin, Solder Cup **S** = Socket, PC Tail **F** = Socket, Solder Cup					
Shell Key Positions (See Table II)	**Omit** = Single Master Key **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Shell Style




	
-00 Jam Nut, Front Panel Mount	**-07** Jam Nut, Rear Panel Mount

Table II: Alternate Key Positions




Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Jam nut, rear panel mount receptacle - style 07

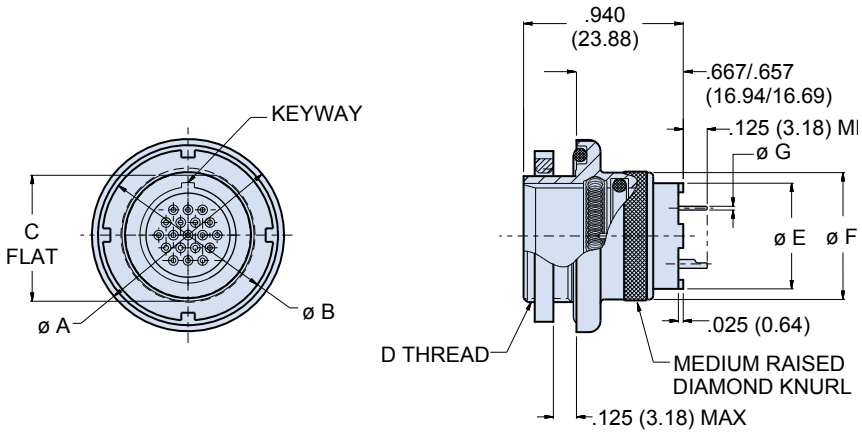

Rear Panel Jam Nut
804-005-07

Dimensions												
Shell Size	Ø A		Ø B		C Flat		D Threads	Ø E		Ø F		Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
5	.730	18.54	.562	14.27	.415	10.54	.4375-32 UN-2A	.244	6.20	.435	11.05	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)
6	.730	18.54	.625	15.87	.467	14.40	.5000-32 UN-2A	.330	8.38	.483	12.27	
7	.910	23.11	.750	19.05	.594	15.09	.6250-28 UN-2A	.432	10.97	.570	14.48	
8	.955	24.26	.750	19.05	.594	15.09	.6250-28 UN-2A	.493	12.52	.593	15.06	
9	1.000	25.40	.812	20.62	.655	16.64	.6875-28 UN-2A	.551	14.00	.685	17.40	
10	1.085	27.48	.875	22.22	.721	18.31	.7500-28 UN-2A	.620	15.75	.725	18.42	
11	1.135	28.83	.938	23.83	.788	20.02	.8125-28 UN-2A	.662	16.81	.810	20.57	
12	1.190	30.23	1.000	25.40	.843	21.41	.8750-28 UN-2A	.703	17.86	.850	21.59	
14	1.325	33.66	1.125	28.57	.968	24.59	1.0000-28 UN-2A	.863	21.92	.973	24.71	

Rear Mount Jam Nut Panel Mount Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	.427/.423	10.85/10.74	.448	11.38
6	.479/.475	12.17/12.07	.510	12.95
7	.606/.602	15.39/15.29	.635	16.13
8	.606/.602	15.39/15.29	.635	16.13
9	.667/.663	16.94/16.84	.695	17.65
10	.734/.729	18.64/18.52	.760	19.30
11	.801/.796	20.35/20.22	.822	20.88
12	.855/.851	21.72/21.62	.885	22.48
14	.980/.976	24.89/24.79	1.010	25.65


G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse Connector
PC Tail or Solder Cup Receptacle
804-005-00, 804-020-00 Dimensions


Jam nut, front panel mount receptacle - style 00

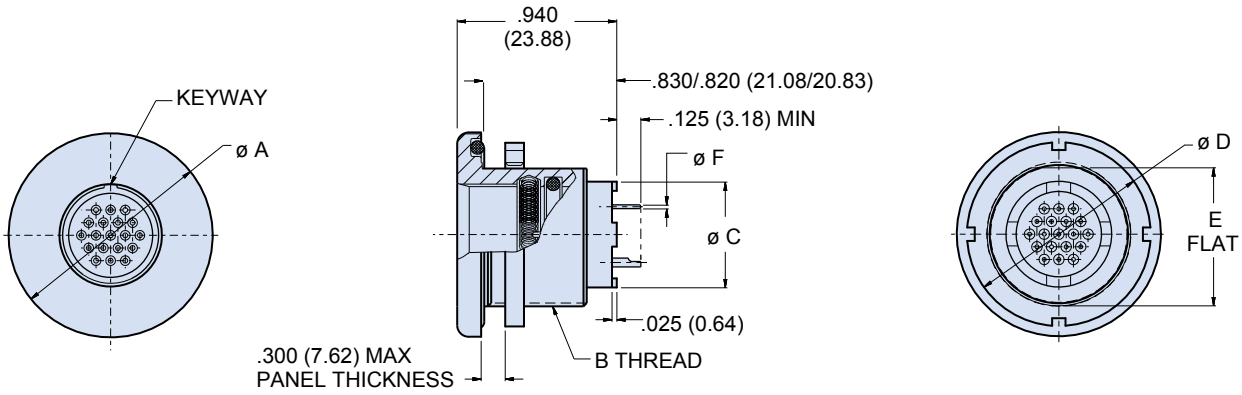

Front Panel Jam Nut
804-005-00

Dimensions										
Shell Size	Ø A		B Threads	Ø C		Ø D		E Flat		Ø F Tail Dia.
	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.830	21.08	.5000-32 UN-2A	.244	6.20	.625	15.87	.470	11.94	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)
6	.885	22.48	.5625-28 UN-2A	.330	8.38	.688	17.47	.530	13.46	
7	.995	25.27	.6875-28 UN-2A	.432	10.97	.812	20.62	.663	16.84	
8	.995	25.27	.6875-28 UN-2A	.493	12.52	.812	20.62	.663	16.84	
9	1.075	27.31	.7500-28 UN-2A	.551	14.00	.875	22.22	.720	18.29	
10	1.140	28.95	.8125-28 UN-2A	.620	15.75	.938	23.82	.788	20.02	
11	1.190	30.23	.8750-28 UN-2A	.662	16.81	1.000	25.4	.843	21.41	
12	1.340	34.04	1.0000-28 UN-2A	.703	17.86	1.125	28.57	.970	24.64	
14	1.390	35.31	1.0620-20 UN-2A	.863	21.92	1.162	29.51	1.020	25.91	

Front Mount Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	0.480	12.19	0.510	12.95
6	0.540	13.73	0.575	14.61
7	0.673	17.09	0.698	17.73
8	0.673	17.09	0.698	17.73
9	0.730	18.54	0.760	19.30
10	0.798	20.27	0.822	20.88
11	0.853	21.67	0.885	22.48
12	0.980	24.89	1.010	25.65
14	1.030	26.16	1.075	27.31

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse Hermetic Receptacle

804-006 Ordering Information



Series 804 Hermetic Receptacles feature 304L stainless steel shells, fused vitreous glass insulators and gold-plated Alloy 52 iron alloy contacts.

1 X 10^{-7} cc/second maximum helium leak rate when tested at 1 atmosphere vacuum.

Two Shell Styles are available:
Style 00 for front panel mounting
Style 07 for rear panel mounting.

"Push-Pull" Quick-Disconnect
Canted coil spring securely retains mating plug connector and provides low shell-to-shell resistance for excellent EMI shielding. O-ring inside receptacle shell provides water-tight seal when mated.

How To Order

Sample Part Number	804-006	-07	Z1	9-19	P	A
Series	**804-006** = Hermetic Receptacle					
Shell Style (See Table I)	**-00** = Front Panel Mount Jam Nut (See Table IV) **-07** = Rear Panel Mount Jam Nut (See Table III)					
Shell Material and Finish	**Z1** = Stainless Steel / Passivated; RoHS Compliant **ZL =** Stainless Steel/Nickel Plated					
Shell Size - Insert Arrangement	See Contact Arrangements Page G-2					
Contact Type	**P** = Pin, Solder Cup **C** = Pin, PC Tail **S** = Socket, Solder Cup **D** = Socket, PC Tail					
Shell Key Positions (See Table II)	**Omit** = Single Master Key **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Shell Style




	
-00 Jam Nut, Front Panel Mount	**-07** Jam Nut, Rear Panel Mount

Table II: Alternate Key Positions



Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	210°
F	95°	210°

G


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Hermetic Receptacle

804-006-07 Dimensions


Jam nut, rear panel mount receptacle - shell style 07

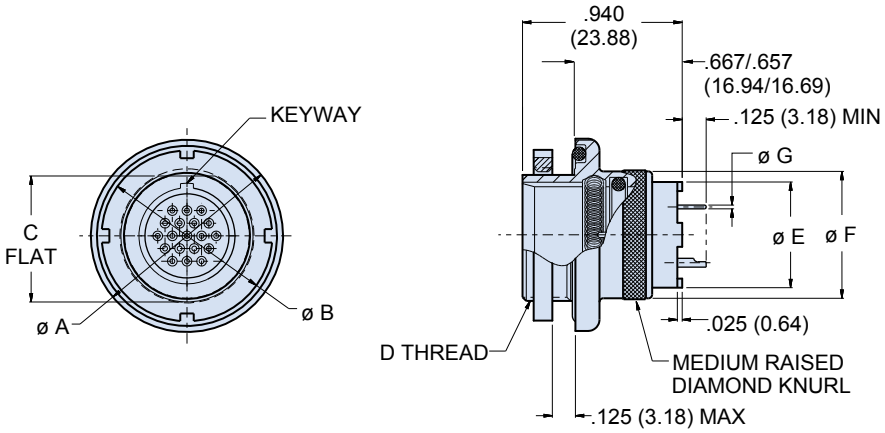

Rear Panel Jam Nut
804-006-07

Dimensions												
Shell Size	Ø A		Ø B		C Flat		D Threads	Ø E		Ø F		Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
5	.790	20.07	.562	14.27	.415	10.54	.4375-32 UN-2A	.244	6.20	.450	11.43	
6	.830	21.08	.625	15.87	.467	14.40	.5000-32 UN-2A	.336	8.53	.520	13.21	**#23** .018/.022 (0.46/0.56)
7	.910	23.11	.750	19.05	.594	15.09	.6250-28 UN-2A	.432	10.97	.580	14.73	**#20** .024/.028 (0.61/0.71)
8	.955	24.26	.750	19.05	.594	15.09	.6250-28 UN-2A	.493	12.52	.603	15.32	**#16** .060/.064 (1.52/1.63)
9	1.000	25.40	.812	20.62	.655	16.64	.6875-28 UN-2A	.551	14.00	.695	17.65	**#12** .092/.096 (2.34/2.44)
10	1.085	27.48	.875	22.22	.721	18.31	.7500-28 UN-2A	.620	15.75	.735	18.67	
11	1.135	28.83	.938	23.83	.788	20.02	.8125-28 UN-2A	.662	16.81	.810	20.57	
12	1.180	29.97	1.000	25.40	.843	21.41	.8750-28 UN-2A	.703	17.86	.880	22.35	
14	1.325	33.66	1.125	28.57	.968	24.59	1.0000-28 UN-2A	.863	21.92	1.010	25.65	

Rear Mount Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	.425	10.8	.448	11.38
6	.477	12.12	.510	12.95
7	.604	15.34	.635	16.13
8	.604	15.34	.635	16.13
9	.665	16.89	.695	17.65
10	.731	18.57	.760	19.30
11	.798	20.26	.822	20.88
12	.853	21.67	.885	22.48
14	.978	28.84	1.010	25.65

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Jam nut, front panel mount receptacle- shell style 00

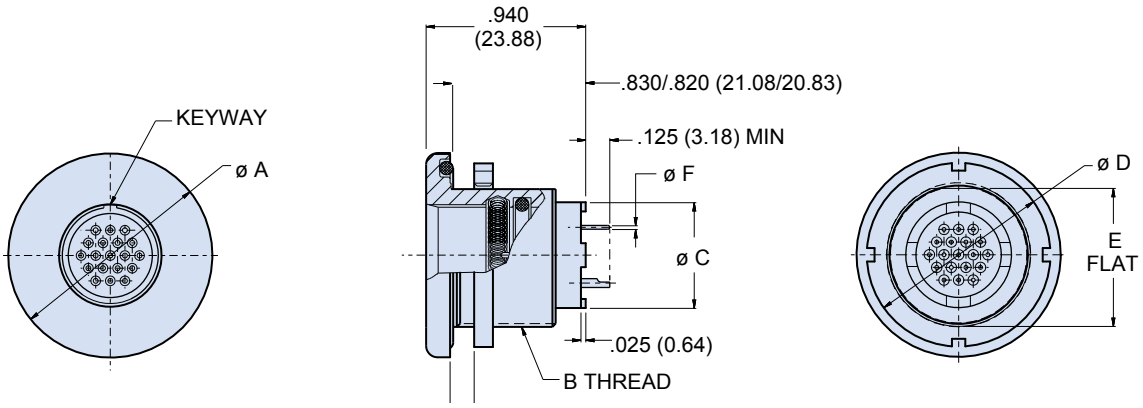

Front Panel Jam Nut
804-006-00

Dimensions									
Shell Size	Ø A		B Threads	Ø C		Ø D		E Flat		Ø F Tail Dia.
	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
5	.830	21.08	.5000-32 UN-2A	.244	6.20	.625	15.87	.470	11.94	**#23** .018/.022 (0.46/0.56) **#20** .024/.028 (0.61/0.71) **#16** .060/.064 (1.52/1.63) **#12** .092/.096 (2.34/2.44)
6	.885	22.48	.5625-28 UN-2A	.336	8.53	.688	17.47	.530	13.46	
7	.995	25.27	.6875-28 UN-2A	.432	10.97	.812	20.62	.663	16.84	
8	.995	25.27	.6875-28 UN-2A	.493	12.52	.812	20.62	.663	16.84	
9	1.075	27.31	.7500-28 UN-2A	.551	14.00	.875	22.22	.720	18.29	
10	1.140	28.95	.8125-28 UN-2A	.620	15.75	.938	23.82	.788	20.02	
11	1.190	30.23	.8750-28 UN-2A	.662	16.81	1.000	25.4	.843	21.41	
12	1.340	34.04	1.0000-28 UN-2A	.703	17.86	1.125	28.57	.970	24.64	
14	1.390	35.31	1.0625-20 UN-2A	.863	21.92	1.162	30.18	1.020	25.91	

Table IV: Front Mount Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
5	.480	12.19	0.510	12.95
6	.538	13.67	0.575	14.61
7	.671	17.04	0.698	17.73
8	.671	17.04	0.698	17.73
9	.728	18.49	0.760	19.30
10	.796	20.22	0.822	20.88
11	.851	21.62	0.885	22.48
12	.978	28.84	1.010	25.65
14	1.028	26.11	1.075	27.31

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse
Bulkhead Feed–Thru Receptacle
804-067-07 Ordering Information

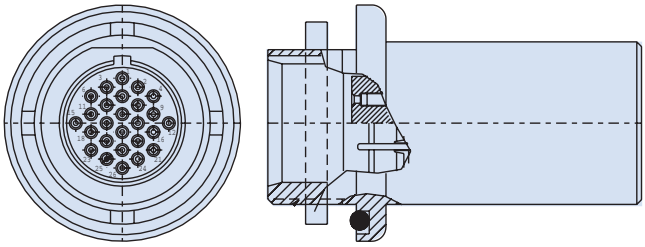

Series 804 Bulkhead Feed–Thru Receptacle

Use when it is desirable to have a separable connection on both sides of the mounting panel. Jam nut receptacle features three contact options: pin/socket (preferred version), pin/pin or socket/socket. Contacts are factory installed and are not removable. Available in aluminum or stainless steel. Gold–plated copper alloy contacts and ground spring, high-grade rigid dielectric insulator, fluorosilicone seals. Note: use caution when specifying pin/pin or socket/socket versions. the arrangement pattern is mirrored about the vertical axis.

How To Order


Sample Part Number	804-067	-07	M	6-7	P	P	A
Series	**804-067** = Bulkhead Feed–Thru Receptacle						
Shell Style		**-07** = Jam Nut					
Shell Material and Finish			**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant				
Shell Size - Insert Arrangement				Available in Shell Sizes 5 thru 14. See Contact Arrangements Page G-3			
Contact Type Jam Nut Side					**P** = Pin **S** = Socket		
Contact Type Other Side						**P** = Pin **S** = Socket	
Shell Key Positions (See Table I)							**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

G

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Rear panel, jam nut mount - style 07

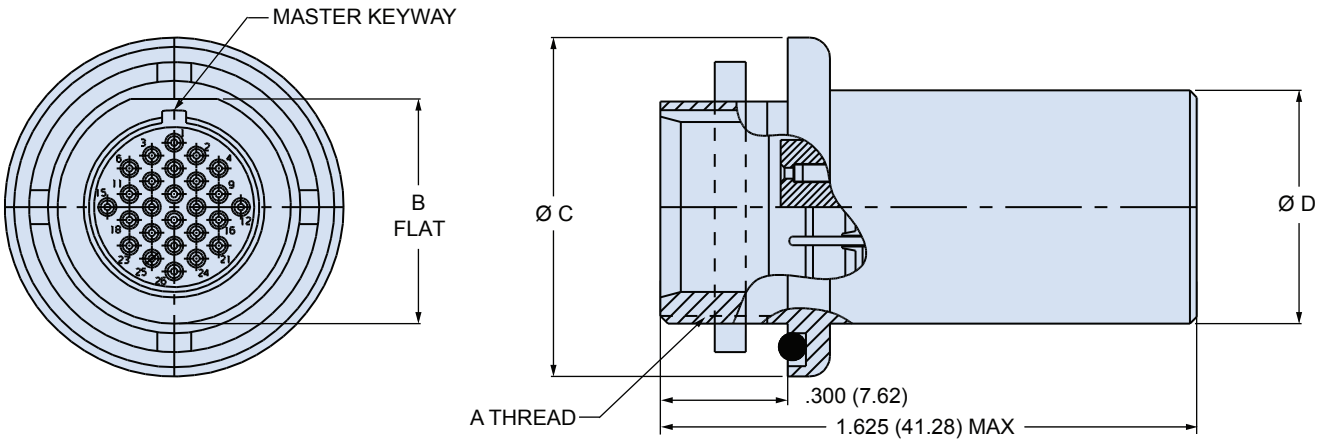


Dimensions							
Shell Size	A Thread	B Flat		Ø C		Ø D	
		In.	mm.	In.	mm.	In.	mm.
5	.4375-32 UN-2A	.415	10.54	.730	18.54	.450	11.43
6	.5000-32 UN-2A	.467	11.86	.730	18.54	.480	12.19
7	.6250-28 UN-2A	.580	14.73	.900	22.86	.580	14.73
8	.6250-28 UN-2A	.580	14.73	.945	24.00	.603	15.32
9	.6875-28 UN-2A	.655	16.64	1.000	25.40	.695	17.65
10	.7500-28 UN-2A	.721	18.31	1.075	27.31	.735	18.67
11	.8750-28 UN-2A	.790	20.07	1.140	28.96	.810	20.57
12	8125-28 UN-2A	.843	21.41	1.190	30.23	.880	22.35
14	8750-28 UN-2A	.968	24.59	1.312	33.32	1.010	25.65

Table I: Alternate Key Positions



Key Position	Key Rotation	
	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Rear Mount Jam Nut Panel Cutout

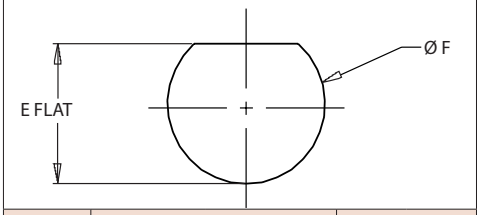


Shell Size	E Flat		Ø F	
	In.	mm.	In.	mm.
5	.425/.421	10.80/10.69	.448	11.38
6	.477/.473	12.12/12.01	.510	12.95
7	.590/.586	14.99/14.88	.635	16.13
8	.590/.586	14.99/14.88	.635	16.13
9	.665/.661	16.89/16.79	.698	17.73
10	.731/.727	18.57/18.47	.760	19.30
11	.800/.796	20.32/20.22	.823	20.90
12	.853/.849	21.67/21.56	.885	22.48
14	.978/.974	24.84/24.74	1.010	25.65

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Quick-Release Lanyard Plug

804-113 Ordering Information

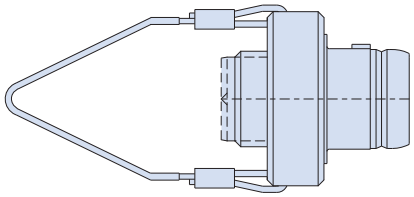

Series 804 Quick-Release Lanyard Receptacle

Quick-release lanyard push/pull plugs provide unparalleled performance wherever quick disengagement is important. Designed to provide quick disconnect of the connector plug with an axial pull on the lanyard and rear accessory thread.

How To Order

Sample Part Number	804-113	-06	M	6-7	P	A	6
Series	**804-113** = 804 Push / Pull Plug with lanyard						
Shell Style	**-06** = Plug						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant						
Shell Size - Insert Arrangement	Available in Shell Sizes 5 thru 14. See Contact Arrangements Page G-3						
Contact Style	**A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts **P** = Pin **S** = Socket **G** = Pin with 30 Awg Crimp Barrel **H** = Socket with 30 Awg Crimp Barrel						
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F						
Lanyard Length	**1** = 1 inch; Lanyard Length In Inches ±.500						


G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 804 Push-Pull Mighty Mouse Quick-Release Lanyard Plug

804-113 Dimensions

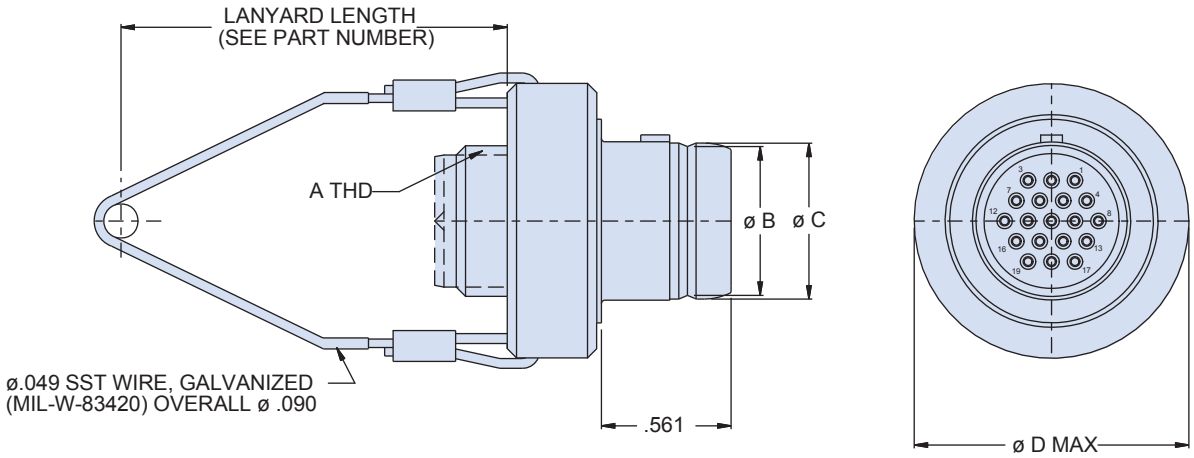

Dimensions							
Shell Size	A Thread	ø B		ø C		ø D MAX	
		In	mm	In	mm	In	mm
5	.250-32 UNEF	0.219	5.56	0.250	6.35	0.812	20.62
6	.3125-32 UNEF	0.282	7.16	0.313	7.95	0.875	22.23
7	.4375-28 UNEF	0.351	8.92	0.383	9.73	0.938	23.83
8	.5000-28 UNEF	0.398	10.11	0.429	10.90	1.000	25.40
9	.5625-24 UNEF	0.454	11.53	0.486	12.34	1.062	26.97
10	.6250-24 UNEF	0.529	13.44	0.563	14.30	1.125	28.58
11	.6875-24 UNEF	0.587	14.91	0.618	15.70	1.188	30.18
12	.6875-24 UNEF	0.646	16.41	0.676	17.17	1.250	31.75
14	.9375-20 UNEF	0.768	19.51	0.800	20.32	1.375	34.93
15	.9375-20 UNEF	0.828	21.03	0.860	21.84	1.438	36.53

Table I: Alternate Key Positions



Key Position	Key Rotation	
	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

NOTES


1. Contacts are size 23 crimp type, and are used ina rear release retention system
2. Crimp barrel accommodates 22, 24, 26 and 28 gage wire
3. Crimp tool data:
   - crimp frame: M22520/2-01
   - Positionser for use with crimp frame: Glenair part number 809-005
   - insertion/extration tool: Glenair part number 809-088
4. This connector, plug mates with all push/pull high density receptacle connecors with same polarization and opposite contact gender 804-0044, 804-004, 804-005, 804-006, and 804-114
5. Red stripe indicator for alignment during mating
6. Connector releases from 0° to 15°, 15° release force will vary

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse Quick-Release Lanyard Receptacle

804-114 Ordering Information

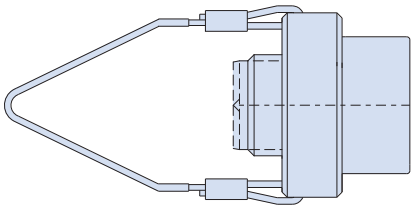

Series 804 Quick-Release Lanyard Receptacle

Quick-release lanyard push/pull receptacles provide unparalleled performance where-ever quick disengagement is important. Designed to provide quick disconnect of the connector receptacle with an axial pull on the lanyard and rear accessory thread.

How To Order								
Sample Part Number	**804-114**	**-01**	**M**	**6-7**	**P**	**A**	**6**
Series	**804-114** = 804 Push / Pull Receptacle with Lanyard						
Shell Style	**-01** = Receptacle						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant						
Shell Size - Insert Arrangement	Available in Shell Sizes 5 thru 14. See Contact Arrangements Page G-3						
Contact Style	**A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts **P** = Pin **S** = Socket **G** = Pin with 30 Awg Crimp Barrel **H** = Socket with 30 Awg Crimp Barrel						
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F						
Lanyard Length	**1** = 1 inch; Lanyard Length In Inches ±.500						


G


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Quick-Release Lanyard Receptacle


804-114 Dimensions

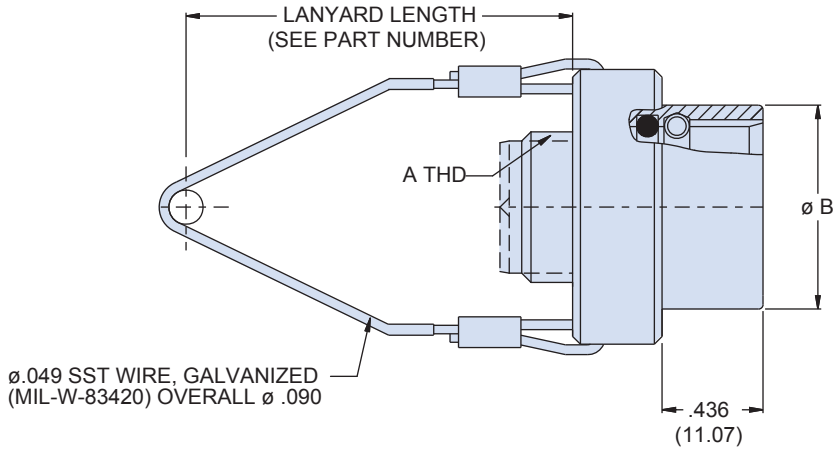

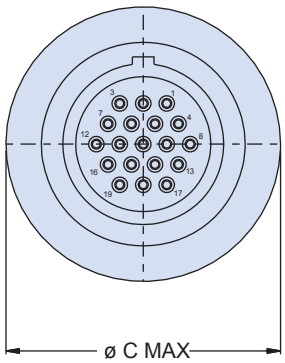

Dimensions					
Shell Size	A Thread	ø B		ø C MAX	
		In	mm	In	mm
5	.250-32 UNEF	0.450	11.43	0.812	20.62
6	.3125-32 UNEF	0.480	12.19	0.875	22.23
7	.4375-28 UNEF	0.580	14.73	0.938	23.83
8	.500-28 UNEF	0.600	15.24	1.000	25.40
9	.5265-24 UNEF	0.690	17.53	1.062	26.97
10	.6250-24 UNEF	0.735	18.67	1.125	28.58
11	.6875-24 UNEF	0.788	20.02	1.188	30.18
12	.6875-24 UNEF	0.880	22.35	1.250	31.75
14	.9375-20 UNEF	0.973	24.71	1.375	34.93
15	.9375-20 UNEF	1.028	26.11	1.438	36.53

Table I: Alternate Key Positions



Key Position	Key Rotation	
	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

NOTES

1. Contacts are size 23 crimp type, and are used ina rear release retention system
2. Crimp barrel accommodates 22, 24, 26 and 28 gage wire
3. Crimp tool data:
   - crimp frame: M22520/2-01
   - Positionser for use with crimp frame: Glenair part number 809-005
   - insertion/extration tool: Glenair part number 809-088
4. This connector, plug mates with all push/pull high density receptacle connecors with same polarization and opposite contact gender (804-001, 804-002, 804-113)
5. Red stripe indicator for alignment during mating
6. Connector releases from 0° to 15°, 15° release force will vary

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 804 Harsh Environment Shielded Cordsets



Overmolded Cordset

High performance Mighty Mouse cordsets feature easy ordering and fast delivery. These fully shielded and watertight assemblies withstand abrasion, temperature extremes and chemicals. Flexible overmolding provides rugged, watertight protection to wire and shield. Two styles are available: ***Style 1*** polyamide overmold and polyurethane cable jacket, and ***Style 2*** improved temperature range, high flexibility thermoplastic rubber overmold and cable jacket. Overmolded Mighty Mouse cordsets are suitable for military gear and other hostile environments where interconnect reliability and survivability is essential.

Product Features

- Single-ended or double-ended
- Rugged, watertight construction
- 100% electrically tested
- Flexible to -55ºC. (Style 2)
- Stainless steel shield termination band
- Resistant to chemicals
- Withstands UV and ozone

High-Speed Cordsets


Controlled impedance twisted pair cordsets for Ethernet, USB and other protocols are available. Please refer to Section U

Harsh Environment Cordset Selection Guide		
Property	Style 1 Polyurethane Jacket Polyamide Overmold	Style 2 Rubber Jacket Rubber Overmold
Cable jacket	Thermoplastic polyurethane (TPU), black	Thermoplastic elastomer (TPV), black
Overmold	Polyamide, black	Thermoplastic elastomer (TPV), black
Operating temperature	-30° C. to +105° C.	-55° C. to +135° C.
Flexibility	Good	Excellent
Water Resistance	Waterproof	Waterproof
Solvent Resistance, Cable Jacket	Excellent	Good
Solvent Resistance, Overmold	Fair (1)	Good
Weatherability	Excellent	Excellent
Abrasion Resistance	Excellent	Good
Flammability	Flame retardant UL 94 V-0	Flame retardant UL 94 HB
Low Smoke, Zero Halogen Cable Jacket	Yes	No
(1) Excellent resistance to most solvents, fuels, and oils; poor resistance to strong acids and bipolar solvents (alcohol)		

Specifications	
Cable jacket	Style 1: thermoplastic polyurethane, black, low-smoke, zero-halogen Style 2: thermoplastic elastomer, black
Overmold	Style 1: polyamide Style 2: thermoplastic elastomer, black
Cable shield	Tin-coated copper braid, 90% minimum coverage
Conductors	Silver coated stranded wire, TFE insulated, per M22759/11
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	#23 5 amps, #20 7.5 amps, #16 13 amps, #12 23 amps
Test voltage (DWV)	500 VAC
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

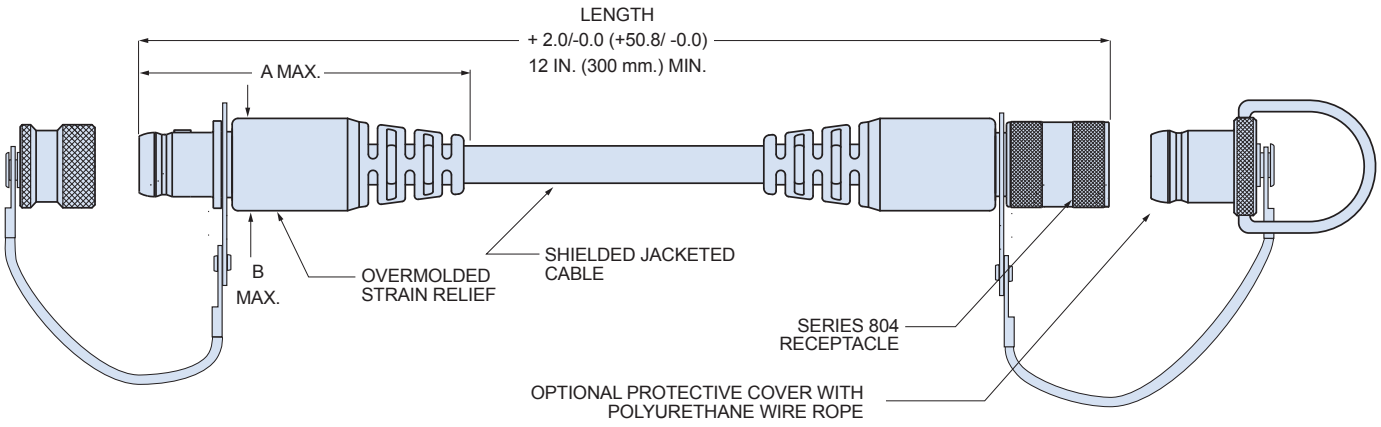

Dimensions				
Shell Size	A Max.		B Max.	
	In.	mm.	In.	mm.
5	2.46	62.48	0.50	12.70
6	2.56	65.02	0.56	14.22
7	2.64	67.06	0.63	16.00
8	2.70	68.58	0.68	17.27
9	2.90	73.66	0.73	18.54
10	2.95	74.93	0.81	20.57
11	3.0	76.2	0.90	22.86
12	3.10	78.74	0.92	23.37
14	3.20	81.28	1.05	26.67

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TFE insulation, 600V, in accordance with M22759/11.
3. Wire color is IAW MIL-STD-681 for cables containing 10 wires or less. For cable containing more than 10 wires, wire color is white.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Overmolded Cordset with Size #23 and #20HD Contacts

804-015, -062, -022, and -063 Ordering Information

Series 804 Cordsets with #23 Contacts								
Sample Part Number								
804-015	**-A**	**C**	**2**	**M**	**7-10**	**P**	**A**	**-72**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
804-015 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **804-062** **Style 2** Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #22 AWG **4** #24 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Insert Arr. page G-2	**P** Metal Protective Covers Included **N** No Covers Supplied	**Omit** Single Master Key **A** Pos. A (Normal) **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page G-4	Overall Length In Inches 12 Inch Min.

Series 804 Cordsets with #20HD Contacts								
Sample Part Number								
804-022	**-A**	**C**	**0**	**M**	**8-28**	**N**	**A**	**-72**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
804-022 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **804-063** **Style 2** Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**0** #20 AWG **2** #22 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Insert Arr. page G-2	**P** Metal Protective Covers Included **N** No Covers Supplied	**Omit** Single Master Key **A** Pos. A (Normal) **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page G-4	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse
Overmolded Cordsets with Size #16 and #12 Contacts
804-018, 064, -019, -065 Ordering Information

Series 804 Cordsets with #16 Contacts								
Sample Part Number								
804-018	**-A**	**C**	**2**	**M**		**N**	**A**	**-72**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
804-018 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **804-064** **Style 2** Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**6** #16 AWG **8** #18 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Insert Arr. page G-2	**P** Metal Protective Covers Included **N** No Covers Supplied	**Omit** Single Master Key **A** Pos. A (Normal) **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page G-4	Overall Length In Inches 12 Inch Min.

Series 804 Cordsets with #12 Contacts								
Sample Part Number								
804-019	**-A**	**C**	**0**	**M**		**N**	**A**	**-72**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
804-019 **Style 1** Polyurethane Cable Jacket, Polyamide Overmold **804-065** **Style 2** Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Insert Arr. page G-2	**P** Metal Protective Covers Included **N** No Covers Supplied	**Omit** Single Master Key **A** Pos. A (Normal) **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page G-4	Overall Length In Inches 12 Inch Min.

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Ultraflexible “Phantom Cable” Cordsets



Phantom Cable cordsets feature high-flex rubber-insulated wires, lightweight shield and overbraided jackets for maximum flexibility, reduced size and minimum weight. Flexible rubber overmold provides strain relief and environmental sealing. EMI shield options include high-strength, ultralightweight **Amberstrand**® nickel-coated composite braid, **ArmorLite™** or lightweight, high flexibility tinned copper braid. Braid outer jackets are available with **NOMEX**®, **HALAR**® or PTFE-coated fiberglass.

Product Features

- Overbraided cable jacket for excellent flexibility
- Ultra-lightweight AmberStrand® EMI shield
- 100% electrically tested
- Flexible to -55ºC.
- Stainless steel shield termination band

Application Note

Overbraided textile jackets are ideal for applications where flexibility and weight are important. However, water can penetrate through the jacket and cable shield. Dust and contamination can also become entrapped in the braid. Braided jackets are prone to fraying damage caused by snagging on velcro closures and MOLLE vests. Extruded cable jackets are recommended if debris entrapment, moisture ingress or fraying damage are concerns.

Braid Shield Selection Guide

Property	Amberstrand®	Armorlite®	Copper
Type	nickel-coated high-strength super fiber	Micro-filament nickel-coated stainless steel	Tin-coated copper
Weight/ft. (0.5 in. ID)	3.7 grams	4.4 grams	22.3 grams
Operating Temp(1)	-65º C to +200º C	-80º C to +260º C	-80º C to +150º C
Coverage	90% min.	90% min.	90% min.
Flexibility	Excellent	Excellent	Good
Cost Comparison	$$$	$$	$
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Jacket Selection Guide

Property	NOMEX®	HALAR®	PTFE Coated Fiberglass
Color	Black or olive drab	Black	Tan
Operating Temp(1)	-55º C to +260º C	-73º C to +150º C	-75º C to +300º C
Chemical Resistance	Excellent	Excellent	Excellent
Flammability	Self-extinguishing, will not melt	Fire retardant UL VW-1	Self-extinguishing
Toxicity	Non-toxic	Non-toxic	Non-toxic
Flexibility	Excellent	Excellent	Excellent
Abrasion resistance	Excellent	Excellent	Excellent
(1) Rubber wires and rubber overmold are rated for -55º C to +135º C.			

Specifications


Cable jacket	NOMEX®, HALAR® or PTFE-coated fiberglass
Temperature Range	-55º C to +135º C
Overmold	Thermoplastic elastomer, black
Cable shield	AmberStrand®, ArmorLite® or tinned copper, 90% minimum coverage
Conductors	Silver coated stranded wire, rubber insulation
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	5 amps
Test voltage (DWV)	500 Vac
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 804 "Phantom Cable" Cordsets size #12, #16, #20 and #23 Contacts										
Sample Part Number										
804-058	**-B**	**N**	**2**	**Z1**	**5-3**	**N**	**A**	**-60**	**C**	**N**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length	Shield Option	Jacket Option
Size #23 Contacts **804-058** Phantom Cable Cordset **Size #20 HD Contacts** **804-059** Phantom Cable Cordset **Size #16 Contacts** **804-060** Phantom Cable Cordset **Size #12 Contacts** **804-061** Phantom Cable Cordset	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Rec. with Male Pin Contacts **-D** Rec. with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Rec. with Male Pin Contacts **D** Rec. with Female Socket Contacts **N** No Connector (Single-Ended)	**Size #23 Contacts** **4** #24 AWG **6** #26 AWG **8** #28 AWG **Size #20 HD Contacts** **0** #20 AWG **2** #22 AWG **Size #16 Contacts** **6** #16 AWG **8** #18 AWG **Size #12 Contacts** **2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Cont. Arr. Page G-2 .	**P** Metal Protective Covers Included **N** No Covers Supplied	**Omit** Single Master Key **A** Pos. A (Normal) **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See page G-4	Overall Length In Inches 12 Inch Min.	**A** Amberstrand **B** Armorlite **C** Tin-Coated Copper	**N** Nomex, Black **H** Halar (Monofil) **P** PTFE-Glass (Natural/ Tan)

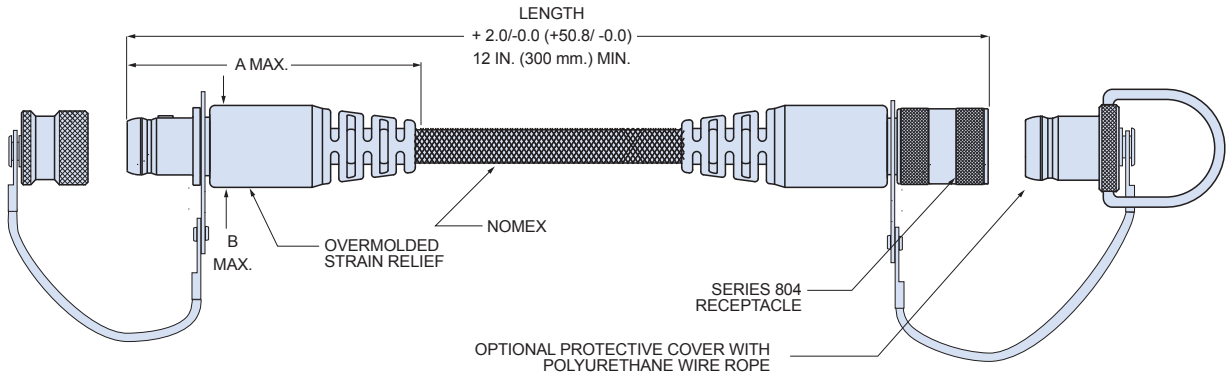

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TPE insulation, 600V, UL VW-1 rated.
3. Wire color is IAW MIL-STD-681 for cables containing 10 wires or less. For cable containing more than 10 wires, wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 804 Push/Pull Mighty Mouse USB Cordset Hub

808-086



808-086 USB Cordset Hub

The Mighty Mouse USB Cordset Hub regulates 5V USB power from a 16V source while providing power management. Features a dedicated battery port, 3 downstream USB receptacle ports, 1 downstream USB plug port and 1 host/upstream receptacle.

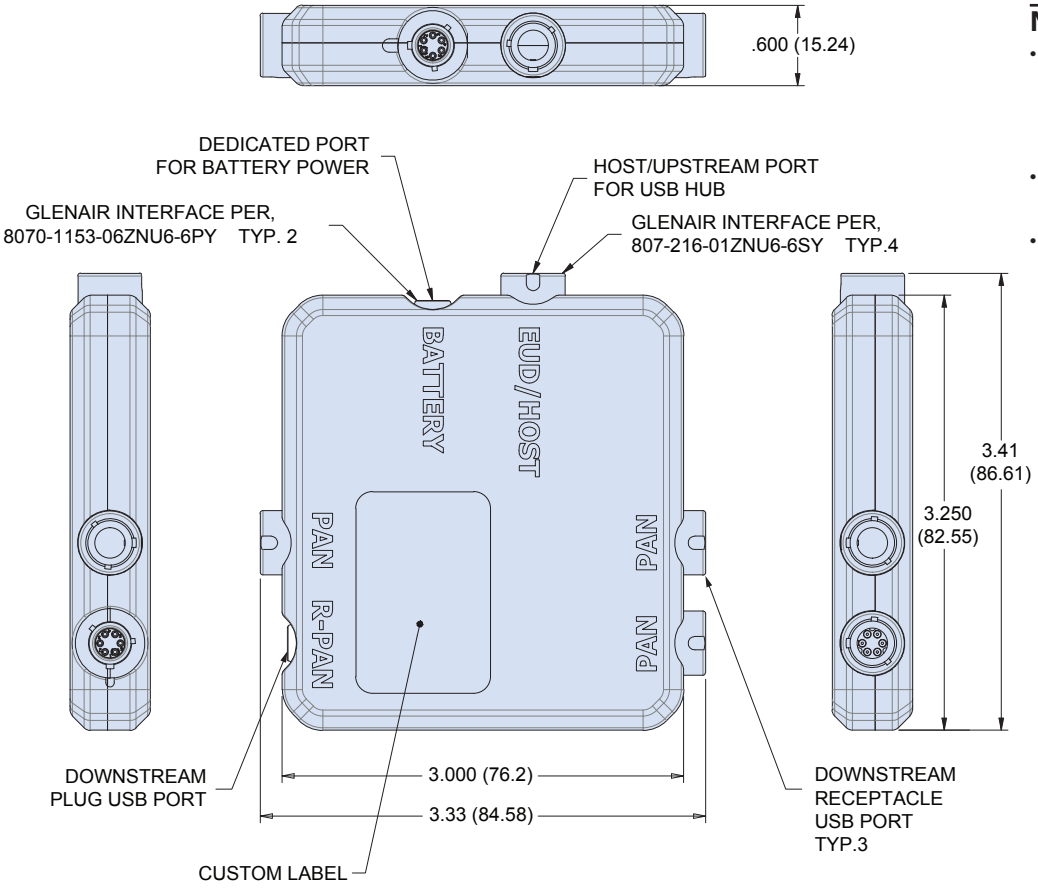

NOTES:

- Marking: IUID per MIL-STD-130. Red epoxy infill for master key and embossed text
- 100% system tested for functionality.
- Unit pack: 1 each in electro-static bag, heat-sealed. Includes dust cap.


G

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

These cordsets feature ruggedized series 804 Mighty Mouse Push/Pull connectors in a size #6 shell with insert arrangements for 6 pins for both plug and receptacle. Polyurethane cable jacket is suitable for general purpose applications. Mighty Mouse connector is overmolded with polyamide for strain relief and water ingress protection. All pin connectors have first to mate, last to break (FMLB) contact in position 2.

Note: Cable Type D shown for reference only. See Table I and II for Ordering information on polyurethane or Nomex® jacketed cable types.

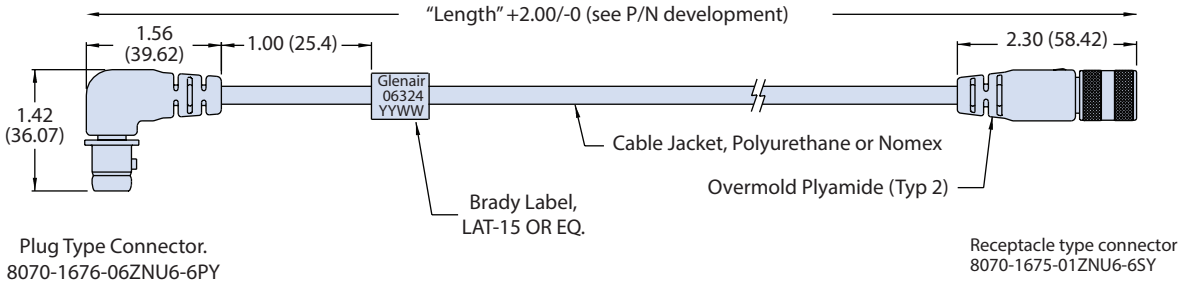

Wiring Diagram

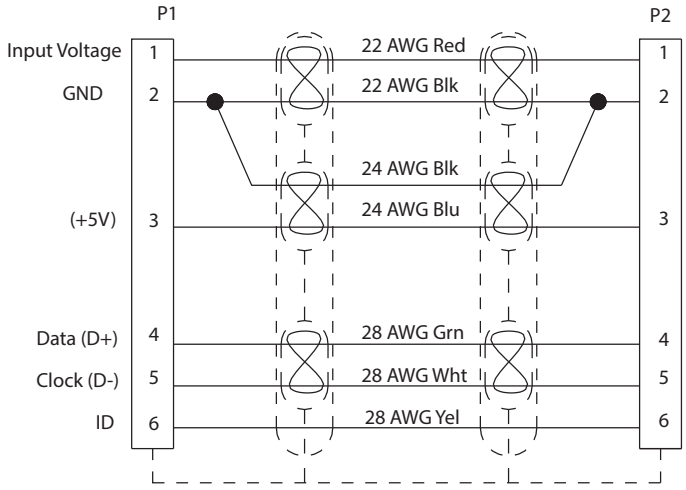

G


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 804 Push/Pull Mighty Mouse
USB Tactical Patch Cable with Polyurethane Jacket
808-007 Interface Adapter

Table I: How To Order Cables with Polyurethane Cable Jacket


Basic P/N	Cable Type	Length
808-007	**-A** = Single Ended **-AA** = Double Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-A**	**12**

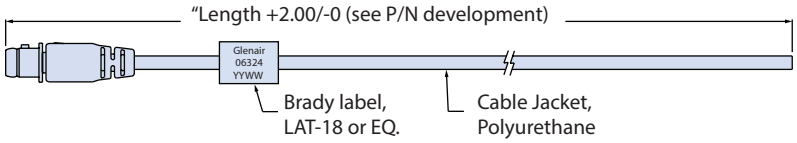


Basic P/N	Cable Type	Length
808-007	**-B** = Single Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-B**	**12**

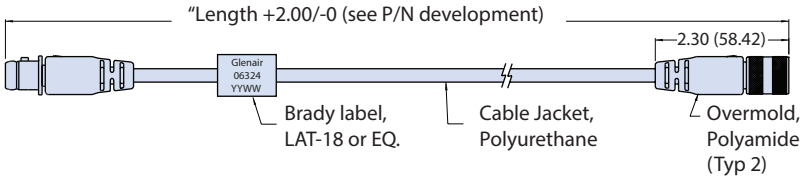


Basic P/N	Cable Type	Length
808-007	**-C** = Single Ended **-CC** = Double Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-C**	**12**

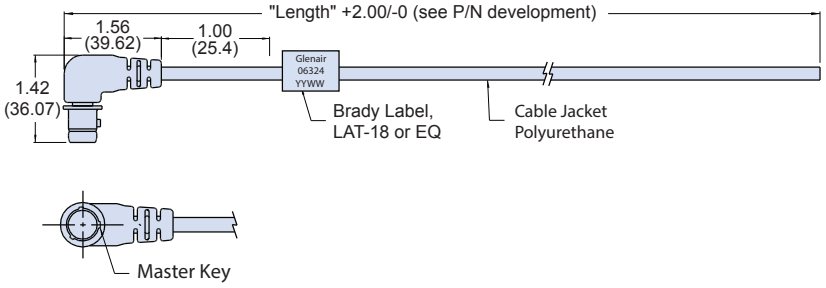

Basic P/N	Cable Type	Length
808-007	**-D** = Single Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-D**	**12**

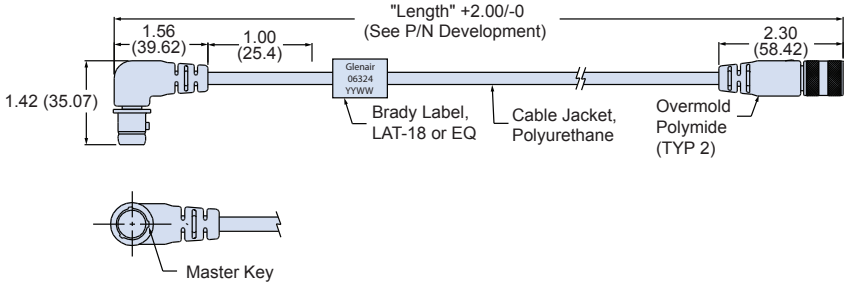

Basic Part Number	Cable Type	Length
808-007	**-E** = Single Ended **-EE** = Double Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-E**	**12**

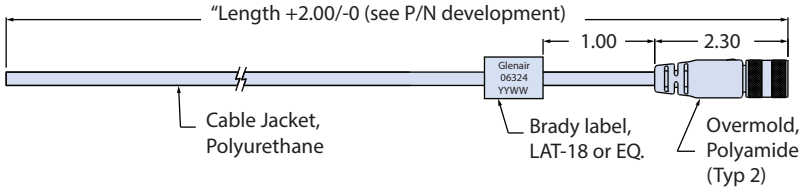


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Table 2: How To Order Cables with Nomex Jacket


Basic P/N	Cable Type	Length
808-007	**-G** = Single Ended **-GG** = Double Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-G**	**12**

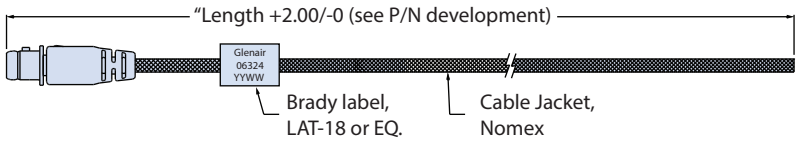


Basic P/N	Cable Type	Length
808-007	**-H** = Single Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-H**	**12**

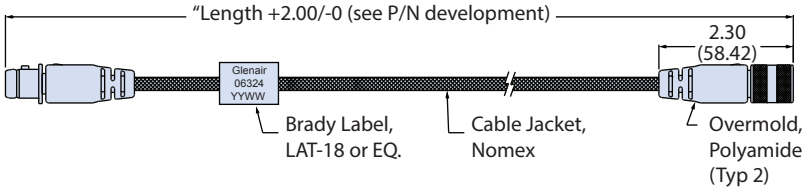


Basic P/N	Cable Type	Length
808-007	**-J** = Single Ended **-JJ** = Double Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-J**	**12**

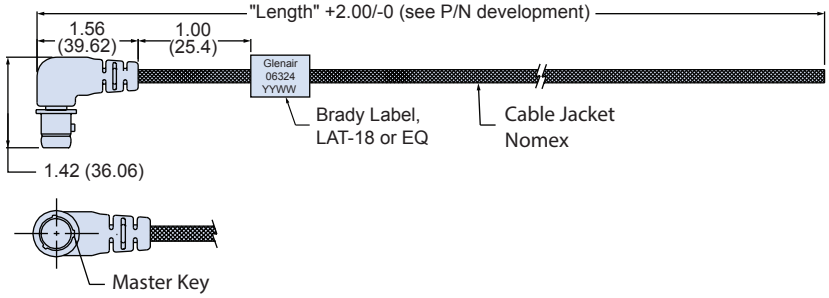

Basic P/N	Cable Type	Length
808-007	**-K** = Single Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-K**	**12**

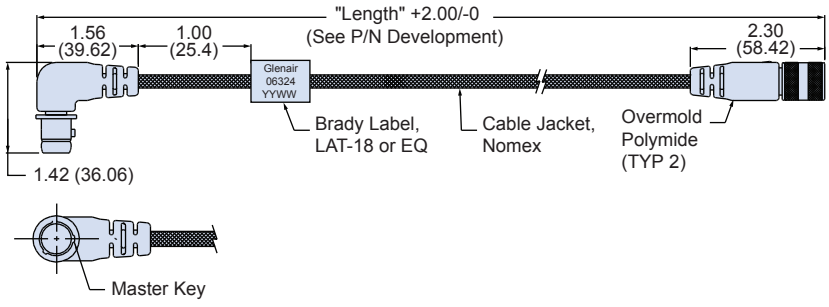

Basic P/N	Cable Type	Length
808-007	**-L** = Single Ended **-LL** = Double Ended	In inches **12** = 12 in.
Sample Part Number		
808-007	**-LL**	**12**

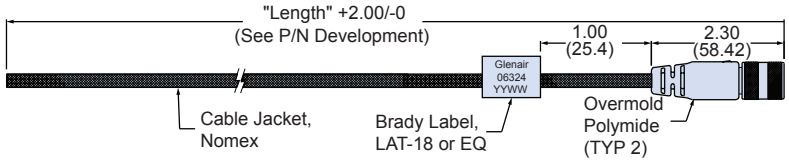


Dimensions in Inches (millimeters) are subject to change without notice.

AN/PRC-148 Radio Connector with Mighty Mouse 804 Push/Pull Interface


808-027 - General Information

These AN/PRC-148, -152, -152A, -154 and RF7800T radio connectors are available as un-cabled, cabled, and cabled pigtail versions to meet your requirements. Connectors feature pogo pin contacts to ensure reliable and consistent performance with situational awareness devices. Cabled and un–cabled versions feature Glenair Mighty Mouse 804 Push/Pull connectors, ideal for breakaway connections. The Series 804 QDC connector features a stainless steel spring in the receptacle and a detent on the plug body. Used for headsets, radios, weapons and other applications, the QDC Mighty Mouse meets immersion requirements and provides excellent durability. The gold-plated spring provides low shell-to-shell resistance for excellent EMI shielding. A fluorosilicone o-ring provides a watertight seal when mated. ***See following pages for ordering information.***

808-027-06
Un-Cabled

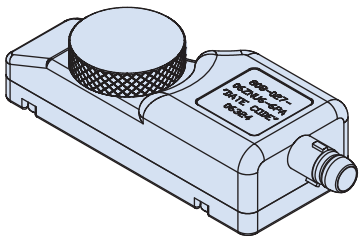

808-027-96
Cabled

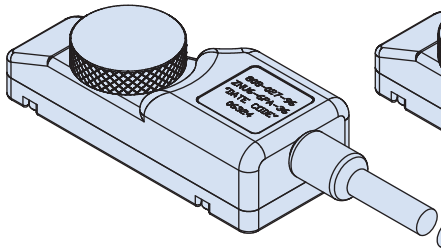

808-027-99
Pigtail

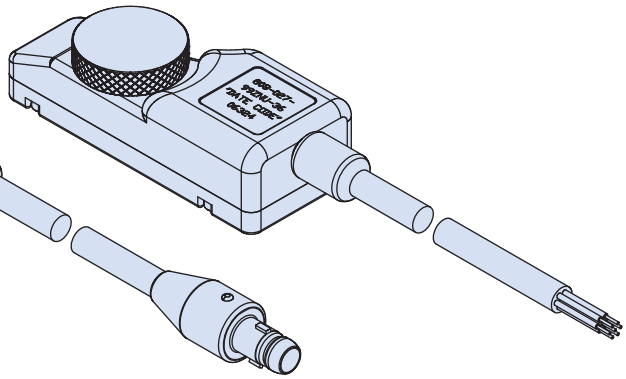


Table I: Alternate Key Positions

Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°









Table II: Radio Connector Type (Uncabled Versions Shown)

				
808-027 AN/PRC-148 Radio Connector	**808-028** AN/PRC-152 Radio Connector	**808-029** AN/PRC-152A Radio Connector	**808-030** AN/PRC-154 Radio Connector	**808-031** RF7800T Radio Connector

G

NOTES

Specifications

1. 100% Electrical test for shorts, continuity, and insulation resistance at 200 megohms minimum.
2. Unused cavities will be filled with dummy contacts and sealing plugs.
3. Consult factory for additional finishes, custom wiring diagram, or custom connector.

Material / finish:

- Housings & shells - al alloy / per part number development.
- Thumbscrew - SST / passivated with black powder-coated head
- Screws - SST / black oxide
- E-clip - SST / passivated
- Insulators - high-grade rigid dielectric, black / N.A.
- Housing gasket - silicone / N.A.
- Radio gasket - conductive fluorosilicone / N.A.
- Contacts - brass alloy / gold plated
- Mighty mouse connectors per 804-001 and 804-003 specifications.

Rev 112017

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

AN/PRC-148 Un-Cabled Radio Connector with Mighty Mouse 804 Push/Pull Interface

808-027 - Ordering Information

How To Order Uncabled Radio Connector

Sample Part Number	808-027	-01	ZNU	6-6	P	A	P
Series/Basic Number	Select Radio Connector Type from Table II						
Shell Style	**01** = Receptacle **06** = Plug						
Finish Symbol	**NF** = Aluminum/Cadmium with Olive Drab Chromate **UC** = Zinc-Cobalt, Black **UCR** = Zinc-Cobalt, Black (RoHS) **UF** = Cadmium, Black **ZN** = Zinc-Nickel, Olive Drab **ZNU** = Zinc-Nickel, Black						
Contact Arrangement	**6-6**, **6-7**						
Contact Type	**P** = Pin **S**= Socket						
Key Position (See Table I)	**A**, **B**, **C**, **D**, **E**, **F** **Omit** = None						
Protective Cover	**P** = Protective Rubber Cover **Omit** = None						

How To Order Cabled Radio Connector

Sample Part Number	808-027	-91	ZNU	6-6	P	A	P	36
Series/Basic Number	Select Radio Connector Type from Table II							
Shell Style	**91** = Receptacle, Cabled **96** = Plug, Cabled							
Finish Symbol	**NF** = Aluminum/Cadmium with Olive Drab Chromate **UC** = Zinc-Cobalt, Black **UCR** = Zinc-Cobalt, Black (RoHS) **UF** = Cadmium, Black **ZN** = Zinc-Nickel, Olive Drab **ZNU** = Zinc-Nickel, Black							
Contact Arrangement	**6-6**, **6-7**							
Contact Type	**P** = Pin **S**= Socket							
Key Position (See Table I)	**A**, **B**, **C**, **D**, **E**, **F** **Omit** = None							
Protective Cover	**P** = Protective Rubber Cover **Omit** = None							
Cable Length	Overall Length In inches; i.e. 36 = 36 Inches							

How To Order Pigtail Radio Connector

Sample Part Number	808-027	-99	ZNU	P
Series/Basic Number	Select Radio Connector Type from Table II			
Shell Style	**99** = Pigtail			
Finish Symbol	**NF** = Aluminum/Cadmium with Olive Drab Chromate **UC** = Zinc-Cobalt, Black **UCR** = Zinc-Cobalt, Black (RoHS) **UF** = Cadmium, Black **ZN** = Zinc-Nickel, Olive Drab **ZNU** = Zinc-Nickel, Black			
Protective Cover	**P** = Protective Rubber Cover **Omit** = None (Omit for Pigtailed Shell Style)			

G

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Glenair Mighty Mouse Series 804 Push/Pull USB 2.0 Flash Drive


808-001

How To Order						
Sample Part Number	**808-001**	**A**	**ZNU**	**A**	**32**	**R**

Series/Basic Number	**808-001** = Push/Pull Style USB 2.0 Flash Drive
Connector Designator	**A** - Plug w/ pins **B** - Plug w/ sockets **C** - Receptacle w/ pins **D** - Receptacle w/ sockets
Finish Code	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Key	**A**, **B**, **C**, or **D**; Omit for single Master Key
Storage Size	**8**, **16**, **32**, or **64**
Protective Cover	**P** - Metal Cover **R** - Rubber Cover **Omit** = no cover

Glenair Mighty Mouse Series 804 USB 2.0 flash drive featuring a push/pull 804 series ruggedized interface and available in 8GB, 16GB, 32GB, or 64GB storage capacities. Optional metal or rubber covers available. Flash drive complies with USB 2.0 standard and is backwards compatible.

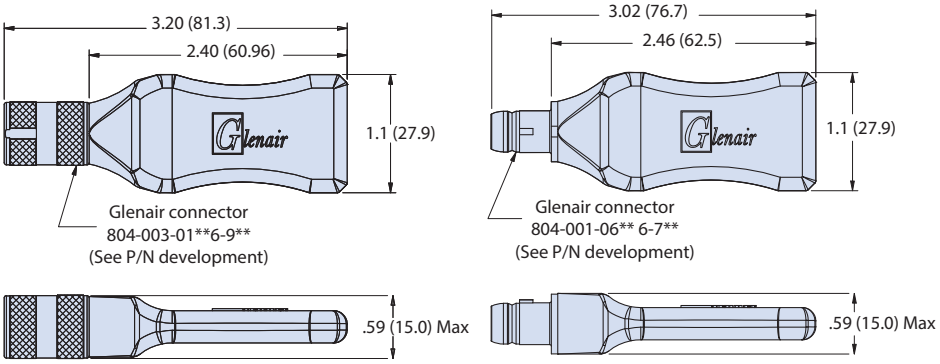



G

NOTES:

USB flash memory specifications

- Storage capacity: 8GB,16GB,32GB,64 GB (see p/n development)
- System requirements: Windows 2000, XP, Vista, Windows 7
- Compatibility: plug & play, USB 2.0 compliance
- Data transfer rates: up to 25 MB/Sec read, 10 MB/Sec write depending on host hardware, software & usage
- Password protection and AES encryption (only supported by Windows XP & Vista)

Materials and finishes

- Connector - various see 804-001 804-003 connector drawings
- Mold body - Thermoplastic
- Lanyard - nylon rope*
- *Optional equipment (see P/N development)

Environmental parameters

- Operating temperature: -40°C to 85°C
- Storage temperature: -40°C to 85°C
- Humidity operating range: 10% to 70%

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 824
Locking Push-Pull Mighty Mouse Plug
824-001 Ordering Information



Series 824 Locking Push/Pull Connector mates and locks with a straight push. To de-mate connectors release locking mechanism by pulling back on release ring. Rugged locking mechanism withstands 50 pound (223 N) pull force. Aluminum shell, high-grade rigid dielectric insulators, gold-plated copper alloy contacts, copper alloy locking mechanism, fluorosilicone O-ring and wire seal. The Series 824 is ideal for sensors, chargers, vision systems and weaponry where accidental connector disengagement is not an option. Supplied with contacts packaged separately. Contacts are crimp type, snap-in, rear release. Series 824 connectors are compatible with standard Mighty Mouse tools and accessories.

How To Order						
Sample Part Number	**824-001**	**-06**	**M**	**6-7**	**P**	**A**
Series	**824-001** = Locking Push-Pull plug with shield termination platform					
Shell Style	**-06** = In-Line Cable Plug					
Shell Material and Finish	**ME** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **C** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab over Electroless Nickel **ZNU** = Aluminum / Zinc-Nickel with Black over Electroless Nickel					
Shell Size - Insert Arrangement	See page G-3					
Contact Type	**Connector supplied with Crimp contacts** **P** = Pin **S** = Socket	**Connector supplied without contacts** **A** = Pin Connector, less contacts **B** = Socket Connector, less contacts	**Connector Supplied with 30 AWG Crimp Barrel** **G** = #23 Pin **H** = #23 Socket			
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					


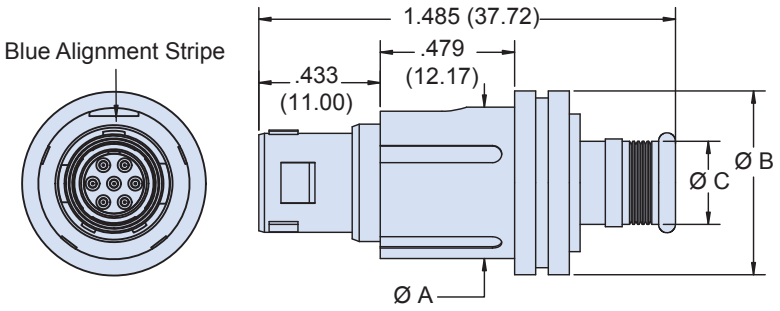


Table I: Alternate Key Positions



Pos.	Size 5 - 8		Size 9 - 12	
	A°	B°	A°	B°
A	150°	210°	140°	220°
B	45°	210°	30°	220°
C	45°	230°	30°	250°
D	140°	315°	110°	330°
E	150°	315°	140°	330°

Dimensions

Shell Size	Ø A		Ø B		Ø C	
	in	mm	in	mm	in	mm
5	0.487	12.37	0.609	15.47	0.230	5.84
6	0.539	13.69	0.661	16.79	0.296	7.52
7	0.614	15.60	0.736	18.69	0.390	9.91
8	0.679	17.25	0.801	20.35	0.436	11.07
9	0.742	18.85	0.864	21.95	0.493	12.52
10	0.807	20.50	0.929	23.60	0.570	14.48
12	0.934	23.72	1.056	26.82	0.683	17.35

Rev 112017

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 824 Locking Push-Pull Mighty Mouse
Mighty Mouse Receptacles
824-003 How to Order



Series 824 Locking Push/Pull Receptacle Connector mates and locks with the 824-001 plug. Available as in–line, jam nut rear panel mount and front panel mount.


How To Order						
Sample Part Number	**824-003**	**-01**	**M**	**6-7**	**P**	**A**

Series (See Table I)	**824-003** = Locking Push-Pull Receptacle with band platform		
Shell Style	**-01** = In-Line **-07** = Rear Panel Mount Jam Nut **-00** = Front Panel Mount Jam Nut		
Shell Material and Finish	**ME** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **C** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab over Electroless Nickel **ZNU** = Aluminum / Zinc-Nickel with Black over Electroless Nickel		
Shell Size - Insert Arrangement	See page G-3		
Contact Type	**Connector supplied with Crimp contacts** **P** = Pin **S** = Socket	**Connector supplied without contacts** **A** = Pin Connector, less contacts **B** = Socket Connector, less contacts	**Connector Supplied with 30 AWG Crimp Barrel** **G** = Pin **H** = Socket
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F		

Dimensions

Shell Size	Ø A		Ø B		Ø C		Ø D		E Thread	F Thread	G Flat		H Flat	
	in	mm	in	mm	in	mm	in	mm			in	mm	in	mm
5	0.548	13.92	0.868	22.05	0.868	22.05	0.316	8.03	9/16-28 UN	1/2-28 UNEF	0.534	13.56	0.470	11.94
6	0.600	15.24	0.868	22.05	0.868	22.05	0.390	9.91	9/16-28 UN	9/16-28 UN	0.534	13.56	0.530	13.46
7	0.696	17.68	1.039	26.39	1.039	26.39	0.473	12.01	11/16-28 UN	11/16-28 UN	0.655	16.64	0.663	16.84
8	0.760	19.30	1.097	27.86	1.039	26.39	0.560	14.22	3/4-28 UN	11/16-28 UN	0.721	18.31	0.663	16.84
9	0.822	20.88	1.116	28.35	1.097	27.86	0.586	14.88	13/16-28 UN	3/4-28 UN	0.788	20.02	0.720	18.29
10	0.893	22.68	1.231	31.27	1.160	29.46	0.688	17.48	7/8-28 UN	13/16-28 UN	0.846	21.49	0.788	20.02
12	0.974	24.74	1.359	34.52	1.347	34.21	0.805	20.45	1-28 UN	1-28 UN	0.968	24.59	0.970	24.64

Table I: Alternate Key Positions



Pos.	Size 5 - 8		Size 9 - 12	
	A°	B°	A°	B°
A	150°	210°	140°	220°
B	45°	210°	30°	220°
C	45°	230°	30°	250°
D	140°	315°	110°	330°
E	150°	315°	140°	330°


Panel Cutout Dimensions

Shell Size	I Flat		Ø J		K Flat		Ø L	
	in	mm	in	mm	in	mm	in	mm
5	0.544	13.82	0.575	14.61	0.480	12.19	0.510	12.95
6	0.544	13.82	0.575	14.61	0.540	13.72	0.575	14.61
7	0.665	16.89	0.698	17.73	0.673	17.09	0.698	17.73
8	0.731	18.57	0.760	19.30	0.673	17.09	0.698	17.73
9	0.798	20.27	0.820	20.83	0.730	18.54	0.760	19.30
10	0.856	21.74	0.885	22.48	0.798	20.27	0.820	20.83
12	0.978	24.84	1.010	25.65	0.980	24.89	1.010	25.65


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


In–line cable receptacle - shell style 01

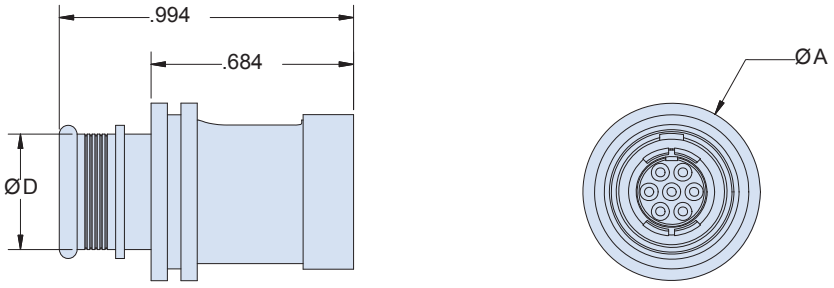

Jam nut, rear panel mount receptacle - shell style 07

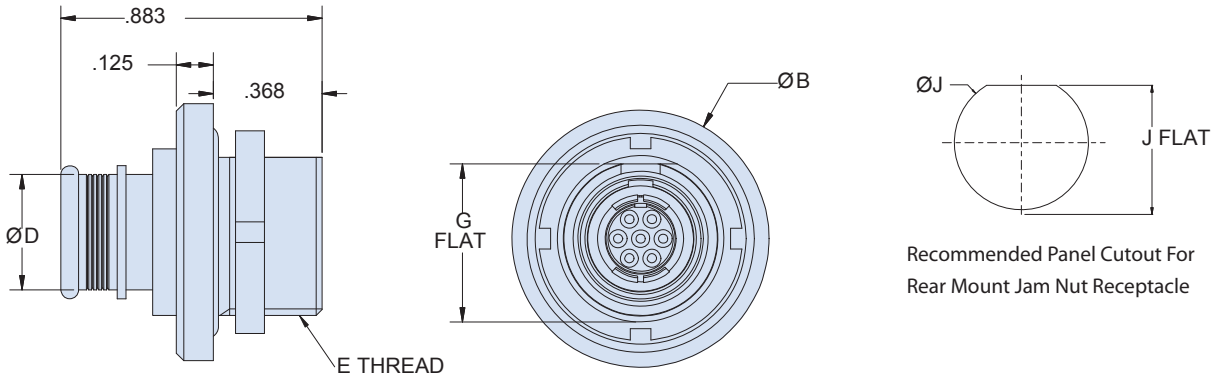

Jam nut, front panel mount receptacle - shell style 00

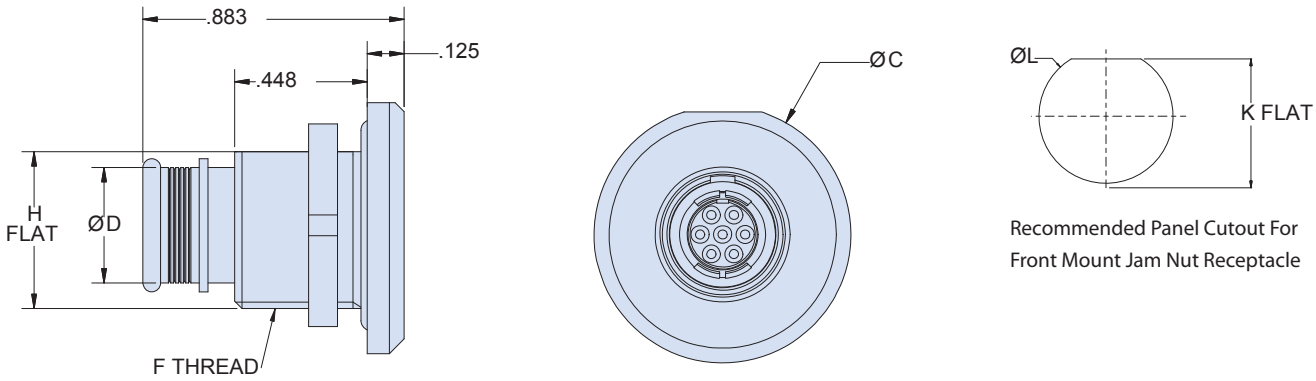

G

Dimensions in Inches (millimeters) are subject to change without notice.

Series 824 Locking Push-Pull Mighty Mouse
Locking Push/Pull with Hi-Speed 10G Contacts
Ordering Information





Quick Disconnect
These plugs snap securely into receptacle housings and release with a simple pull.

Two Keying Styles
A single master key provides fast mating in low-light situations, or specify three keys for more polarizing options.

How To Order

Sample Part Number	824-010	-01	MT	P	A	-1
Series (See Table I)	**824-009** = Plug with Shrink Boot Groove **824-010** = Receptacle with Boot Groove					
Shell Style	**-06** = Plug **-01** = In-Line Receptacle **-00** = Front Panel Jam Nut Mount **-07** = Rear Panel Mount, Jam Nut Receptacle					
Shell Material and Finish	**ME** = Aluminum Alloy / Electroless Nickel **MT** = Aluminum Alloy / Nickel-PTFE, RoHS Compliant **ZN** = Aluminum Alloy / O.D. Zinc-Nickel over Electroless Nickel **ZNU** = Aluminum Alloy / Black Zinc Nickel over Electoless Nickel					
Module Type	**P** = Pin **S** = Socket					
Alternative Polarization	**A**, **B**, **C**, **D**, **E**					
Cable Size	See Cable Size Table					

Alternate Positions

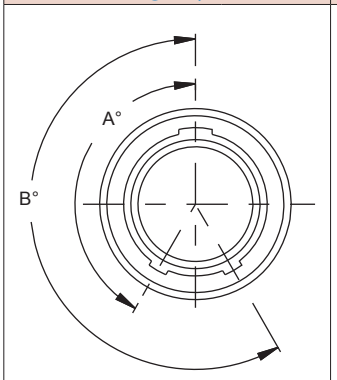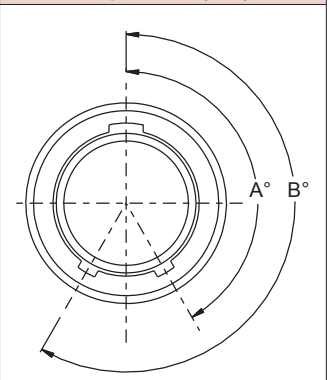Plug (Key)	Receptacle (Keyway)
	

Pos.	A°	B°
A	140	220
B	30	220
C	30	250
D	110	330
E	140	330

Table I: Series







	
824-009-06 Plug with Banding Platform	**824-010-00** FPM Jam Nut, Receptacle with Banding Platform
	
824-010-01 In-Line Receptacle with Banding Platform	**824-010-07** RPM Jam Nut Receptacle with Banding Platform

Figure 1: Contact Module, Inner Orientation



SOCKET MODULE FACE
858-100




PIN MODULE FACE
858-101


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Plug
shell style -06

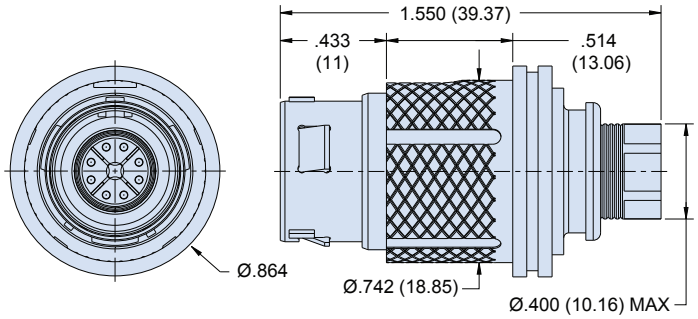


Front panel mount, jam nut reptacle
shell style 00

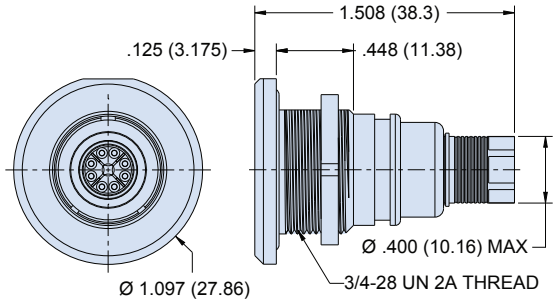

In-line receptacle
shell style 01

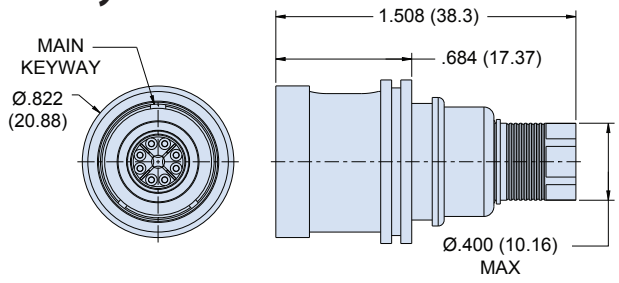

Jam nut, rear panel mount receptacle
shell style 07

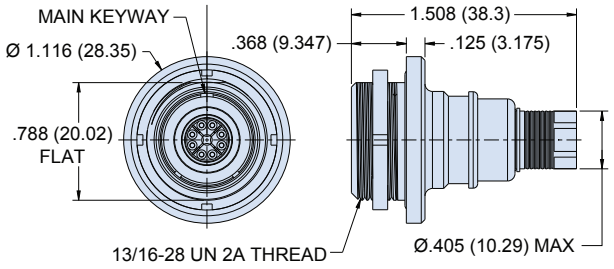

Cable Size Options (See note 1)	
Cable Size	Cable Diameter
1	.280 (7.11)
2	.2740 (6.96)
3	.260 (6.60)
4	.250 (6.35)
5	.240 (6.10)
6	.230 (5.84)
7	.220 (5.59)

Cable*					
Cable P/N	Cable Category	Cable Construction	Wire Gage	Max Wire Insulation Dia.	Assembly Instructions
963-003-24	CAT 6A	SF/UTP	24	.050	AI85082
963-003-26	CAT 6A	SF/UTP	26	.050	
963-037	CAT 6A	SF/UTP	24	.050	
963-038	CAT 6A	SF/UTP	24	.050	

Contact factory to inquire about use with other cables

G

NOTES

1. Material / finish:
   - Shell: see how to order table
   - Latch sleeve: BeCu Alloy/electroless nickel
   - O-rings: fluorosilicone / N.A.
   - Shrink boot: LSZH / N.A.
2. Spare high speed modules (858-100 and 858-101) may be ordered separately. Module wrench tool (607-011) supplied with each connector
3. See assembly instruction AI85082 for high speed module terminations. See assembly insructions AI85087 for module installation
4. See Fugure 1 for inner contact pinout
5. This plug mates with 824-009 of the same key polarization using a speedmaster module of the opposite gender.
6. See cable size table for available cable size options. See cable table. For cable in-between sizes select smaller size. Maximum cable diameter is .280

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


SERIES 805

MIGHTY MOUSE

Triple–start threaded coupling with superior EMI protection and anti–decoupling ratchet mechanism.



The Series 805 Mighty Mouse connectors feature the culmination of performance within the Series 80 family. ACME triple start threads ensure quick mate and de–mate operation and resists cross threading. Nickel-plated beryllium copper ground spring and metal to metal bottoming ensure excellent EMI shielding while reducing shell to shell resistance. Proven ratchet mechanism prevents decoupling in applications where high vibration is a concern. Meets MIL-STD-810 Method 512 immersion requirements. Choose between aluminum or stainless steel shells and the right fit for your application with our broad selection of 69 shell size and insert arrangement combinations.

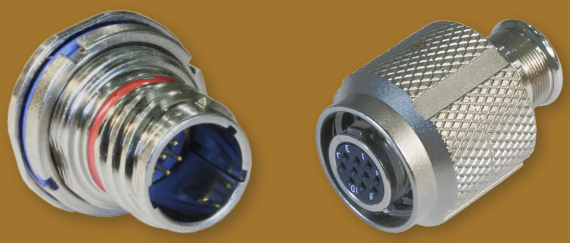

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

Series 805 Mighty Mouse
Triple-Start Threaded Coupling
Table of Contents and Introduction

PRODUCT SELECTION GUIDE



Series 805 Mighty Mouse Plugs
These connectors are supplied with a full complement of contacts for termination to insulated wire. Use with Band-Master™ ATS stainless steel bands (ordered separately), or select connectors with accessory threads for use with a variety of strain relief options. **Page H-8**




Series 805 Mighty Mouse Cobra™ Style Plugs
Mighty Mouse Cobra connectors feature an integral backshell equipped with a removable rear cover and gasket providing an easy path to installion of the supplied crimp contacts. Available in shell sizes 8 thru 23 **Page H-10**




Series 805 Mighty Mouse Receptacles for Insulated Wire
Jam nut, square flange and in-line versions make it easy to find a style for every application. Use with Band-Master™ ATS stainless steel bands (ordered separately), or select connectors with accessory threads for use with a variety of strain relief options. **Page H-13**



Series 805 Mighty Mouse Evironmental or Watertight Receptacles
PCB or solder cup receptacles available as environmental (805-005) or watertight (805-017). Watertight meets MIL-STD 810 method 512G immersion requirements. Choose printed circuit terminals for attachment to flexible or rigid circuits, or choose solder cup contacts. **Page H-18**



Series 805 Mighty Mouse Receptacles with Twinax PC Tail Contacts
Front (style 02) or rear panel mount connectors with #12 TwinAx contacts are offered in 8 standard or 9 hybrid insert arrangements. Non-removable, contacts are copper alloy and gold plated. Connector comes with .025" standoff and is back potted. **Page H-22**




Series 805 Mighty Mouse Jam Nut Receptacle, PC Tail or Solder Cup
These rear panel mount connectors feature a .025 in standoff. Gold plated, factory-installed non–removable contacts. Copper alloy, gold plated contacts. Printed circuit terminals for attachment to flex circuits or rigid boards. High-grade rigid dielectric insulator. **Page H-24**



Series 805 Mighty Mouse Right Angle PCB Connector
These rear panel mount right angle connectors feature gold plated, factory-installed non–removable contacts. Printed circuit terminals for attachment to flex circuits or rigid boards. Connector are potted with epoxy for general purpose applications. **Page H-26**



Series 805 Mighty Mouse Hermetic PCB or Solder Cup Receptacles
Hermetic 805-019 connector with solder cups and integral banding porch or 805-006 square flange–front or rear panel mount, solder mount and rear panel mount options. Connector is hermetically sealed to 10^-7 CC/He per second at 1 atmosphere. **Page H-30**



Series 805 Mighty Mouse Bulkhead Feedthru Receptacle Connector
Jam Nut mount, shell sizes 5 to 23. This connector mates with all triple-start threaded high density plug connectors with the same polarization and opposite contact genders. Copper alloy gold-plated contacts, pins to pin, pin to plug or plug to plug. **Page H-35**



Series 805 Sav–Con® Connector Savers
Protect expensive test equipment and cables with Glenair Sav-Con® connector savers. These plug/receptacle adapters feature non-removable contacts and a ratcheting coupling mechanism to prevent loosening under vibration. **Page H-37**



Series 805 Mighty Mouse Cordsets
Choose overmolded or overbraided cordsets for your specific application. Overmolded sets are low smoke and offer excellent all-weather cable protection, overbraided sets are ultraflexible and available with Nomex®, Halar® or PTFE-coated fiberglass. **Page H-39**

H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 805 Mighty Mouse
Triple-Start Threaded Coupling
Contact Arrangements

Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8**
8-1				1		
8-23			3			
8-4	4					
8-6	6					
8-7	7					
9-1					1	
9-25			5			
9-10	10					
10-2				2		
10-28			8			
10-13	13					
10-200	4	2				
11-4				4		
11-210			10			
11-19	19					
11-200	4			2		
11-201	8	2				
12-2					2	
12-5				5		
12-26	26					
12-200	12				1	
12-201	4				2	
12-202	8			2		
13-31	31					
15-2					2	
15-3					3	
15-7				7		
15-220			20			


*Arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688


**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts


Contact Legend


#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕ #8 ⊕


Mating Face View of Pin Connector
(socket connector numbers are reversed)


8-1



8-23



8-4



8-6



8-7



9-1



9-25



9-10



10-2



10-28



10-13



10-200



11-4



11-210



11-19



11-200



11-201



12-2



12-5



12-26



12-200



12-201



12-202



13-31


15-2


15-3


15-7


15-220


15-37

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8**
15-37	37					
15-200	6				2	
15-201	10				2	
15-202	20			2		
15-203	12			4		
15-204	12				2	
15-205	4				4	
18-4					4	
18-5					5	
18-12				12		
18-235			35			
18-55	55					
18-204	40			2		
18-205	32			4		
18-206	34				2	
18-207	20				4	
18-208	32					1
19-7					7	
19-14				14		
19-241			41			


*Arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688

**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts


Contact Legend

#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕ #8 ⊕


Mating Face View of Pin Connector
(socket connector numbers are reversed)




15-200




15-201




15-202




15-203




15-204




15-205




18-4




18-5




18-12




18-235




18-55




18-204




18-205




18-206




18-207




18-208



19-7



19-14



19-241

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse
Triple-Start Threaded Coupling
Contact Arrangements

Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8**
19-85	85					
19-203	40			4		
19-204	28				4	
19-205	40					1
21-19				19		
21-255			55			
21-100	100					
21-201	44					2
21-202	12					4
23-12					12	
23-22				22		
23-269			69			
23-130	130					
23-200	28					4


*Arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688

**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.


Contact Legend

#23 ○ #20HD ◓ #20 ● #16 ◒ #12 ⊕ #8 ⊕


Mating Face View of Pin Connector
(socket connector numbers are reversed)




19-85




19-203




19-204




19-205




21-19




21-255




21-100




21-201




21-202




23-12




23-22



23-269



23-130

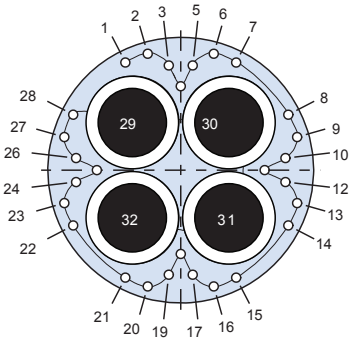

23-200

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start


Jam Nut Receptacle Panel Cutout Dimensions, Key Positions and Weight and Size Comparisons and Connector Weights

Size Comparison: Series 805 Versus D38999 Series III


Layout	Number of Contacts	D38999 Layout	Number of Contacts	Maximum Plug Diameter					Maximum Jam Nut Receptacle Diameter				
				Series 805		D38999		% Reduction	Series 805		D38999		% Reduction
				In.	mm.	In.	mm.		In.	mm.	In.	mm.	
8-7	7 #23	9-35	6 #20	.707	17.96	.859	21.81	17%	.775	19.69	1.201	30.51	35%
10-13	13 #23	11-35	13 #22D	.804	20.42	.969	24.61	18%	.895	22.73	1.386	30.50	35%
11-19	19 #23	13-35	19 #22D	.933	23.70	1.141	28.98	20%	.960	24.38	1.512	38.40	36%
12-26	26 #23	17-26	26 #20	.999	25.37	1.391	35.33	29%	1.075	27.31	1.764	44.81	39%
15-37	37 #23	15-35	37 #22D	1.113	28.27	1.266	32.16	13%	1.218	30.86	1.638	41.61	26%
18-55	55 #23	17-35	55 #22D	1.308	33.22	1.391	35.33	7%	1.404	35.66	1.764	44.81	20%
19-85	85 #23	21-35	85 #22D	1.328	33.73	1.625	41.27	19%	1.465	37.21	2.075	52.71	29%
23-130	130 #23	25-35	128 #22D	1.577	40.06	1.875	47.63	16%	1.720	43.69	2.323	59.00	26%

Panel Cut Outs

-07 JAM NUT



-02 FLANGE
-12 & -22 FLANGE




Panel Cutout For Jam Nut and Wall Mount Receptacles

Shell Size	G Bsc		Ø H		N Flat		Ø P		Ø R	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
8	.660	16.76	.096 .091	2.44 2.31	.545 .541	13.84 13.74	.572 .567	14.53 14.40	.515	13.08
9	.723	18.36			.671 .667	17.04 16.94	.698 .693	17.73 17.60	.578	14.68
10	.785	19.34			.671 .667	17.04 16.94	.698 .693	17.73 17.60	.640	16.26
11	.848	21.54			.731 .727	18.57 18.47	.760 .755	19.30 19.18	.703	17.86
12	.909	23.09			.794 .790	20.17 20.07	.822 .817	20.87 20.75	.765	19.43
13	.973	24.71			.851 .847	21.62 21.51	.885 .881	22.48 23.38	.828	21.03
15	1.058	26.87	.130 .126	3.30 3.20	.982 .976	24.89 24.79	1.010 1.006	25.65 25.55	.953	24.21
18	1.255	31.88			1.157 1.153	29.39 29.29	1.198 1.193	30.43 30.30	1.140	28.96
19	1.327	33.71			1.231 1.227	31.27 31.17	1.260 1.255	32.00 31.88	1.203	30.56
21	1.452	36.88			1.358 1.354	34.49 34.39	1.383 1.381	35.13 35.08	1.328	33.73
23	1.570	39.88			1.480 1.476	37.59 37.49	1.510 1.505	38.35 38.23	1.453	36.91

Series 805 Key Positions

Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



NORMAL AND ALTERNATE POSITION KEYWAY ROTATION

Series 805 Connector Weight In Grams (cont. on next page)

Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
8-23P	7.5	5.8	5.7	5.8	4.6
8-23S	8	6.4	6.2	6.4	5.1
8-4P	8.3	6.6	6.5	6.6	5.4
8-4S	8.8	7.2	7.0	7.2	5.9
8-6P	8.4	6.7	6.8	5.5	5.7
8-6S	8.9	7.3	7.3	5.9	6.2
8-7P	7.3	5.6	5.5	5.6	4.4
8-7S	7.7	6.1	5.9	6.1	4.8
9-1P	10.9	9.0	9.0	6.8	7.7
9-1S	11.4	9.6	9.6	7.4	8.3
9-25P	10.8	8.9	8.8	6.7	7.6
9-25S	11.3	9.6	9.4	7.4	8.1
9-10P	10.7	8.8	8.8	6.6	7.5
9-10S	11.6	9.7	9.7	7.5	8.4
10-2P	13.3	10.2	10.3	8.9	9.4
10-2S	14.1	11.0	11.1	9.7	10.1
10-28P	15.2	10.4	10.9	9.1	10
10-28S	16.4	11.5	11.7	10.2	10.7
10-13P	12.7	9.6	9.7	8.3	8.7
10-13S	13.4	10.3	10.5	9.0	9.5
10-200P	13.9	10.8	10.9	9.5	9.9
10-200S	14.7	11.7	11.8	10.3	10.8
11-4P	15.4	12.1	13.1	10.3	11.3
11-4S	16.4	13.1	14.1	11.3	12.3
11-210P	15.2	11.9	12.6	10.1	10.8

H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start
Connector Weights

Series 805 Connector Weight In Grams (cont. on next page)					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
11-210S	16.4	13.1	13.8	11.3	12
11-19P	14.3	11.0	12.0	9.2	10.2
11-19S	15.4	12.1	13.1	10.3	11.3
11-200P	14.9	11.6	12.5	9.8	10.8
11-200S	16.0	12.7	13.6	10.9	11.9
11-201P	14.5	11.3	11.6	9.5	9.8
11-201S	15	12.4	12.7	10.6	10.9
12-2P	17.4	13.6	15.4	11.9	12.2
12-2S	18.7	14.9	16.9	13.2	13.7
12-5P	17.6	13.9	16.3	12.2	13.1
12-5S	19.0	15.3	17.7	13.6	14.5
12-26P	15.8	12.1	14.5	10.5	11.3
12-26S	17.4	13.6	16.1	12.0	12.9
12-200P	16.5	12.8	15.2	11.1	12.0
12-200S	17.9	14.2	16.6	12.5	13.4
12-201P	16.6	12.9	15.3	11.2	12.1
12-201S	18.0	14.3	16.7	12.7	13.5
12-202P	16.6	12.9	15.3	11.2	12.1
12-202S	18.2	14.4	16.8	12.8	13.6
13-31P	19.5	15.7	19.1	12.8	15.9
13-31S	21.8	18	20.8	14.4	17.6
15-2P	20.7	20.2	21.8	17.1	19.5
15-2S	22.3	21.9	23.4	18.7	21.1
15-3P	21.7	21.2	22.8	18.0	20.5
15-3S	23.4	23.0	24.5	19.8	22.2
15-7P	21.9	21.5	23.0	18.3	20.7
15-7S	24.5	24.1	25.6	20.9	23.3
15-220P	20.8	21	24.1	18.2	21.8
15-220S	23.8	23.4	25.9	21.3	23.6
15-37P	20.1	19.7	21.2	16.5	18.9
15-37S	23.0	22.6	24.1	19.4	21.8
15-200P	20.4	19.9	21.5	16.7	19.1
15-200S	22.6	22.1	23.7	18.9	21.3
15-201P	20.7	20.2	21.8	17.1	19.5
15-201S	23.0	22.6	24.1	19.4	21.8
15-202P	20.8	20.3	22.4	17.2	20.9
15-202S	22.7	22.3	23.8	19.1	22.4
15-203P	21.1	20.6	23.7	17.5	21.4
15-203S	23	22.6	25.1	19.4	22.8
18-12P	30.7	32.3	30.9	36.8	29.8
18-12S	34.3	36.0	34.5	30.5	33.4
18-235P	29	31.9	32	26.4	31
18-235S	32.7	35.9	35.1	30.4	34
18-55P	27.3	28.9	27.5	23.4	26.4
18-55S	30.7	32.3	30.9	26.8	29.8
18-204P	29	30.6	30	25.1	28.9
18-204S	33	34.7	32.5	29.2	31.4
18-205P	29.3	30.9	30.5	25.4	29.4
18-205S	33.3	35	31.6	29.5	31.8
18-206P	29.5	31.1	30.6	25.6	29.5
18-206S	33.4	35.1	33.2	29.6	32.1
18-207P	30.3	31.9	31.5	26.4	30.4
18-207S	34.2	35.9	34.4	30.4	33.3


Series 805 Connector Weight In Grams (cont. on next page)					
Contact Arr.	Cable Plug	J/N Recep Crimp	J/N Recep PCB	Sq. Flange Recep Crimp	Sq. Flange Recep PCB
19-7P	27.9	30.0	33.1	25.1	33.0
19-7S	31.0	33.1	36.2	28.2	36.1
19-14P	32.9	35.0	38.1	30.0	38.0
19-14S	32.6	34.7	37.7	29.7	37.6
19-241P	32.8	29.5	33.6	29.9	33.5
19-241S	33.6	33.9	36.7	30.7	36.6
19-85P	26.6	28.7	31.8	23.8	31.7
19-85S	31.1	33.2	36.3	28.3	36.2
19-203P	25.8	27.9	31.6	23	30.5
19-203S	29.4	31.6	34	26.7	32.9
19-204P	26.4	28.5	32.6	23.6	40.2
19-204S	30.3	32.5	35.5	27.6	43.1
21-19P	46	46.9	42.1	32.3	42
21-19S	46.7	47.7	45.4	39.4	45.2
21-100P	43.7	44.6	41.5	35.5	36.8
21-100S	45.7	46.6	44.6	44.3	39.1
21-255P	45.8	46.7	41.8	37.6	37.1
21-255S	48	48.8	46	46.6	40.5
21-201P	48.4	49.3	42.2	40.2	37.5
21-201S	52.6	53.5	49.4	51.2	43.9
21-202P	54	54.9	46.2	45.8	41.5
21-202S	61	61.9	57.5	59.6	52.02
23-5P	49	51.7	48.3	45.5	47.8
23-5S	61.8	54.6	62.3	58.4	61.8
23-12P	40.2	42.9	44.4	36.7	43.9
23-12S	45.2	48.0	49.5	41.8	49.0
23-22P	42.7	45.4	47.0	39.3	46.4
23-22S	49.6	52.4	53.9	46.2	53.4
23-269P	39.3	43	44.9	35.8	44.4
23-269S	46.4	50.3	50	43	49.5
23-130P	37.8	40.6	42.1	34.4	41.6
23-130S	44.9	47.7	49.3	41.6	48.7
23-200P	46.6	49.3	47.9	43.1	47.4
23-200S	58.3	51.1	59.9	54.9	58.9

Maximum connector weight in grams.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

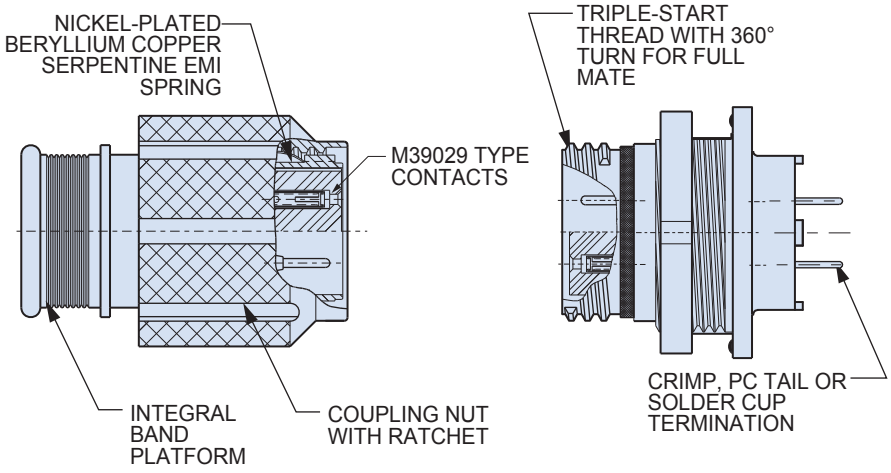

Outstanding EMI Shielding
Nickel-plated beryllium copper ground spring and metal-to-metal bottoming for excellent EMI performance.

Triple-Start Coupling
Rugged ACME threads resist cross-threading and allow fast mating.

Environmentally Sealed
Meets MIL-STD-810 Method 512 immersion.

Ratchet Mechanism
Ratcheting anti-decoupling mechanism prevents coupling nut backoff when subjected to vibration.

Glenair's Series 805 Connector Offers Outstanding EMI Protection and Vibration Resistance in a Miniaturized Package

The Series 805 connector was developed to provide several performance enhancements compared to other "Mighty Mouse" versions. A ratchet mechanism in the coupling nut prevents de-mating under severe vibration. EMI performance is improved with a serpentine ground spring on the plug barrel. This nickel plated beryllium copper spring assures low shell-to-shell resistance. The Series 805, although larger than other Series 80 versions, saves size and weight compared to MIL-DTL-38999 connectors with no compromise in performance.





Specifications	
Current Rating	#23–5 A, #20HD–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD–1000 VAC #12 and #16–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum low frequency from 100MHz to 1000MHz. and 65 dB minimum high frequency from 1 GHz to 10GHz.
Magnetic Permeability	2.0 µ maximum
Durability	2000 mating cycles

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	High-grade rigid dielectric
Contact Retention Clip	Beryllium copper alloy
Seal, O-rings, Grommet	Fluorosilicone rubber
Spring	Nickel-plated beryllium copper
See Series 80 General Information for complete material and finish specs.	

Rev. 111417

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse
Triple-Start ACME Thread Plug
805-001 and 805-002 Ordering Information



Two Shell Styles: Integral platform for direct shield attachment using Band-Master™ ATS termination system, or accessory thread for attaching a strain relief.

EMI Ground Spring Achieves low shell-to-shell resistance. This nickel-plated beryllium copper spring enables the Series 805 to meet greater than 60 dB shielding effectiveness from 100 MHz to 15 GHz.


Ratchet Design for Secure Coupling Series 805 connectors feature a spring mechanism in the coupling nut that locks into radial teeth on the plug barrel. This feature allows the Series 805 to stay mated even when under high vibration, without the need for safety wire or torque tools.

How To Order


Sample Part Number	805-001	-16	M	8-4	P	A

Series (See Table I)	**805-001** = Plug with Banding Platform **805-002** = Plug with Accessory Thread
Shell Style	**-16** = Plug Connector with Ratcheting Anti-Decoupling Mechanism
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant
Shell Size - Insert Arrangement	See Contact Arrangements Page H-2
Contact Type	**With contacts** — **Without contacts** — **With 30 AWG Crimp Barrel** **P** = Pin — **A** = Pin Connector, less contacts — **G** = #23 Pin **S** = Socket — **B** = Socket Connector, less contacts — **H** = #23 Socket Connector with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

Table I: Series




805-001
Plug with Banding Platform



805-002
Plug with Accessory Thread

Table II: Key Positions


Key Position	Key Rotation A	Key Rotation B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Plug connector

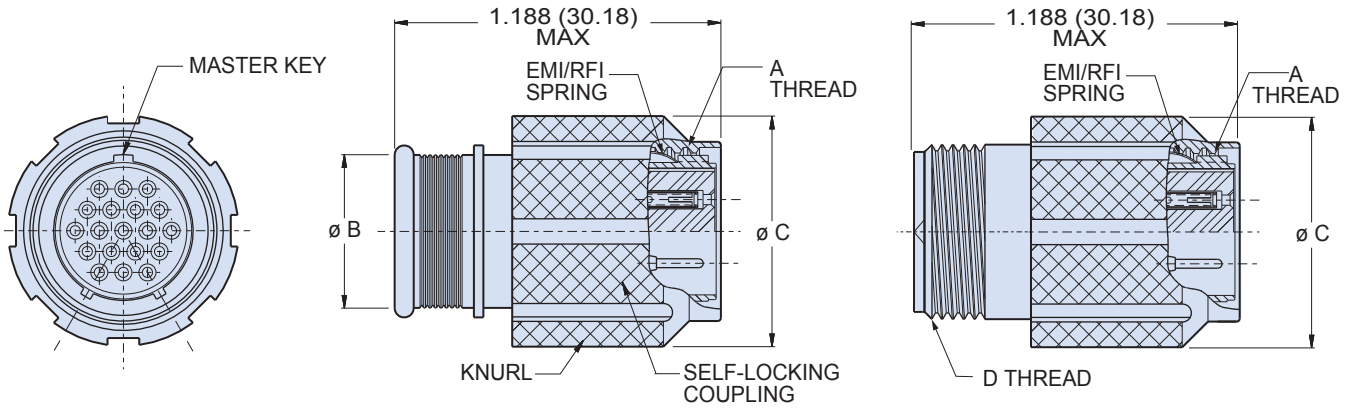

Band Platform
805-001

Accessory Thread
805-002

Dimensions						
Shell Size	A Thread	Ø B		Ø C		D Thread Accessory
		In.	mm.	In.	mm.	
8	.5000-.1P-.3L-TS-2B	.317	8.05	.692	17.55	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2B	.397	10.08	.789	19.99	.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2B	.473	12.01	.827	20.98	.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2B	.519	13.18	.918	23.27	.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2B	.585	14.86	.984	24.94	.6250-24 UNEF-2A
13	.8125-.1P-.3L-TS-2B	.646	16.41	1.047	25.59	.6875-24 UNEF-2A
15	.9375-.1P-.3L-TS-2B	.687	17.45	1.098	27.86	.7500-20 UNEF-2A
18	1.1250-.1P-.3L-TS-2B	.884	22.45	1.287	32.77	.9375-20 UNEF-2A
19	1.1875-.1P-.3L-TS-2B	.884	22.45	1.311	33.27	.9375-20 UNEF-2A
21	1.3125-.1P-.3L-TS-2B	1.003	25.48	1.448	36.78	1.0625-18 UNEF-2A
23	1.4375-.1P-.3L-TS-2B	1.135	28.83	1.562	39.67	1.1875-18 UNEF-2A

NOTES

Materials and Finishes

- Connector Shell: Aluminum or Stainless Steel
- Insulator: High-grade rigid dielectric
- Seals: Fluorosilicone Rubber, Blue
- Pin Contact: Copper Alloy, Gold over Nickel Plating
- Socket Contact: Copper Alloy, Gold over Nickel Plating, with SST Hood
- Contact Retainer Clip: Beryllium Copper, Unplated

H

Rev. 111417

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Cobra™
Plug with Integral Cobra™ Backshell
805-061 Ordering Information



Series 805 Mighty Mouse Cobra™


Integral Cobra™ style ultra-low profile right angle shielded backshell reduces clearance requirements without compromising ruggedness, environmental protection or shielding performance. Removable rear cover allows easy access for soldering wires or inserting crimped wire contacts. Cover gasket prevents moisture intrusion. Aluminum or stainless steel shell and coupling nut, gold–plated copper alloy contacts, fluorosilicone seals. Terminate cable shield to backshell with Band–Master strap. Band platform has groove for lipped heatshrink boots. Crimp version features snap–in rear release contacts supplied unassembled. Solder cup version has factory installed, epoxy potted non-removable contacts.

Available with size #23 contacts only.

How To Order								
Sample Part Number		**805-061-16**	**Z1**	**8-6**	**P**	**A**	**1**	**05**
Series and Shell Style	**805-061-16** = Triple-Start Plug with Ratcheting Anti-Decoupling Mechaniism							
Shell Material and Finish	**M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant							
Shell Size - Insert Arrangement	**8-4**, **8-6**, **8-7**, **9-10**, **10-13**, **11-19**, **12-26**, **13-31**, **15-37**, **18-55**, **19-85**, **21-100**, **23-130**							
Contact Type	**P** = Pin, Crimp **A** = Pin, Solder **S** = Socket , Crimp **B** = Socket, Solder							
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F							
Cable Exit Direction (See Table III)	**1** through **8**							
Cable Entry Size (See Table III)	**02**, **03**, **04**, **05**, **06**, **07**, **08**, **09**, **10**, **11**, **12**, **13**, **14**, **15**, **16**, **17**							

Table I: Key Positions


Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Plug with ratcheting anti-decoupling mechanism

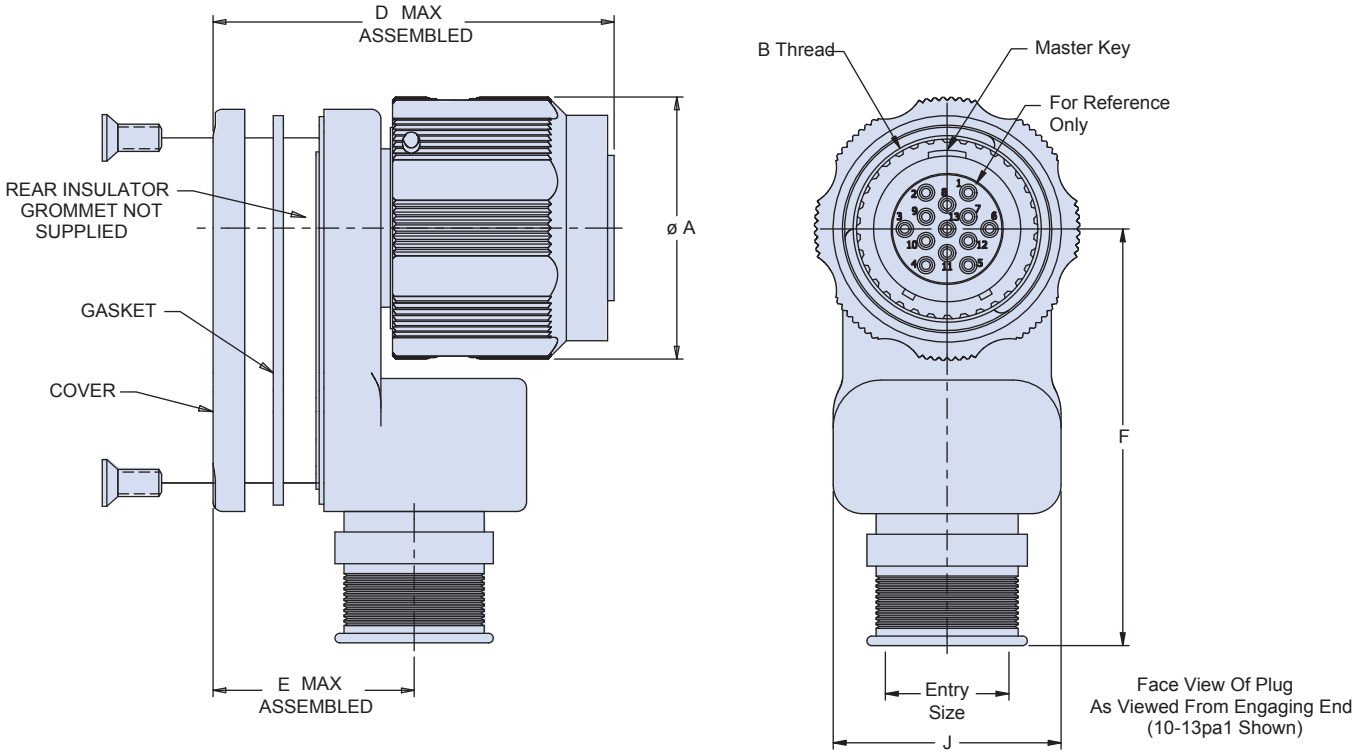

Dimensions									
Shell Size	Ø A	B Thread	D	E	F	G	H	J	Max Entry
8	.65 (15.7)	.5000-.1P-.3L-TS-2B	1.02 (25.9)	.34 (8.6)	1.24 (31.5)	1.76 (44.7)	1.62 (41.1)	.560 (14.22)	04
9	.79 (20.1)	.5625-.1P-.3L-TS-2B	1.03 (26.2)	.39 (9.9)	1.28 (32.5)	1.77 (45.0)	1.63 (41.4)	.650 (16.51)	05
10	.83 (21.1)	.6250-.1P-.3L-TS-2B	1.05 (26.7)	.42 (10.7)	1.31 (33.3)	1.79 (45.5)	1.65 (41.9)	.710 (18.03)	06
11	.92 (23.4)	.6875-.1P-.3L-TS-2B	1.08 (27.4)	.45 (11.4)	1.34 (34.0)	1.82 (46.2)	1.68 (42.7)	.770 (19.56)	07
12	.98 (24.9)	.7500-.1P-.3L-TS-2B	1.11 (28.2)	.48 (12.2)	1.37 (34.8)	1.85 (47.0)	1.71 (43.4)	.835 (21.21)	08
13	1.05 (26.7)	.8125-.1P-.3L-TS-2B	1.14 (29.0)	.50 (12.7)	1.43(36.3)	1.88 (47.8)	1.74 (44.2)	.900(22.86)	09
15	1.10 (27.9)	.9375-.1P-.3L-TS-2B	1.17 (29.7)	.52 (13.2)	1.48 (37.6)	1.91 (48.5)	1.77 (45.0)	.950 (24.13)	10
18	1.29 (32.8)	1.1250-.1P-.3L-TS-2B	1.25 (31.8)	.58 (14.7)	1.64 (41.7)	1.99 (50.5)	1.85 (47.0)	1.070 (27.18)	12
19	1.31 (33.3)	1.1875-.1P-.3L-TS-2B	1.32 (33.5)	.63 (16.0)	1.78 (45.2)	2.06 (52.3)	1.92 (48.8)	1.180 (29.97)	13
21	1.45 (36.8)	1.3125-.1P-.3L-TS-2B	1.44 (36.6)	.70 (17.8)	1.89 (48.0)	2.18 (55.4)	2.04 (51.8)	1.300 (33.02)	15
23	1.56 (39.6)	1.4375-.1P-.3L-TS-2B	1.55 (39.4)	.76 (19.3)	1.98 (50.3)	2.30 (58.4)	2.16 (54.9)	1.410 (35.81)	17


H


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Cobra™
Triple-Start ACME Thread Low Profile Plug
805-061 Dimensions

Plug with ratcheting anti-decoupling mechanism

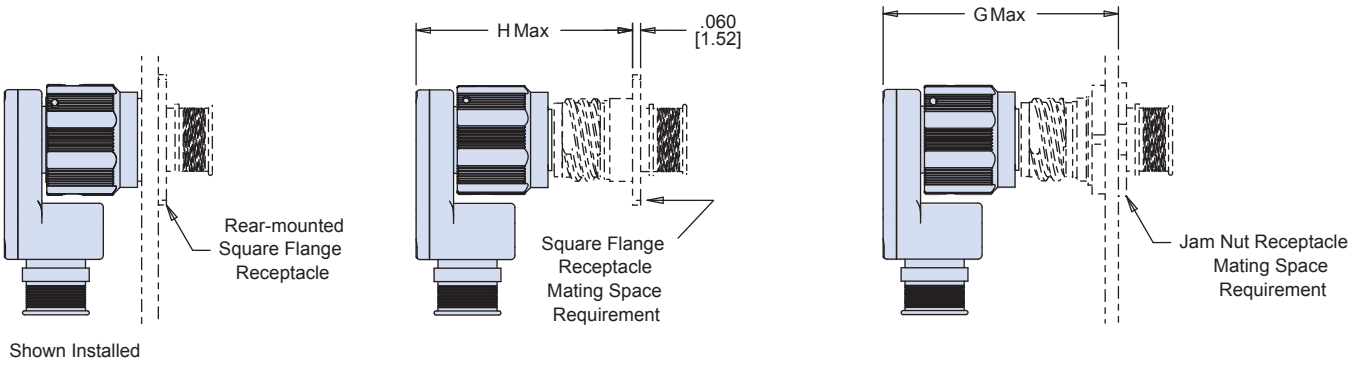

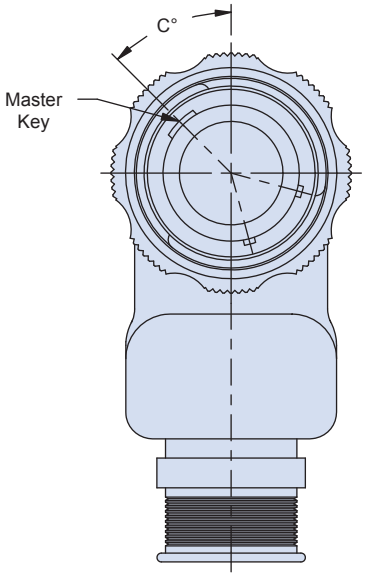

Cable Exit Direction
(Direction 2 Shown)

Cable Exit Direction	
Direction	C°
1	0°
2	45°
3	90°
4	135°
5	180°
6	225°
7	270°
8	315°

Cable Entry Size	
Code	Entry Size
02	0.125
03	0.188
04	0.250
05	0.313
06	0.375
07	0.438
08	0.500
09	0.563
10	0.625
11	0.688
12	0.750
13	0.813
14	0.875
15	0.938
16	1.000
17	1.063

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse
Triple-Start ACME Thread Receptacle
805-003 and 805-004 Ordering Information



Three Shell Mounting Options: Jam nut with O-ring for rear panel mounting, square flange for front or rear panel mounting, or in-line receptacles for free-hanging cables.

Gold-Plated Crimp Contacts are held in place with beryllium copper retention clips. Contacts are removable.

Two Shell Styles: Choose integral band platform for direct attachment of a cable shield. Install a boot, or overmold a boot over the band platform. An accessory thread is available for attaching strain reliefs and backshells.

How To Order

Sample Part Number	805-004	-02	NF	9-10	P	A

Series (See Table I)	**805-003** = Receptacle with Banding Platform **805-004** = Receptacle with Accessory Thread
Shell Style (See Table II)	**-01** = In-line **-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut for Rear Panel Mounting
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy/Black Chromate
Shell Size - Insert Arrangement	See Contact Arrangements Page H-2
Contact Type	**With contacts**: **P** = Pin, **S** = Socket **Without contacts**: **A** = Pin Connector, less contacts, **B** = Socket Connector, less contacts **With 30 AWG Crimp Barrel**: **G** = #23 Pin, **H** = #23 Socket
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

Table I: Series






	
805-003 Receptacle with Banding Platform	**805-004** Receptacle with Accessory Thread

Table II: Shell Style

		
-01 In-line Receptacle	**-02, -12, -22** Square Flange	**-07** Jam Nut

H

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com

E-Mail: sales@glenair.com

Series 805 Mighty Mouse
Triple-Start ACME Thread Receptacle
805-003 and 805-004 Shell Style -01 Dimensions


In-line cable receptacle - shell style 01

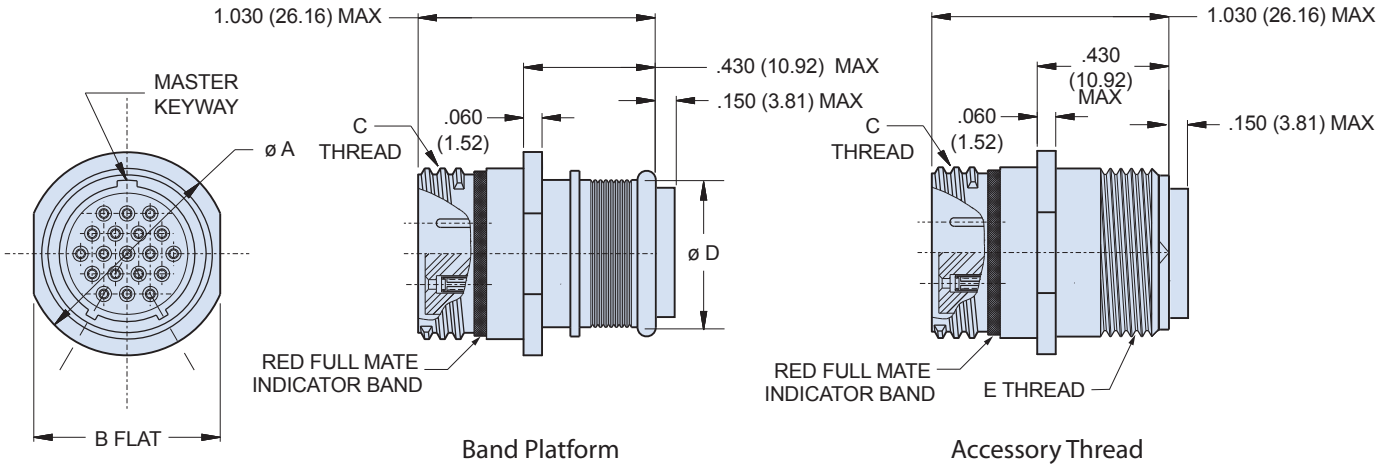

Band Platform
805-003

Accessory Thread
805-004

Table III: Key Positions



Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions

Shell Size	Ø A		B Flat		C Thread	Ø D		E Accessory Thread
	In.	mm.	In.	mm.		In.	mm.	
8	.540	13.72	.510	12.95	.5000-.1P-.3L-TS-2A	.316	8.05	.3750-32 UNEF-2A
9	.605	15.37	.575	14.61	.5625-.1P-.3L-TS-2A	.397	10.08	.4375-28 UNEF-2A
10	.668	16.96	.638	16.21	.6250-.1P-.3L-TS-2A	.472	12.01	.5000-28 UNEF-2A
11	.730	18.54	.700	17.78	.6875-.1P-.3L-TS-2A	.519	13.18	.5625-24 UNEF-2A
12	.793	20.14	.763	19.38	.7500-.1P-.3L-TS-2A	.585	14.86	.6250-24 UNEF-2A
13	.855	21.72	.825	20.96	.8125-.1P-.3L-TS-2A	.646	16.41	.6875-24 UNEF-2A
15	.980	24.89	.950	24.13	.9375-.1P-.3L-TS-2A	.687	17.45	.7500-20 UNEF-2A
18	1.165	29.59	1.135	28.83	1.1250-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
19	1.235	31.37	1.205	30.61	1.1875-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
21	1.360	34.54	1.330	33.78	1.3125-.1P-.3L-TS-2A	1.003	25.48	1.0625-18 UNEF-2A
23	1.485	37.72	1.455	36.96	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.1875-18 UNEF-2A

NOTES

Performance Specifications

1. Immersion, mated: MIL-STD-810 Method 512. One meter for one hour.

Materials and Finishes

- Connector shell: aluminum or stainless steel
- Insulator: high-grade rigid dielectric
- Seals: fluorosilicone rubber, blue
- Pin contact: copper alloy, gold over nickel plating
- Socket contact: copper alloy, gold over nickel plating, with SST hood
- Contact retainer clip: beryllium copper, unplated


Rev. 111417

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com
E-Mail: sales@glenair.com


Square flange, front or rear panel mount receptacle - shell style 02

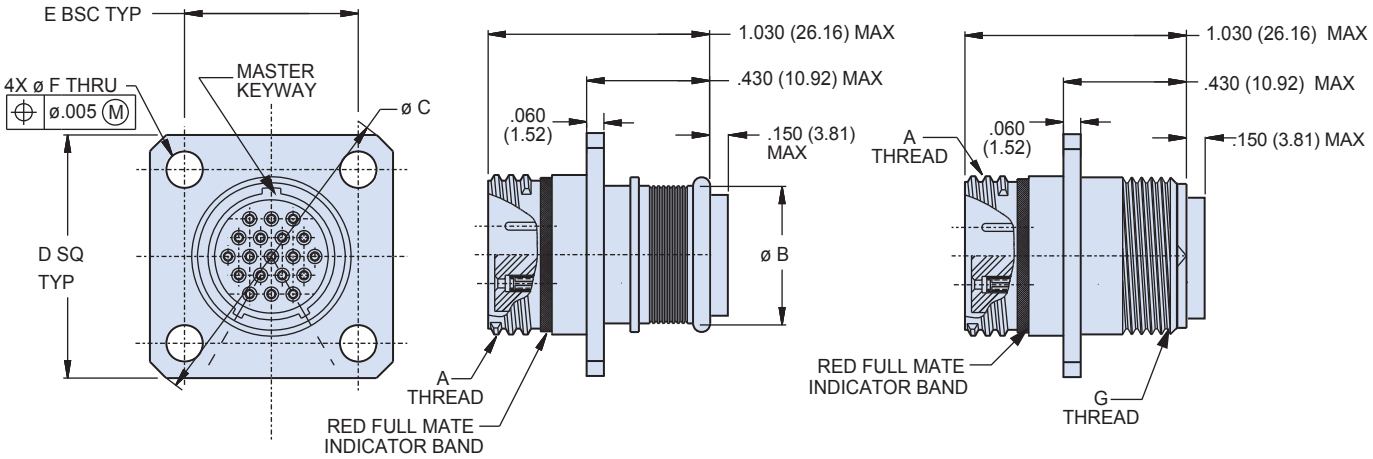

Band Platform
805-003

Accessory Thread
805-004

Dimensions												
Shell Size	A Thread	Ø B		Ø C		D SQ TYP		E BSC		Ø F		G Accessory Thread
		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In. ± .003	mm. ± .08	
8	.5000-.1P-.3L-TS-2A	.316	8.05	1.150	29.21	.850	21.59	.660	16.76	.096 .091	2.44 2.31	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.397	10.08	1.230	31.24	.913	23.19	.723	18.36			.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2A	.472	12.01	1.330	33.78	.975	24.77	.785	19.94			.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.519	13.18	1.410	35.81	1.039	26.39	.848	21.54			.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.585	14.86	1.500	38.10	1.099	27.91	.909	23.09			.6250-24 UNEF-2A
13	.8125-.1P-.3L-TS-2A	.646	16.41	1.590	40.39	1.163	29.54	.973	24.71			.6875-24 UNEF-2A
15	.9375-.1P-.3L-TS-2A	.687	17.45	1.750	44.45	1.288	32.74	1.058	26.87	.130 .126	3.30 3.20	.7500-20 UNEF-2A
18	1.1250-.1P-.3L-TS-2A	.884	22.45	2.000	50.80	1.475	37.47	1.255	31.88			.9375-20 UNEF-2A
19	1.1875-.1P-.3L-TS-2A	.884	22.45	2.094	53.19	1.537	71.06	1.327	33.71			.9375-20 UNEF-2A
21	1.3125-.1P-.3L-TS-2A	1.003	25.48	2.270	57.66	1.663	42.24	1.452	40.39			1.0625-18 UNEF-2A
23	1.4375-.1P-.3L-TS-2A	1.134	28.80	2.440	61.98	1.787	45.39	1.570	39.88			1.1875-18 UNEF-2A




Square Flange Panel Cut Out Dimensions												
Shell Size	P Bsc		Ø R		Ø S		Shell Size	P Bsc		Ø R		Ø S	
	In.	mm.	In.	mm.	In.	mm.				In.	mm.	In.	mm.
8	0.660	16.76	.515	13.08	.096 .091	2.43 2.31	15	1.058	26.87	.953	24.21	.130 .126	3.30 3.20
9	0.723	18.36	.578	14.68			18	1.255	31.88	1.140	28.96		
10	0.785	19.94	.640	16.26			19	1.327	33.71	1.203	30.56		
11	0.848	21.54	.703	17.86			21	1.452	36.88	1.328	33.73		
12	0.909	23.09	.765	19.43			23	1.570	39.88	1.453	36.91		
13	0.973	24.71	.828	21.03									

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse
Triple-Start ACME Thread Receptacle
805-003 and 805-004 Shell Style -07 Dimensions


Jam nut, rear panel mount receptacle - shell style 07

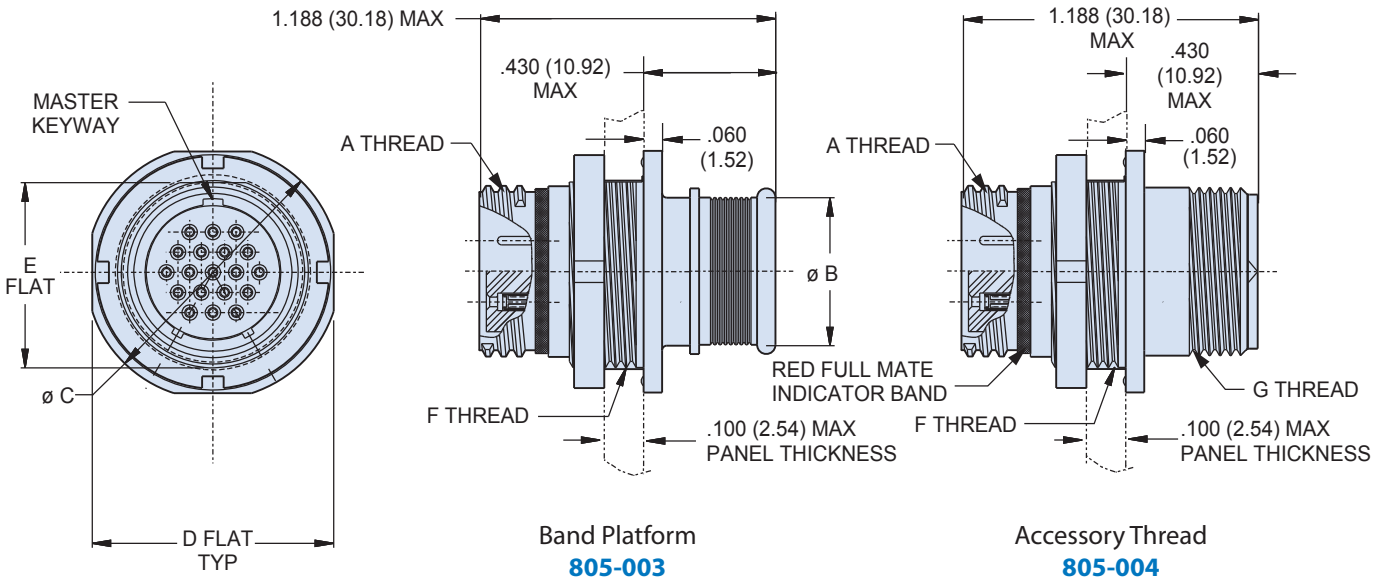

Band Platform
805-003

Accessory Thread
805-004

Dimensions											
Shell Size	A Thread	Ø B		Ø C		D Flat		E Flat		F Threads	G Accessory Thread
		In.	mm.	In.	mm.	In.	mm.	In.	mm.		
8	.5000-.1P-.3L-TS-2A	.316	8.03	.760	19.30	.730	18.54	.535	13.59	.5625-28 UNEF-2A	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.397	10.08	.880	22.35	.850	21.59	.661	16.79	.6875-28 UN-2A	.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2A	.472	11.99	.880	22.35	.850	21.59	.661	16.79	.6875-28 UN-2A	.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.519	13.18	.955	24.26	.925	23.50	.721	18.31	.7500-28 UN-2A	.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.585	14.86	1.060	26.92	1.035	26.29	.784	19.91	.8125-28 UN-2A	.6250-24 UNEF-2A
13	.8125-.1P-.3L-TS-2A	.646	16.41	1.120	28.45	1.090	27.69	.843	21.41	.8750-28 UN-2A	6875-24 UNEF-2A
15	.9375-.1P-.3L-TS-2A	.687	17.45	1.203	30.56	1.173	29.79	.970	24.64	1.0000-28 UN-2A	.7500-20 UNEF-2A
18	1.1250-.1P-.3L-TS-2A	.884	22.45	1.389	35.28	1.359	34.52	1.147	29.13	1.1875-28 UN-2A	.9375-20 UNEF-2A
19	1.1875-.1P-.3L-TS-2A	.884	22.45	1.450	36.83	1.420	36.07	1.221	31.01	1.2500-28 UN-2A	.9375-20 UNEF-2A
21	1.3125-.1P-.3L-TS-2A	1.003	25.48	1.590	40.39	1.560	39.62	1.350	34.29	1.3750-28 UN-2A	1.0625-18 UNEF-2A
23	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.705	43.31	1.675	42.55	1.470	37.34	1.5000-28 UN-2A	1.1875-18 UNEF-2A




Jam Nut Panel Cutout Dimensions								
Shell Size	N Flat	Ø P	Shell Size	N Flat	Ø P	Shell Size	N Flat	Ø P
8	.545 (13.84) .541 (13.74)	.572 (14.53) .567 (14.40)	12	.794 (20.17) .790 (20.07)	.822 (20.88) .817 (20.75)	19	1.231 (31.27) 1.227 (31.17)	1.260 (32.00) 1.255 (31.88)
9	.671 (17.04) .667 (16.94)	.698 (17.73) .693 (17.60)	13	.851 (21.62) .847 (21.51)	.885 (22.48) .881 (22.38)	21	1.358 (34.49) 1.354 (34.39)	1.383 (35.13) 1.381 (35.08)
10	.671 (17.04) .667 (16.94)	.698 (17.73) .693 (17.60)	15	.982 (24.94) .976 (24.79)	1.010 (25.65) 1.006 (25.55)	23	1.480 (37.59) 1.476 (37.49)	1.510 (38.35) 1.505 (38.23)
11	.731 (18.57) .727 (18.47)	.760 (19.30) .755 (19.18)	18	1.157 (29.39) 1.153 (29.29)	1.198 (30.43) 1.193 (30.30)			

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Square flange, rear panel mount receptacle with clinch nut - shell style 12/22

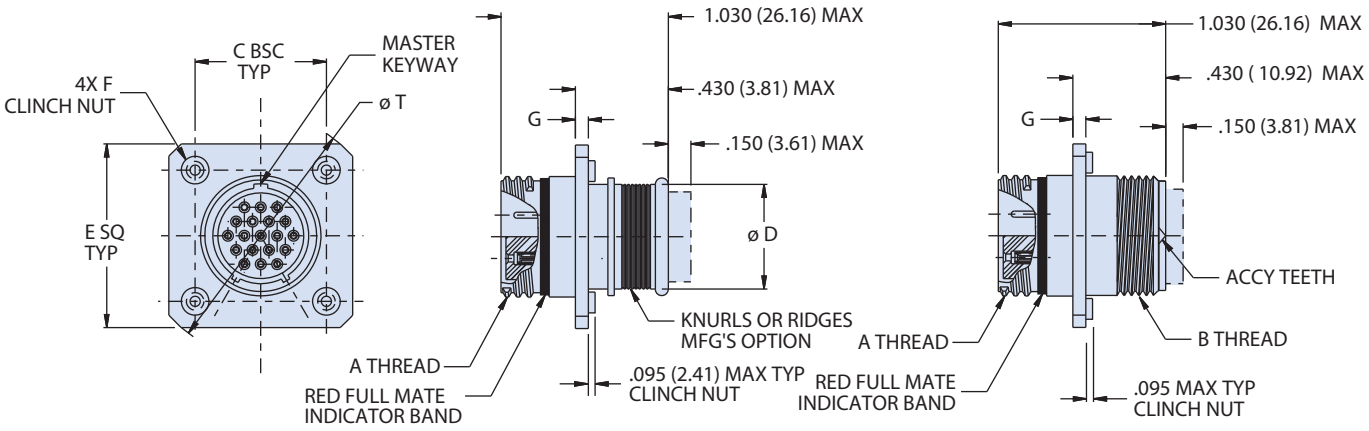

Band Platform
805-003

Accessory Thread
805-004

Dimensions												
Shell Size	A Thread	B Thread	C BSC		Ø D		E SQ		Ø T		F Clinch Nuts	G
			in.	mm.	in.	mm.	in.	mm.	in.	mm.		
8	.5000-.1P-.3L-TS-2A	.3750-32 UNEF-2A	0.660	16.76	1.194	30.33	0.920	23.37	1.194	30.33	2-56	.030
9	.5625-.1P-.3L-TS-2A	.4375-28 UNEF-2A	0.723	18.36	1.283	32.59	0.983	24.97	1.283	32.59		
10	.6250-.1P-.3L-TS-2A	.5000-28 UNEF-2A	0.785	19.94	1.371	34.82	1.045	26.54	1.371	34.82		
11	.6875-.1P-.3L-TS-2A	.5625-24 UNEF-2A	0.848	21.54	1.460	37.08	1.104	28.04	1.460	37.08		
12	.7500-.1P-.3L-TS-2A	.6250-24 UNEF-2A	0.909	23.09	1.546	39.27	1.169	29.69	1.546	39.27		
13	.8125-.1P-.3L-TS-2A	.6875-24 UNEF-2A	0.973	24.71	1.637	41.58	1.233	31.32	1.637	41.58		
15	.9375-.1P-.3L-TS-2A	.7500-20 UNEF-2A	1.058	26.87	1.817	46.15	1.378	35.00	1.817	46.15	4-40	.060
18	1.1250-.1P-.3L-TS-2A	.9375-20 UNEF-2A	1.255	31.88	2.096	53.24	1.575	40.01	2.096	53.24		
19	1.1875-.1P-.3L-TS-2A	.9375-20 UNEF-2A	1.327	33.71	2.197	55.80	1.647	41.83	2.197	55.80		
21	1.3125-.1P-.3L-TS-2A	1.0625-18 UNEF-2A	1.452	36.88	2.380	60.45	1.772	45.01	2.380	60.45		
23	1.4375-.1P-.3L-TS-2A	1.1875-18 UNEF-2A	1.570	39.88	2.541	64.54	1.890	48.01	2.541	64.54		



Square Flange Panel Cut Out Dimensions												
Shell Size	P Bsc		Ø R		Ø S		Shell Size	P Bsc		Ø R		Ø S	
	In.	mm.	In.	mm.	In.	mm.				In.	mm.	In.	mm.
8	0.660	16.76	.515	13.08	.096 .091	2.43 2.31	15	1.058	26.87	.953	24.21	.130 .126	3.30 3.20
9	0.723	18.36	.578	14.68			18	1.255	31.88	1.140	28.96		
10	0.785	19.94	.640	16.26			19	1.327	33.71	1.203	30.56		
11	0.848	21.54	.703	17.86			21	1.452	36.88	1.328	33.73		
12	0.909	23.09	.765	19.43			23	1.570	39.88	1.453	36.91		
13	0.973	24.71	.828	21.03									


H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread PCB or Solder Cup Receptacle

805-005 and 805-017 Ordering Information



Printed Circuit Board/Solder Cup Receptacles feature low profile shells for minimum protrusion inside enclosures and integral standoffs for board washout. Contacts are non-removable.

Water Immersion, Unmated Specify 805-005 connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify 805-017 watertight connectors . These 805-017 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40° C to +70° C.

How To Order						
Sample Part Number	**805-017**	**-07**	**M**	**10-13**	**P**	**B**
Series	**805-005** = Receptacle with Standard Epoxy Potting **805-017** = Receptacle with Special "MOD-518" Sealing For Open Face (unmated) Water Immersion Requirements. 100% Leak Tested.					
Shell Style (See Table I)	**-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut Rear Panel Mount					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy/Black Chromate					
Shell Size - Insert Arrangement	See Contact Arrangements Page H-2					
Contact Type	**P** = Pin, PC Tail **E** = Pin, Solder Cup **S** = Socket, PC Tail **F** = Socket, Solder Cup					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Shell Style




	
-02, -12, -22 Square Flange	**-07** Jam Nut

Table II: Key Positions


Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Square flange, front or rear panel mount receptacle - shell style 02

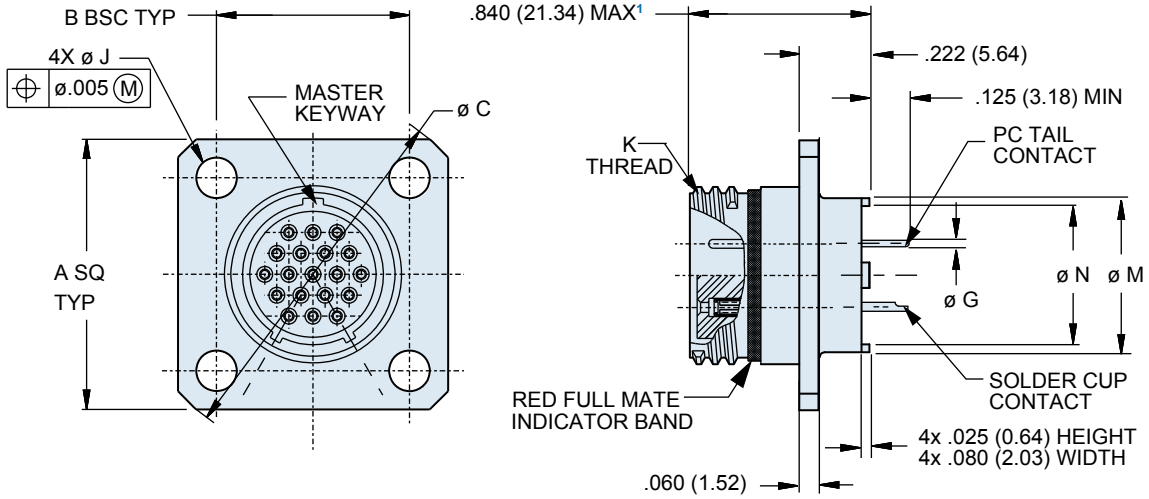

Dimensions														
Shell Size	A SQ Typ		B Bsc Typ		Ø C		Ø J		K Thread	Ø M		Ø N		Ø G Tail Dia.
							In. ± .003	mm. ± .08						
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
8	.850	21.59	.660	16.76	1.150	29.21	.094	2.39	.5000-.1P-.3L-TS	.330	8.38	.236	5.99	#23 .018/.022 (0.46/0.56)
9	.913	23.19	.723	18.36	1.230	31.24	.094	2.39	.5625-.1P-.3L-TS	.432	10.97	.322	8.18	
10	.975	24.77	.785	19.94	1.330	33.78	.094	2.39	.6250-.1P-.3L-TS	.493	12.52	.386	9.80	
11	1.039	26.39	.848	21.54	1.410	35.81	.094	2.39	.6875-.1P-.3L-TS	.551	14.00	.442	11.23	#20 .024/.028 (0.61/0.71)
12	1.099	27.91	.909	23.09	1.500	38.10	.094	2.39	.7500-.1P-.3L-TS	.620	15.78	.513	13.03	
13	1.163	29.54	.973	24.71	1.590	40.39	.094	2.39	.8125-.1P-.3L-TS	.661	16.79	.554	14.07	
15	1.288	32.74	1.058	26.87	1.750	44.45	.128	3.25	.9375-.1P-.3L-TS	.703	17.86	.594	15.09	#16 .060/.064 (1.52/1.63)
18	1.475	37.47	1.255	31.88	2.000	50.80	.128	3.25	1.1250-.1P-.3L-TS	.863	21.92	.755	19.18	
19	1.537	71.06	1.327	33.71	2.094	53.19	.128	3.25	1.1875-.1P-.3L-TS	.912	23.16	.805	20.45	
21	1.663	42.24	1.452	36.88	2.270	57.66	.128	3.25	1.3125-.1P-.3L-TS	1.017	25.83	.910	23.11	#12 .092/.096 (2.34/2.44)
23	1.787	45.39	1.570	39.88	2.440	61.98	.128	3.25	1.4375-.1P-.3L-TS	1.162	29.51	1.055	26.80	

Flange Style Recommended Panel Cutout

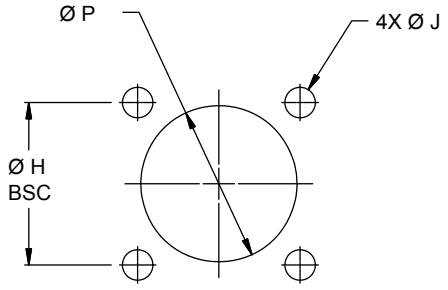

Shell Size	H BSC	J Holes	Ø P
8	0.660 (16.76)	0.096 (2.43) 0.091 (2.31)	0.515 (13.08)
9	0.723 (18.36)		0.578 (14.68)
10	0.785 (19.94)		0.640 (16.26)
11	0.848 (21.54)		0.703 (17.86)
12	0.909 (23.09)		0.765 (19.43)
13	0.973 (24.71)		0.828 (21.03)
15	1.058 (26.87)	0.130 (0.13) 0.126 (3.20)	0.953 (24.21)
18	1.255 (31.88)		1.140 (28.96)
19	1.327 (33.71)		1.203 (30.56)
21	1.452 (36.88)		1.328 (33.73)
23	1.570 (39.88)		1.453 (36.91)


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 805 Mighty Mouse Triple-Start ACME Thread PCB or Solder Cup Receptacle


805-005 and 805-017 Shell Styles -12 and -22 Dimensions

Square flange, front or rear panel mount receptacle - shell style 12 and 22

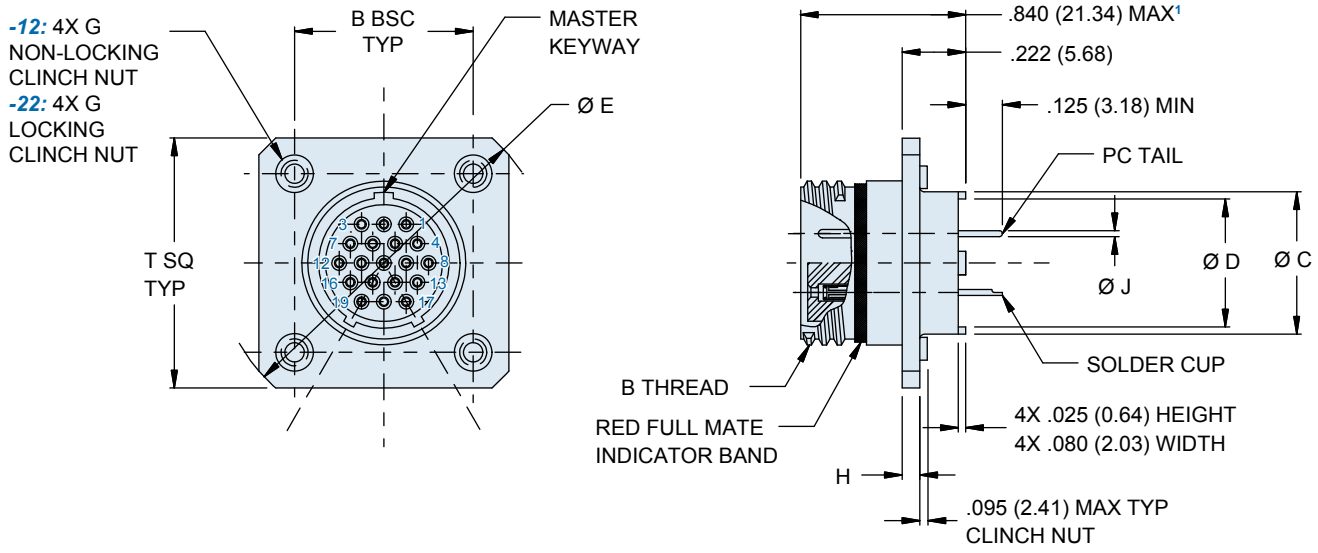

Dimensions														
Shell Size	B BSC Typ		B Thread	Ø C		Ø D		Ø E		T SQ Typ		G	H	Ø J Tail Dia.
	In	mm		In	mm	In	mm	In	mm	In	mm			
8	.660	16.76	.5000-.1P-.3L-TS	0.330	8.38	0.236	5.99	1.194	30.33	0.920	23.37	2-56	0.030 (.76)	#23 .018/.022 (0.46/0.56) #20 .024/.028 (0.61/0.71) #16 .060/.064 (1.52/1.63) #12 .092/.096 (2.34/2.44)
9	.723	18.36	.5625-.1P-.3L-TS	0.432	10.97	0.322	8.18	1.283	32.59	0.983	24.97			
10	.785	19.94	.6250-.1P-.3L-TS	0.493	12.52	0.386	9.80	1.371	34.82	1.045	26.54			
11	.848	21.54	.6875-.1P-.3L-TS	0.551	14.00	0.442	11.23	1.460	37.08	1.104	28.04			
12	.909	23.09	.7500-.1P-.3L-TS	0.620	15.75	0.513	13.03	1.546	39.27	1.169	29.69			
13	.973	24.71	.8125-.1P-.3L-TS	0.661	16.79	0.554	14.07	1.637	41.58	1.233	31.32			
15	1.058	26.87	.9375-.1P-.3L-TS	0.705	17.91	0.594	15.09	1.817	46.15	1.378	35.00	4-40	0.060 (1.52)	
18	1.255	31.88	1.1250-.1P-.3L-TS	0.863	21.92	0.755	19.18	2.096	53.24	1.575	40.01			
19	1.327	33.71	1.1875-.1P-.3L-TS	0.912	23.16	0.805	20.45	2.197	55.80	1.647	41.83			
21	1.452	36.88	1.3125-.1P-.3L-TS	1.017	25.83	0.910	23.11	2.380	60.45	1.772	45.01			
23	1.570	39.88	1.4375-.1P-.3L-TS	1.162	29.51	1.055	26.80	2.541	64.54	1.890	48.01			


Flange Style Recommended Panel Cutout						
Shell Size	A BSC		B Holes	Ø C	
8	0.660	16.76	0.096 (2.43) 0.091 (2.31)	0.515	13.08
9	0.723	18.36		0.578	14.68
10	0.785	19.94		0.640	16.26
11	0.848	21.54		0.703	17.86
12	0.909	23.09		0.765	19.43
13	0.973	24.71		0.828	21.03
15	1.058	26.87	0.130 (0.13) 0.126 (3.20)	0.953	24.21
18	1.255	31.88		1.140	28.96
19	1.327	33.71		1.203	30.56
21	1.452	36.88		1.328	33.73
23	1.570	39.88		1.453	36.91

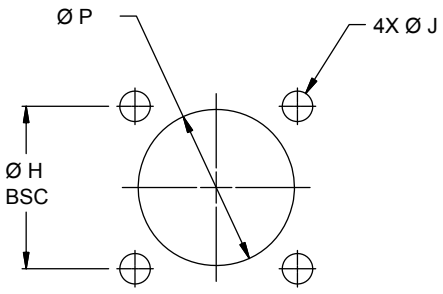

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount receptacle - shell style 07

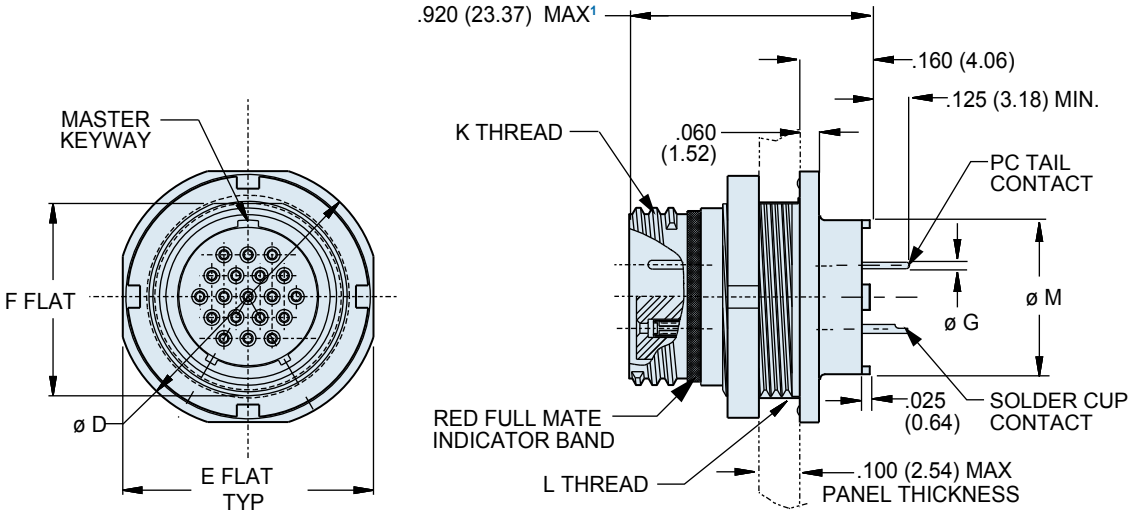

Dimensions											
Shell Size	Ø D		E Flat		F Flat		K Thread	L Thread	Ø M		Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
8	.760	19.30	.730	18.54	.535	13.59	.5000-.1P-.3L-TS	.5625-28 UNEF-2A	.330	8.38	
9	.880	22.35	.850	21.59	.661	16.79	.5625-.1P-.3L-TS	.6875-28 UN-2A	.432	10.97	#23 .018/.022 (0.46/0.56)
10	.880	22.35	.850	21.59	.661	16.79	.6250-.1P-.3L-TS	.6875-28 UN-2A	.493	12.52	
11	.955	24.26	.925	23.50	.721	18.31	.6875-.1P-.3L-TS	.7500-28 UN-2A	.551	14.00	
12	1.060	26.92	1.035	26.29	.784	19.91	.7500-.1P-.3L-TS	.8125-28 UN-2A	.620	15.78	#20 .024/.028 (0.61/0.71)
13	1.120	28.45	1.090	27.69	.841	21.36	.8125-.1P-.3L-TS	8750-28 UN-2A	.661	16.79	
15	1.203	30.56	1.173	29.79	.970	24.64	.9375-.1P-.3L-TS	1.0000-28 UN-2A	.705	17.86	
18	1.389	35.28	1.359	34.52	1.147	29.13	1.1250-.1P-.3L-TS	1.1875-28 UN-2A	.863	21.92	#16 .060/.064 (1.52/1.63)
19	1.450	36.83	1.420	36.07	1.221	31.01	1.1875-.1P-.3L-TS	1.2500-28 UN-2A	.912	23.16	
21	1.580	40.13	1.550	39.37	1.348	34.24	1.3125-.1P-.3L-TS	1.3750-28 UN-2A	1.017	25.83	#12 .092/.096 (2.34/2.44)
2	1.705	43.31	1.675	42.55	1.470	37.34	1.4375-.1P-.3L-TS	1.500-28 UN-2A	1.162	29.51	

Jam Nut Panel Cut Out										
Shell Size	Ø P		N Flat		Shell Size	Ø P		N Flat		
	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
8	.575/.571	14.60/14.50	.547/.543	13.89/13.79	15	1.012/1.008	25.70/25.60	.982/.978	24.94/24.84	
9	.700/.696	17.78/17.68	.673/.669	17.09/16.99	18	1.200/1.196	30.48/30.38	1.159/1.155	29.44/29.34	
10	.700/.696	17.78/17.68	.673/.669	17.09/16.99	19	1.262/1.258	32.05/31.95	1.233/1.229	31.32/31.22	
11	.762/.758	19.35/19.25	.733/.729	18.61/18.52	21	1.387/1.383	35.23/35.13	1.360/1.356	34.54/34.44	
12	.825/.821	20.96/20.85	.796/.792	20.22/20.12	23	1.512/1.508	38.40/38.30	1.482/1.478	37.64/37.54	
13	.887/.883	22.53/22.43	.853/.849	21.67/21.56						



H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Panel Mount Receptacle with #12 TwinAx PCB Contacts

805-129 Ordering Information

Twin-Ax PC Tail, Panel Mount Receptacles


Receptacles offer military grade performance in a small, lightweight package. Mounting options include rear panel mount wall mount and rear panel mount jam-nut. Style 02, wall mount connector can also be front mounted depending on your application. 6 shell sizes available in 17 insert arrangements including 8 size #12 contact arrangements or 9 combination arrangements with size #12 and #23 contacts. Connectors are environmentally sealed with contacts that are non-removable and back potted.

How To Order

Sample Part Number	805-129	-07	M	9-1	P	A
Series	**805-129** = TwinAx PCB Receptacle					
Shell Style	**-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut					
Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	**9-1, 12-2, 15-2, 15-3, 18-5, 19-7, 23-12, 12-200, 12-201, 15-200, 15-201,15-204,18-206, 18-207, 19-204**					
Contact Type	**P** = Pin, PC Tail **S** = Socket, PC Tail					
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Key Positions

Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




H


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Jam nut mount receptacle - shell style 07

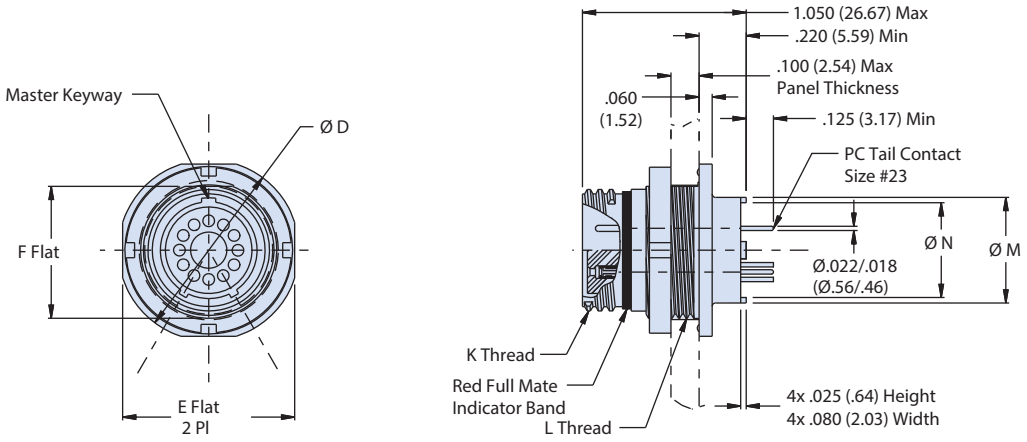

Square flange mount receptacle - shell style 02

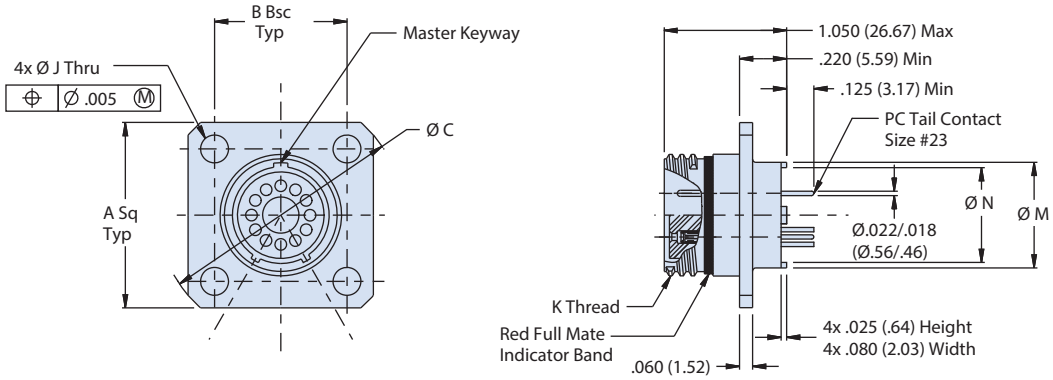

Square flange mount receptacle - shell style 12 and 22

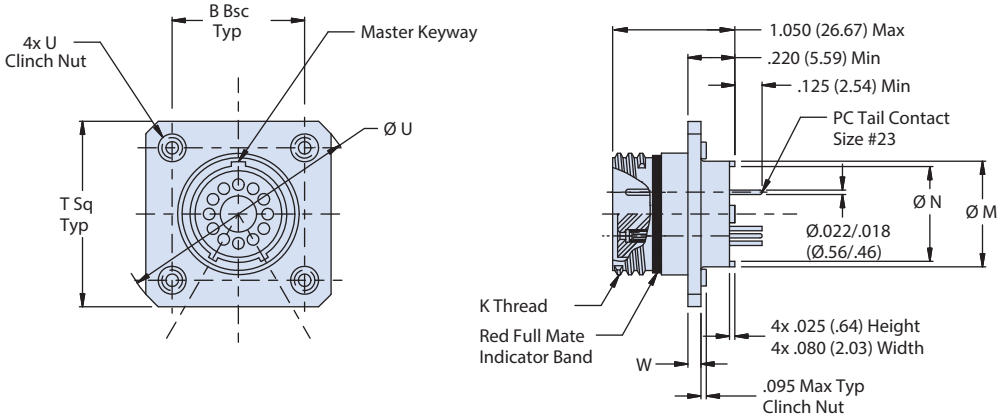


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Square Flange Jam Nut PCB Receptacle

805-067 Ordering Information



Series 805 Backpotted Receptacle features a choice of 304L stainless steel or aluminum alloy shells with stand off, liquid crystal insulator and gold plated copper alloy non-removable contacts.


Popular Jam Nut Mount Style Mates with all triple start threaded high density plug connectors with the same polarization and opposite contact gender.

PC Tail or Solder Cup for attachment to flexible or rigid circuits or rigid boards.

How To Order						
Sample Part Number	**805-067**	**-07**	**M**	**8-23**	**P**	**A**
Series	**805-067** = PCB Receptacle with Solder Cup or PC tail Contacts					
Shell Style	**-07** = Jam Nut Rear Panel Mount **-17** = Jam Nut Mount, Self-Locking Heli-Coils					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page H-2					
Contact Type	**P** = Pin, PC Tail **S** = Socket, PC Tail					
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Key Positions

Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




H

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Jam nut, rear panel mount receptacle - shell style 07

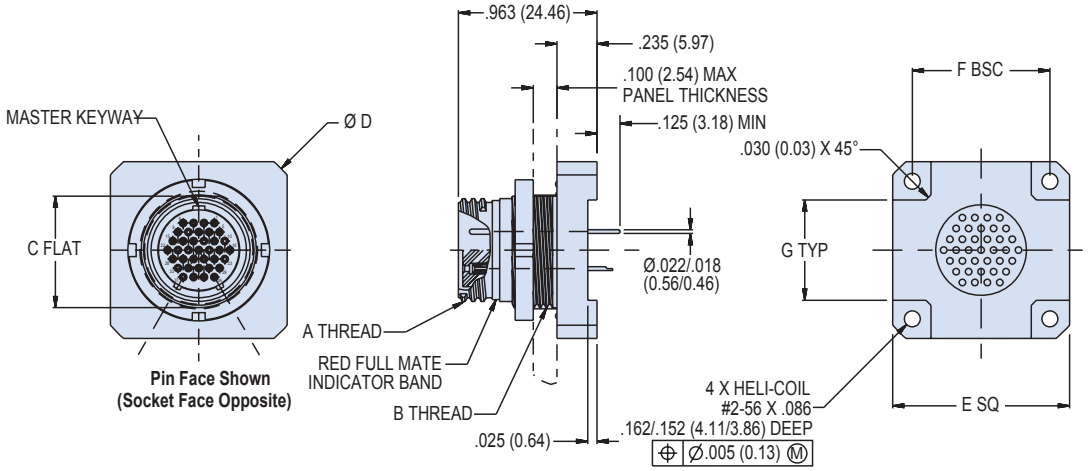

Dimensions											
Shell Size	A Thread	B Thread	C Flat		Ø D		E SQ		F BSC		G Typ	
			In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
8	.5000-.1P-.3L-TS	.5625-28 UNEF-2A	.535	13.59	.920	23.37	.729	18.52	.496	12.60	.276	7.01
9	.5625-.1P-.3L-TS	.6875-28 UN-2A	.661	16.79	1.110	28.19	.859	15.93	.627	15.93	.407	10.34
10	.6250-.1P-.3L-TS	.6875-28 UN-2A	.661	16.79	1.110	28.19	.859	15.93	.627	15.93	.407	10.34
11	.6875-.1P-.3L-TS	.7500-28 UN-2A	.721	18.31	1.200	30.48	.930	23.62	.698	17.73	.478	12.14
12	.7500.1P-.3L-TS	.8125-28 UN-2A	.784	19.91	1.370	34.80	1.044	26.52	.812	20.62	.592	15.04
13	.8125-.1P-.3L-TS	.8750-28 UN-2A	.843	21.41	1.420	36.07	1.085	27.56	.853	21.67	.633	16.08
15	.9375.1P-.3L-TS	1.0000-28 UN-2A	.970	24.64	1.560	39.62	1.175	29.85	.943	23.95	.723	18.36
18	1.1250.1P-.3L-TS	1.1875-28 UN-2A	1.147	29.13	1.800	45.72	1.351	34.32	1.119	28.42	.899	22.83
19	1.1875-.1P-.3L-TS	1.2500-28 UN-2A	1.221	31.01	1.880	47.75	1.407	35.74	1.175	29.85	.955	24.26
21	1.3125-.1P-.3L-TS	1.3750-28 UN-2A	1.350	34.29	2.090	53.09	1.550	39.37	1.318	33.48	1.098	27.89
23	1.4375-.1P-.3L-TS	1.5000-28 UN-2A	1.470	37.34	2.270	57.66	1.680	42.67	1.448	36.78	1.228	31.19

Jam Nut Panel Cutout

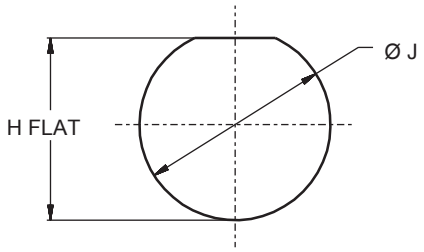


Shell Size	H Flat		Ø J	
	In.	mm.	In.	mm.
8	.545/.541	13.84/13.74	.573	14.55
9	.671/.667	17.04/16.94	.698	17.73
10	.671/.667	17.04/16.94	.698	17.73
11	.731/.727	18.57/18.47	.760	19.30
12	.794/.790	20.17/20.07	.823	20.90
13	.853/.849	21.67/21.56	.885	22.48
15	.980/.976	24.89/24.79	1.010	25.65
18	1.157/1.153	29.39/29.29	1.198	30.43
19	1.231/1.227	31.27/31.17	1.260	32.00
21	1.360/1.357	34.54/34.47	1.385	35.18
23	1.480/1.476	37.59/37.49	1.510	38.35

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 805 Mighty Mouse Triple-Start ACME Thread Right Angle PCB Receptacle

805-011 Ordering Information



Right Angle PCB Receptacle connectors offer military grade performance in a small, lightweight package. These connectors are rated for MIL-STD-810 Method 512 immersion. High temperature thermoplastic housing withstands soldering temperatures. Stainless steel threaded inserts simplify attachment to printed circuit board.


- **Triple-Start ACME Thread**
- **Right Angle Contacts**
- **High Temperature Housing**
- **Threaded Inserts**
- **Environmentally Sealed**

How To Order

Sample Part Number	805-011	-07	M	8-7	S	A

Series	**805-011** = PCB Right Angle Receptacle
Shell Style	**-07** = Jam Nut for Rear Panel Mounting (See Table II)
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant
Shell Size - Insert Arrangement	**8-1**, **8-4**, **8-6**, **8-7**, **9-1**, **9-10**, **10-2**, **10-13**, **11-4**, **11-19**, **11-200**, **12-2**, **12-5**, **12-201**
Contact Type	**P** = Pin, PC Tail **S** = Socket, PC Tail
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F


Table I: Key Positions



Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Jam Nut Panel Cutout

Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
8	.545	13.84	.572	14.53
9	.671	17.04	.698	17.73
10	.671	17.04	.698	17.73
11	.731	18.57	.760	19.30
12	.794	20.17	.822	20.88

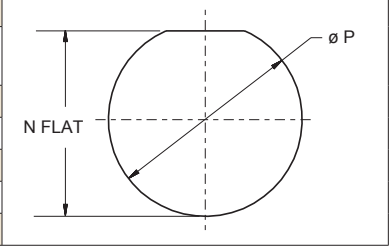


H


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Jam nut mount receptacle - shell style 07

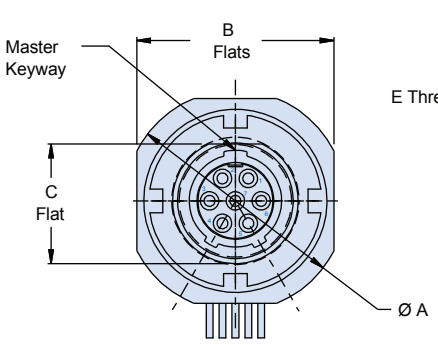


Arrangement No. 8-7
Socket Face Shown
(Ref Only)

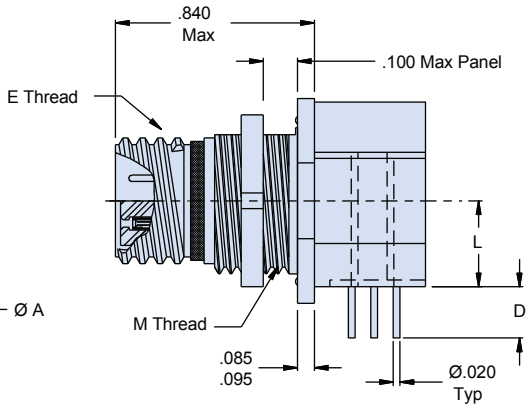


Normal and Alternate Position
Key Rotation





Recommended Panel Cutout

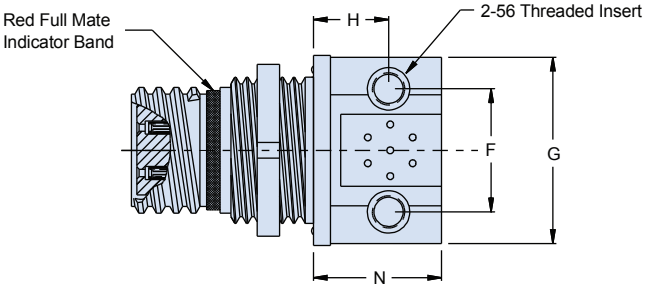


Dimensions																										
Shell Size	A		B		C ± .002		D ±.035		E Thread	F		G		H ±.055		J Flat +.004 -.000		Ø K		L		M Thread	N	
	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		in	mm
8-1	0.76	19.30	0.73	18.54	0.536	13.61	0.292	7.42	.5000-.1P-.3L-TS	.385	9.78	.589	14.96	.314	7.98	.542	13.77	.573	14.55	.225	5.72	.5625-28 UN-2A	.435	11.05
8-4	0.76	19.30	0.73	18.54	0.536	13.61	0.292	7.42	.5000-.1P-.3L-TS	.385	9.78	.589	14.96	.314	7.98	.542	13.77	.573	14.55	.225	5.72	.5625-28 UN-2A	.435	11.05
8-6 8-7	0.76	19.30	0.73	18.54	0.536	13.61	0.265	6.73	.5000-.1P-.3L-TS	.408	10.36	.589	14.96	.277	7.04	.542	13.77	.573	14.55	.225	5.72	.5625-28 UN-2A	.435	11.05
9-1	0.88	22.35	0.85	21.59	0.662	16.81	0.273	6.93	.5625-.1P-.3L-TS	.452	11.48	.710	18.03	.260	6.60	.668	16.97	.698	17.73	.296	7.52	.6875-28 UN-2A	.435	11.05
9-10	0.88	22.35	0.85	21.59	0.662	16.81	0.273	6.93	.5625-.1P-.3L-TS	.452	11.48	.710	18.03	.260	6.60	.668	16.97	.698	17.73	.296	7.52	.6875-28 UN-2A	.435	11.05
10-2	0.88	22.35	0.85	21.59	0.664	16.87	0.305	7.75	.6250-.1P-.3L-TS	.490	12.45	.710	18.03	.320	8.13	.668	16.97	.698	17.73	.320	8.13	.6875-28 UN-2A	.580	14.73
10-13	0.88	22.35	0.85	21.59	0.662	16.81	0.305	7.75	.6250-.1P-.3L-TS	.490	12.45	.710	18.03	.320	8.13	.668	16.97	.698	17.73	.320	8.13	.6875-28 UN-2A	.580	14.73
11-4	0.952	24.18	0.925	23.50	0.722	18.34	0.24	6.10	.6875-.1P-.3L-TS	.600	15.24	.800	20.32	.432	10.97	.728	18.49	.760	19.30	.362	9.19	.7500-28 UN-2A	.580	14.73
11-19	0.952	24.18	0.925	23.50	0.722	18.34	0.275	6.99	.6875-.1P-.3L-TS	.600	15.24	.800	20.32	.432	10.97	.728	18.49	.760	19.30	.362	9.19	.7500-28 UN-2A	.580	14.73
11-200	0.952	24.18	0.925	23.50	0.722	18.34	0.255	6.48	.6875-.1P-.3L-TS	.600	15.24	.800	20.32	.432	10.97	.728	18.49	.760	19.30	.362	9.19	.7500-28 UN-2A	.580	14.73
12-2	1.06	26.92	1.035	26.29	0.784	19.91	0.299	7.59	.7500-.1P-.3L-TS	.640	16.26	.840	21.34	.452	11.48	.790	20.07	.823	20.90	.397	10.08	.8125-28 UN-2A	.660	16.76
12-5	1.06	26.92	1.035	26.29	0.784	19.91	0.255	6.48	.7500-.1P-.3L-TS	.640	16.26	.840	21.34	.452	11.48	.790	20.07	.823	20.90	.397	10.08	.8125-28 UN-2A	.660	16.76
12-201	1.06	26.92	1.035	26.29	0.784	19.91	0.294	7.47	.7500-.1P-.3L-TS	.640	16.26	.840	21.34	.452	11.48	.790	20.07	.823	20.90	.397	10.08	.8125-28 UN-2A	.660	16.76


H

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Series 805 Mighty Mouse Triple-Start ACME Thread
Right Angle PCB Receptacle
805-011 Shell Style -07 Dimensions



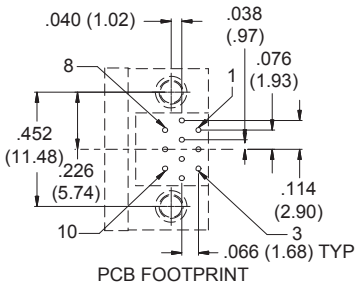


PCB FOOTPRINT

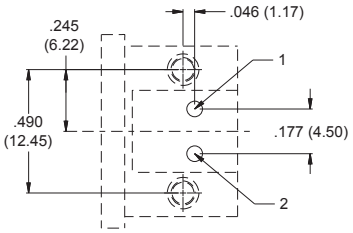





ARRANGEMENT NO. 9-1
(1 #12 CONTACT)
SOCKET FACE SHOWN
(PIN FACE OPOSITE)




ARRANGEMENT NO. 9-10
(10 #23 CONTACTS)
SOCKET FACE SHOWN
(PIN FACE OPOSITE)




ARRANGEMENT NO. 10-2
(2 #16 CONTACTS)
SOCKET FACE SHOWN
(PIN FACE OPOSITE)



PCB FOOTPRINT



ARRANGEMENT NO. 10-13
(13 #23 CONTACTS)
SOCKET FACE SHOWN
(PIN FACE OPOSITE)

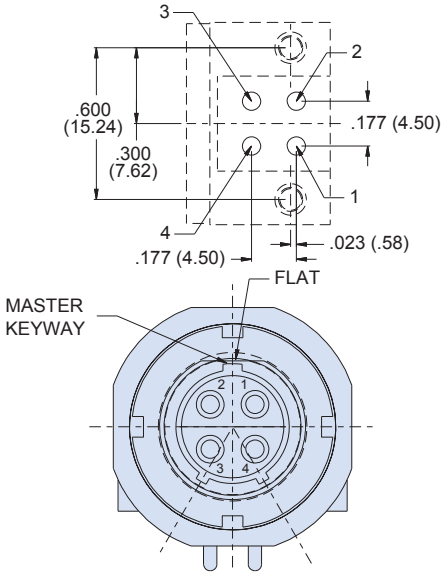


ARRANGEMENT NO. 11-4
(4 #16 CONTACTS)
SOCKET FACE SHOWN
(PIN FACE OPOSITE)


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Series 805 Mighty Mouse Triple-Start ACME Thread Right Angle PCB Receptacle

805-011 Shell Style -07 Dimensions

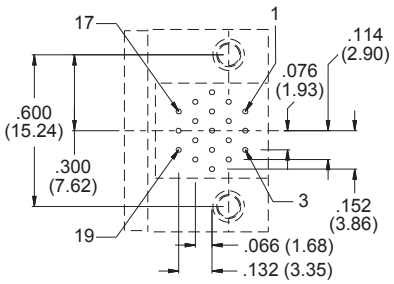


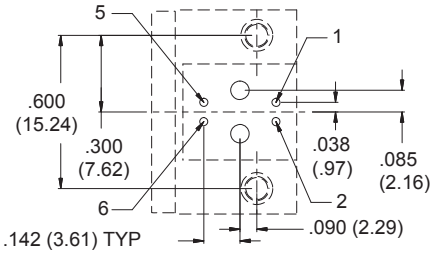




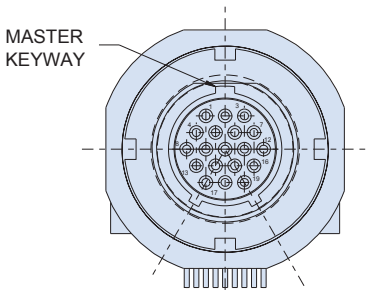


ARRANGEMENT NO. 11-19
(19 #23 CONTACTS)
SOCKET FACE SHOWN

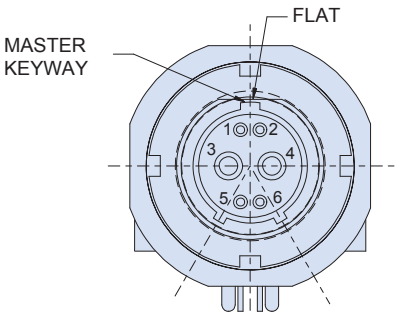



ARRANGEMENT NO. 11-200
(2 #16, 4 #23 CONTACTS)
SOCKET FACE SHOWN
PIN FACE OPPOSITE)

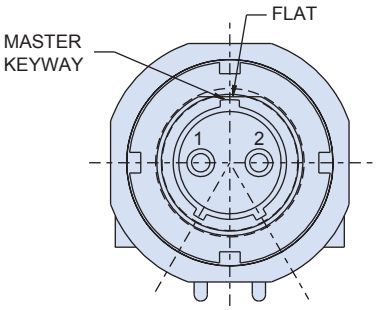


ARRANGEMENT NO. 12-2
(2 #12 CONTACTS)
SOCKET FACE SHOWN

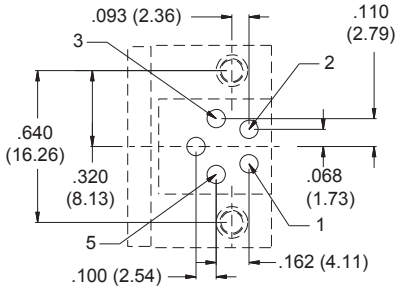

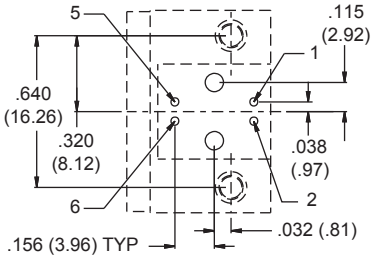

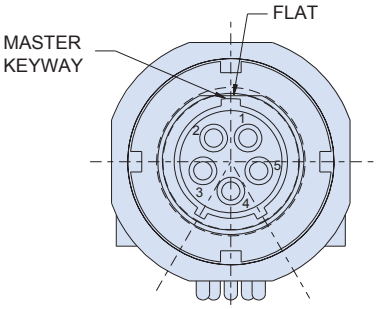

ARRANGEMENT NO. 12-5
(5 #16 CONTACTS)
SOCKET FACE SHOWN

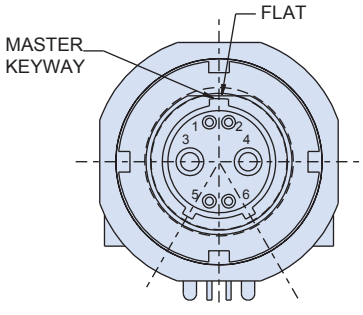

ARRANGEMENT NO. 12-201
(2 #12, 4 #23 CONTACTS)
SOCKET FACE SHOWN
(PIN FACE OPPOSITE)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Hermetic Receptacles

805-006 and 805-019 Ordering Information



Hermetic Receptacle with Integral Banding Porch

High density connectors feature gold plated, nickel alloy pin contacts and copper alloy socket contacts. Mounting options include square flange–front or rear panel mount, solder mount, rear panel mount jam-nut and weld mount (805-006 only). Connectors are hermetically sealed and tested for leak rate less than 1 X 10^-7 CC/HeSEC at atmosphere. Contacts are non-removable and back potted. Consult factory for additional arrangements.

How To Order						
Sample Part Number	**805-019**	**-02**	**Z1**	**8-7**	**P**	**A**
Series	**805-006** = Hermetic PC tail or solder cup receptacle **805-019** = Hermetic Receptacle with Integral Banding Porch					
Shell Style (See Table I)	**-02** = Square Flange, Front or Rear Mount Receptacle **-03** = Solder Mount Receptacle **-07** = Jam Nut Receptacle **-13** = Weld Mount, Front Panel Mount Receptacle (only available for 805-006					
Material and Finish	**Z1** = Stainless Steel / Passivated **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy/Black Chromate **ZL** = Stainless Steel / Electrodeposited Nickel **ZN** = Stainless Steel / Zinc Nickel/Olive Drab over Electroless Nickel (not avaiailable on 805-006) **ZU** = Stainless Steel / Cadmium Black (not available for 805-006)					
Shell Size - Insert Arrangement	Refer to section B (shell size 13 not available for 805-019)					
Contact Type	**P** = Pin, Solder Cup **S** = Socket, Solder Cup **C** = Pin, PC Termination **D** = Socket, PC Termination (PC termination only available for 805-006)					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Shell Style





	
-02 Square Flange	**-07** Jam Nut
	
-03 Solder Mount	**-13** Weld Mount (805-006 only)

Table II: Key Positions



Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°


NOTES

1. This connector maes with all quick coupling high density plug connectors with same polariztion and opporsite contact gender 805-001, 805-002
2. For additional insert arrangements consult factory
3. Contacts are non removable and connector is back potted
4. Hermeticity is less than 1 X 10^-7 CC/ HeSEC at one atmophere
5. Material/Finish:
   - Shell, jam nut - cres 304L / passivate or plate as required
   - Contacts, hermetic - alloy 52 / gold plate
   - Contacts, socket - copper alloy / gold plate
   - Seals - fluorosilicone / N.A.
   - Insulator, hermetic - fused vitreous glass / N.A.
   - Insulator, socket - rigid dielectric / N.A.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Wall mount receptacle - shell style 02

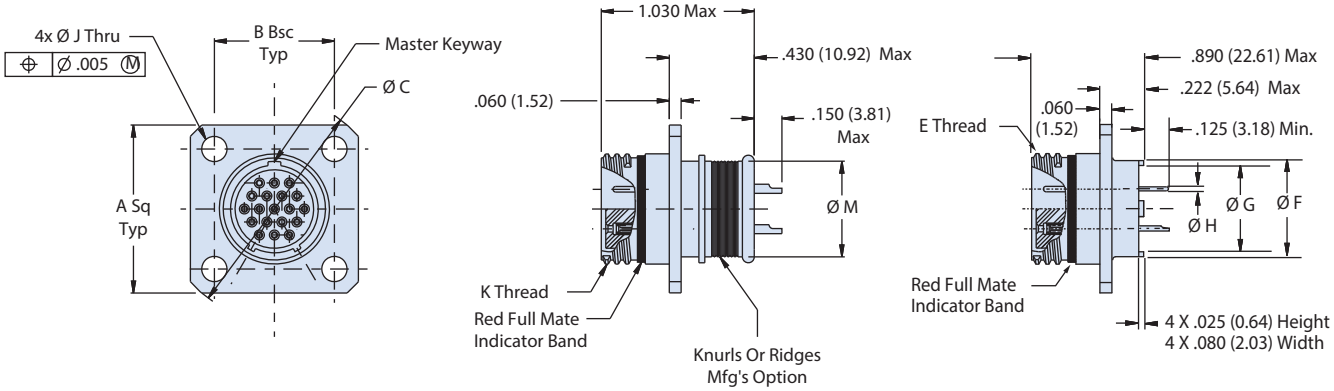

805-019
Integral Banding Porch
Solder Cup
See Table IV

805-006
PC Tail or Solder Cup
See Table III

Solder mount receptacle - shell style 03

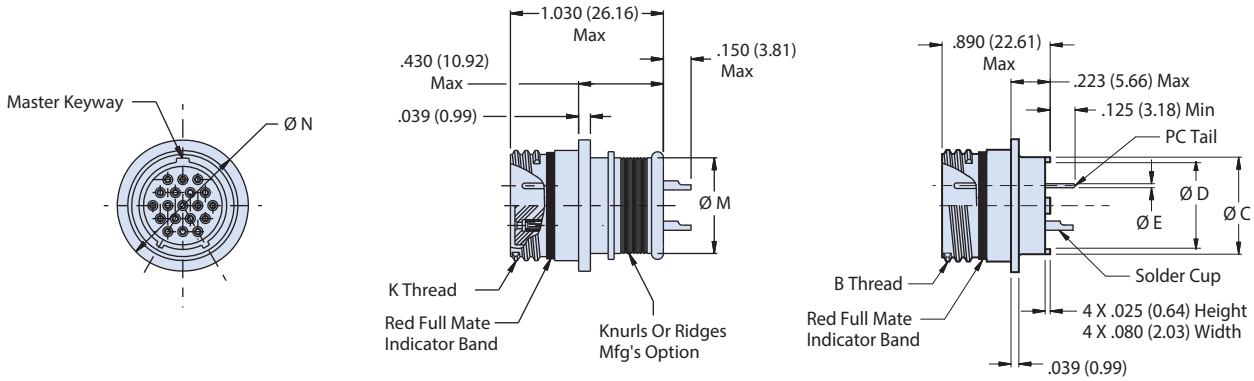

805-019
Integral Banding Porch
Solder Cup
See Table IV

805-006
PC Tail or Solder Cup
See Table III


H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread
PCB or Solder Cup Hermetic Receptacles
805-006 and 805-019 Dimensions


Jam nut mount receptacle - shell style 07

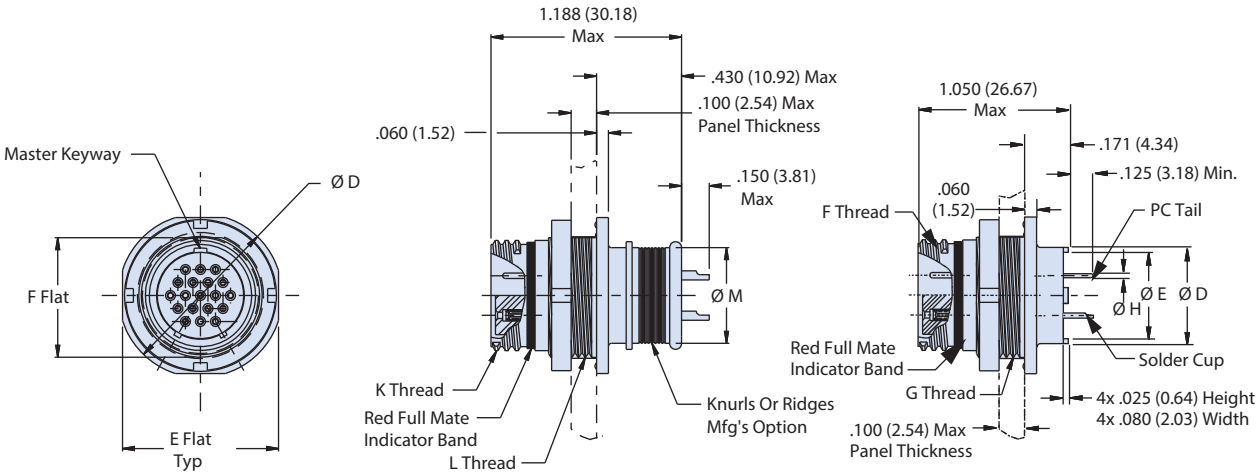

805-019
Integral Banding Porch
Solder Cup Only
See Table IV

805-006
PC Tail or Solder Cup
See Table III

Weld mount receptacle - shell style 13 (805-006 only)

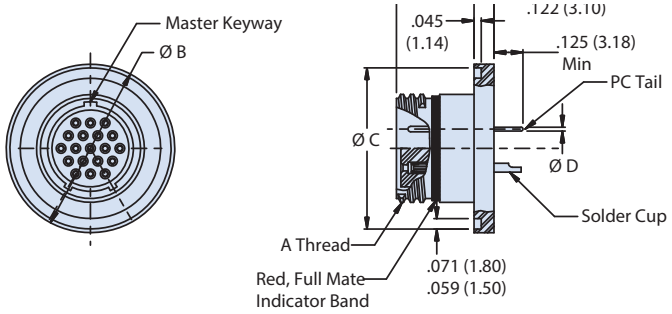

805-006
PCB or Solder Cup
See Table III


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Table III: 805-006 Dimensions

Shell Size	A Sq	B Bsc	Ø C	Ø D	E Flat	F Flat	J Holes	K Thread	L Thread	Ø M	Ø N Min	Ø P	Ø S ±.002	Ø T ±.006
8	.850 (21.59)	.660 (16.76)	1.150 (29.21)	.760 (19.30)	.730 (18.54)	.535 (13.59)	.096 (2.44) .091 (2.31)	.5000-.1P-.3L-TS	.5625-28 UN-2A	.330 (8.38)	.230 (5.84)	.625 (15.88)	.788 (20.02)	0.745 (18.92)
9	.913 (23.19)	.723 (18.36)	1.230 (31.24)	.880 (22.35)	.850 (21.59)	.661 (16.79)		.5625-.1P-.3L-TS	.6875-28 UN-2A	.432 (10.97)	.322 (8.18)	.688 (17.48)	.912 (23.16)	0.869 (22.07)
10	.975 (24.76)	.785 (19.94)	1.330 (33.78)	.880 (22.35)	.850 (21.59)	.661 (16.79)		.6250-.1P-.3L-TS	.6875-28 UN-2A	.493 (12.52)	.386 (9.80)	.750 (19.05)	.975 (24.76)	0.933 (23.70)
11	1.039 (26.39)	.848 (21.54)	1.410 (35.81)	.955 (24.26)	.925 (23.50)	.721 (18.31)		.6875-.1P-.3L-TS	.7500-28 UN-2A	.553 (14.05)	.442 (11.23)	.812 (20.62)	1.038 (26.37)	0.995 (25.27)
12	1.099 (27.91)	.909 (23.09)	1.500 (38.10)	1.060 (26.92)	1.035 (26.29)	.784 (19.91)		.7500-.1P-.3L-TS	.8125-28 UN-2A	.620 (15.75)	.513 (13.03)	.875 (22.23)	1.100 (27.94)	1.057 (26.85)
13	1.163 (29.54)	.973 (24.71)	1.590 (40.39)	1.120 (28.45)	1.090 (27.69)	.843 (21.41)	.130 (3.30) .126 (3.20)	.8125-.1P-.3L-TS	.8750-28 UN-2A	.661 (16.79)	.554 (14.07)	.938 (23.83)	1.162 (29.51)	1.119 (28.42)
15	1.288 (32.72)	1.058 (26.87)	1.75 (44.45)	1.203 (30.56)	1.173 (29.79)	.970 (24.64)		.9375-.1P-.3L-TS	1.0000-28 UN-2A	.703 (17.86)	.594 (15.09)	1.062 (26.97)	1.288 (32.72)	1.245 (31.62)
18	1.475 (37.47)	1.255 (31.88)	2.000 (50.80)	1.389 (35.28)	1.359 (34.52)	1.147 (29.13)		1.1250-.1P-.3L-TS	1.1875-28 UN-2A	.863 (21.92)	.750 (19.05)	1.250 (31.75)	1.475 (37.47)	1.430 (36.32)
19	1.537 (39.04)	1.327 (33.71)	2.094 (53.19)	1.450 (36.83)	1.420 (36.07)	1.221 (31.01)		1.1875-.1P-.3L-TS	1.2500-28 UN-2A	.912 (23.16)	.805 (20.45)	1.312 (33.32)	1.540 (39.12)	1.495 (37.97)
21	1.663 (42.24)	1.452 (36.88)	2.27 (57.66)	1.58 (40.13)	1.550 (39.37)	1.35 (34.29)		1.3125-.1P-.3L-TS	1.3750-28 UN-2A	1.017 (25.83)	.910 (23.11)	1.438 (36.53)	1.665 (42.29)	1.620 (41.15)
23	1.787 (45.39)	1.576	2.44 (61.98)	1.705 (43.31)	1.675 (42.55)	1.470 (37.34)		1.4375-.1P-.3L-TS	1.5000-28 UN-2A	1.162 (29.51)	1.050 (26.67)	1.562 (39.67)	1.795 (45.59)	1.750 (44.45)

	805-006 Panel Cut-Out Dimensions			
Shell Size	G Flat	Ø H	Ø U ±.003	Ø V Min
8	0.547 (13.89) 0.543 (13.79)	0.575 (14.60) 0.571 (14.50)	0.794 (20.17)	0.350 (8.89)
9	0.673 (17.09) 0.669 (16.99)	0.700 (17.78) 0.696 (17.68)	0.918 (23.32)	0.455 (11.56)
10	0.673 (17.09) 0.669 (16.99)	0.700 (17.78) 0.696 (17.68)	0.981 (24.92)	0.520 (13.21)
11	0.733 (18.62) 0.729 (18.52)	0.762 (19.35) 0.758 (19.25)	1.044 (26.52)	0.575 (14.60)
12	0.796 (20.22) 0.792 (20.12)	0.825 (20.96) 0.821 (20.85)	1.106 (28.09)	0.650 (16.51)
13	0.853 (21.67) 0.849 (21.56)	0.887 (22.53) 0.883 (22.43)	1.168 (29.67)	0.685 (17.40)
15	0.982 (24.94) 0.978 (24.84)	1.012 (25.70) 1.008 (25.60)	1.294 (32.87)	0.730 (18.54)
18	1.159 (29.44) 1.155 (29.34)	1.200 (30.48) 1.196 (30.38)	1.481 (37.62)	0.890 (22.61)
19	1.233 (31.32) 1.229 (31.22)	1.262 (32.05) 1.258 (31.95)	1.546 (39.27)	0.940 (23.88)
21	1.360 (34.54) 1.356 (34.44)	1.387 (35.23) 1.383 (35.13)	1.671 (42.44)	1.040 (26.42)
23	1.482 (37.64) 1.478 (37.54)	1.512 (38.40) 1.508 (38.30)	1.801 (45.75)	1.190 (30.23)



Recommended Panel Cutout
-13 Jam-Nut

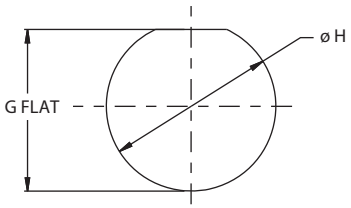

Recommended Panel Cutout
-07 Jam-Nut

H

Dimensions in Inches (millimeters) are subject to change without notice.

Series 805 Mighty Mouse Triple-Start ACME Thread PCB or Solder Cup Hermetic Receptacles


805-006 and 805-019 Dimensions

Table IV: 805-019 Dimensions


Shell Size	A Sq	B Sq	Ø C	Ø D	E Flat	F Flat	J Holes	K Thread	L Thread	Ø M	Ø N
8	.850 (21.59)	.660 (16.76)	1.150 (29.21)	.760 (19.30)	.730 (18.54)	.535 (13.59)	.096 (2.44) .091 (2.31)	.5000 -.1P-.3L-TS	.5625-28 UNEF-2A	.316 (8.03)	.625 (15.88)
9	.913 (23.19)	.723 (18.36)	1.230 (31.24)	.880 (22.35)	.850 (21.59)	.661 (16.79)		.5625 -.1P-.3L-TS	.6875-28 UN-2A	.397 (10.08)	.688 (17.48)
10	.975 (24.76)	.785 (19.94)	1.330 (33.78)	.880 (22.35)	.850 (21.59)	.661 (16.79)		.6250 -.1P-.3L-TS	.6875-28 UN-2A	.472 (11.99)	.750 (19.05)
11	1.039 (26.39)	.848 (21.54)	1.410 (35.81)	.955 (24.26)	.925 (23.50)	.721 (18.31)		.6875 -.1P-.3L-TS	.7500-28 UN-2A	.519 (13.18)	.812 (20.62)
12	1.099 (27.91)	.909 (23.09)	1.500 (38.10)	1.060 (26.92)	1.035 (26.29)	.784 (19.91)		.7500 -.1P-.3L-TS	.8125-28 UN-2A	.585 (14.86)	.875 (22.23)
15	1.288 (32.72)	1.058 (26.87)	1.750 (44.45)	1.203 (30.56)	1.173 (29.79)	.970 (24.64)	.130 (3.30) .126 (3.20)	.9375 -.1P-.3L-TS	1.000-28 UN-2A	.687 (17.45)	1.062 (26.97)
18	1.475 (37.47)	1.255 (31.88)	2.000 (50.80)	1.389 (35.28)	1.359 (34.52)	1.147 (29.13)		1.125 -.1P-.3L-TS	1.1875-28 UN-2A	.884 (22.45)	1.250 (31.75)
19	1.537 (39.04)	1.327 (33.71)	2.094 (53.19)	1.450 (36.83)	1.420 (36.07)	1.221 (31.01)		1.187 -.1P-.3L-TS	1.250-28 UN-2A	.884 (22.45)	1.312 (33.32)
21	1.663 (42.24)	1.452 (36.88)	2.270 (57.66)	1.580 (40.13)	1.550 (39.37)	1.350 (34.29)		1.312 -.1P-.3L-TS	1.3750-28 UN-2A	1.003 (25.48)	1.438 (36.53)
23	1.787 (45.39)	1.570 (39.88)	2.440 (61.98)	1.705 (43.31)	1.675 (42.55)	1.470 (37.34)		1.438 -.1P-.3L-TS	1.5000-28 UN-2A	1.134 (28.80)	1.562 (39.67)

805-019 Recommended Panel Cut-Out Dimensions

Shell Size	B Bsc	G Flat	Ø H	Ø P
8	.660 (16.76)	.545 (13.84) .541 (13.74)	.577 (14.66) .567 (14.40)	.505 (12.83)
9	.723 (18.36)	.671 (17.04) .667 (16.94)	.703 (17.86) .693 (17.60)	.570 (14.48)
10	.785 (19.94)	.671 (17.04) .667 (16.94)	.703 (17.86) .693 (17.60)	.630 (16.00)
11	.848 (21.54)	.731 (18.57) .727 (18.47)	.765 (19.43) .755 (19.18)	.695 (17.65)
12	.909 (23.09)	.794 (20.17) .790 (20.07)	.827 (21.01) .817 (20.75)	.755 (19.18)
15	1.058 (26.87)	.980 (24.89) .976 (24.79)	1.015 (25.78) 1.005 (25.53)	.945 (24.00)
18	1.255 (31.88)	1.157 (29.39) 1.153 (29.29)	1.203 (30.56) 1.193 (30.30)	1.130 (28.70)
19	1.327 (33.71)	1.231 (31.27) 1.227 (31.17)	1.265 (32.13) 1.255 (31.88)	1.195 (30.35)
21	1.452 (36.88)	1.360 (34.54) 1.356 (34.44)	1.385 (35.18) 1.255 (31.88)	1.320 (33.53)
23	1.570 (39.88)	1.482 (37.64) 1.478 (37.54)	1.512 (38.40) 1.508 (38.30)	1.445 (36.70)

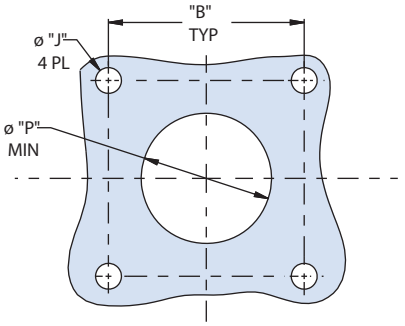

Recommended Panel Cutout
-02 Wall Mount

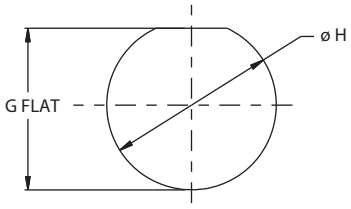

Recommended Panel Cutout
-07 Jam-Nut

H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Bulkhead Feed–Thru Receptacle

805-066 Ordering Information




Series 805 bulkhead Feed–Thru Receptacle is available in shell sizes 8 to 23 and mates with all high density triple-start threaded connectors with the same polarization and opposite contact genders (805-001 and 805-002). Copper alloy gold-plated contacts, pin to pin, pin to socket or socket to socket. Your choice of aluminum alloy or stainless steel and seven standard finishes. Please contact the factory for other materials and finishes.

How To Order							
Sample Part Number	**805-066**	**-07**	**M**	**8-7**	**P**	**P**	**N**
Series	**805-066** = Bulkhead Feedthru Receptacle						
Shell Style		**-07** = Jam Nut for Rear Panel Mounting					
Shell Material and Finish			**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant			
Shell Size - Insert Arrangement				See Contact Arrangements Page H-2			
Contact Type * (Jam Nut Side)					**P** = Pin **S** = Socket		
Contact Type* (Other Side)						**P** = Pin **S** = Socket	
Shell Key Position (See Table I)							**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

* Connector with PP and SS contact styles will cause the arrangement pattern to be mirrored about the vertical centerline.

Table I: Key Positions

Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Bulkhead Feed–Thru Receptacle

805-066-07 Shell Style -07 Dimensions

Rear panel, jam nut mount


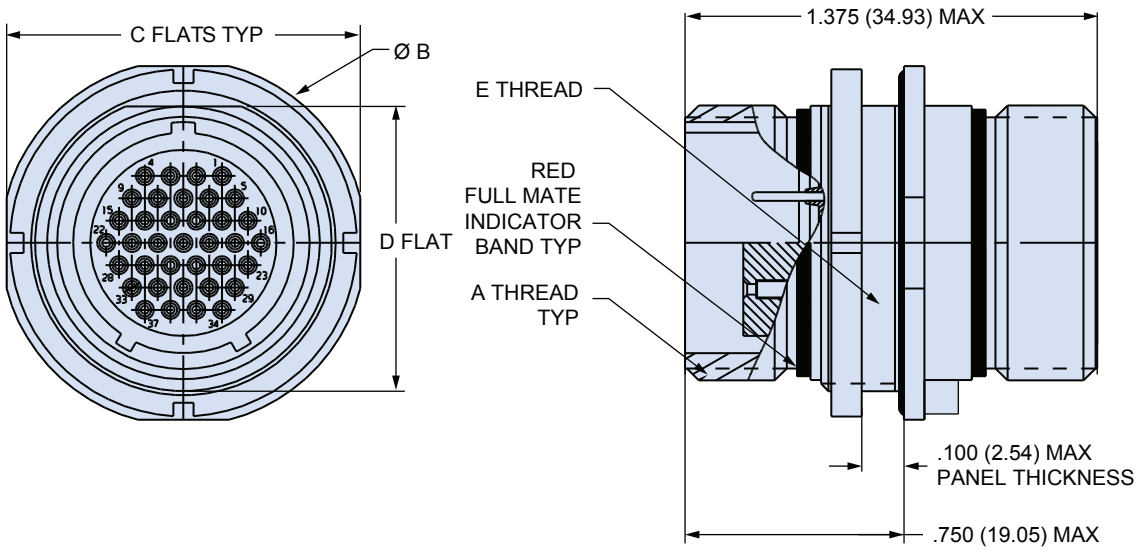


Table II: Dimensions

Shell Size	A Thread	Ø B		C Flat		D Flat		E Thread	F Flat		Ø G	
		In.	mm.	In.	mm.	In.	mm.		In. ± .002	mm. ±.05	In.	mm.
8	.5000-.1P-.31L-TS	.760	19.30	.730	18.54	.535	13.59	.5625-28 UNEF-2A	.543	13.79	.573	14.55
9	.5625-.1P-.31L-TS	.880	22.35	.850	21.59	.661	16.79	.6875-28 UN-2A	.669	16.99	.698	17.73
10	.6250-.1P-.31L-TS	.880	22.35	.850	21.59	.661	16.79	.6875-28 UN-2A	.669	16.99	.698	17.73
11	.6875-.1P-.31L-TS	.955	24.26	.925	23.50	.721	18.31	.7500-28 UN-2A	.729	18.52	.760	19.30
12	.7500-.1P-.31L-TS	1.060	26.92	1.035	26.29	.784	19.91	.8125-28 UN-2A	.792	20.12	.823	20.90
13	.8125-.1P-.31L-TS	1.120	28.45	1.090	27.69	.843	21.41	.8750-28 UN-2A	.851	21.62	.885	22.48
15	.9375-.1P-.31L-TS	1.203	30.56	1.173	29.79	.970	24.64	1.0000-28 UN-2A	.978	24.84	1.010	25.65
18	1.1250-.1P-.31L-TS	1.389	35.28	1.359	34.52	1.147	29.13	1.1875-28 UN-2A	1.155	29.34	1.198	30.43
19	1.1875-.1P-.31L-TS	1.450	36.83	1.420	36.07	1.221	31.01	1.2500-28 UN-2A	1.229	31.22	1.260	32.00
21	1.3125-.1P-.31L-TS	1.590	40.39	1.560	39.62	1.350	34.29	1.3750-28 UN-2A	1.360/ 1.357	34.54/ 34.47	1.385	35.18
23	1.4375-.1P-.31L-TS	1.705	43.31	1.675	42.55	1.470	37.34	1.5000-28 UN-2A	1.478	37.54	1.510	38.35



RECOMMENDED PANEL CUTOUT

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Sav-Con® Saver

805-010 Ordering Information



Glenair Sav-Con® Connector Savers are designed to protect connectors that are subject to repeated mating and unmating cycles. Sav-Con® Connector Savers prevent costly repair or replacement of expensive connectors while preserving the quality and integrity of the connector by absorbing connect and disconnect abuse.


Protect Equipment, equipment connectors that are mated frequently during manufacturing, test, check-out phases and environmental test programs can be protected by Glenair Sav-Con® Connector Savers.

Prolong the Service Life of Test Cables Glenair Sav-Con® Connector Savers mated to test-cable connectors take the punishment of repetitive matings and unmatings.

How To Order						
Sample Part Number		**805-010**	**Z1**	**8-7**	**P**	**A**
Series	**805-010** = Series 805 Connector Saver					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page H-2					
Contact Type * (Jam Nut Side)	**P** = Pin on Plug Side, Socket Contact on Receptacle Side **PP** = Pin on Both Sides **S** = Socket Contact on Plug Side, Pin Contact on Receptacle Side **SS** = Socket on Both Sides					
Shell Key Position (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Key Positions

Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Sav-Con® Saver

805-010 Dimensions

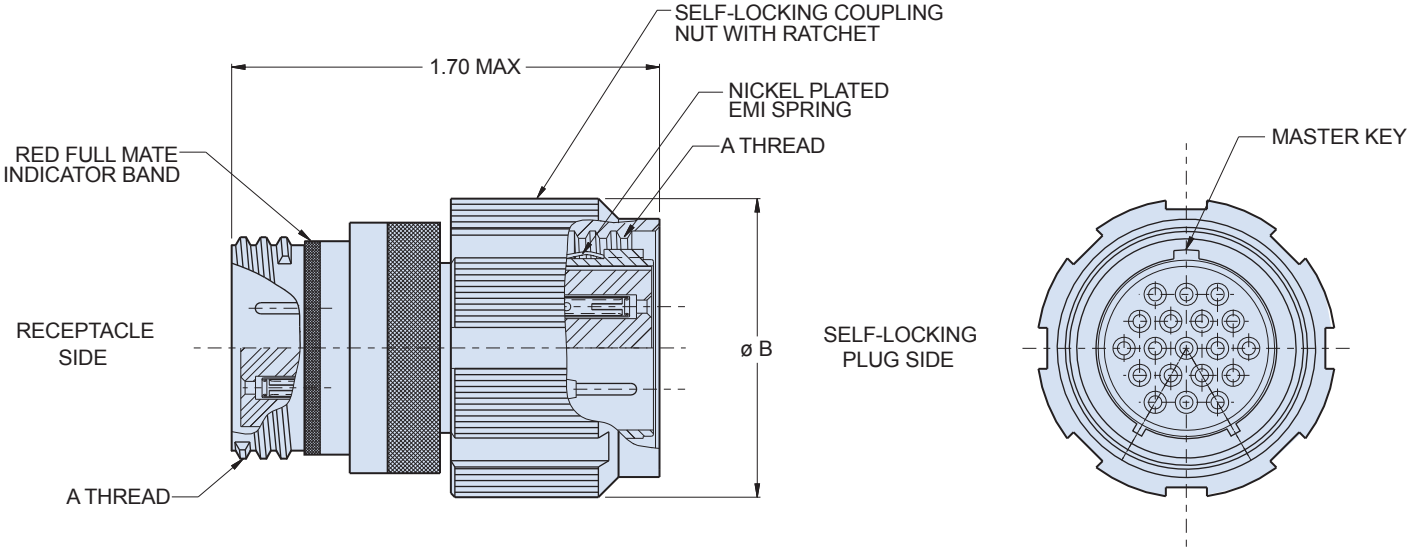

Dimensions			
Shell Size	A Threads	Ø B	
		In.	mm.
8	.5000-.1P-.3L-TS	.692	17.58
9	.5625-.1P-.3L-TS	.789	20.04
10	.6250-.1P-.3L-TS	.827	21.01
11	.6875-.1P-.3L-TS	.918	23.32
12	.7500-.1P-.3L-TS	.984	24.99
13	.8125-.1P-.3L-TS	1.047	26.59
15	.9375-.1P-.3L-TS	1.098	27.89
18	1.1250-.1P-.3L-TS	1.287	32.69
19	1.1875-.1P-.3L-TS	1.311	33.30
21	1.3125-.1P-.3L-TS	1.448	36.78
23	1.4375-.1P-.3L-TS	1.562	39.67

NOTES

Specifications

1. Current Rating: #23 5 A, #16 13 A, #12 23 A
2. Dielectric Withstanding Voltage: #23 750 VAC, #20HD 1000 VAC, #12 and #16 1800 VAC
3. Insulation Resistance: 5000 megohms minimum
4. Operating Temperature: -65° C. to +175° C.
5. Shock: 300 g.
6. Vibration: 37 g.
7. Shielding Effectiveness: 65 dB minimum from 1GHz to 10GHz.
8. Magnetic Permeability: 2.0 µ maximum
9. Durability: 2000 mating cycles

Materials and Finishes

- Shell: Aluminum alloy or stainless steel
- Contacts: Copper alloy, 50 µInch gold plated
- Insulators: High-grade rigid dielectric
- Seal: Fluorosilicone rubber
- Ground Spring: Nickel-plated beryllium copper

Rev. 111417

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Harsh Environment Shielded Cordsets



High performance Mighty Mouse cordsets feature easy ordering and fast delivery. These fully shielded and watertight assemblies withstand abrasion, temperature extremes and chemicals. Flexible overmolding provides rugged, watertight protection to wire and shield. Two styles are available: ***Style 1*** polyamide overmold and polyurethane cable jacket, and ***Style 2*** improved temperature range, high flexibility thermoplastic rubber overmold and cable jacket. Overmolded Mighty Mouse cordsets are suitable for military gear and other hostile environments where interconnect reliability and survivability is essential.

Product Features

- Single-ended or double-ended
- Rugged, watertight construction
- 100% electrically tested
- Flexible to -55°C. (Style 2)
- Stainless steel shield termination band
- Resistant to chemicals
- Withstands UV and ozone

High-Speed Cordsets

Controlled impedance twisted pair cordsets for Ethernet, USB and other protocols are available. Please refer to Section U

Harsh Environment Cordset Selection Guide		
Property	Style 1 Polyurethane Jacket Polyamide Overmold	Style 2 Rubber Jacket Rubber Overmold
Cable jacket	Thermoplastic polyurethane (TPU), black	Thermoplastic elastomer (TPV), black
Overmold	Polyamide, black	Thermoplastic elastomer (TPV), black
Operating temperature	-30° C. to +105° C.	-55° C. to +135° C.
Flexibility	Good	Excellent
Water Resistance	Waterproof	Waterproof
Solvent Resistance, Cable Jacket	Excellent	Good
Solvent Resistance, Overmold	Fair (1)	Good
Weatherability	Excellent	Excellent
Abrasion Resistance	Excellent	Good
Flammability	Flame retardant UL 94 V-0	Flame retardant UL 94 HB
Low Smoke, Zero Halogen Cable Jacket	Yes	No
(1) Excellent resistance to most solvents, fuels, and oils; poor resistance to strong acids and bipolar solvents (alcohol)		

Specifications	
Cable jacket	Style 1: thermoplastic polyurethane, black, low-smoke, zero-halogen Style 2: thermoplastic elastomer, black
Overmold	Style 1: polyamide Style 2: thermoplastic elastomer, black
Cable shield	Tin-coated copper braid, 90% minimum coverage
Conductors	Silver coated stranded wire, TFE insulated, per M22759/11
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	#23 5 amps, #20 7.5 amps, #16 13 amps, #12 23 amps
Test voltage (DWV)	500 Vac
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.


H

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Shielded Overmolded Harsh Environment Cordsets

Dimensions

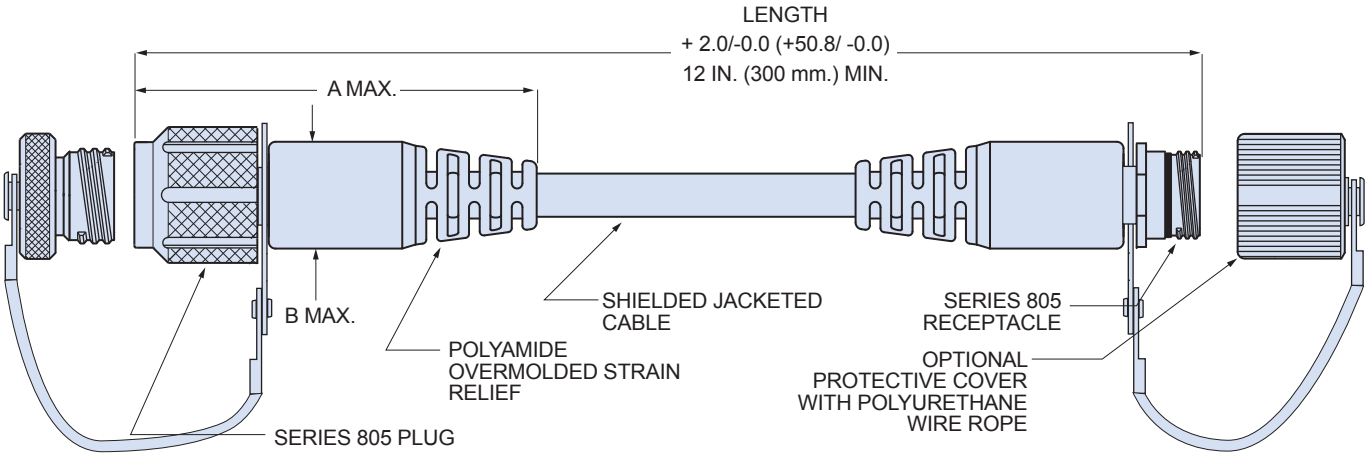

Dimensions				
Shell Size	A Max.		B Max.	
	In.	mm.	In.	mm.
8	2.62	66.55	0.5	12.70
9	2.70	68.58	0.55	13.97
10	2.80	71.12	0.65	16.51
11	2.80	71.12	0.65	16.51
12	2.90	73.66	0.71	18.03
15	3.10	78.74	0.82	20.83
18	3.42	86.87	1.1	27.94
19	3.42	86.87	1.1	27.94

NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TFE insulation, 600V, in accordance with M22759/11.
3. Wire color is IAW MIL-STD-681 for cables containing 10 wires or less. For cable containing more than 10 wires, wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 805 Mighty Mouse Triple-Start ACME Thread Shielded Overmolded Harsh Environment Cordsets

805-009, -018, -062, -063 Ordering Information

Series 805 Cordsets with #23 Contacts								
Sample Part Number								
805-009	**-A**	**C**	**2**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
805-009 Style 1 Polyurethane Cable Jacket, Polyamide Overmold **805-062** Style 2 Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #22 AWG **4** #24 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Insert Arr. page H-3	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See key positions on page H-5	Overall Length In Inches 12 Inch Min.

Series 805 Cordsets with #20HD Contacts								
Sample Part Number								
805-063	**-A**	**C**	**0**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
805-018 Style 1 Polyurethane Cable Jacket, Polyamide Overmold **805-063** Style 2 Rubber Cable Jacket and Overmold,	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**0** #20 AWG **2** #22 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	See Insert Arr. page H-3	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See key positions on page H-5	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 805 Mighty Mouse Triple-Start ACME Thread Shielded Overmolded Harsh Environment Cordsets

805-015, 016, -064 and -065 Ordering Information

Series 805 Cordsets with #16 Contacts								
Sample Part Number								
805-015	**-A**	**C**	**6**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
805-015 Style 1 Polyurethane Cable Jacket, Polyamide Overmold **805-064** Style 2 Rubber Cable Jacket and Overmold	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**6** #16 AWG **8** #18 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	Available in Shell Sizes **8** Thru **19** See Cont. Arr. Page H-3	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See key positions on page H-5	Overall Length In Inches 12 Inch Min.

Series 805 Cordsets with #12 Contacts								
Sample Part Number								
805-065	**-A**	**C**	**2**	**M**	**8-28**	**N**	**A**	**-36**
Series	End A Connector	End B Connector	Wire Size	Shell Material / Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length
805-016 Style 1 Polyurethane Cable Jacket, Polyamide Overmold **805-065** Style 2 Rubber Cable Jacket and Overmold,	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Receptacle, with Male Pin Contacts **-D** Receptacle, with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Receptacle, with Male Pin Contacts **D** Receptacle, with Female Socket Contacts **N** No Connector (Single-Ended)	**2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	Available in Shell Sizes **8** Thru **19** See Cont. Arr. Page H-3	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See key positions on page H-5	Overall Length In Inches 12 Inch Min.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 805 Ultraflexible “Phantom Cable” Cordsets



Phantom Cable cordsets feature high-flex rubber-insulated wires, lightweight shield and overbraided jackets for maximum flexibility, reduced size and minimum weight. Flexible rubber overmold provides strain relief and environmental sealing. EMI shield options include high-strength, ultralightweight Amberstrand® nickel-coated composite braid, ArmorLite™ or lightweight, high flexibility tinned copper braid. Braid outer jackets are available with NOMEX®, HALAR® or PTFE-coated fiberglass.

Product Features

- Overbraided cable jacket for excellent flexibility
- Ultra-lightweight AmberStrand® EMI shield
- 100% electrically tested
- Flexible to -55°C.
- Stainless steel shield termination band

Application Note

Overbraided textile jackets are ideal for applications where flexibility and weight are important. However, water can penetrate through the jacket and cable shield. Dust and contamination can also become entrapped in the braid. Braided jackets are prone to fraying damage caused by snagging on velcro closures and MOLLE vests. Extruded cable jackets are recommended if debris entrapment, moisture ingress or fraying damage are concerns.

Braid Shield Selection Guide			
Property	Amberstrand®	Armorlite®	Copper
Type	nickel-coated high-strength super fiber	Micro-filament nickel-coated stainless steel	Tin-coated copper
Weight/ft. (0.5 in. ID)	3.7 grams	4.4 grams	22.3 grams
Operating Temp(1)	-65° C to +200° C	-80° C to +260° C	-80° C to +150° C
Coverage	90% min.	90% min.	90% min.
Flexibility	Excellent	Excellent	Good
Cost Comparison	$$$	$$	$
(1) Rubber wires and rubber overmold are rated for -55° C to +135° C.			

Jacket Selection Guide			
Property	NOMEX®	HALAR®	PTFE Coated Fiberglass
Color	Black or olive drab	Black	Tan
Operating Temp(1)	-55° C to +260° C	-73° C to +150° C	-75° C to +300° C
Chemical Resistance	Excellent	Excellent	Excellent
Flammability	Self-extinguishing, will not melt	Fire retardant UL VW-1	Self-extinguishing
Toxicity	Non-toxic	Non-toxic	Non-toxic
Flexibility	Excellent	Excellent	Excellent
Abrasion resistance	Excellent	Excellent	Excellent
(1) Rubber wires and rubber overmold are rated for -55° C to +135° C.			

Specifications	
Cable jacket	NOMEX®, HALAR® or PTFE-coated fiberglass
Temperature Range	-55° C to +135° C
Overmold	Thermoplastic elastomer, black
Cable shield	AmberStrand®, ArmorLite® or tinned copper, 90% minimum coverage
Conductors	Silver coated stranded wire, rubber insulation
Shield Termination	Band-Master™ ATS stainless steel shield termination band
Current rating	5 amps
Test voltage (DWV)	500 Vac
Insulation resistance	200 Megohms minimum
Shielding effectiveness	50 dB minimum from 100MHz to 1000MHz.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start ACME Thread Flexible, Lightweight Phantom Cable Cordsets

805-057, 058, 059 and -060 Ordering Information

Series 805 "Phantom Cable" Cordsets size #12 thru #23 Contacts										
Sample Part Number										
805-027	**-B**	**N**	**2**	**Z1**	**5-3**	**N**	**A**	**-60**	**C**	**N**
Series	End A Connector	End B Connector	Wire Size	Shell Material/ Finish	Insert Arr.	Protective Cover	Shell Key Pos.	Length	Shield Option	Jacket Option
Size #23 Contacts **805-057** Phantom Cable Cordset Size #20 HD Contacts **805-058** Phantom Cable Cordset Size #16 Contacts **805-059** Phantom Cable Cordset Size #12 Contacts **805-060** Phantom Cable Cordset	**-A** Plug, with Male Pin Contacts **-B** Plug, with Female Socket Contacts **-C** Rec. with Male Pin Contacts **-D** Rec. with Female Socket Contacts	**A** Plug, with Male Pin Contacts **B** Plug, with Female Socket Contacts **C** Rec. with Male Pin Contacts **D** Rec. with Female Socket Contacts **N** No Connector (Single-Ended)	Size #23 Contacts **4** #24 AWG **6** #26 AWG **8** #28 AWG Size #20 HD Contacts **0** #20 AWG **2** #22 AWG Size #16 Contacts **6** #16 AWG **8** #18 AWG Size #12 Contacts **2** #12 AWG **4** #14 AWG	**M** Aluminum / Electroless Nickel **NF** Aluminum / Cadmium with OD Chromate **ZNU** |Aluminum / Zinc-Nickel with Black Chromate **MT** Aluminum / Nickel-PTFE **Z1** Stainless Steel / Passivated	Available in Shell Sizes **8** Thru **19** See Cont. Arr. Page H-3	**P** Metal Protective Covers Included **N** No Covers Supplied	**A** Normal **B** Pos. B **C** Pos. C **D** Pos. D **E** Pos. E **F** Pos. F See key positions on page H-5	Overall Length In Inches 12 Inch Min.	**A** Amberstrand **B** Armorlite **C** Tin-Coated Copper	**D** **Nomex,** Olive Drab **N** Nomex, Black **H** Halar (Monofil) **P** Peek (Monofil)

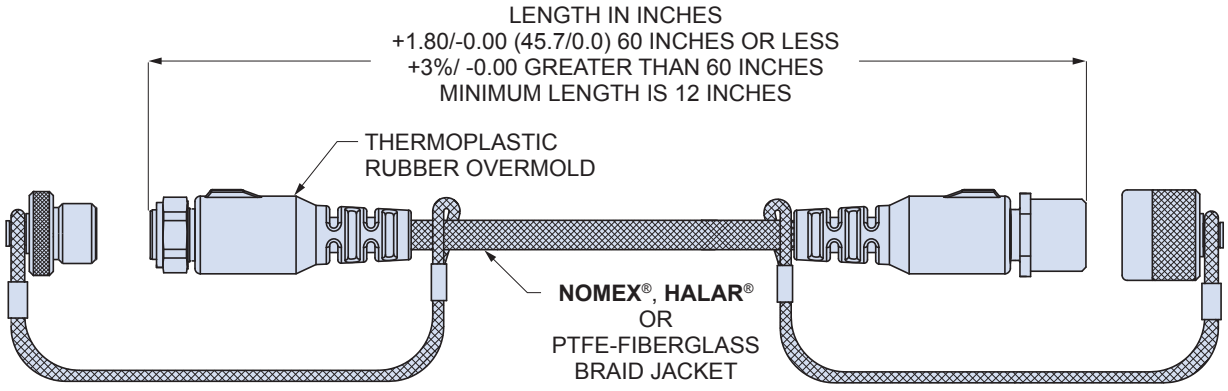


NOTES

1. Double-ended cordsets are wired pin #1 to pin #1, #2 to #2, and so on.
2. Wires are silver-coated stranded copper with TPE insulation, 600V, UL VW-1 rated.
3. Wire color is IAW MIL-STD-681 for cables containing 10 wires or less. For cable containing more than 10 wires, wire color is white.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

PRODUCT SELECTION GUIDE




Series 801 Mighty Mouse Filter Connector
High Density, Quick Coupling Threads, Square Flange or Jam Nut

Page J-8




Series 801 Mighty Mouse Filter Connector Adapter
High Density, Quick Coupling Threads

Page J-12




Series 804 Mighty Mouse Filter Connector
Jam Nut Receptacle, Push-Pull Quick Disconnect

Page J-15




Series 805 Mighty Mouse Filter Connector
Receptacles with Triple-Start ACME Coupling Threads,
Square Flange or Jam Nut with Solder Cup Contacts and Banding Platform

Page J-16




Series 805 Mighty Mouse Filter Connector
Receptacles with Triple-Start ACME Coupling Threads,
PCB Contacts

Page J-17



Series 805 Mighty Mouse Filter Connector Adapter
with Triple-Start ACME Coupling Threads

Page J-20



Series 800 Mighty Mouse Filter Connector
Receptacles with UN Mating Threads, Square Flange or Jam Nut

Page J-22


J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 80 Mighty Mouse Filter Connector
Normal and Alternate Key Positions

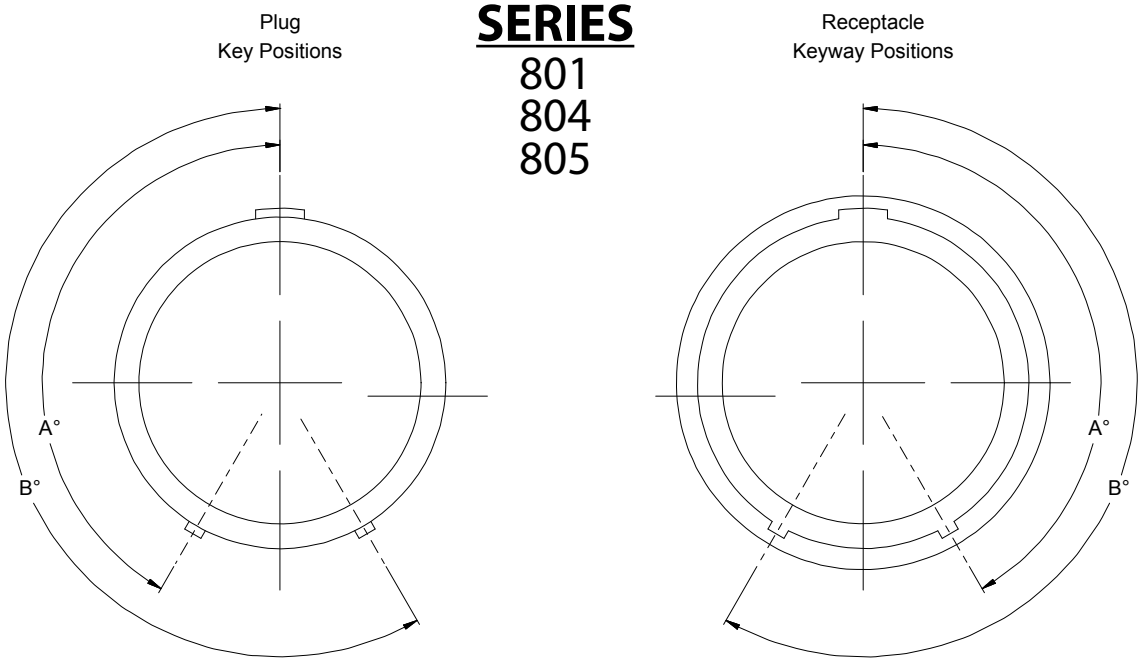

Series 80 Mighty Mouse Alternate Key Positions			
Key Position	Notes	A°	B°
A	Normal	150°	210°
B	Alternate #1	75°	210°
C	Alternate #2	95°	230°
D	Alternate #3	140°	275°
E	Alternate #4	75°	275°
F	Alternate #5	95°	210°
U	Universal	-	-

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.





















Series 80 Mighty Mouse Contact Arrangements								
Contact Size	Contact Quantity					Contact Arrangements		
	#23	#20	#20Hd	#16	#12	Series 801	Series 804	Series 805
Size #23 Contacts 5 Amp Max	3					5-3	5-3	N/A
	4					6-4	6-4	8-4
	6					6-6	6-6	8-6
	7					6-7	6-7	8-7
	10					7-10	7-10	9-10
	13					8-13	8-13	10-13
	19					9-19	9-19	11-19
	26					10-26	10-26	12-26
	31					11-31	11-31	13-31
	37					13-37	12-37	15-37
	55					16-55	14-55	18-55
	85					17-85	N/A	19-85
	100					19-100	N/A	21-100
	130					21-130	N/A	23-130
Size #20HD Contacts 7.5 Amp Max			3			6-23	6-23	8-23
			5			7-25	7-25	9-25
			8			8-28	8-28	10-28
			10			9-210	9-210	11-210
			20			13-220	12-220	15-220
			35			16-235	14-235	18-235
			41			17-241	N/A	19-241
			55			19-255	N/A	21-255
			69			21-269	N/A	23-269
Size #16 Contacts 13 Amp Max				1		6-1	6-1	8-1
				2		8-2	8-2	10-2
				4		9-4	9-4	11-4
				5		10-5	10-5	12-5
				7		13-7	12-7	15-7
				12		16-12	14-12	18-12
				14		17-14	N/A	19-14
				19		19-19	N/A	21-19
				22		21-22	N/A	23-22
Size #12 Contacts 23 Amp Max					1	7-1	7-1	9-1
					2	10-2	10-2	12-2
					2	13-2	12-2	15-2
					3	13-3	12-3	15-3
					5	16-5	14-5	18-5
					7	17-7	N/A	19-7
					12	21-12	N/A	23-12
Mixed Size "Combo" Layouts	4	2				8-200	8-200	10-200
	8	2				9-201	9-201	11-201
	4			2		9-200	9-200	11-200
	8			2		10-202	10-202	12-202
	4				2	10-201	10-201	12-201
	6				2	13-200	12-200	15-200
	10				2	13-201	12-201	15-201
	12				1	10-200	10-200	12-200

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Filter Connector
Contact Arrangements (Pin Front View)
Printed Circuit Board Dimensions














						
Series 801	5-3	6-4	6-6	6-7	6-23	6-1
Series 804	5-3	6-4	6-6	6-7	6-23	6-1
Series 805	N/A	8-4	8-6	8-7	8-23	8-1
					
Series 801	7-10	7-25	7-1	8-13	8-28	
Series 804	7-10	7-25	7-1	8-13	8-28	
Series 805	9-10	9-25	9-1	10-13	10-28	
						
Series 801	8-2	8-200	9-19	9-4	9-210	9-200
Series 804	8-2	8-200	9-19	9-4	9-210	9-200
Series 805	10-2	10-200	11-19	11-4	11-210	11-200
						
Series 801	9-201	10-26	10-5	10-2		
Series 804	9-201	10-26	10-5	10-2		
Series 805	11-201	12-26	12-5	12-2		

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Filter Connector
Contact Arrangements (Pin Front View)
Printed Circuit Board Dimensions



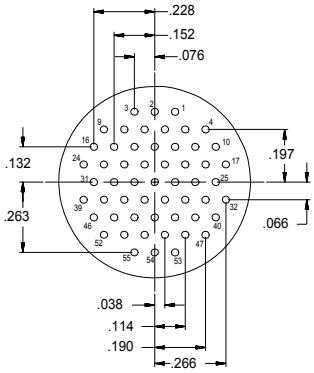

					
Series 801	10-200	10-201	10-202	11-31	13-37
Series 804	10-200	10-201	10-202	11-31	12-37
Series 805	12-200	12-201	12-202	13-31	15-37
					
Series 801	13-7	13-2	13-3	13-200	13-201
Series 804	12-7	12-2	12-3	12-200	12-201
Series 805	15-7	15-2	15-3	15-200	15-201
					
Series 801	13-220	16-55	16-235		
Series 804	12-220	14-55	14-235		
Series 805	15-220	18-55	18-235		



J




Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Filter Connector Contact Arrangements (Pin Front View) with Printed Circuit Board Dimensions





				
Series 801	16-5	16-12	17-7	17-14
Series 804	14-5	14-12	N/A	N/A
Series 805	18-5	18-12	19-7	19-14

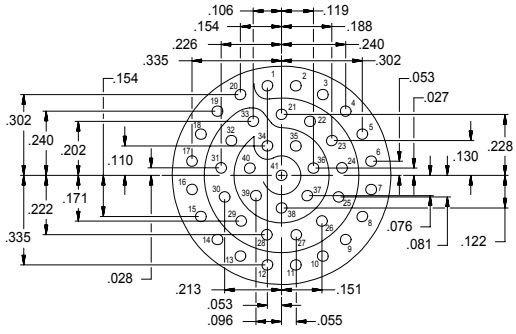		
Series 801	17-85	17-241
Series 804	N/A	N/A
Series 805	19-85	19-241

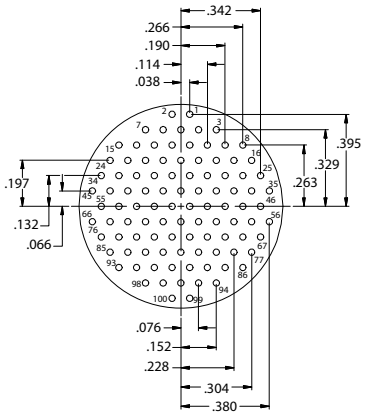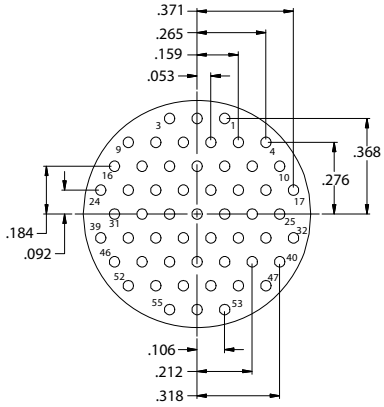			
Series 801	19-100	19-255	19-19
Series 804	N/A	N/A	N/A
Series 805	21-100	21-255	21-19

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

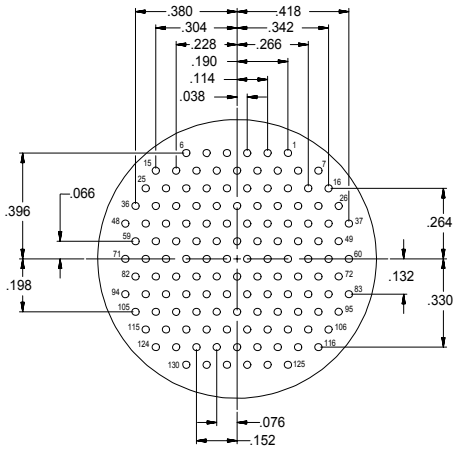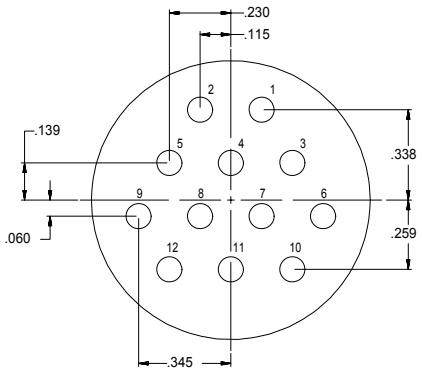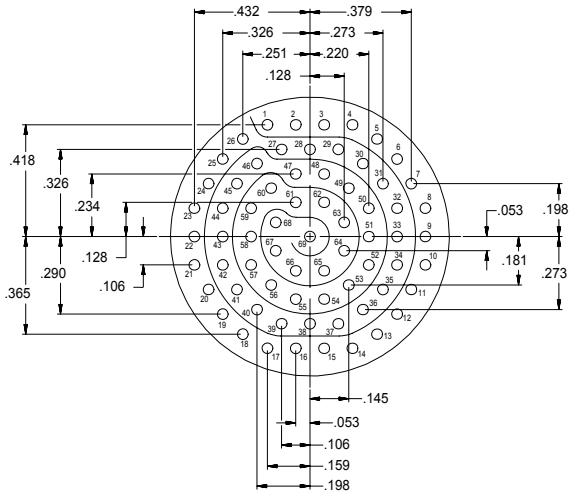		
Series 801	21-130	21-12
Series 804	N/A	N/A
Series 805	23-130	23-12
		
Series 801	21-22	21-269
Series 804	N/A	N/A
Series 805	23-22	23-269

J


Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Filter Connector
High Density, Quick Coupling Threads
240-801 Ordering Information

Mighty mouse filter connector with solder cup contacts and banding platform

How To Order										
Sample Part Number	**240-801-**	**07**	**M**	**6-7**	**P**	**S**	**P**	**A**	**A**
Filter Connector	**240-801** = Series 801 Mighty Mouse									
Shell Style	**01** = Square flange receptacle with banding platform **07** = Jam nut receptacle with banding platform									
Shell Material/Finish	See Table I									
Insert Arrangement	See pages J-3 – J-7									
Contact Gender	**P** = Pin **S** = Socket									
Termination Type	**S** = Solder Cup									
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)									
Capacitance	See Table II									
Alternate Key Position	**A, B, C, D, E, F, U** **A** = Normal, **U** = Universal (See page J-2)									

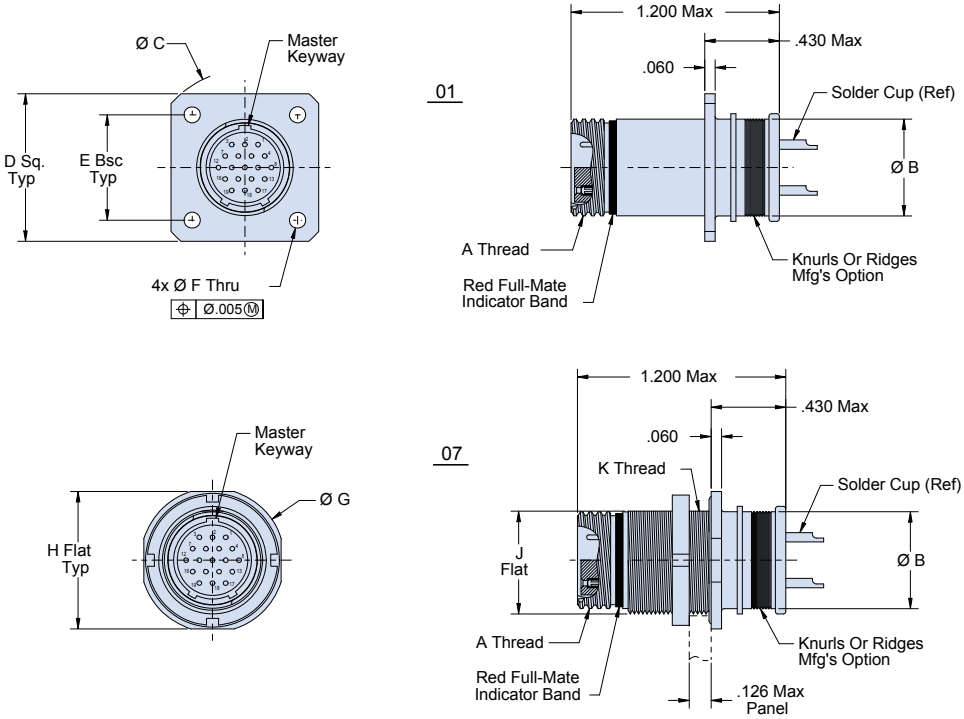

NOTES


1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.

Dimensions in inches (millimeters) and are subject to change without notice.


© 2014 Glenair, Inc.


Mighty mouse filter connector with PC tail contacts

How To Order										
Sample Part Number	**240-801-**	**02**	**M**	**6-7**	**P**	**P**	**P**	**A**	**A**
Filter Connector	**240-801** = Series 801 Mighty Mouse									
Shell Style	**02** = Square flange receptacle with PCB contacts **08** = Jam nut receptacle with PCB contacts									
Shell Material/Finish	See Table I									
Insert Arrangement	See pages J-3 – J-7									
Contact Gender	**P** = Pin **S** = Socket									
Termination Type	**P** = PC Tail									
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)									
Capacitance	See Table II									
Alternate Key Position	**A, B, C, D, E, F, U** **A** = Normal, **U** = Universal (See page J-2)									

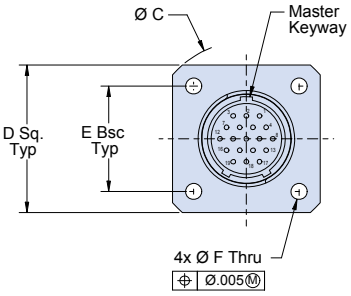


02

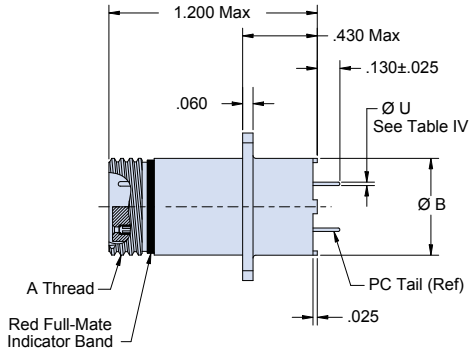



08

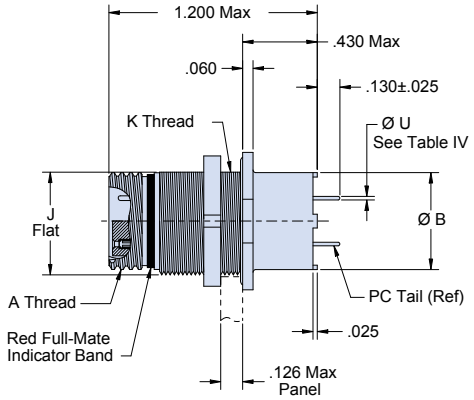

NOTES

1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.

J

Dimensions in inches (millimeters) and are subject to change without notice.

Series 801 Mighty Mouse Filter Connector
High Density, Quick Coupling Threads
240-801 Dimensions

Mighty mouse filter connector with solder cup contacts and banding platform

Table I: Material and Finish		
Sym	Material	Finish Description
M	Aluminum	Electroless Nickel
MT		Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
NF		Cadmium, Olive Drab over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab
ZR		Zinc-Nickel, Black - RoHS
ZL	Stainless Steel	Electro-Deposited Nickel

Table II: Capacitor Array Code Capacitance Range		
Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

PC Tail Dia	
Contact Size	Ø U
23	.022 (0.56) .018 (0.46)
20	.028 (0.71) .024 (0.61)
16	.042 (1.07) .038 (0.97)
12	.096 (2.44) .092 (2.34)


Dimensions										
Shell Size	A Thread	B Dia	C Dia	D Sq	E Bsc	F Holes	G Dia	H Flat	J Flat	K Thread
5	.3125-.05P-.1L-2A	.365 (9.3)	.680 (17.3)	.530 (13.5)	.363 (9.2)	.096 (2.4) .091 (2.3)	.575 (14.6)	.545 (13.8)	.350 (8.9)	.3750-28 UN-2A
6	.3750-.05P-.1L-2A	.409 (10.4)	.750 (19.1)	.590 (15.0)	.423 (10.7)		.635 (16.1)	.595 (15.1)	.410 (10.4)	.4375-28 UNEF-2A
7	.4375-.05P-.1L-2A	.500 (12.7)	.850 (21.6)	.650 (16.5)	.483 (12.3)		.755 (19.2)	.723 (18.4)	.536 (13.6)	.5625-32 UN-2A
8	.5000-.05P-.1L-2A	.522 (13.3)	.938 (23.8)	.712 (18.1)	.545 (13.8)		.755 (19.2)	.723 (18.4)	.536 (13.6)	.5625-32 UN-2A
9	.5625-.05P-.1L-2A	.610 (15.5)	1.125 (28.6)	.850 (21.6)	.607 (15.4)		.830 (21.1)	.790 (20.1)	.596 (15.1)	.6250-28 UN-2A
10	.6250-.05P-.1L-2A	.652 (16.6)	1.188 (30.2)	.890 (22.6)	.670 (17.0)	.130 (3.3) .126 (3.2)	.890 (22.6)	.855 (21.7)	.658 (16.7)	.6875-28 UN-2A
11	.6875-.05P-.1L-2A	.694 (17.6)	1.250 (31.8)	.935 (23.8)	.715 (18.2)		.960 (24.4)	.925 (23.5)	.718 (18.2)	.750-28 UN-2A
13	.8125-.1P-.2L-2A	.746 (18.9)	1.375 (34.9)	1.030 (26.2)	.812 (20.6)		1.078 (27.4)	1.044 (26.5)	.845 (21.5)	.875-28 UN-2A
16	1.000-.1P-.2L-2A	.871 (22.1)	1.625 (41.3)	1.219 (31.0)	.981 (24.9)		1.264 (32.1)	1.230 (31.2)	1.022 (26.0)	1.0625-20 UN-2A
17	1.062-.1P-.2L-2A	.965 (24.5)	1.700 (43.2)	1.280 (32.5)	1.060 (26.9)		1.325 (33.7)	1.290 (32.8)	1.096 (27.8)	1.125-28 UN-2A
19	1.1875-.1P-.2L-2A	1.078 (27.4)	1.900 (48.3)	1.432 (36.8)	1.191 (30.3)		1.450 (36.8)	1.415 (35.9)	1.225 (31.1)	1.250-28 UN-2A
21	1.3125-.1P-.2L-2A	1.186 (30.1)	1.938 (49.2)	1.565 (39.8)	1.322 (33.6)		1.625 (41.3)	1.577 (40.1)	1.345 (34.2)	1.375-28 UN-2A

Dimensions in inches (millimeters) and are subject to change without notice.


© 2014 Glenair, Inc.

Series 801 Mighty Mouse Square Flange Cut-Outs			
Shell Size	ØA	B Bsc	ØC Holes
5	.328 (8.33)	.363 (9.22)	.096 (2.44) .091 (2.31)
6	.390 (9.91)	.423 (10.74)	
7	.453 (11.51)	.483 (12.27)	
8	.515 (13.08)	.545 (13.84)	
9	.578 (14.68)	.607 (15.42)	.130 (3.30) .126 (3.20)
10	.640 (16.26)	.670 (17.02)	
11	.703 (17.86)	.715 (18.16)	
13	.828 (21.03)	.812 (20.62)	
16	1.015 (25.78)	.981 (24.92)	
17	1.078 (27.38)	1.060 (26.92)	
19	1.203 (30.56)	1.191 (30.25)	
21	1.328 (33.73)	1.322 (33.58)	

Square Flange Mount

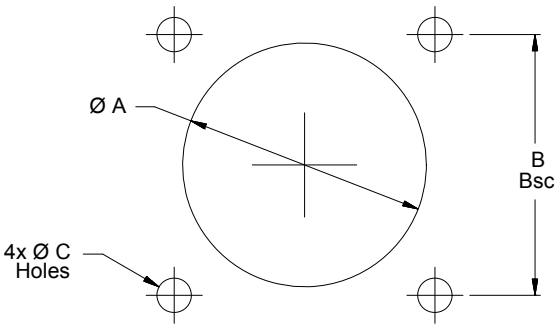

Jam Nut Mount

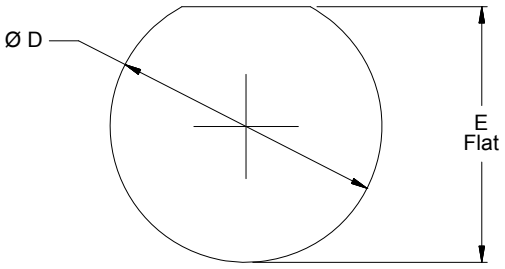

Series 801 Mighty Mouse Jam Nut Cut-Outs		
Shell Size	ØD	E Flat
5	.387 (9.8) .383 (9.7)	.358 (9.1) .354 (9.0)
6	.449 (11.4) .445 (11.3)	.418 (10.6) .414 (10.5)
7	.574 (14.6) .570 (14.5)	.544 (13.8) .540 (13.7)
8	.574 (14.6) .570 (14.5)	.544 (13.8) .540 (13.7)
9	.637 (16.2) .633 (16.1)	.604 (15.3) .600 (15.2)
10	.699 (17.8) .695 (17.7)	.666 (16.9) .662 (16.8)
11	.762 (19.4) .758 (19.3)	.726 (18.4) .722 (18.3)
13	.887 (22.5) .883 (22.4)	.853 (21.7) .849 (21.6)
16	1.077 (27.4) 1.073 (27.3)	1.030 (26.2) 1.026 (26.1)
17	1.137 (28.9) 1.133 (28.8)	1.104 (28.0) 1.100 (27.9)
19	1.262 (32.1) 1.258 (32.0)	1.235 (31.4) 1.231 (31.3)
21	1.387 (35.2) 1.383 (35.1)	1.355 (34.4) 1.351 (34.3)

J


Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Filter Connector Adapter
High Density, Quick Coupling Threads
240-801-AA Ordering Information

Mighty mouse filter connector adapter

How To Order									
Sample Part Number		**240-801-**	**AA**	**M**	**6-7**	**PS**	**P**	**A**	**A**
Filter Connector	**240-801** = Series 801 Mighty Mouse								
Shell Style	**AA** = Adapter								
Shell Material/Finish	See Table I								
Insert Arrangement	See pages J-3 – J-7								
Contact Gender	**PS** = Pins, Plug Side **SP** = Sockets, Plug Side (See Note 2)								
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)								
Capacitance	See Table II								
Alternate Key Position	**A**, **B**, **C**, **D**, **E**, **F**, **U** **A** = Normal, **U** = Universal (See page J-2)								

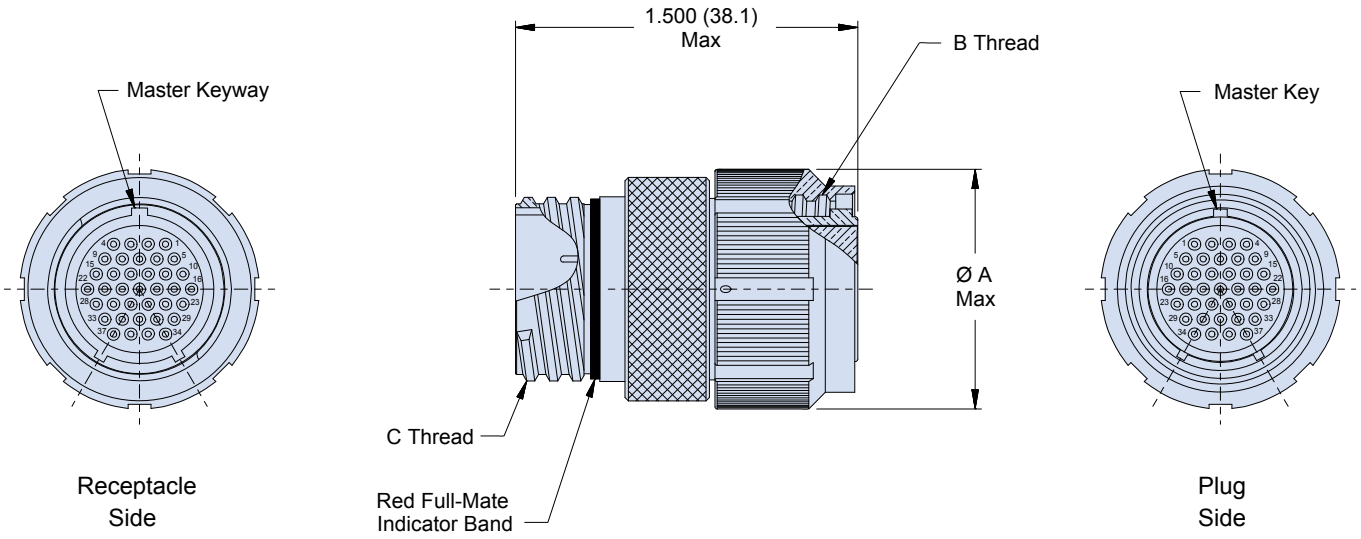

NOTES

1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.
2. Please consult factory for Pin/Pin and/or Socket/Socket contact arrangements.

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Table I: Material and Finish		
Sym	Material	Finish Description
M	Aluminum	Electroless Nickel
MT		Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
NF		Cadmium, Olive Drab over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab
ZR		Zinc-Nickel, Black - RoHS
ZL	Stainless Steel	Electro-Deposited Nickel

Table II: Capacitor Array Code Capacitance Range		
Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

Dimensions			
Shell Size	Ø A Max	B Thread	C Thread
5	.720 (18.3)	.3125-.05P-.1L-DS-2B	.3125-.05P-.1L-DS-2A
6	.750 (19.1)	.3750-.05P-.1L-DS-2B	.3750-.05P-.1L-DS-2A
7	.850 (21.6)	.4375-.05P-.1L-DS-2B	.4375-.05P-.1L-DS-2A
8	.870 (22.1)	.5000-.05P-.1L-DS-2B	.5000-.05P-.1L-DS-2A
9	.930 (23.6)	.5625-.05P-.1L-DS-2B	.5625-.05P-.1L-DS-2A
10	1.000 (25.4)	.6250-.05P-.1L-DS-2B	.6250-.05P-.1L-DS-2A
11	1.100 (27.9)	.6875-.05P-.1L-DS-2B	.6875-.05P-.1L-DS-2A
13	1.170 (29.7)	.8125-.1P-.2L-DS-2B	.8125-.1P-.2L-DS-2A
16	1.380 (35.1)	1.0000-.1P-.2L-DS-2B	1.0000-.1P-.2L-DS-2A
17	1.460 (37.1)	1.0625-.1P-.2L-DS-2B	1.0625-.1P-.2L-DS-2A
19	1.600 (40.6)	1.1875-.1P-.2L-DS-2B	1.1875-.1P-.1L-DS-2A
21	1.850 (47.0)	1.3125-.1P-.2L-DS-2B	1.3125-.1P-.2L-DS-2A

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Mighty Mouse Filter Connector
Jam Nut Receptacle, Push-Pull Quick Disconnect
240-804 Ordering Informaton

Mighty mouse push-pull jam nut receptacle filter connector


How To Order										
Sample Part Number	**240-804-**	**07**	**M**	**6-7**	**P**	**S**	**P**	**A**	**A**
Filter Connector	**240-804** = Series 804 Mighty Mouse Push-Pull								
Shell Style	**07** = Rear mount jam nut receptacle with PCB contacts **08** = Frount mount jam nut receptacle with PCB contacts								
Shell Material/Finish	See Table I								
Insert Arrangement	See pages J-3 – J-7								
Contact Gender	**P** = Pin **S** = Socket								
Termination Type	**P** = PC Tail **S** = Solder Cup								
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)								
Capacitance	See Table II								
Alternate Key Position	**A, B, C, D, E, F, U** **A** = Normal, **U** = Universal (See page J-2)								

Table I: Material and Finish


Sym	Material	Finish Description
M	Aluminum	Electroless Nickel
MT		Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
NF		Cadmium, Olive Drab over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab
ZR		Zinc-Nickel, Black - RoHS
ZL	Stainless Steel	Electro-Deposited Nickel

Table II: Capacitor Array Code Capacitance Range

Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

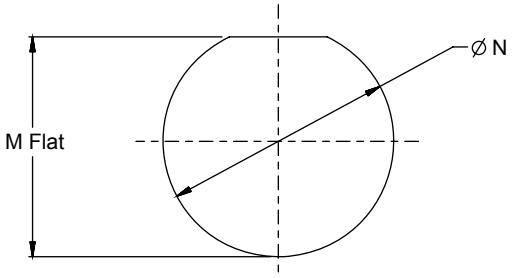

Recomended Panel Cut-Out for
Rear Mount Jam Nut Receptacle

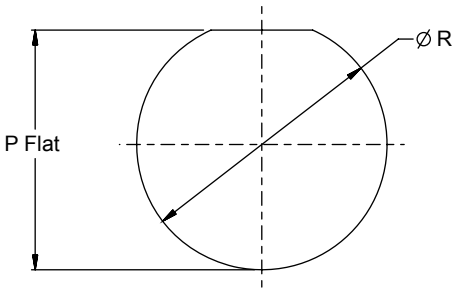

Recomended Panel Cut-Out for
Front Mount Jam Nut Receptacle

Table III: PC Tail Dia

Contact Size	Ø U
23	.022 (0.56) .018 (0.46)
20	.028 (0.71) .024 (0.61)
16	.042 (1.07) .038 (0.97)
12	.096 (2.44) .092 (2.34)

NOTES

1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

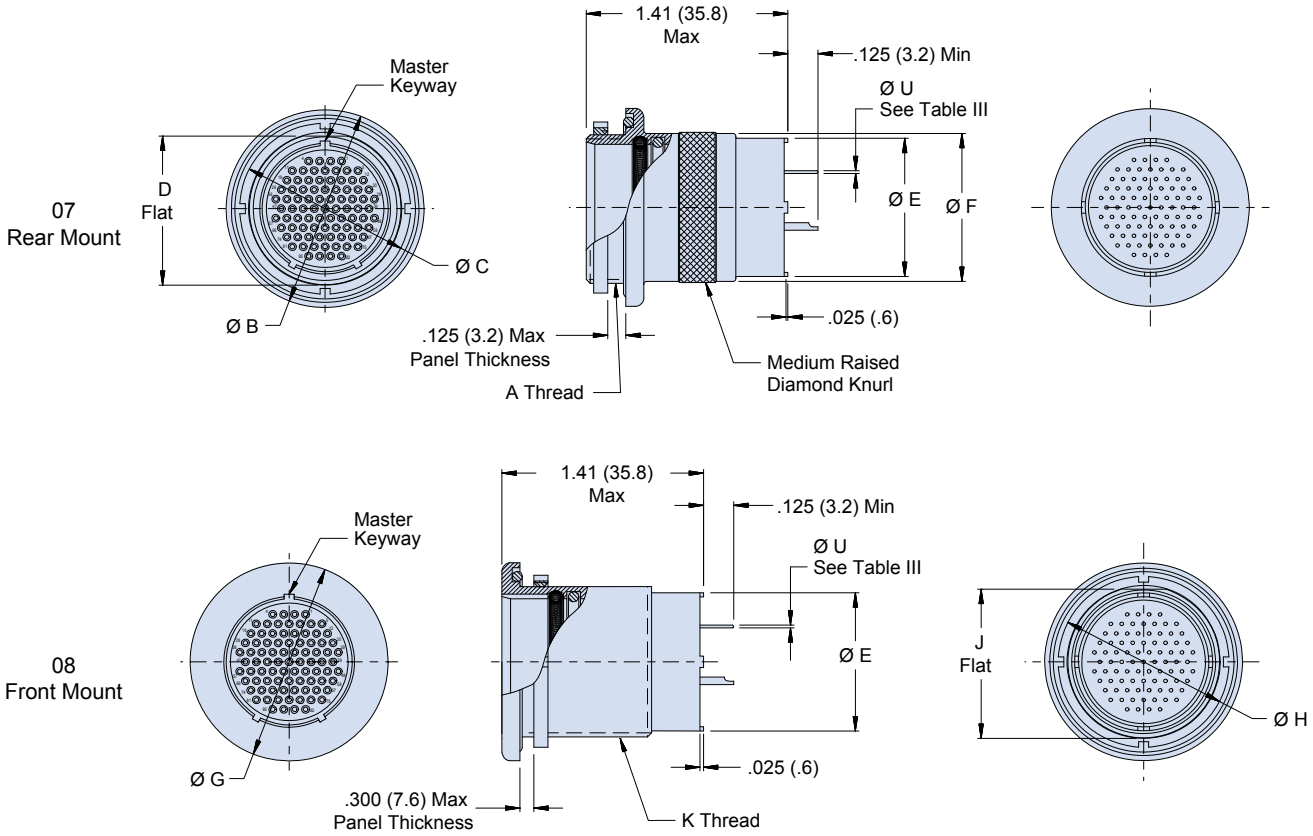


Table III: Dimensions

Shell Size	A Thread	Ø B	Ø C	D Flat	Ø E	Ø F	Ø G	Ø H	J Flat	K Thread	Rear Mount -07		Front Mount -08	
											M Flat	Ø N	P Flat	Ø R
5	.4375-32 UN-2A	.790 (20.1)	.562 (14.3)	.415 (10.5)	.365 (9.3)	.450 (11.4)	.830 (21.1)	.625 (15.9)	.470 (11.9)	.5000-32 UN-2A	.427 (10.9) .423 (10.7)	.453 (11.5) .443 (11.3)	.482 (12.2) .478 (12.1)	.515 (13.1) .505 (12.8)
6	.5000-32 UN-2A	.830 (21.1)	.625 (15.9)	.467 (11.9)	.409 (10.4)	.520 (13.3)	.885 (22.5)	.688 (17.5)	.530 (13.5)	.5625-32 UN-2A	.479 (12.2) .475 (12.1)	.515 (13.1) .505 (12.8)	.542 (13.8) .538 (13.7)	.580 (14.7) .570 (14.5)
7	.6250-28 UN-2A	.910 (23.1)	.750 (19.1)	.594 (15.1)	.500 (12.7)	.570 (14.5)	.995 (25.3)	.812 (20.6)	.663 (16.8)	.6875-28 UN-2A	.606 (15.4) .602 (15.3)	.640 (16.3) .630 (16.0)	.676 (17.2) .671 (17.0)	.703 (17.9) .693 (17.6)
8	.6250-28 UN-2A	.955 (24.3)	.750 (19.1)	.594 (15.1)	.522 (13.3)	.603 (15.3)	.995 (25.3)	.812 (20.6)	.663 (16.8)	.6875-28 UN-2A	.606 (15.4) .602 (15.3)	.640 (16.3) .630 (16.0)	.676 (17.2) .671 (17.0)	.703 (17.9) .693 (17.6)
9	.6875-28 UN-2A	1.000 (25.4)	.812 (20.6)	.655 (16.6)	.610 (15.5)	.685 (17.4)	1.075 (27.3)	.875 (22.2)	.720 (18.3)	.7500-28 UN-2A	.667 (17.0) .663 (16.8)	.700 (17.8) .690 (17.5)	.732 (18.6) .728 (18.5)	.765 (19.4) .755 (19.2)
10	.7500-28 UN-2A	1.085 (27.6)	.875 (22.2)	.721 (18.3)	.652 (16.6)	.735 (18.7)	1.140 (29.0)	.938 (23.8)	.788 (20.0)	.8125-28 UN-2A	.734 (18.6) .729 (18.5)	.765 (19.4) .755 (19.2)	.801 (20.4) .796 (20.2)	.827 (21.0) .817 (20.8)
11	.8125-28 UN-2A	1.135 (28.8)	.938 (23.8)	.788 (20.0)	.694 (17.6)	.810 (20.6)	1.190 (30.2)	1.000 (25.4)	.843 (21.4)	.8750-28 UN-2A	.801 (20.3) .796 (20.2)	.827 (21.0) .817 (20.8)	.855 (21.7) .851 (21.6)	.890 (22.6) .880 (22.4)
12	.8750-28 UN-2A	1.180 (30.0)	1.000 (25.4)	.843 (21.4)	.746 (18.9)	.850 (21.6)	1.340 (34.0)	1.125 (28.6)	.970 (24.6)	1.0000-28 UN-2A	.855 (21.7) .851 (21.6)	.890 (22.6) .880 (22.4)	.982 (24.9) .978 (24.8)	1.015 (25.8) 1.005 (25.5)
14	1.0000-28 UN-2A	1.325 (33.7)	1.125 (28.6)	.968 (24.6)	.871 (22.1)	.973 (24.7)	1.390 (35.3)	1.188 (30.2)	1.020 (25.9)	1.0625-20 UN-2A	.980 (24.9) .976 (24.8)	1.015 (25.8) 1.005 (25.5)	1.032 (26.2) 1.028 (26.1)	1.080 (27.4) 1.070 (27.2)

J


Dimensions in inches (millimeters) and are subject to change without notice.


© 2014 Glenair, Inc.


Series 805 Mighty Mouse Filter Connector Receptacles with Triple-Start ACME Coupling Threads,
240-805 Ordering Informaton


Mighty mouse triple-start receptacle filter connector with solder cup contacts and banding platform

How To Order										
Sample Part Number	**240-805-**	**07**	**M**	**8-7**	**P**	**S**	**P**	**A**	**A**
Filter Connector	**240-805** = Series 805 Mighty Mouse Triple-Start								
Shell Style	**01** = Square flange receptacle with banding platform **07** = Jam nut receptacle with banding platform								
Shell Material/Finish	See Table I								
Insert Arrangement	See pages J-3 – J-7								
Contact Gender	**P** = Pin **S** = Socket								
Termination Type	**S** = Solder Cup								
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)								
Capacitance	See Table II								
Alternate Key Position	**A, B, C, D, E, F, U** **A** = Normal, **U** = Universal (See page J-2)								

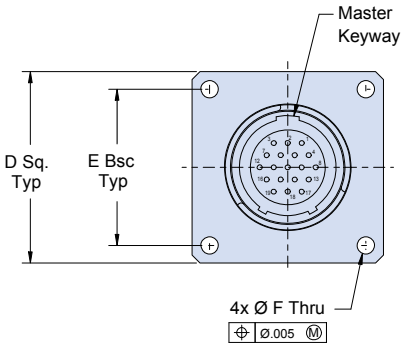

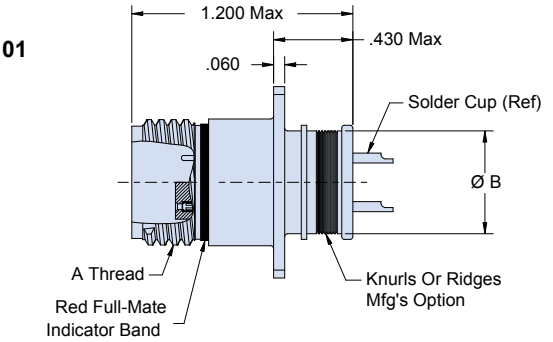

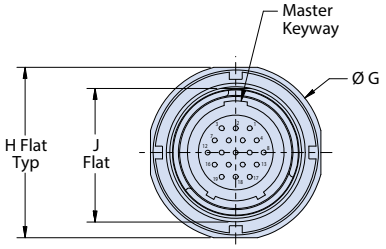

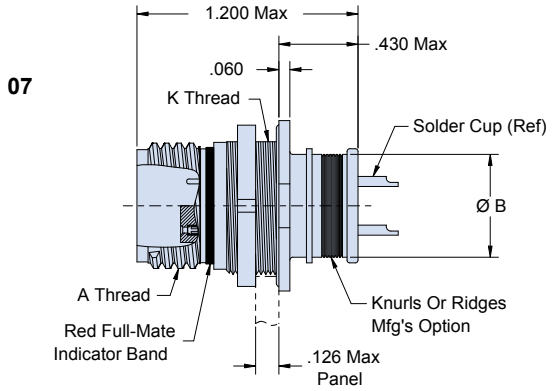

NOTES


1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.

Dimensions in inches (millimeters) and are subject to change without notice.


© 2014 Glenair, Inc.


Mighty mouse triple-start receptacle filter connector with PCB contacts

How To Order										
Sample Part Number	**240-805-**	**02**	**M**	**8-7**	**P**	**P**	**P**	**A**	**A**
Filter Connector	Series 805 Mighty Mouse Triple-Start								
Shell Style	**02** = Square flange receptacle with PCB contacts **08** = Jam nut receptacle with with PCB contacts								
Shell Material/Finish	See Table I								
Insert Arrangement	See pages J-3 – J-7								
Contact Gender	**P** = Pin **S** = Socket								
Termination Type	**P** = PC Tail								
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)								
Capacitance	See Table II								
Alternate Key Position	**A**, **B**, **C**, **D**, **E**, **F**, **U** **A** = Normal, **U** = Universal (See page J-2)								

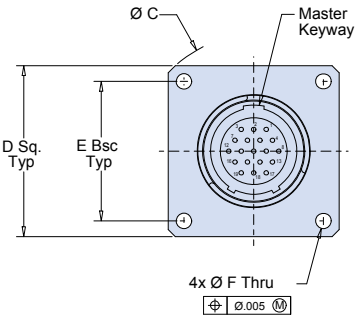


02

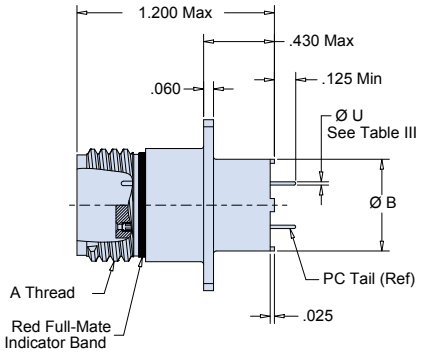



08

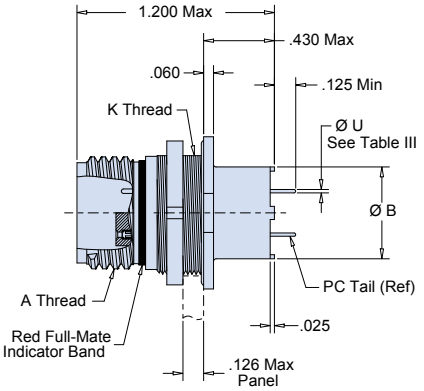

NOTES

1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Filter Connector Receptacles with Triple-Start ACME Coupling Threads

240-805 Dimensions

Table I: Material and Finish		
Sym	Material	Finish Description
M	Aluminum	Electroless Nickel
MT		Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
NF		Cadmium, Olive Drab over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab
ZR		Zinc-Nickel, Black - RoHS
ZL	Stainless Steel	Electro-Deposited Nickel

Table II: Capacitor Array Code Capacitance Range		
Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

Table III: PC Tail Dia	
Contact Size	Ø U
23	.022 (0.56) .018 (0.46)
20	.028 (0.71) .024 (0.61)
16	.042 (1.07) .038 (0.97)
12	.096 (2.44) .092 (2.34)

Dimensions										
Shell Size	A Thread	B Dia	C Dia	D Sq	E Bsc	F Holes	G Dia	H Flat	J Flat	K Thread
8	.5000-.1P-.3L-TS-2A	.413 (10.5)	1.150 (29.2)	.850 (21.6)	.660 (16.8)	.096 (2.4) .091 (2.3)	.760 (19.3)	.730 (18.5)	.535 (13.6)	.5625-28 UN-2A
9	.5625-.1P-.3L-TS-2A	.500 (12.7)	1.230 (31.2)	.913 (23.2)	.723 (18.4)		.880 (22.4)	.850 (21.6)	.661 (16.8)	.6875-28 UN-2A
10	.6250-.1P-.3L-TS-2A	.530 (13.5)	1.330 (33.7)	.975 (24.8)	.785 (19.9)		.880 (22.4)	.850 (21.6)	.661 (16.8)	.6875-28 UN-2A
11	.6875-.1P-.3L-TS-2A	.610 (15.5)	1.410 (35.8)	1.039 (26.4)	.848 (21.5)		.955 (24.3)	.925 (23.5)	.721 (18.3)	.7500-28 UN-2A
12	.7500-.1P-.3L-TS-2A	.655 (16.6)	1.500 (38.1)	1.099 (27.9)	.909 (23.1)		1.060 (26.9)	1.035 (26.3)	.784 (19.9)	.8125-28 UN-2A
13	.8125-.1P-.3L-TS-2A	.685 (17.4)	1.590 (40.4)	1.163 (29.5)	.973 (24.7)		1.120 (28.4)	1.090 (27.7)	.843 (21.4)	.8750-28 UN-2A
15	.9375-.1P-.3L-TS-2A	.746 (18.9)	1.750 (44.5)	1.288 (32.7)	1.058 (26.9)	.130 (3.3) .126 (3.2)	1.203 (30.6)	1.173 (29.8)	.970 (24.6)	1.000-28 UN-2A
18	1.1250-.1P-.3L-TS-2A	.871 (22.1)	2.000 (50.8)	1.475 (37.5)	1.255 (31.9)		1.389 (35.3)	1.359 (34.5)	1.147 (29.1)	1.187-28 UN-2A
19	1.1870-.1P-.3L-TS-2A	.972 (24.7)	2.094 (53.2)	1.537 (39.0)	1.327 (33.7)		1.450 (36.8)	1.420 (36.1)	1.221 (31.0)	1.250-28 UN-2A
21	1.3125-.1P-.3L-TS-2A	1.084 (27.5)	2.270 (57.7)	1.663 (42.2)	1.452 (36.9)		1.590 (40.4)	1.560 (39.6)	1.350 (34.3)	1.3750-28 UN-2A
23	1.4375-.1P-.3L-TS-2A	1.186 (30.1)	2.440 (62.0)	1.787 (45.4)	1.570 (39.9)		1.705 (43.3)	1.675 (42.5)	1.470 (37.3)	1.500-28 UN-2A

Dimensions in inches (millimeters) and are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com


E-Mail: sales@glenair.com

Series 805 Mighty Mouse Square Flange Cut-Outs			
Shell Size	ØA	B Bsc	ØC Holes
8	.515 (13.08)	.660 (16.76)	.096 (2.4) .091 (2.3)
9	.578 (14.68)	.723 (18.36)	
10	.640 (16.26)	.785 (19.94)	
11	.703 (17.86)	.848 (21.54)	
12	.765 (19.43)	.909 (23.09)	
13	.828 (21.03)	.973 (24.71)	
15	.953 (24.21)	1.058 (26.87)	.130 (3.3) .126 (3.2)
18	1.140 (28.96)	1.255 (31.88)	
19	1.203 (30.56)	1.327 (33.71)	
21	1.328 (33.73)	1.452 (36.88)	
23	1.453 (36.91)	1.570 (39.88)	

Square Flange Mount

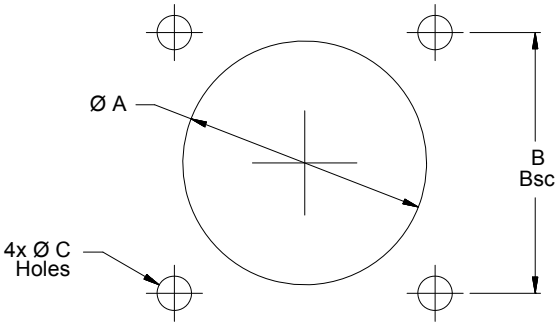

Jam Nut Mount

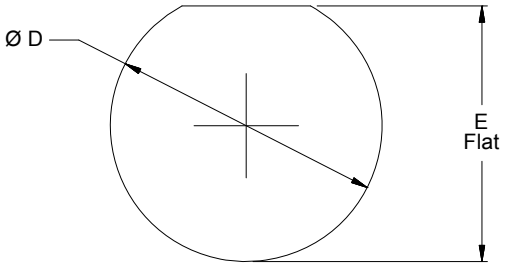

Series 805 Mighty Mouse Jam Nut Cut-Outs		
Shell Size	ØD	E Flat
8	.575 (14.6) .571 (14.5)	.547 (13.9) .543 (13.8)
9	.700 (17.8) .696 (17.7)	.673 (17.1) .669 (17.0)
10	.700 (17.8) .696 (17.7)	.673 (17.1) .669 (17.0)
11	.762 (19.4) .758 (19.3)	.733 (18.6) .729 (18.5)
12	.825 (21.0) .821 (20.9)	.796 (20.2) .792 (20.1)
13	.887 (22.5) .883 (22.4)	.853 (21.7) .849 (21.6)
15	1.012 (25.7) 1.008 (25.6)	.982 (24.9) .978 (24.8)
18	1.200 (30.5) 1.196 (30.4)	1.159 (29.4) 1.155 (29.3)
19	1.262 (32.1) 1.258 (32.0)	1.233 (31.3) 1.229 (31.2)
21	1.387 (35.2) 1.383 (35.1)	1.360 (34.5) 1.356 (34.4)
23	1.512 (38.4) 1.508 (38.3)	1.482 (37.6) 1.478 (37.5)

J


Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Filter Connector
Adapter with Triple-Start ACME Coupling Threads
240-805-AA Ordering Information

Mighty mouse triple-start connector adapter

How To Order								
Sample Part Number	**240-805-**	**AA**	**M**	**8-7**	**PS**	**P**	**A**	**A**
Filter Connector	**240-805** = Series 805 Mighty Mouse Triple-Start							
Shell Style	**AA** = Adapter							
Shell Material/Finish	See Table I							
Insert Arrangement	See pages J-3 – J-7							
Contact Gender	**PS** = Pins, Plug Side **SP** = Sockets, Plug Side (See Note 2)							
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)							
Capacitance	See Table II							
Alternate Key Position	**A**, **B**, **C**, **D**, **E**, **F**, **U** **A** = Normal, **U** = Universal (See page J-2)							

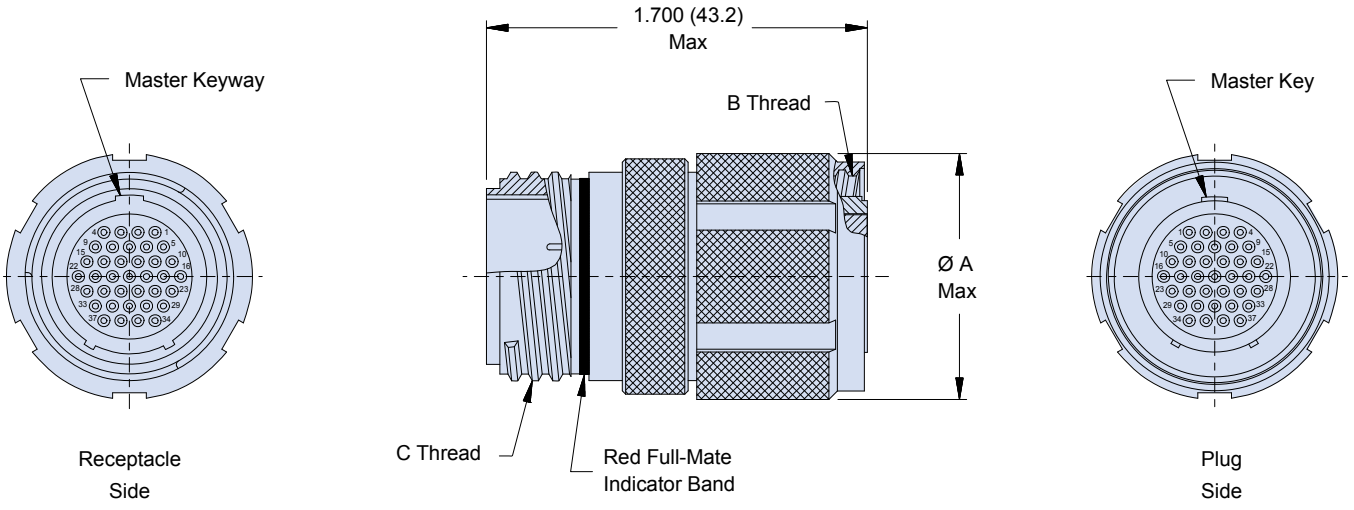

NOTES

1. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.
2. Please consult factory for Pin/Pin and/or Socket/Socket contact arrangements.

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

Table I: Material and Finish		
Sym	Material	Finish Description
M	Aluminum	Electroless Nickel
MT		Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
NF		Cadmium, Olive Drab over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab
ZR		Zinc-Nickel, Black - RoHS
ZL	Stainless Steel	Electro-Deposited Nickel

Table II: Capacitor Array Code Capacitance Range		
Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

Dimensions			
Shell Size	Ø A Max	B Thread	C Thread
8	.870 (22.1)	.5000-.1P-.3L-TS-2B	.5000-.1P-.3L-TS-2A
9	.930 (23.6)	.5625-.1P-.3L-TS-2B	.5625-.1P-.3L-TS-2A
10	1.000 (25.4)	.6250-.1P-.3L-TS-2B	.6250-.1P-.3L-TS-2A
11	1.170 (29.7)	.6875-.1P-.3L-TS-2B	.6875-.1P-.3L-TS-2A
12	1.170 (29.7)	.7500-.1P-.3L-TS-2B	.7500-.1P-.3L-TS-2A
13	1.300 (33.0)	.8125-.1P-.3L-TS-2B	.8125-.1P-.3L-TS-2A
15	1.350 (34.3)	.9375-.1P-.3L-TS-2B	.9375-.1P-.3L-TS-2A
18	1.600 (40.6)	1.1250-.1P-.3L-TS-2B	1.1250-.1P-.3L-TS-2A
19	1.600 (40.6)	1.1875-.1P-.3L-TS-2B	1.1875-.1P-.3L-TS-2A
21	1.750 (44.5)	1.3125-.1P-.3L-TS-2B	1.3125-.1P-.3L-TS-2A
23	1.850 (47.0)	1.4375-.1P-.3L-TS-2B	1.4375-.1P-.3L-TS-2A


Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.


Series 800 Mighty Mouse Filter Connector
UN Mating Threads, Solder Cup, PCB Receptacle
240-800 Ordering Information

Mighty mouse UN mating thread receptacle, square flange or jam nut

How To Order								
Sample Part Number	**240-800-**	**02**	**M**	**6-7**	**P**	**P**	**A**	**N**
Filter Connector	**240-800** = Series 800 Mighty Mouse							
Shell Style	**01** = Square flange receptacle with solder cup contacts and banding platform **02** = Square flange receptacle with PCB contact **07** = Jam nut receptacle with solder cup contacts and banding platform **08** = Jam nut receptacle with PCB contacts s							
Shell Material/Finish	See Table II							
Insert Arrangement	See page J-23							
Contact Gender	**P** = Pin **S** = Socket							
Filter Type	**P** = Pi Circuit **C** = C Circuit (See Note 1)							
Capacitance	See Table III							
Alternate Keyway Position	**X**, **Y**, **Z**, **N** = Normal							

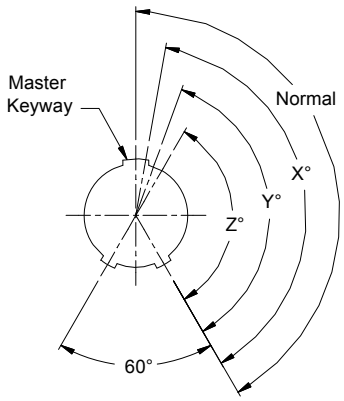

Keyway Positions
(See Table I)
Shell Sizes 5 & 6

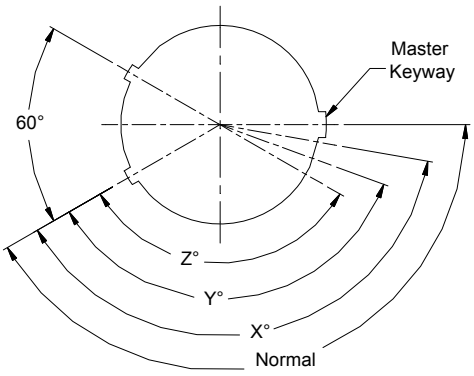

Keyway Positions
(See Table I)
Shell Sizes 7 - 12

Alternate Keyway Positions	
Normal	150°
X	140°
Y	130°
Z	120°

J

Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.


Series 800 Mighty Mouse Filter Connector
UN Mating Threads, Solder Cup, PCB Receptacle
240-800 Dimensions

Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12
5-3	3				
6-1				1	
6-23			3		
6-4	4				
6-6	6				
6-7	7				
7-1					1
7-25			5		
7-10	10				
8-2				2	
8-28			8		
8-13	13				
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
12-2					2
12-3					3
12-7				7	
12-220			20		
12-37	37				
12-200	6				2
12-201	10				2

Material and Finish		
Sym	Material	Finish Description
M	Aluminum	Electroless Nickel
MT		Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
NF		Cadmium, Olive Drab over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab
ZR		Zinc-Nickel, Black - RoHS
ZL	Stainless Steel	Electro-Deposited Nickel

Capacitor Array Code Capacitance Range		
Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

PC Tail Dia	
Contact Size	Ø U
23	.022 (0.56) .018 (0.46)
20	.028 (0.71) .024 (0.61)
16	.042 (1.07) .038 (0.97)
12	.096 (2.44) .092 (2.34)




Recommended
Panel Cut-Out

Dimensions										
Shell Size	A Thread	B Sq.	C Bsc	Ø D	Ø E	Ø G	H Flat	J Flat	Ø L ±.003 (0.05)	M Flat ±.005 (0.13)
5	.3125-28 UN-2A	.527 (13.4)	.363 (9.2)	.680 (17.3)	.365 (9.3)	.541 (13.7)	.500 (12.7)	.285 (7.2)	.297 (7.54)	.322 (8.18)
6	.3750-28 UN-2A	.588 (14.9)	.423 (10.7)	.750 (19.1)	.409 (10.4)	.610 (15.5)	.562 (14.3)	.352 (8.9)	.360 (9.14)	.385 (9.78)
7	.4375-28 UNEF-2A	.650 (16.5)	.483 (12.3)	.830 (21.1)	.500 (12.7)	.670 (17.0)	.635 (16.1)	.411 (10.4)	.426 (10.82)	.447 (11.35)
8	.5000-32 UN-2A	.710 (18.0)	.542 (13.8)	.938 (23.8)	.522 (13.3)	.775 (19.7)	.735 (18.7)	.473 (12.0)	.481 (12.22)	.510 (12.95)
9	.5625-32 UN-2A	.938 (23.8)	.719 (18.3)	1.250 (31.8)	.610 (15.5)	.875 (22.2)	.806 (20.5)	.530 (13.5)	.539 (13.69)	.572 (14.53)
10	.6250-32 UN-2A	.938 (23.8)	.719 (18.3)	1.250 (31.8)	.652 (16.6)	.980 (24.9)	.940 (23.9)	.604 (15.3)	.612 (15.54)	.635 (16.13)
12	.7500-28 UN-2A	1.031 (26.2)	.812 (20.6)	1.375 (34.9)	.746 (18.9)	1.062 (27.0)	.986 (25.0)	.712 (18.1)	.719 (18.26)	.760 (19.30)


Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.


Series 800 Mighty Mouse Filter Receptacle Connector
UN Mating Threads, Square Flange
240-800 Dimensions

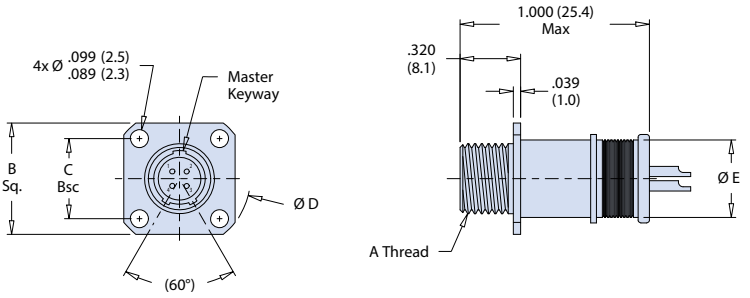


-01 Solder Cup
Sq. Flange Mount
Shell Sizes 5 & 6

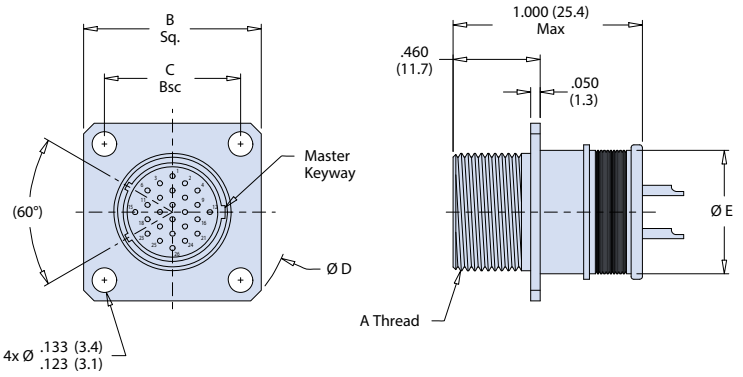

-01 Solder Cup
Sq. Flange Mount
Shell Sizes 7 - 12

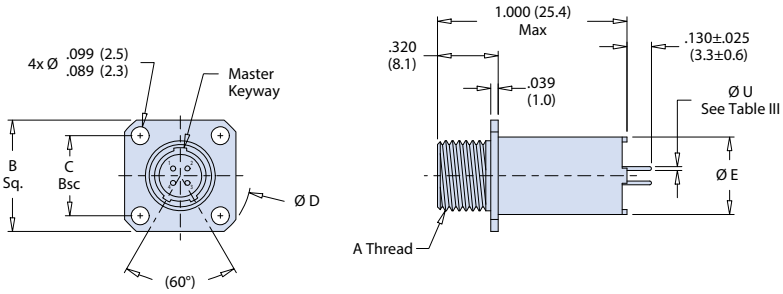

-02 PC Tail
Sq. Flange Mount
Shell Sizes 5 & 6

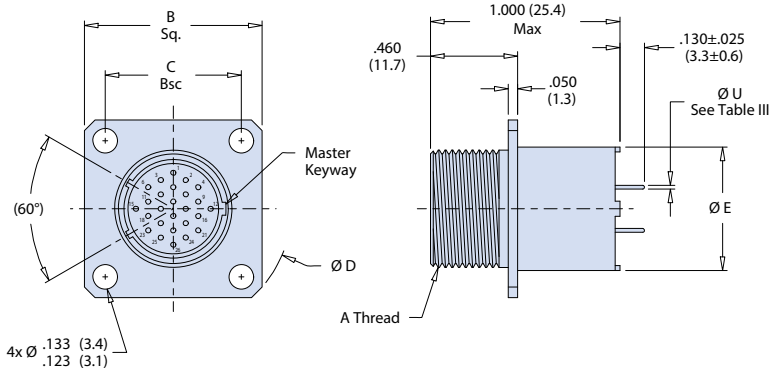


-02 PC Tail
Sq. Flange Mount
Shell Sizes 7 - 12

J


Dimensions in inches (millimeters) and are subject to change without notice.

© 2014 Glenair, Inc.

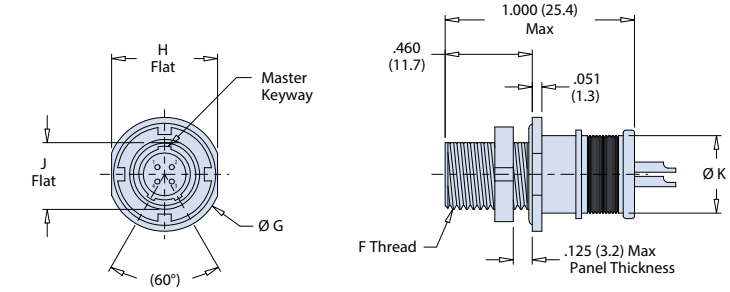


-07 Solder Cup

Jam Nut Mount
Shell Sizes 5 & 6

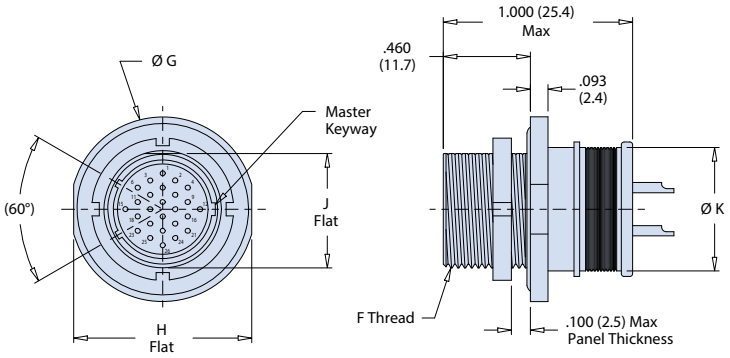


-07 Solder Cup

Jam Nut Mount
Shell Sizes 7 - 12

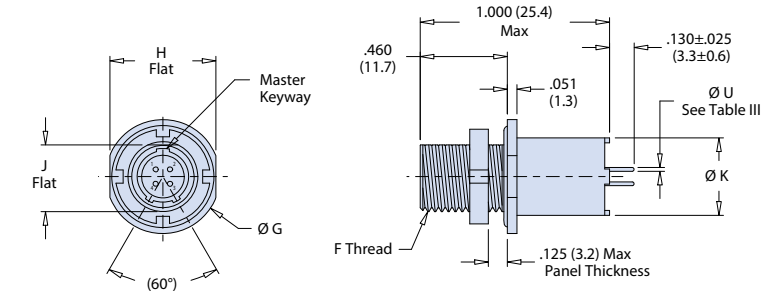

-08 PC Tail

Jam Nut Mount
Shell Sizes 5 & 6

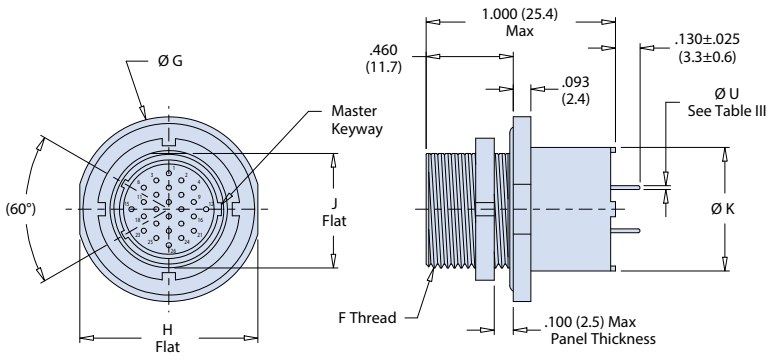

-08 PC Tail

Jam Nut Mount
Shell Sizes 7 - 12

J

Dimensions in inches (millimeters) and are subject to change without notice.

SIZE #8
CONTACTS

EL OCHITO™

The ultimate Ethernet contact—100% drop-in solution for size #8 cavity Mighty Mouse insert arrangements



The "Little Eight": Eight miniaturized contacts in a size #8 shielded module—1G/10G Ethernet ready, with dramatic size and weight reduction when compared to Quadrax

- **One full Ethernet channel per size #8 cavity**
- **100% drop-in solution to installed connectors—no redesign or reinstallation of interfaces**
- **Full inter- and intra-pair shielding—all cable shielding virtues preserved through contact cavity**
- **Dramatic cable and connector weight reduction compared to Quadrax links**
- **Ideal high-speed copper interface for military and commercial aerospace high-datarate applications**

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

New Mighty Mouse Layouts with Size #8 Quadrax, Twinax, Coax or Power Contacts

Table of Contents and Introduction

PRODUCT SELECTION GUIDE

K



Series 801 Plug and Receptacle Connectors — Page K-6
Rugged double-start ACME mating threads.



Series 805 Plug and Receptacle Connectors — Page K-13
Rugged Triple-Start ACME mating threads, EMI ground spring, ratchet anti-decoupling mechanism.



#8 Power Contacts — Page K-19
Power contacts are supplied with connectors or ordered separately.



75 Ohm Coax Contacts for High-Frequency Video — Page K-21
DC - 4GHz. For RS170 and SMPTE 292M video cables.



50 Ohm Coax Contacts for LLSB-200 Low Loss Cable — Page K-23
DC - 2.5GHz.



Quadrax Contacts for 100BASE-T Ethernet — Page K-25
Size 8 multi-pin contacts with four signal pins and an outer contact body. Used for ARINC 664 100BASE-T Ethernet




Concentric Twinax Contacts for MIL-STD-1553 Databus — Page K-27



100 Ohm Differential Twinax Contacts for Controlled Impedance Shielded Pair Cable — Page K-29



Coax Contacts for Rg180 Cable — Page K-31



100 Ohm El Ochito® Contacts for 10G Ethernet — Page K-33

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

General Information



Series 805 Plug
with Quadrax Contacts



Series 801 Plug
with #8 Power Contacts

MIGHTY MOUSE

- Size #8 contacts
- 1, 2, 3, 4 or 5 contacts
- Snap-in, rear-release
- Quadrax, Twinax, Coax, El Ochito® or power contacts
- Lightweight, low profile
- Comprehensive range of assembly tooling

Now Available, Mighty Mouse Connectors with Industry—Standard size 8 Quadrax, Coax, Twinax, El Ochito® and Power Contacts

New Mighty Mouse connectors have size #8 snap-in, rear-release contacts for power and data applications. Available with 1, 2, 3, 4 or 5 contacts, these connectors meet the need for a low-profile, lightweight connector compatible with size #8 twinax, quadrax and Coax contacts used in MIL-DTL-38999 connectors. Quadrax contacts are 100 ohm impedance for Ethernet networks. Concentric Twinax contacts accept M17/176-000 cable for MIL-STD-1553 databus. 75 ohm coaxial contacts accept aerospace-grade SMPTE 424M high bit rate digital video cable. Power contacts accept size #8 AWG wire for up to 46 amps continuous duty.

RoHS COMPLIANT




Series 80 Mighty Mouse Connectors, Cordsets and Accessories

Save weight and space with the Glenair Mighty Mouse. The Series 80 product family includes 68 contact arrangements and a wide variety of styles to fit every application. Widely used in aerospace, tactical and harsh environment equipment, the Mighty Mouse connector is unequaled for versatility and availability.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

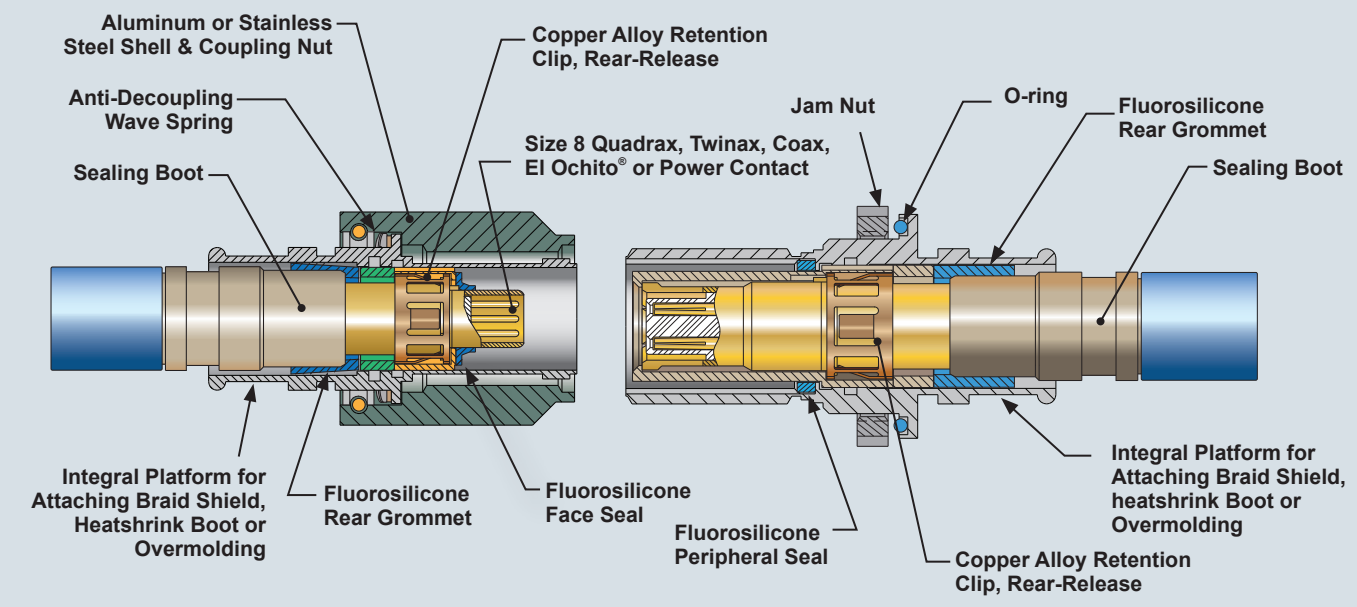

About Keyed Contacts

Mighty Mouse connectors with size #8 cavities have an alignment slot inside the contact cavity. Quadrax, differential twinax and El Ochito® contacts have an alignment key to properly orient the contact.

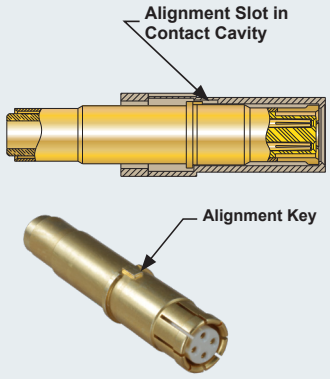

Connector Specifications	
Current Rating	#8 power contacts 46 Amps. For coax, twinax, quadrax, and El Ochito® contacts refer to following pages
Dielectric Withstanding Voltage	1800 VAC Sea Level
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum from 100MHz to 1000MHz.
See Series 80 Mighty Mouse catalog for complete performance specs.	

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulator	High-grade rigid dielectric
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber
See Series 80 Mighty Mouse catalog for complete material and finish specs.	

Size #8 Metal Inserts			
No of Contacts	Series 800, 802, 803, 804	801	805
1	8G1	8G1	10G1
2	14G2	16G2	18G2
3	15G3	17G3	19G3
4	19G4	19G4	21H4
5	21G5	21G5	23G5

Rev. 11/14/17

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Introducing El Ochito™ "The Little Eight"
New Technology Overview




Series 801 Mighty Mouse cordset with El Ochito™

Exploded View


- El Ochito™ ("The Little Eight"): Eight miniaturized contacts in a size #8 shielded module
- With low-insertion-force Stinger contact technology
- One Full Ethernet channel per cavity
- 100% drop-in solution to installed connectors—no redesign or reinstallation of interfaces
- Full inter– and intra–pair shielding—all cable shielding virtues preserved through contact cavity
- Dramatic cable weight reduction compared to Quadrax links
- Ideal high-speed copper interface for IFE video and other high datarate applications

Dramatic size and weight reduction in 1G/10G Ethernet networks, available now with the Series 80 Mighty Mouse El Ochito™



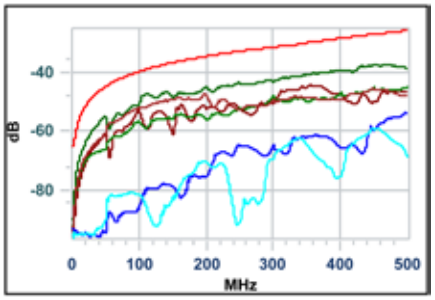

Near End Crosstalk · Cat 6a · 500 MHz

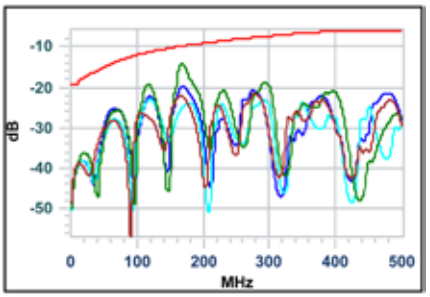

Return Loss · Cat 6a · 500 MHz

El Ochito™ is a drop-in solution for Series 80 Mighty Mouse, as well as EN4165, and ARINC connectors





How-To-Order El Ochito™ Contacts	
Size 8 Ochito 26-AWG Crimp Pin	Size 8 Ochito 26-AWG Crimp Socket
	
858-003-01 858-003-01F (with optional grommet follower)	858-004-01 858-004-01F (with optional grommet follower)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.




GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com



Series 801 and 805 Mighty Mouse size 8 contact arrangements

Mighty Mouse #8 Contact Arrangements					
Mating Face					
Series 801	8-1	16-2	17-3	19-4	21-5
Series 805	10-1	18-2	19-3	21-4	23-5

Series 801 and 805 Mighty Mouse size 8 combo contact arrangements

Combo Contact Arrangements		
Shell Size Contact Arr.	No. of Contacts	
	#23	8
Series 801		
16-208	32	1
17-205	40	1
19-201	44	2
19-202	12	4
21-200	28	4
Series 805		
18-208	32	1
19-205	40	1
21-201	44	2
21-202	12	4
23-200	28	4

Mighty Mouse #8 Combo Contact Arrangements			
Mating Face			
Series 801	16-208	17-205	19-201
Series 805	18-208	19-205	21-201

Mighty Mouse #8 Combo Contact Arrangements		
Mating Face		
Series 801	19-202	21-200
Series 805	21-202	23-200

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Plug Connector with Size #8 Quadrax, Twinax, Coax or Power Contacts

801-007 and 801-008 Ordering Information



Series 801 Plug Connectors with Size #8 Contacts

New Mighty Mouse contact arrangements accept size #8 contacts for power, Ethernet or high frequency coax applications. Series 801 Mighty Mouse plugs feature damage-resistant double-start ACME mating threads. Available with anti-decoupling feature or vibration-resistant ratchet mechanism, these plugs are supplied with power contacts (contact types P or S). Or, specify contact types A or B for connectors supplied less contacts for use with quadrax, twinax or coax contacts purchased separately.

Contacts are crimp type and are snap-in, rear-release with plastic extraction tool sold separately. Aluminum or stainless steel shell, thermoplastic insulators, fluorosilicone rubber seals.

How To Order						
Sample Part Number	**801-007**	**-16**	**M**	**8-1**	**P**	**A**
Series (See Table I)	**801-007** = Plug with Banding Platform **801-008** = Plug with Accessory Thread					
Shell Style		**-16** = Plug with Anti-Decoupling Spring **-26** = Self-Locking Plug with Ratchet Mechanism				
Shell Material and Finish			**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant			
Shell Size - Insert Arrangement				**8-1**, **16-2**, **16-208**, **17-3**, **17-205**, **19-4**, **19-201**, **19-202**, **21-5**, **21-200** (See page K-5)		
Contact Type					**Connector supplied with size #8 power contacts** **P** = Pin with #8 Power Contacts **S** = Socket with #8 Power Contacts	**Connector supplied without contacts (Order quadrax, twinax or coax contacts separately.)** **A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




	
801-007 Plug with Banding Platform	**801-008** Plug with Accessory Thread

Table II: Shell Key Positions


Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Plug with anti-decoupling or self-locking mechanism - shell style 16/26

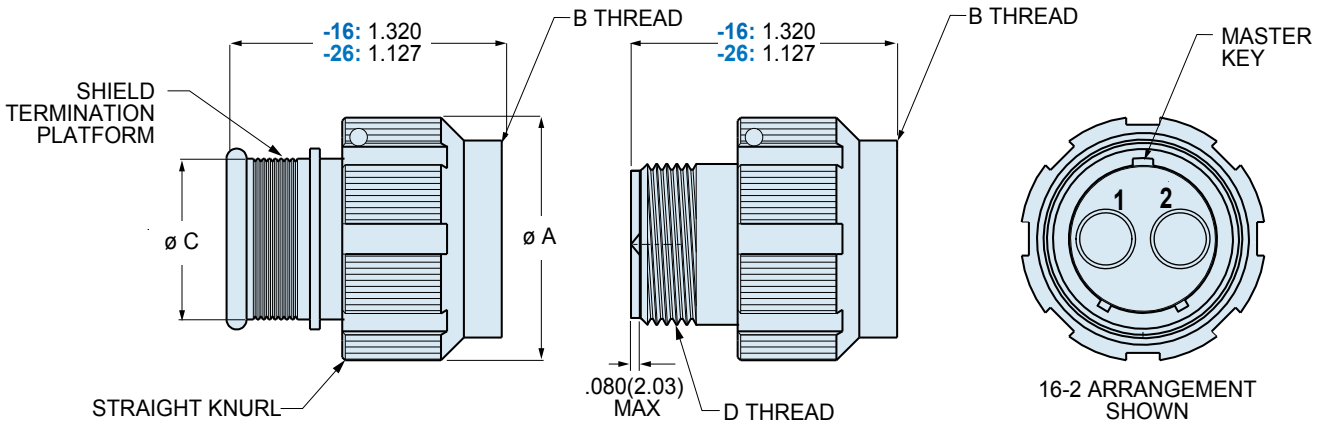

Integral Band Platform
801-007

Accessory Thread
801-008


Dimensions								
Shell Size.	Style 16 Ø A		Style 26 Ø A		B Thread	Ø C		D Thread UNEF-2A
	In.	mm.	In.	mm.		In.	mm.	
8	.750	19.05	.830	21.59	.5000-.05P-.1L-2B	.445	11.30	.5000-28
16	1.240	31.50	1.340	34.04	1.000-.1P-.2L-2B	.805	20.45	.9375-20
17	1.300	33.02	1.400	35.56	1.062-.1P-.2L-2B	.850	21.59	.9375-20
19	1.400	35.56	1.500	38.10	1.1875-.1P-.2L-DS-2B	1.003	25.48	1.0625-18
21	1.550	39.37	1.650	41.91	1.3125-.1P-.2L-2B	1.110	28.19	1.1875-18

Sealing Boot

Sealing boot provides wire seal. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix added on contact part number specifies contact supplied with sealing boot P/N 859-042-03.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.170 - .205	4.3 - 5.2	859-042-03



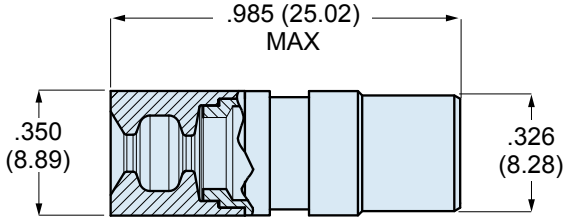

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Receptacle Connector with Size #8 Quadrax, Twinax, Coax or Power Contacts

801-009 and 801-010 Ordering Information



Series 801 Receptacle Connectors with Size #8 Contacts

New Mighty Mouse contact arrangements accept size #8 contacts for power, Ethernet or high frequency coax applications. Series 801 Mighty Mouse receptacles feature damage-resistant double-start ACME mating threads. Available for rear panel jam nut mounting, in-line or square flange styles, these receptacles are supplied with power contacts (contact types P or S). Or, specify contact types A or B for connectors supplied less power contacts for use with quadrax, twinax or coax contacts purchased separately. Contacts are crimp type and are snap-in, rear-release with plastic extraction tool sold separately. Aluminum or stainless steel shell, thermoplastic insulators, fluorosilicone rubber seals.

How To Order						
Sample Part Number	**801-010**	**-02**	**Z1**	**17-3**	**P**	**A**
Series (See Table I)	**801-009** = Receptacle with Banding Platform **801-010** = Receptacle with Accessory Thread					
Shell Style	**-01** = In-Line For Free-Hanging Cables **-02** = Square Flange For Front or Rear Mounting **-12** = Square Flange For Rear Mounting with Non-Locking Clinch Nuts **-22** = Square Flange For Rear Mounting with Locking Clinch Nuts **-07** = Jam Nut For Rear Panel Mounting					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	**8-1**, **16-208**, **16-2**, **17-3**, **17-205**, **19-4**, **21-5**, **19-201**, **19-202**, **21-200** (See page K-5)					
Contact Type	**Connector supplied with #8 power contacts** **P** = Pin with #8 Power Contacts **A** = Pin Connector, Less Contacts **Connector supplied without contacts (Order quadrax, twinax or coax contacts separately.)** **S** = Socket with #8 AWG Power Contacts **B** = Socket Connector, Less Contacts					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




	
801-009 Receptacle with Banding Platform	**801-010** Receptacle with Accessory Thread

Table II: Shell Key Positions


Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In-line cable receptacle with band platform or accessory thread

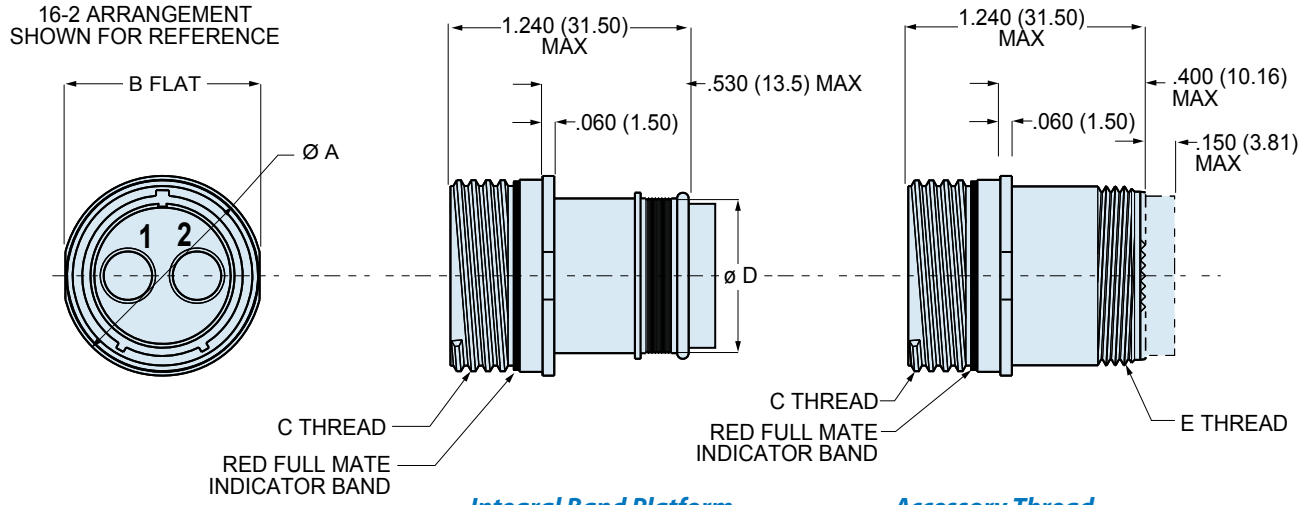

Integral Band Platform
801-009-01

Accessory Thread
801-010-01


Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread UNEF-2A
	In.	mm.	In.	mm.		In.	mm.	
8	.540	13.72	.510	12.95	.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28
16	1.040	26.42	1.010	25.65	1.000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.110	28.19	1.070	27.18	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
19	1.243	31.57	1.191	30.25	1.1875-.1P-.2L-DS-2A	.956	24.28	1.0625-18
21	1.405	35.69	1.385	35.18	1.3125-.1p-.2l-DS-2a	1.110	28.19	1.1875-18

Sealing Boot

Sealing boot provides wire seal. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix added on contact part number specifies contact supplied with sealing boot P/N 859-042-03.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.170 - .205	4.3 - 5.2	859-042-03



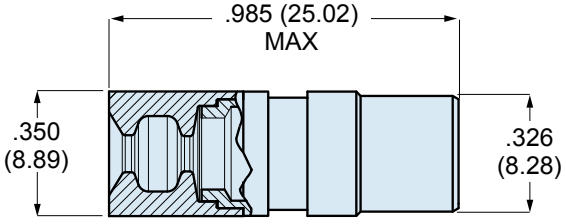


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Square Flange Mighty Mouse Receptacle with Size #8 Quadrax, Twinax, Coax or Power Contacts

801-009 and 801-010 - Shell Style -02 Dimensions

Square flange receptacle with band platform or accessory thread

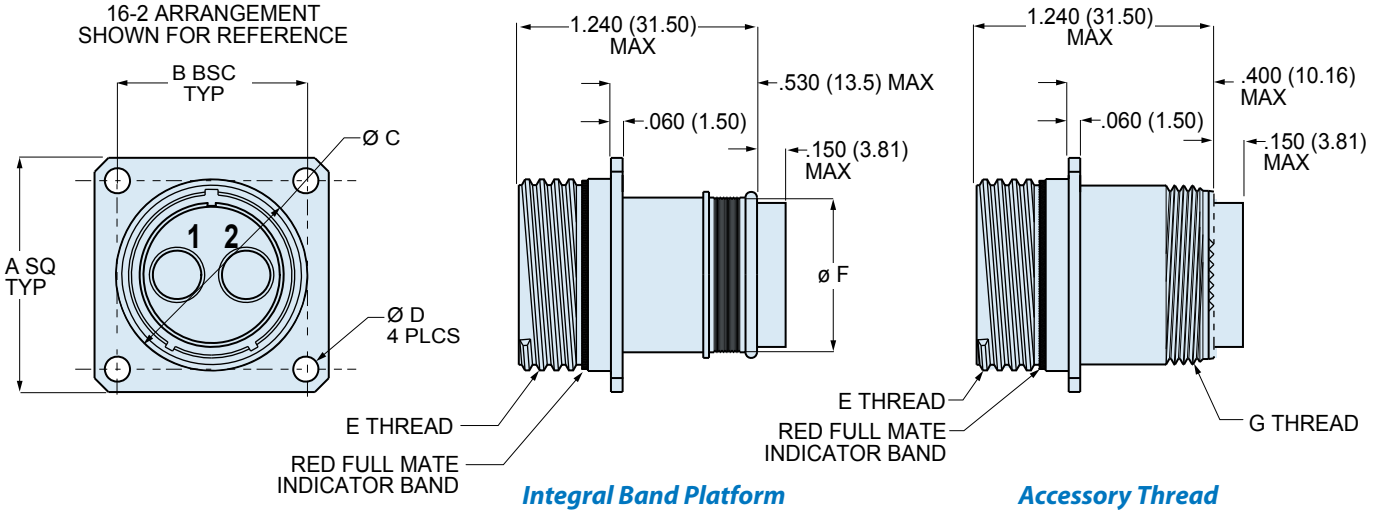


Integral Band Platform
801-009-02

Accessory Thread
801-010-02

Dimensions												
Shell Size	A		B BSC		Ø C		Ø D		E Thread	Ø F		G Thread UNEF-2A
							In.	mm.				
	In.	mm.	In.	mm.	In.	mm.	+.003	+.08		In.	mm.	
8	.712	18.08	.545	13.84	.938	23.83	.093	2.36	.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28
16	1.219	30.96	.981	24.92	1.625	41.28	.128	3.25	1.000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.280	32.51	1.060	26.92	1.700	43.18	.128	3.25	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
19	1.432	36.37	1.191	30.25	1.900	48.26	.128	3.25	1.1875-.1P-.2L-DS-2A	.956	24.28	1.0625-18
21	1.565	36.32	1.322	30.61	2.100	49.23	.128	3.25	1.3125-.1p-.2l-DS-2a	1.110	28.19	1.1875-18


Square Flange Panel Cutout						
Shell Size	Ø A		B BSC		Ø C	
	In	mm.	In	mm.	In	mm.
8	.515	13.08	.545	13.84	.093	2.36
16	1.015	25.78	.981	24.92	.128	3.25
17	1.078	27.38	1.060	26.92	.128	3.25
19	1.203	30.56	1.191	30.25	.128	3.25
21	1.325	33.66	1.205	30.61	.128	3.25



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam nut rear panel mount receptacle with band platform or accessory thread

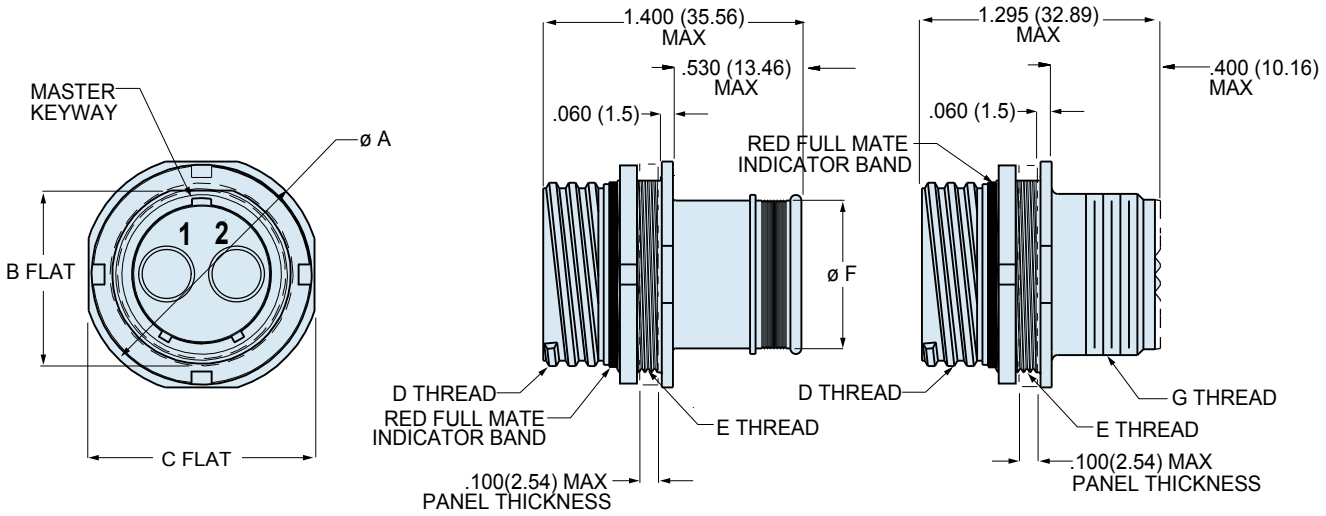


Integral Band Platform
801-009-07

Accessory Thread
801-010-07

Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread UN-2A	Ø F		G Thread UNEF-2A
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
8	.755	19.77	.536	13.61	.723	18.36	.5000-.05P-.1L-DS-2A	.5625-32	.445	11.30	.5000-28
16	1.264	32.11	1.022	25.96	1.230	31.24	1.000-.1P-.2L-DS-2A	1.0625-20	.805	20.45	.9375-20
17	1.325	33.66	1.096	27.84	1.290	32.77	1.0625-.1P-.2L-DS-2A	1.125-28	.850	21.59	.9375-20
19	1.450	36.83	1.225	31.12	1.415	35.94	1.1875-.1P-.2L-DS-2A	1.250-28	.956	24.28	1.0625-18
21	1.625	41.28	1.345	34.16	1.577	40.06	1.3125-.1p-.2l-DS-2a	1.375-28	1.110	28.19	1.1875-18

Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
8	.542	13.77	.573	14.55
16	1.028	26.11	1.075	27.31
17	1.102	27.99	1.135	28.83
19	1.233	31.32	1.260	32.00
21	1.354	34.39	1.385	35.18


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Square Flange Mighty Mouse Receptacle with Size #8 Quadrax, Twinax, Coax or Power Contacts

801-009 and 801-010 - Shell Style -12 and -22 Dimensions


Square flange rear panel mount receptacle with band platform or accessory thread

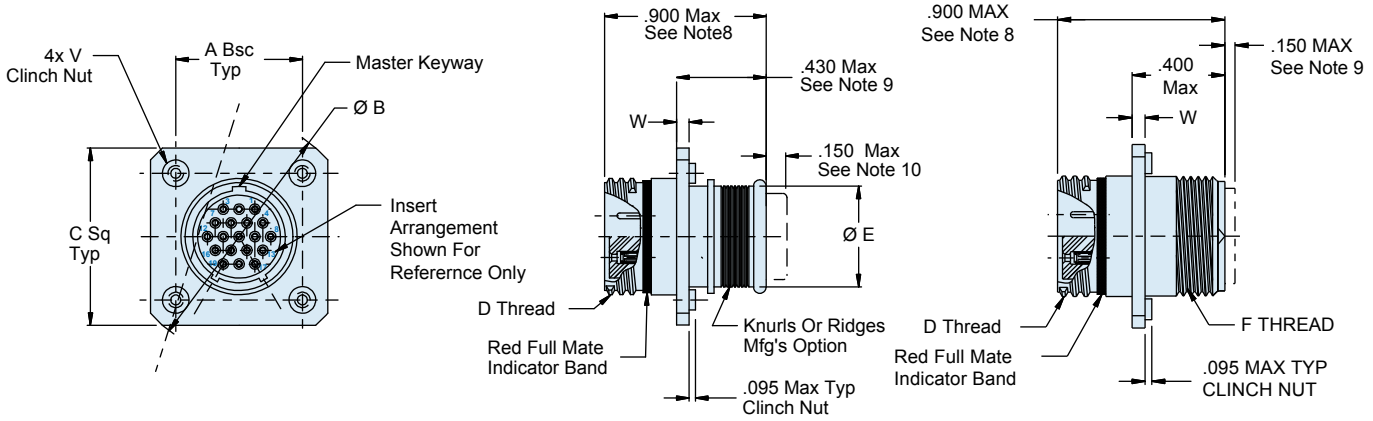

Integral Band Platform
801-009-12

Accessory Thread
801-010-12

Dimensions													
Shell Size	A Bsc		ØB		C Sq.		D Thread	Ø E		F Thread	V Clinch Nuts	W	
	In.	mm.	In.	mm.	In.	mm.		In.	mm.			In.	mm.
8	0.545	13.84	1.032	26.21	0.805	20.45	.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28 UNEF-2A	2-56	.030	.76
16	0.981	24.92	1.708	43.38	1.301	33.05	1.0000-.05P-.1L-DS-2A	.805	20.45	.9375-28 UNEF-2A	4-40	.060	1.52
17	1.060	26.92	1.822	46.28	1.382	35.10	1.0625-.05P-.1L-DS-2A	.850	21.59	.9375-28 UNEF-2A			
19	1.191	30.25	2.006	50.95	1.511	38.38	1.1875-.05P-.1L-DS-2A	1.003	25.48	1.0625-28 UNEF-2A			
21	1.322	33.58	2.190	55.63	1.642	41.71	1.3125-.05P-.1L-DS-2A	1.110	28.19	1.1875-28 UNEF-2A			

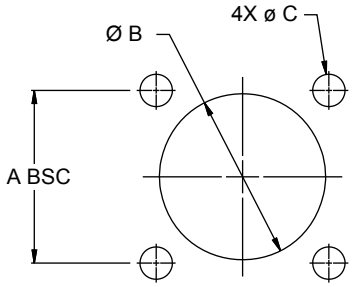Square Flange Panel Cutout							
Shell Size	A Bsc		ØB		C Sq.		
	In.	mm.	In.	mm.	In.	mm.	
8	.545	13.84	.515	13.08	.096 .091	2.44 2.31	
16	.981	24.92	1.015	25.78	.130 .126	3.30 3.20	
17	1.060	26.92	1.078	27.38			
19	1.191	30.25	1.203	30.56			
21	1.322	33.58	1.328	33.73			

-02 Flange
-12 & 22 Flange

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Size #8 Connector Plug with Quadrax, Twinax, Coax or Power Contacts

805-001 and 805-002 - Shell Style -16 Ordering Information




Series 805 Plug Connectors with Size #8 Contacts


Series 805 Mighty Mouse plugs feature damage-resistant triple start ACME mating threads, anti-decoupling ratchet and ground spring for EMI protection. New Mighty Mouse contact arrangements accept size #8 contacts for power, Ethernet or high frequency coax applications. Available with integral band platform or accessory attachment threads, these plugs are supplied with power contacts for AWG #8 wire (contact types P or S). Or, specify contact types A or B for connectors supplied less power contacts for use with quadrax, twinax or coax contacts purchased separately. Contacts are crimp type and are snap-in, rear-release with plastic extraction tool sold separately. Aluminum or stainless steel shell, thermoplastic insulators, fluorosilicone rubber seals.

How To Order						
Sample Part Number	**805-001**	**-16**	**M**	**19-205**	**P**	**A**
Series (See Table I)	**805-001** = Plug with Banding Platform **805-002** = Plug with Rear Accessory Thread					
Shell Style	**-16** = Plug with Anti-Decoupling Ratchet					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement (See Table II)	**10-1**, **18-2**, **19-3**, **21-4**, **23-5**, **18-208**, **19-205**, **21-201**, **21-202**, **23-200** (See page K-5)					
Contact Type	**Connector supplied with size #8 contacts** **P** = Pin with #8 Power Contacts **S** = Socket with #8 AWG Power Contacts			**Connector supplied without contacts (Order quadrax, twinax or coax contacts separately.)** **A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts		
Shell Key Positions (See Shell Key Position Table)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




805-001
Plug with Banding Platform



805-002
Plug with Accessory Thread

Table II: Shell Key Positions

Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Size #8 Connector Plug with Quadrax, Twinax, Coax or Power Contacts

805-001 and 805-002 - Shell Style -16 Dimensions

Plug with band platform or accessory thread - shell style 16

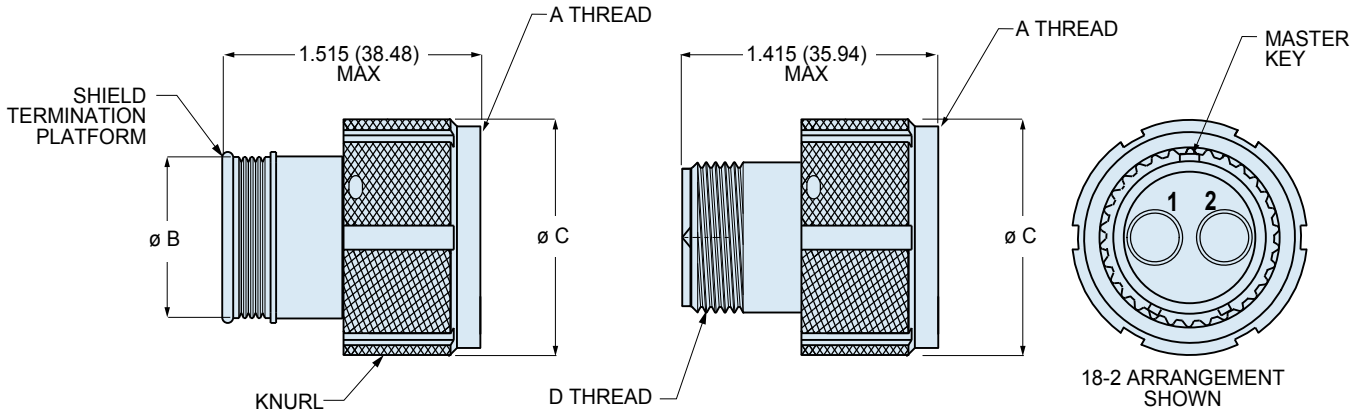

Integral Band Platform
805-001-16


Accessory Thread
805-002-16

Dimensions						
Shell Size	A Threads	Ø B		Ø C		D Threads Accessory
		In.	mm.	In.	mm.	
10-1	.6250-.1P-.3L-TS-2B	.472	11.99	.827	21.01	.5000-28 UNEF-2A
18-2	1.1250-.1P-.3L-TS-2B	.884	22.45	1.287	32.69	.9375-20 UNEF-2A
19-3	1.1875-.1P-.3L-TS-2B	.884	22.45	1.311	33.30	.9375-20 UNEF-2A
21-4	1.3125-.1P-.3L-TS-2B	1.003	25.48	1.448	36.78	1.0625-18 UNEF-2A
23-5	1.4375-.1P-.3L-TS-2B	1.135	28.83	1.562	39.67	1.1875-18 UNEF-2A

Sealing Boot

Sealing boot provides wire seal. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix added on contact part number specifies contact supplied with sealing boot P/N 859-042-03.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.170 - .205	4.3 - 5.2	859-042-03

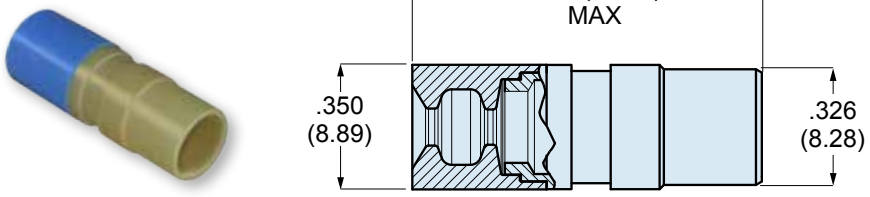

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Size #8 Connector Receptacle with Quadrax, Twinax, Coax or Power Contacts

Series 805-003 and 805-004 Ordering Information



Series 805 Receptacles with Size #8 Contacts

New Mighty Mouse contact arrangements accept size #8 contacts for power, Ethernet or high frequency coax applications. Series 805 Mighty Mouse receptacles feature damage-resistant triple start ACME mating threads. Available with integral band platform or accessory attachment threads, these plugs are supplied with power contacts for AWG #8 wire (contact types P or S). Or, specify contact types A or B for connectors supplied less power contacts for use with quadrax, twinax or coax contacts purchased separately. Contacts are crimp type and are snap-in, rear-release with plastic extraction tool sold separately. Aluminum or stainless steel shell, thermoplastic insulators, fluorosilicone rubber seals.

How To Order						
Sample Part Number	**805-003**	**-01**	**M**	**19-3**	**S**	**A**
Series (See Table I)	**805-003** = Receptacle with Banding Platform **805-004** = Receptacle with Rear Accessory Thread					
Shell Style	**-01** = In-Line For Free-Hanging Cables **-02** = Square Flange For Front or Rear Mounting **-12** = Square Flange For Rear Mounting with Non-Locking Clinch Nuts **-22** = Square Flange For Rear Mounting with Locking Clinch Nuts **-07** = Jam Nut For Rear Panel Mounting					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement (See Table II)	**10-1**, **18-2**, **19-3**, **21-4**, **23-5**, **18-208**, **19-205**, **21-201**, **21-202**, **23-200** (See page K-5)					
Contact Type	**Connector supplied with size #8 contacts** **P** = Pin with #8 Power Contacts **S** = Socket with #8 AWG Power Contacts			**Connector supplied without contacts (Order quadrax, twinax or coax contacts separately.)** **A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts		
Shell Key Position (See Shell Key Position Table)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




	
805-003 Receptacle with Banding Platform	**805-004** Receptacle with Accessory Thread

Table II: Shell Key Positions

Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Size #8 Connector Receptacle with Quadrax, Twinax, Coax or Power Contacts

Series 805-003 and 805-004 - Style 01 Dimensions

In-line receptacle with band platform or accessory thread

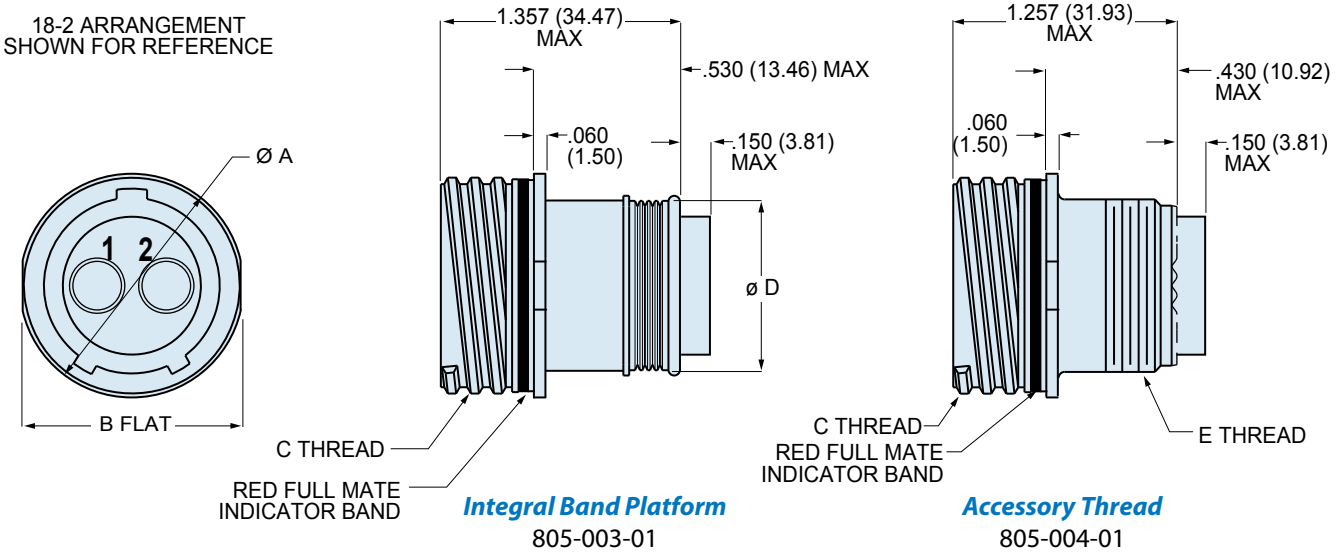

Integral Band Platform
805-003-01


Accessory Thread
805-004-01

Dimensions								
Shell Size	Ø A		B Flat		C Threads	Ø D		E Threads
	In.	mm.	In.	mm.		In.	mm.	
10	.668	16.96	.638	16.21	.6250-.1P-.3L-TS-2A	.472	12.01	.5000-28 UNEF-2A
18	1.165	29.59	1.135	28.83	1.1250-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
19	1.235	31.37	1.205	30.61	1.1875-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
21	1.360	34.54	1.330	33.78	1.3125-.1P-.3L-TS-2A	1.003	25.48	1.0625-18 UNEF-2A
23	1.485	37.72	1.455	36.96	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.1875-18 UNEF-2A

Sealing Boot

Sealing boot provides wire seal. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity."F" suffix added on contact part number specifies contact supplied with sealing boot P/N 859-042-03.


Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.170 - .205	4.3 - 5.2	859-042-03

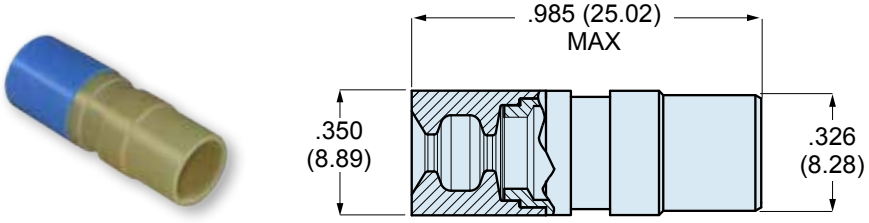

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Square flange front or rear mount receptacle with band platform or accessory thread

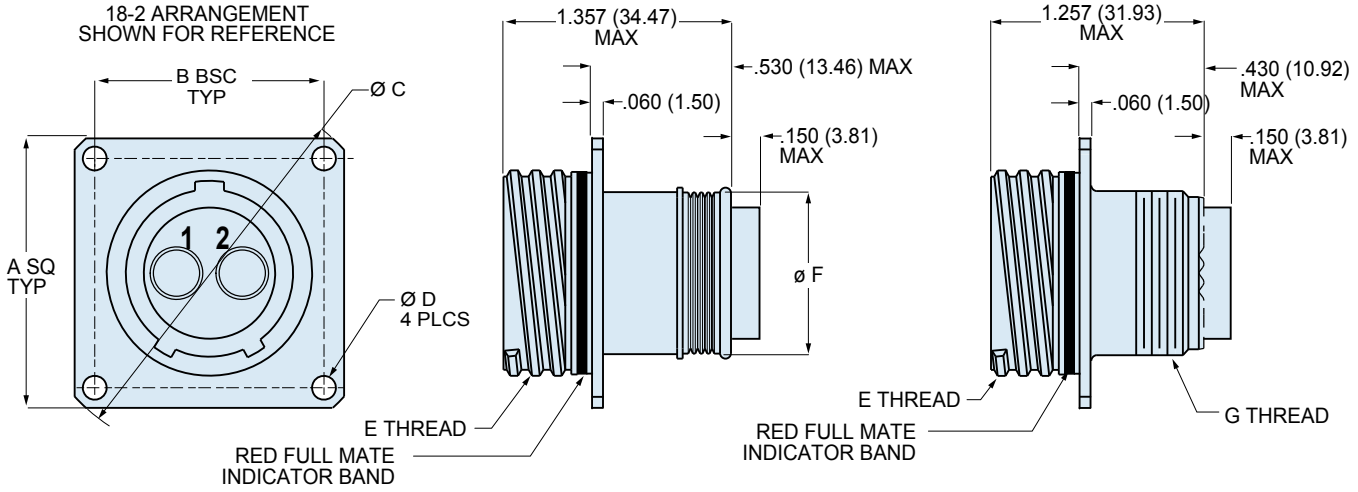


Integral Band Platform
805-003-02

Accessory Thread
805-004-02

Dimensions												
Shell Size	A Sq		B Bsc		Ø C		Ø D		E Threads	Ø F		G Threads
							In.	mm.				
	In.	mm.	In.	mm.	In.	mm.	±.003	±.08		In.	mm.	
10	.975	24.77	.785	19.94	1.330	33.78	.094	2.39	.6250-.1P-.3L-TS-2A	.472	12.01	.5000-28 UNEF-2A
18	1.475	37.47	1.255	31.88	2.000	50.80	.128	3.25	1.1250-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
19	1.537	71.06	1.327	33.71	2.094	53.19	.128	3.25	1.1875-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
21	1.663	42.24	1.452	36.88	2.270	57.66	.128	3.25	1.3125-.1P-.3L-TS-2A	1.003	25.48	1.0625-18 UNEF-2A
23	1.787	45.39	1.570	39.88	2.440	61.98	.128	3.25	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.1875-18 UNEF-2A

Square Flange Panel Cutout						
Shell Size	Ø A		B Bsc		Ø C	
	In	mm.	In	mm.	In	mm.
10	.640	16.26	.785	19.94	.093	2.36
18	1.140	28.96	1.255	31.88	.128	3.25
19	1.203	30.56	1.327	33.71	.128	3.25
21	1.328	33.73	1.452	36.88	.128	3.25
23	1.453	36.91	1.570	39.88	.128	3.25




Dimensions in Inches (millimeters) are subject to change without notice.

Series 805 Mighty Mouse Size #8 Connector Receptacle with Quadrax, Twinax, Coax or Power Contacts

Series 805-003 and 805-004 - Style 07 Dimensions

Jam nut rear panel mount receptacle with band platform or accessory thread

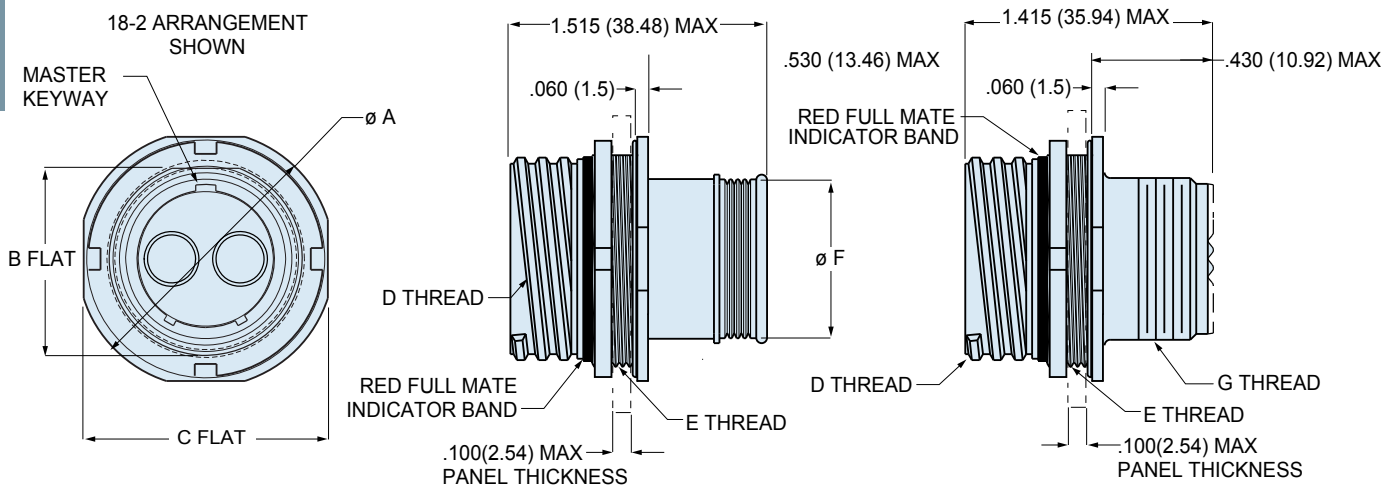


Integral Band Platform
805-003-07

Accessory Thread
805-004-07

Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Threads	E Threads	Ø F		G Threads
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
10	.880	22.35	.661	16.79	.850	21.59	.6250-.1P-.3L-TS-2A	.6875-28 UN-2A	.472	11.99	.5000-28 UNEF-2A
18	1.389	35.28	1.147	29.13	1.359	34.52	1.1250-.1P-.3L-TS-2A	1.1875-28 UN-2A	.884	22.45	.9375-20 UNEF-2A
19	1.450	36.83	1.221	31.01	1.420	36.07	1.1875-.1P-.3L-TS-2A	1.2500-28 UN-2A	.884	22.45	.9375-20 UNEF-2A
21	1.580	40.13	1.350	34.29	1.550	39.37	1.3125-.1P-.3L-TS-2A	1.3750-28 UN-2A	1.003	25.48	1.0625-18 UNEF-2A
23	1.705	43.31	1.470	37.34	1.675	42.55	1.4375-.1P-.3L-TS-2A	1.500-28 UN-2A	1.134	28.80	1.1875-18 UNEF-2A

Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
10	.671	17.04	.698	17.73
18	1.157	29.39	1.198	30.43
19	1.231	31.27	1.260	32.00
21	1.358	34.49	1.385	35.18
23	1.480	37.59	1.510	38.35

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 power contacts



Power contacts accept #8 AWG wire. These contacts fit Mighty Mouse connectors with size 8 cavities. Supplied with sealing boot. 46 amp current rating. Gold-plated copper alloy. Socket contact has stainless steel hood. Conforms to SAE AS39029 requirements. Terminate with pneumatic crimp tool shown on next page.

Figure	Contact Type	Conductor Size	Part Number Contact Only	Part Number Contact and Sealing Boot
Fig. 1	Pin	#8	850-014	850-014F
Fig. 2	Socket	#8	850-013	850-013F

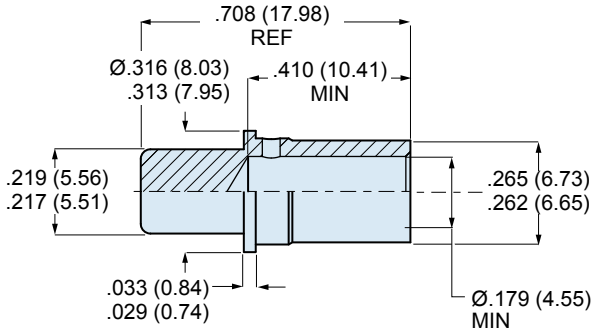


Fig. 1
Pin Contact 850-014

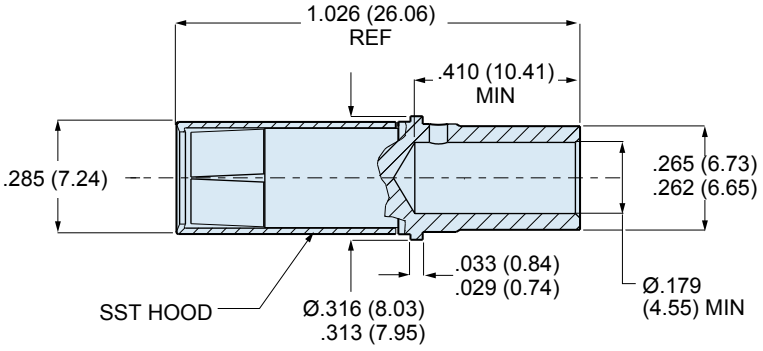


Fig. 2
Socket Contact 850-013

Materials, Finishes	
Contact material	Copper Alloy
Contact finish	50 microinches gold over nickel plating
Socket Contact Hood	Stainless steel, passivated

Specifications		
DESCRIPTION	REQUIREMENT	PROCEDURE
Test Current	46 Amperes	SAE AS39029 para. 4.7.5, EIA-364-06
Contact Resistance	26 millivolts maximum	SAE AS39029 para. 4.7.5, EIA-364-06
Minimum Separation Force	5 ounce minimum	SAE AS39029 para. 4.7.6, EIA-364-37
Crimp Tensile Strength	220 lbs. (978 newtons)	SAE AS39029 para. 4.7.9, EIA-364-08
Durability	500 mating cycles	SAE AS39029 para. 4.7.10

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12




Sealing Boot

Sealing boot provides wire seal. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix added on contact part number specifies contact supplied with sealing boot P/N 859-042-03.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.170 - .205	4.3 - 5.2	859-042-03



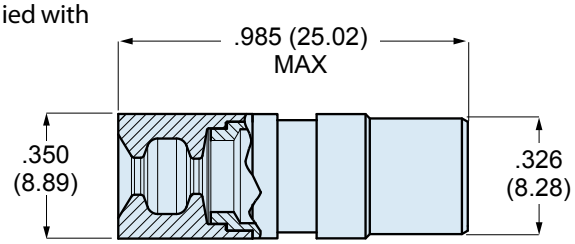

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 Power Contacts 850-013, 850-014

Pneumatic crimp tool for #8 power contacts

The Daniels WA23 pneumatic crimp tool sets the standard for heavy duty crimping chores. This four-indent tool accommodates large power contacts ranging from size 8 through size 0000. Die plates and locators are purchased separately. Qualified to M22520/23, the WA23 tool is specified for use with SAE AS39029 closed barrel copper alloy contacts.

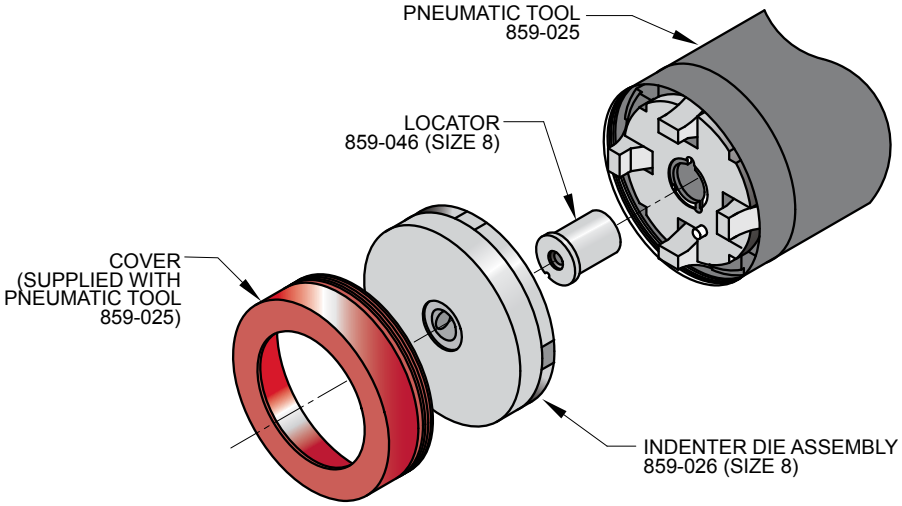

Pneumatic crimp tool



Bench mount heavy duty pneumatic indent crimp tool. Four-indent crimp termination. Use with closed barrel contact sizes 8 through 4/0. Attach to air supply with quick-disconnect fitting or install 1/4 NPT fitting into tapped port. 90-120 psi air supply. Requires die assembly and locator, sold separately. Hand actuate with push-button valve trigger on handle. Steel with black wrinkle enamel coating. 13 inches overall length, 9.2 inches tall, 17 pounds (7.7 Kg).

Description	Part Number	Military Part Number	Daniels Part Number
Pneumatic Crimper	859-025	M22520/23-01	WA23

Die assembly for size #8 contacts



Indenter Die Assembly. Precision four-indent die with hardened tool steel indenters, stainless steel housing, aluminum cap. Use with size #8 contacts. Go/ No Go calibration dimensions are stamped on face of tool. Approximately 3.3 inches (84mm.) diameter.

Description	Part Number	Military Part Number	Daniels Part Number
Die Assembly, Size #8	859-026	M22520/23-02	WA23-2

Locator for size #8 contacts



Aluminum locator holds contact at correct depth for crimping.

Description	Part Number	Military Part Number	Daniels Part Number
Locator, #8, Special	859-046	(none)	WA23-395L

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 coax contacts for 75 ohm video cable



Size 8 coax contacts fit aerospace-grade digital video cable. 75 ohm nominal impedance. 0-4 GHz frequency range. Crimp termination. Supplied as unassembled kit with contact body, center contact, outer ferrule and optional sealing boot. These snap-in, rear-release contacts fit Glenair Series 80 Mighty Mouse connectors and MIL-DTL-38999 Series I, III and IV connectors with size 8 contact cavities. Use with aerospace-grade video cable shown on next page. Gold-plated copper alloy, Fluoropolymer insulator.

Fig.	Contact Type	Part Number Contact Only	Part Number Contact and Sealing Boot	Sealing Boot
Fig. 1	Pin	852-056-01	852-056-01F	859-042-01
Fig. 2	Socket	852-057-01	852-057-01F	859-042-01

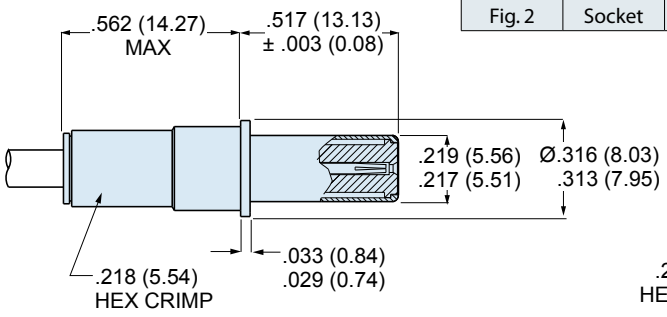


Fig. 1 Pin Contact
852-056-01

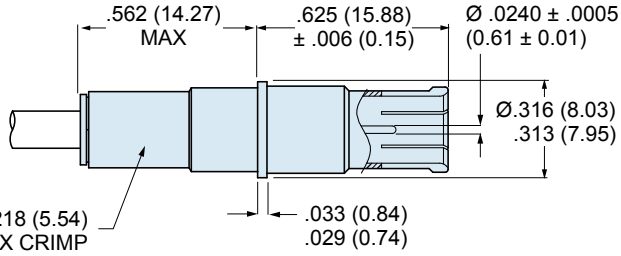


Fig. 2 Socket Contact
852-057-01

Materials, Finishes	
Contact body, center contact, ferrule	Copper Alloy
Contact finish	50 microinches gold over nickel plating
Dielectric	Fluoropolymer

Specifications	
DESCRIPTION	REQUIREMENT
Nominal Impedance	75 Ohms
Frequency Range	0 – 4 GHz
Dielectric Withstanding Voltage	1300 Vac sea level, 250 Vac at 50,000 feet
Insulation Resistance	5000 megohms minimum
Durability	500 mating cycles

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12




Sealing Boot

Optional sealing boot is recommended. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix on contact part number specifies contact supplied with 859-042-01 sealing boot.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03



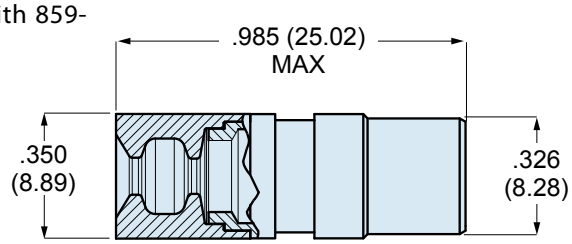

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 75 Ohm Coax Contacts 852-056-01 and 852-057-01

Termination tools for size #8 75 ohm coax contacts



Terminate contacts to coaxial cable with precision hand tools. The inner contact is terminated to the center conductor of the cable with a M22520/2-01 hand tool and bayonet-type positioner. The outer ferrule is terminated to the cable shield with a M22520/5-01 parallel action crimper and a hex die.

A M22520/2-01 crimper. Requires ***B*** positioner, ordered separately. These crimp tools perform precision indents for gas-tight wire terminations and excellent tensile strength. Length is 6.75 inches, weight is approx. 10 oz.


B Positioner. Use with ***A*** crimper, ordered separately. Positioner holds contact at proper depth.

C Parallel action tool terminates cable shield to contact ferrule. Use with ***D*** hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.


D Hex die set for terminating cable shield to contact ferrule. Hardened steel, black oxide finish.

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	859-072	(none)	—
C	809-129	M22520/5-03	HX4
D	859-047	M22520/5-45	Y143


High performance 75 ohm coaxial cable

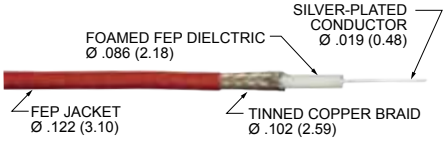

E 75 ohm coaxial cable for RS170 video applications. 50 dB shielding effectiveness. Tinned copper braid shield. Red FEP jacket.

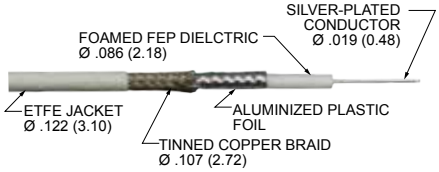

F 75 ohm coaxial cable for RS170 video applications. 90 dB shielding effectiveness. 100% coverage aluminized plastic foil under tinned copper braid shield. ETFE jacket, white.

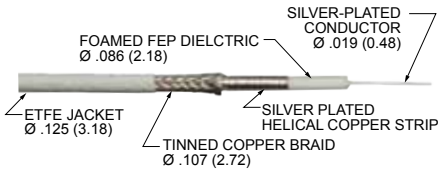

G 75 ohm coaxial cable for SMPTE 292M video applications. 110 dB shielding effectiveness. 100% coverage helical copper strip under tinned copper braid shield. ETFE jacket, white.

PIC™ brand video cable is specially designed and manufactured for reliable performance in aircraft systems and other harsh environments involving high temperature, EMI and corrosive materials. Improved strength, lower attenuation and better shielding compared with M17/94-RG179. Silver-plated conductor, foamed FEP dielectric, tinned copper braid, FEP or ETFE jacket. Syydrol resistant, RoHS compliant, meets FAA FAR Parts 23 and 25, Appendix F flammability, complies with MIL-DTL-17.

	E		F		G	
Glenair Part No.	960-130		960-131		960-132	
Ref. PIC™ Part No.	V75268		V76261		V73263	
Impedance (ohms)	75		75		75	
Shielding Effectiveness (dB)	50		90		110	
Video Application	RS170		RS170		SMPTE 292M	
First Shield	Tinned copper braid, 95% coverage					
Second Shield	None		Aluminized film, 100% coverage		Silver plated helical copper strip, 100%	
Temperature Rating	-65° to +165° C		-65° to +165° C		-65° to +165° C	
Minimum Bend Radius	0.6 in. (15mm.)		0.6 in. (15mm.)		0.65 in. (16.5mm.)	
Weight (lbs/100 ft.)	1.2 lbs		1.1 lbs		1.5 lbs	
Capacitance (pF/ft)	16.0		16.0		16.0	
Velocity of Propagation %	80		80		80	
Time Delay	1.28		1.28		1.28	
Attenuation (dB/100 ft)	Nominal	Max.	Nominal	Max.	Nominal	Max.
1 MHz	0.51	0.55	0.49	0.52	0.43	0.58
10 MHz	1.70	1.77	1.6	1.71	1.4	1.6
100 MHz	5.3	5.7	5.1	5.5	4.5	5.0
400 MHz	11.1	11.8	10.6	11.3	9.6	10.6
1.45 GHz	23.0	24.6	21.9	23.4	20.0	22.0
3 GHz	35.0	37.4	33.7	36.1	30.9	34.0

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 50 ohm contacts for low loss high performance coax cable



Coax contacts fit Glenair Series 80 Mighty Mouse connectors and MIL-DTL-38999 Series I, III and IV connectors with size 8 contact cavities. 50 ohm nominal impedance. 0-2.5 GHz frequency range. Solder conductor to center contact is solder type, shield termination is crimp type. Supplied as unassembled kit with contact body, center contact, outer ferrule and sealing boot. Contacts are snap-in, rear release with plastic extraction tool. Gold-plated copper alloy, Fluoropolymer insulator. See following page for information on coaxial cable.

Fig.	Contact Type	Part Number Contact Only	Part Number Contact and Sealing Boot	Sealing Boot
Fig. 1	Pin	852-043	852-043F	859-042-02
Fig. 2	Socket	852-042	852-042F	859-042-02

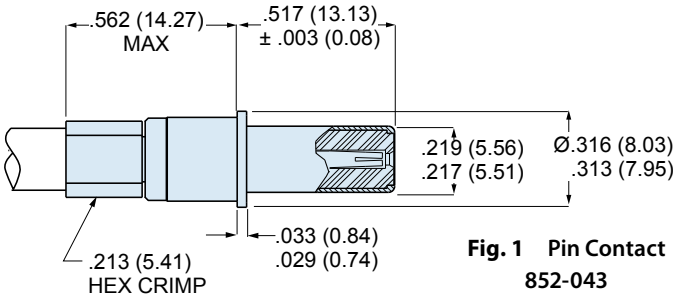


Fig. 1 Pin Contact 852-043

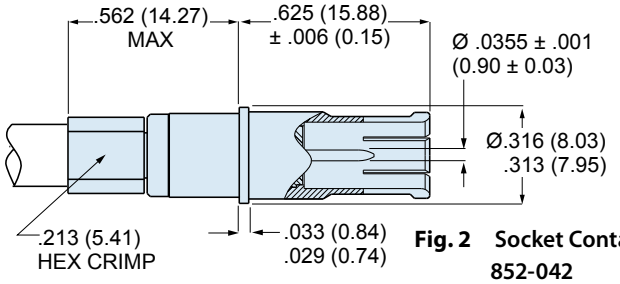


Fig. 2 Socket Contact 852-042

Materials, Finishes	
Contact body, center contact, ferrule	Copper Alloy
Contact finish	50 microinches gold over nickel plating
Dielectric	Fluorocarbon

Specifications	
DESCRIPTION	REQUIREMENT
Nominal Impedance	50 Ohms
Frequency Range	0 – 2.5 GHz
Dielectric Withstanding Voltage	1300 Vac sea level, 250 Vac at 50,000 feet
Insulation Resistance	5000 megohms minimum
Durability	500 mating cycles

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12




Sealing Boot

Optional sealing boot is recommended. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix on contact part number specifies contact supplied with 859-042-02 sealing boot.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03



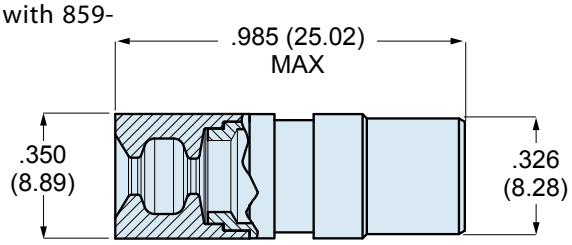


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 50 Ohm Coax Contacts 852-042 and 852-043

Termination tools for size #8 50 ohm coax contacts

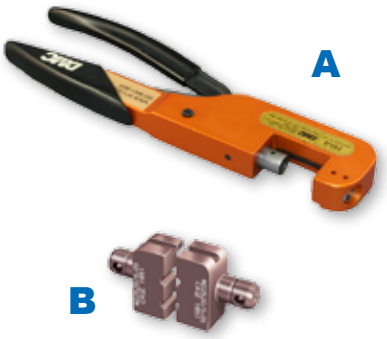

Terminate inner contact to center conductor of cable with soldering iron. The outer ferrule is terminated to the cable shield with a M22520/5-01 parallel action crimper and a hex die.

A Parallel action tool terminates cable shield to contact ferrule. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.


B Hex die set for terminating cable shield to contact ferrule. Hardened steel, black oxide finish.

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-129	M22520/5-01	HX4
B	859-051	M22520/5-05	Y197

Cable information (reference only, not sold by Glenair)

Coax contacts 852-042 and 852-043 are designed for use with LLSB-200 cable. This low loss, flexible cable is suitable for shipboard, airframe and tactical vehicles. Manufactured by Times Microwave, this cable is qualified to MIL-DTL-17/220. Jacket is non-halogen, low smoke black UV resistant cross-linked polyethylene.

Times Microwave Part No.	LLSB-200
Military Part Number	M17/220-0001
Impedance	50 ± 2
Shielding Effectiveness (dB)	90 min.
Conductor Diameter	.044 (1.12)
Conductor Type	Bare Copper
Dielectric Diameter	.118 (3.0)
Outer Shield Diameter	.144 (3.66)
Jacket Diameter	.195 (4.95)
Weight (lbs/100 ft.)	37.4
Capacitance (pF/ft)	27.0
Velocity of Propagation %	80
Temperature Range	-30° to +85°C
Attenuation (dB/100 ft)	
10 MHz	1.3
100 MHz	3.8
400 MHz	7.7
1 GHz	12.0
2.5 GHz	20.0

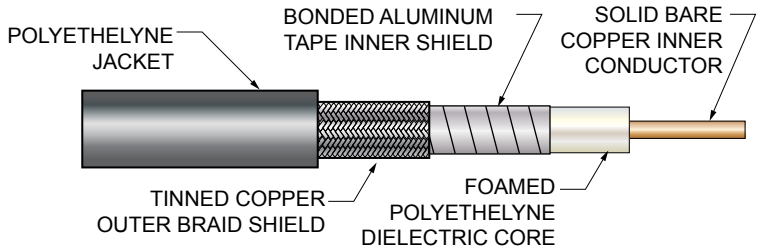

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 quadrax contacts



Fig. 1
Pin Contact
854-001

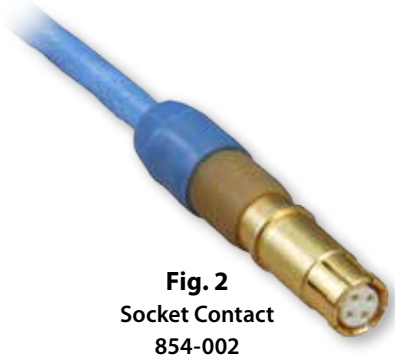


Fig. 2
Socket Contact
854-002

100 ohm quadrax contacts accept standard flight-grade star quad cable. These snap-in, rear release contacts fit Glenair Series 80 Mighty Mouse connectors and Glenair MIL-DTL-38999 Series III type connectors with size #8 keyed insulators to properly align contact. Crimp termination. Contact has in-line key for alignment in connector. Gold-plated copper alloy , thermoplastic insulators. Supplied as unassembled kit.


Fig.	Cable Accommodation	Contact Type	Part Number Contact Only	P/N Contact and Sealing Boot	Wire AWG	Cable OD	
						in.	mm.
1	Tensolite NF22Q100 Draka F-4704-7	Pin	854-001-05	854-001-05F	22	.190	4.83
1	PIC E51424 Tensolite NF24Q100	Pin	854-001-02	854-001-02F	24	.163	4.14
1	PIC E50424 Draka F 4704-4	Pin	854-001-04	854-001-04F	24	.175	4.45
1	PIC E51426 Tensolite NF26Q100	Pin	854-001-01	854-001-01F	26	.137	3.48
1	Draka F 4704-6	Pin	854-001-03	854-001-03F	26	.153	3.89
2	Tensolite NF22Q100 Draka F-4704-7	Socket	854-002-05	854-002-05F	22	.190	4.83
2	PIC E51424 Tensolite NF24Q100	Socket	854-002-02	854-002-02F	24	.163	4.14
2	PIC E50424 Draka F 4704-4	Socket	854-002-04	854-002-04F	24	.175	4.45
2	PIC E51426 Tensolite NF26Q100	Socket	854-002-01	854-002-01F	26	.137	3.48
2	Draka F 4704-6	Socket	854-002-03	854-002-03F	26	.153	3.89

Material And Finish	
Inner and Outer Contact, Crimp Ferrule	Copper alloy, 50 microinches gold over nickel
Insulator, Sealing Boot	High grade engineering thermoplastic
Sealing Boot Grommet	Fluorosilicone

Specifications	
Characteristic Impedance	100 Ohms ± 10 ohms
Frequency Range	DC – 3 GHz
Insulation Resistance, Ambient Temperature	5000 megohms minimum
Contact Resistance – Inner Contact	15.0 milliohms maximum initial @ 1ampere
Contact Resistance – Outer Contact	3.0 milliohms maximum initial @ 12 amperes
Dielectric Withstanding Voltage	1000 Vac RMS between contacts, 500 Vac RMS between contacts and shell
Temperature Range	-65°C to +200°C
Durability	500 mating cycles
Corrosion (salt Fog)	EIA-364-26, condition B, 48 hours
Vibration	EIA-364-28, condition VI, letter J, 43g's
Shock	EIA-364-27, condition D, 300g's

Arinc 664 Star Quad Cable





About Quadrax Contacts and Star Quad Cable

Quadrax contacts are size 8 multi-pin contacts with four signal pins and an outer contact body. These contacts are used for ARINC 664 100BASE-T Ethernet. Each quadrax contact yields one Ethernet port. The outer contact body provides a 360-degree EMI shield around the signal contacts. Star quad cables have four parallel wires uniformly twisted around a center filler. These 100 ohm high performance 100BASE-T cables are designed for use in aircraft systems. The cable has two shields– a flat tinned copper braid inner shield and an outer tinned copper overbraid. The FEP jacket meets FAA flammability requirements.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts


Size #8 100 Ohm Quadrax Contacts 854-001 and 854-002

Dimensions for size #8 quadrax contacts

854-001 Pin

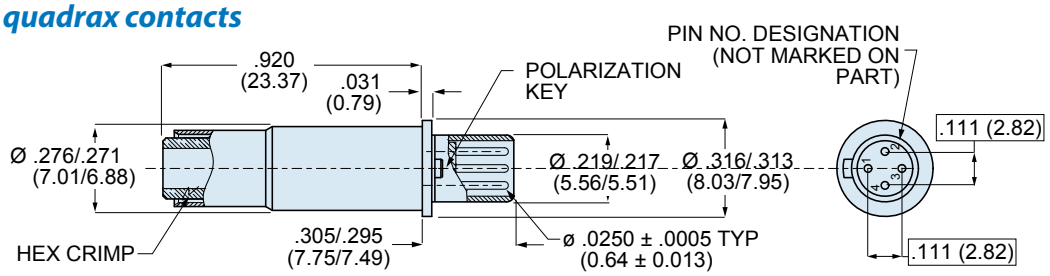

854-002 Socket

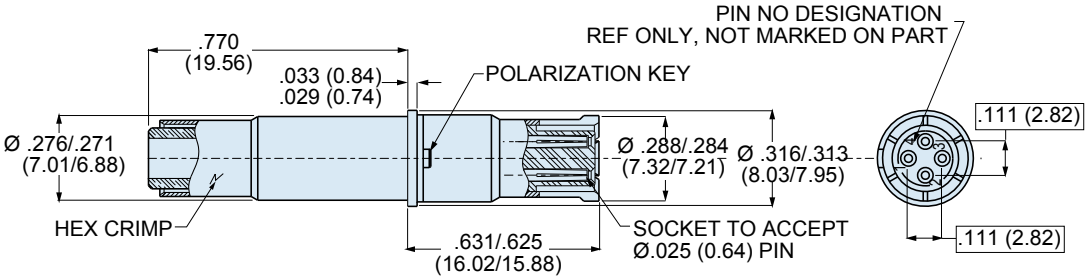

Termination tools for size #8 quadrax contacts



A M22520/2-01 crimper for inner contacts. Requires ***B*** positioner, ordered separately. Length is 6.75 inches, weight is approx. 10 oz.

B Positioner. Use with ***A*** crimper, ordered separately. Positioner holds contact at proper depth.

C Parallel action tool terminates cable shield. Use with ***D*** hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.

D Hex die set for terminating cable shield. Hardened steel, black oxide finish. Closure A is .231 (5.87), closure B is .218 (5.54).

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	809-240	M22520/2-37	K709
C	809-129	M22520/5-01	HX4
D	859-047	M22520/5-45	Y143

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12




Sealing Boot

Optional sealing boot is recommended. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix on contact part number specifies contact supplied with 859-042-02 sealing boot.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03



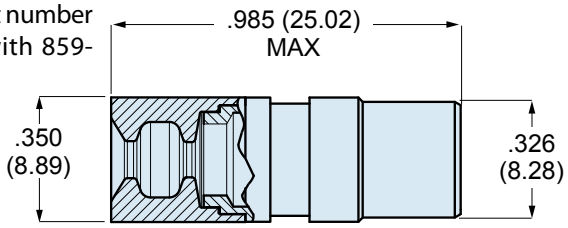

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 concentric twinax contacts for MIL-STD-1553 databus



Fig. 1
Pin Contact
853-003-08-625



Fig. 2
Socket Contact
853-004-08-628




Fig. 3
Heatshrink Boot
(Supplied with Contact)




Fig. 4
Sealing Boot
859-042-01
(Not supplied with contact. Order separately)

Concentric twinax contacts accept M17/176-0002 shielded twisted pair databus cable. These snap-in, rear release contacts fit Glenair Series 80 Mighty Mouse connectors and Glenair MIL-DTL-38999 Series I, III and IV connectors with size #8 cavities. Crimp termination. Gold-plated copper alloy , FEP insulator. Supplied unassembled with heatshrink boot (fig.3). Order sealing boot separately (fig.4). 1 A current rating, 500 Vac. SAE AS39029 qualified.

Fig.	Description	Cable Accommodation	Part Number	AS39029 Part Number	Color Bands		
					1st	2nd	3rd
Fig. 1	Pin	M17/176-00002	853-003-08-625	M39029/113-625	Blu	Red	Grn
Fig. 2	Socket	M17/176-00002	853-004-08-628	M39029/114-628	Blu	Red	Vio
Fig. 4	Sealing Boot	M17/176-00002	859-042-01				

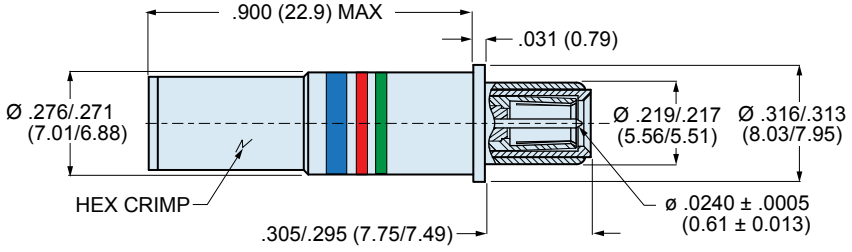


Pin Contact 853-003-08-625

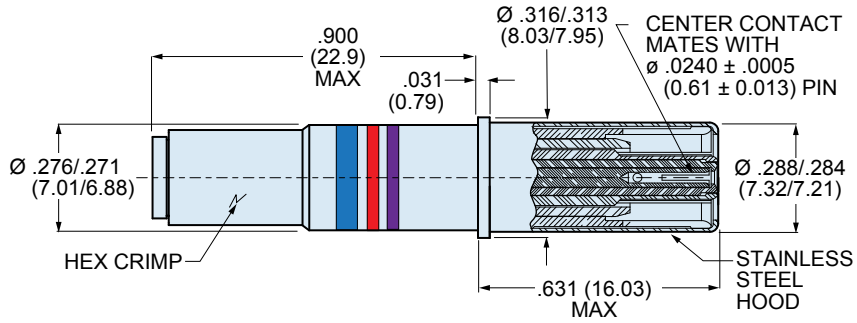

Socket Contact 853-004-08-628

Heatshrink Boot

Supplied with contact. Slide onto cable before terminating contact. Slide onto contact after the cable is terminated. Apply heat to shrink the boot and melt the adhesive. Install contact into connector.

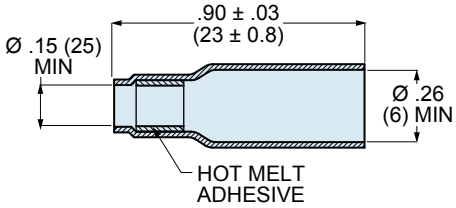


Sealing Boot

Sealing boot is ordered separately. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. Additional information on sealing boot is on the next page.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03



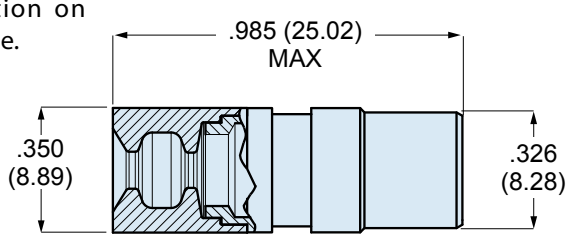

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 100 Ohm Quadrax Contacts 854-001 and 854-002

Material and Finish	
Inner, Intermediate and Outer Contact, Crimp Sleeve	Copper alloy, 50 microinches gold over nickel
Insulators	PTFE
Sealing Boot Rigid Dielectric	Ultem
Sealing Boot Grommet	Fluorosilicone

Specifications	
Current Rating	**1 ampere**
Contact Resistance, Center and Intermediate Contacts	55 millivolt max. voltage drop @ 1 ampere
Contact Resistance – Outer Contact	75 millivolt max. voltage drop @ 12 amperes
Dielectric Withstanding Voltage, Center Contact to Intermediate Contact	1000 Vrms Sea Level, 250 Vrms at 70,000 feet
Dielectric Withstanding Voltage, Intermediate Contact to Outer Contact	500 Vrms Sea Level, 250 Vrms at 70,000 feet
Temperature Range	-65°C to +175°C
Durability	500 mating cycles
Corrosion	EIA-364-26, condition B, 48 hours
Vibration	EIA-364-28, condition V, letter J, 37g's
Shock	EIA-364-27, condition D, 300g's

Termination tools for size #8 concentric twinax contacts



A M22520/2-01 crimper for center contact. Requires ***B*** positioner, ordered separately. Length is 6.75 inches, weight is approx. 10 oz.

B Positioner, M22520/2-37. Use with ***A*** crimper, ordered separately. Positioner holds contact at proper depth.


C Parallel action tool terminates intermediate contact and outer shield ferrule. Use with ***D*** hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.

D Die set for terminating intermediate contact and cable shield. Requires ***C*** crimp tool sold separately. Hardened steel, black oxide finish.

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	809-240	M22520/2-37	K709
C	809-129	M22520/5-01	HX4
D	859-048	M22520/5-105	Y631

Sealing Boot information

The sealing boot is necessary to prevent moisture and contamination from penetrating the connector. The sealing boot is ordered separately. DO NOT USE HEATSHRINK BOOT IF USING SEALING BOOT. The boot consists of a rigid dielectric sleeve and a fluorosilicone rubber grommet. Slide boot onto cable before terminating contact. After the contact is installed into connector, seat the boot into connector grommet.

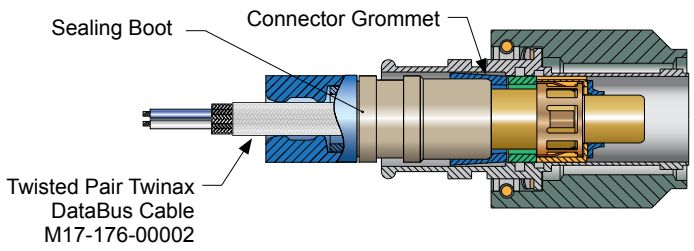

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 differential twinax contacts

100 ohm differential twinax contacts accept shielded twisted pair databus cable. These snap-in, rear release contacts fit Glenair Series 80 Mighty Mouse connectors, Glenair 257-497, and Glenair 257-606 MIL-DTL-38999-type connectors with keyed inserts. Crimp termination. Gold-plated copper alloy , FEP insulator. Supplied unassembled with optional sealing boot.



Fig. 1
Pin Contact
853-014



Fig. 2
Socket Contact
853-013

Figure	Description	Cable Accommodation	Part Number Contact Only	Part Number Contact and Sealing Boot
Fig. 1	Pin Contact	Gore RCN 8945	853-014-01	853-014-01F
Fig. 1	Pin Contact	Gore GSC-03-83971-00	853-014-02	853-014-02F
Fig. 1	Pin Contact	M17/176-00002	853-014-05	853-014-05F
Fig. 1	Pin Contact	TE (Raychem) 0024A0024	853-014-04	853-014-04F
Fig. 2	Socket Contact	Gore RCN 8945	853-013-01	853-013-01F
Fig. 2	Socket Contact	Gore GSC-03-83971-00	853-013-02	853-013-02F
Fig. 2	Socket Contact	M17/176-00002	853-013-05	853-013-05F
Fig. 2	Socket Contact	TE (Raychem) 0024A0024	853-013-04	853-013-04F

Material and Finish	
Inner and Outer Contact, Crimp Ferrule	Copper alloy, 50 microinches gold over nickel
Insulator, Sealing Boot	High grade engineering thermoplastic
Sealing Boot Grommet	Fluorosilicone

Specifications	
Characteristic Impedance	100 Ohms ± 10 ohms
Frequency Range	DC – 3 GHz
Insulation Resistance, Ambient Temperature	5000 megohms minimum
Contact Resistance – Inner Contact	15.0 milliohms maximum initial @ 1ampere
Contact Resistance – Outer Contact	3.0 milliohms maximum initial @ 12 amperes
Dielectric Withstanding Voltage	1000 Vac RMS between contacts, 500 Vac RMS between contacts and shell
Temperature Range	-65°C to +200°C
Durability	500 mating cycles
Corrosion (salt Fog)	EIA-364-26, condition B, 48 hours
Vibration	EIA-364-28, condition VI, letter J, 43g's
Shock	EIA-364-27, condition D, 300g's

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12




Sealing Boot

Optional sealing boot is recommended. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix on contact part number specifies contact supplied with sealing boot.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03



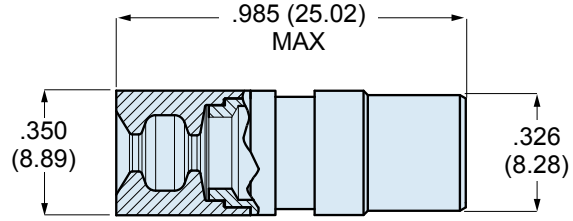


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 Differential Twinax Contacts 853-013 and 853-014

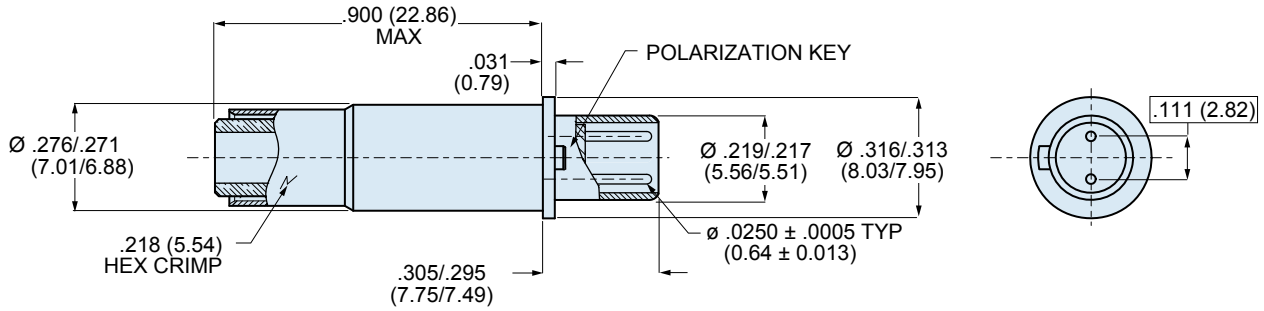

Pin Contact 853-014

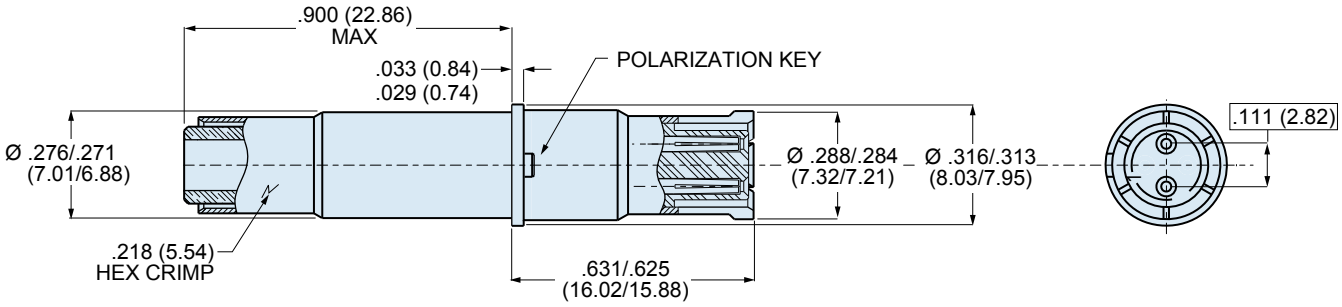

Socket Contact 853-013

Termination tools for size #8 differential twinax contacts



A M22520/2-01 crimper for inner contacts. Requires ***B*** positioner, ordered separately. Length is 6.75 inches, weight is approx. 10 oz.

B Positioner. Use with ***A*** crimper, ordered separately. Positioner holds contact at proper depth.

C Parallel action tool terminates cable shield. Use with ***D*** hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.

D Hex die set for terminating cable shield. Hardened steel, black oxide finish. Closure A is .231 (5.87), closure B is .218 (5.54).

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	809-240	M22520/2-37	K709
C	809-129	M22520/5-01	HX4
D	859-047	M22520/5-45	Y143

About Differential Twinax Contacts

Differential twinax contacts are multi-pin contacts with two signal pins and an outer contact body. These contacts are used for 77 ohm MIL-STD-1553 databus and 100 ohm serial data transmission. The outer contact body provides a 360-degree EMI shield around the signal contacts. A raised boss on the contact body aligns the contact for proper mating. This boss fits into a slot inside the connector. All size 8 Mighty Mouse connector inserts have this alignment slot.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Size #8 coaxial contacts for M17/095-RG-180 cable

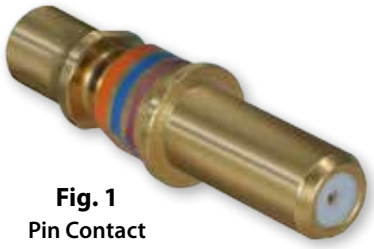



Fig. 1
Pin Contact
852-007-08-367




Fig. 2
Socket Contact
852-006-08-366

Coax contacts accept M17/095-RG180 cable. These snap-in, rear release contacts fit Glenair Series 80 Mighty Mouse connectors and Glenair MIL-DTL-38999 Series I, III and IV connectors with size #8 cavities. Crimp termination. Gold-plated copper alloy, Fluoropolymer insulator. Supplied unassembled. Order sealing boot separately (fig. 3). 1 A current rating, 500 Vac. SAE AS39029 qualified.

Fig.	Description	Cable Accommodation	Part Number	AS39029 Part Number	Color Bands		
					1st	2nd	3rd
Fig. 1	Pin	M17/095-RG180	852-007-08-367	M39029/60-367	Orn	Blu	Vio
Fig. 2	Socket	M17/095-RG180	852-006-08-366	M39029/59-366	Orn	Blu	Blu
Fig. 3	Sealing Boot	M17/095-RG180	859-042-02				

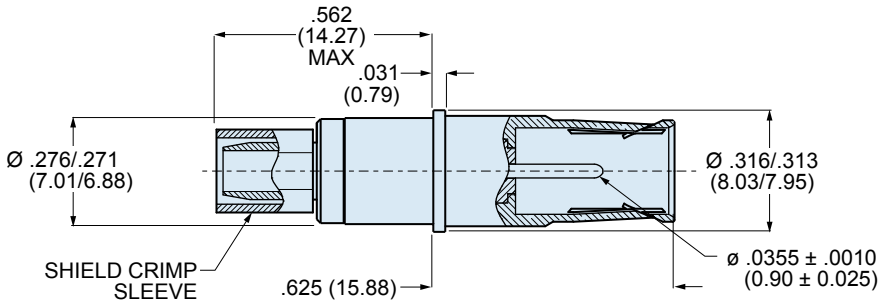

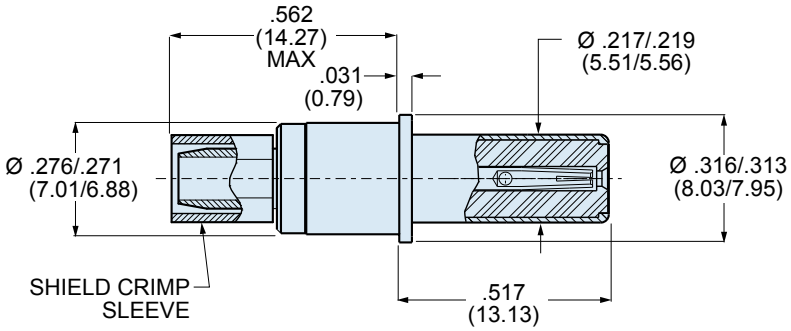

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.

Size	Part Number	Military Part Number
#8	859-049	M81969/14-12




Sealing Boot

Sealing boot is ordered separately. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity.

Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03



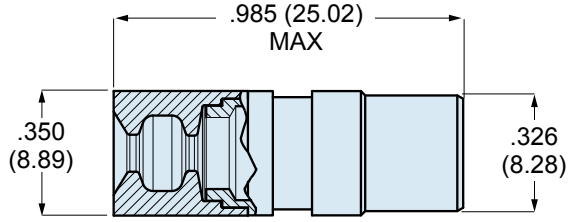

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 Coax Contacts for RG180 Cable

Material and Finish	
Inner Contact, Outer Contact, Inner Ferrule, Crimp Sleeve	Copper alloy, 50 microinches gold over nickel
Insulator	Fluoropolymer
Sealing Boot Rigid Dielectric	Ultem
Sealing Boot Grommet	Fluorosilicone

Specifications	
Current Rating	1 ampere
Contact Resistance, Inner Contact	120 millivolt max. voltage drop @ 1 ampere
Contact Resistance – Outer Contact	60 millivolt max. voltage drop @ 12 amperes
Dielectric Withstanding Voltage	1300 Vrms Sea Level, 250 Vrms at 50,000 feet
Temperature Range	-65°C to +200°C
Durability	500 mating cycles
Corrosion	EIA-364-26, condition B, 48 hours
Vibration	EIA-364-28, condition V, letter J, 37g's
Shock	EIA-364-27, condition D, 300g's

Termination tools for size #8 coax contacts for RG-180 cable



A M22520/2-01 crimper for inner contact. Requires ***B*** positioner, ordered separately. Length is 6.75 inches, weight is approx. 10 oz.

B Positioner, M22520/2-31. Use with ***A*** crimper, ordered separately. Positioner holds contact at proper depth.


C Parallel action tool terminates intermediate contact and outer shield ferrule.Use with ***D*** hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.

D Die set for terminating intermediate contact and cable shield. Two closures— .218(5.54) hex closure for cable shield and Requires ***C*** crimp tool sold separately. Hardened steel, black oxide finish.

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	859-050	M22520/2-31	K406
C	809-129	M22520/5-01	HX4
D	859-051	M22520/5-05	Y197

About Sealing Boots

The sealing boot is necessary to prevent moisture and contamination from penetrating the connector. The sealing boot is ordered separately. The boot consists of a rigid dielectric sleeve and a fluorosilicone rubber grommet. Slide boot onto cable before terminating contact. After the contact is installed into connector, seat the boot into connector grommet.

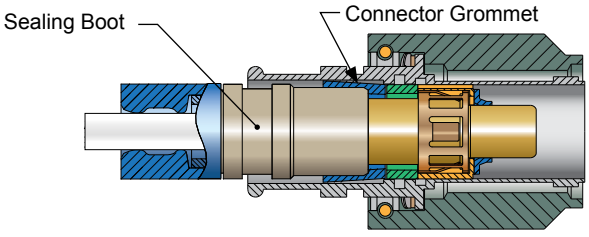

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #8 El Ochito® contacts for 10g Base-T Cat 6a ethernet 4 pair cable




Fig. 1
Pin Contact
858-003



Fig. 2
Socket Contact
858-004

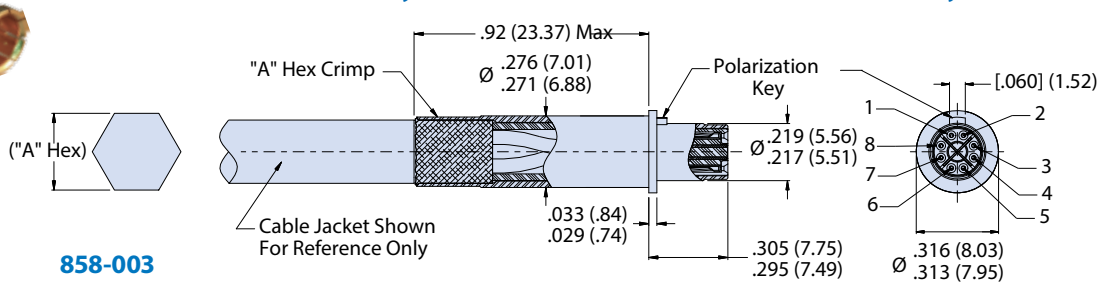



Fig. 3
Sealing Boot
687-643

El Ochito® contacts accept PIC E6A3826 cable. These snap-in, rear release contacts fit Glenair Series 80 Mighty Mouse connectors and Glenair MIL-DTL-38999 Series I, III and IV connectors with size #8 cavities. Crimp termination. Gold-plated copper alloy, Fluoropolymer insulator. 100 Ohms nominal, 500 Vrms DWV, 5000 MegOhms min at 200 VDC. Supplied unassembled. Sealing boot can be ordered with contact or separately.

Fig.	Description	Cable Accommodation	Part Number Only	Part Number Contact and Sealing Boot
Fig. 1	Pin	PIC E6A3826	858-003-01	858-003-01F
Fig. 2	Socket	PIC E6A3826	858-004-01;	858-004-01F
Fig. 3	Sealing Boot	PIC E6A3826	687-643-8-2	687-643-8-2

Fully Assembled Contact Shown for Reference Only



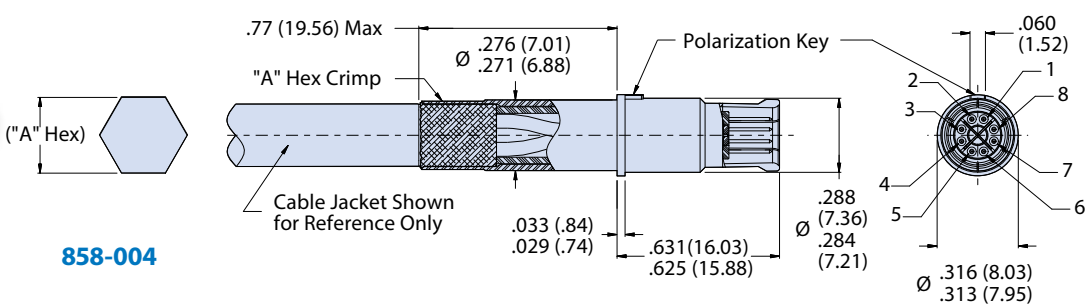

Contact Removal Tool

Plastic tool extracts wired contact from connector. First, remove sealing boot, then insert tool from rear of connector.


Size	Part Number	Military Part Number
#8	859-049	M81969/14-12



Sealing Boot

If sealing boot is used, slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity.

Ref Cable Dia. (in.)	Ref. Cable Dia. (mm.)	Part Number
.220	5.59	687-643-8-2

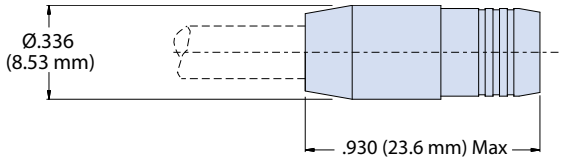

Dimensions in Inches (millimeters) are subject to change without notice.

Rev. 08.04.15

© 2014 Glenair, Inc.

Mighty Mouse Connectors with Size #8 Quadrax, Twinax, Coax or Power Contacts

Size #8 El Ochito Contacts for CAT 6a Cable

Material and Finish	
Inner Contact, Outer Contact, Inner Ferrule, Crimp Sleeve	Copper alloy, 50 microinches gold over nickel
Insulator	Fluoropolymer
Sealing Boot Rigid Dielectric	Ultem
Sealing Boot Grommet	Fluorosilicone

Specifications	
Current Rating	1 A
Insulation Resistance	5000 Meg Ohms minimum
Dielectric Withstanding Voltage	500Vrms Min @ sea Level
Temperature Range	-55° C to +175°C
Durability	>500 cycles
Corrosion	48 Hrs Salt Spray
Vibration	IAW AS39029/113
Thermal Shock	-55° C to +175° C

Termination tools for size #8 coax contacts for PIC E6A3826 cable



A M22520/2-01 crimper for inner contact. Requires ***B*** positioner, ordered separately. Length is 6.75 inches, weight is approx. 10 oz.

B Positioner, Daniels P/N K1906. Use with ***A*** crimper, ordered separately. Positioner holds contact at proper depth.


C Parallel action tool terminates outer contact. Use with ***D*** hex crimp dies. 11 inches OAL, 2.0 pounds. Anodized aluminum frame, steel mechanism, plastic handles. Accepts all M22520/5 die sets.

D Die set for terminating outer contact and cable shield. Two closures— .231(5.87) hex closure for cable shield and Requires ***C*** crimp tool sold separately. Hardened steel, black oxide finish.

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	859-101	None	K1906
C	809-129	M22520/5-01	HX4
D	859-047	M22520/5-45	N/A

About Sealing Boots

The sealing boot is necessary to prevent moisture and contamination from penetrating the connector. The sealing boot is ordered separately. The boot consists of a rigid dielectric sleeve and a fluorosilicone rubber grommet. Slide boot onto cable before terminating contact. After the contact is installed into connector, seat the boot into connector grommet.

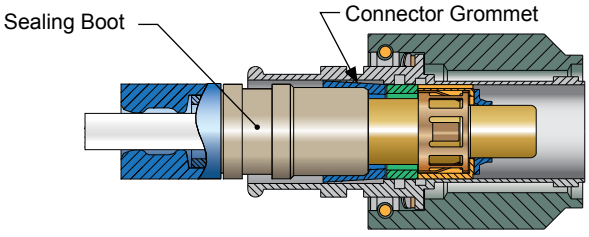

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

SERIES 811

HIGH DENSITY



Double-density Mighty Mouse connectors with vibration and shock resistant TwistPin contacts



The 811 HD difference is found in our Micro TwistPin Contacts. Widely used for radar, missiles, avionics, and space vehicles, the Micro TwistPin is a spring pin composed of helically wound strands of copper alloy wire, welded into a bundle, then "bulged" and crimped to a copper alloy sleeve. TwistPin contacts are specified for applications that require high mating and demating forces for superior resistance to vibration and shock. These gold-over-nickel plated pins and sockets offer low, stable contact resistance even when subjected to temperature extremes and vibration. Designers of soldier systems and other military electronics, medical and high-end industrial equipment have all turned to the TwistPin contact in order to reduce the size and weight of high-performance systems.

Glenair®

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



Series 811 HD In-Line Pigtail Plug Connectors
Factory terminated in-line plugs with optional PTFE or Tefzel® insulated wire; backpotted with epoxy. **Page L-6**




Series 811 HD In-Line Pigtail Receptacle Connectors
Factory terminated in-line receptacles with optional PTFE or Tefzel® insulated wire; backpotted with epoxy. **Page L-7**




Series 811 HD Square Flange Pigtail Receptacles
Factory terminated square flange pigtail receptacles with optional PTFE or Tefzel® insulated wire; backpotted with epoxy. **Page L-8**



Series 811 HD Jam Nut Pigtail Receptacles
Factory terminated jam nut pigtail receptacles with optional PTFE or Tefzel® insulated wire; backpotted with epoxy. **Page L-10**



Series 811 HD Jam Nut Straight PCB Receptacles
Jam nut mount straight PC tail receptacles with enhanced environmental sealing for open faced immersion requirements. **Page L-12**



Series 811 HD Square Flange Straight PCB Receptacles
Square flange panel mount PC tail receptacles with enhanced environmental sealing for open faced immersion requirements. **Page L-13**



Series 811 HD Harsh Environment Cordsets
Overmolded Series 811 cordsets withstand abrasion and chemical exposure. Silver coated stranded conductors with TFE insulation, tinned copper braid shield and extruded polyurethane jacket. **Page L-15**

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 811 Mighty Mouse High Density (HD)
General Information




811-001-06ME9-42SA
Series 811 Plug



811-003-07ME9-42PA
Series 811 Receptacle


- **High Density Micro TwistPin Contact System**
- **600 VAC DWV Rating**
- **7 to 42 Contacts**
- **3 Amp Current Rating**
- **Water Resistant to 1 Meter**

New Mighty Mouse High Density Connector Delivers Size and Weight Savings and Outstanding Performance

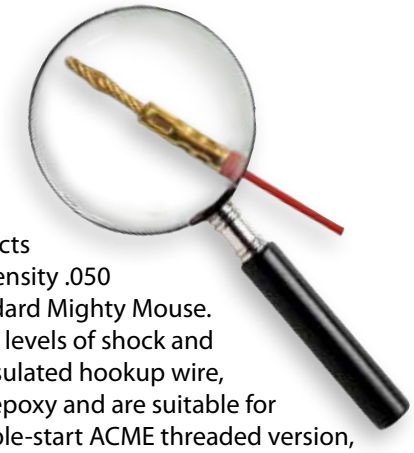

New Series 811 Mighty Mouse HD connector features high performance TwistPin contacts for increased circuit density and outstanding shock and vibration performance. High density .050 inch (1.27mm) contact spacing essentially doubles the pincount compared to our standard Mighty Mouse. The unique spring construction of the pin contact results in excellent resistance to high levels of shock and vibration. Three configurations are available: pre-wired pigtail cable assemblies with insulated hookup wire, shielded cordsets, and printed circuit board versions. Connectors are backpotted with epoxy and are suitable for hostile environment applications. The Series 811 Mighty Mouse HD connector is a double-start ACME threaded version, available with 7, 12, 22, 30 and 42 contacts for size #26 to #30 AWG wire.

Series 811 Mighty Mouse HD with High Performance TwistPins

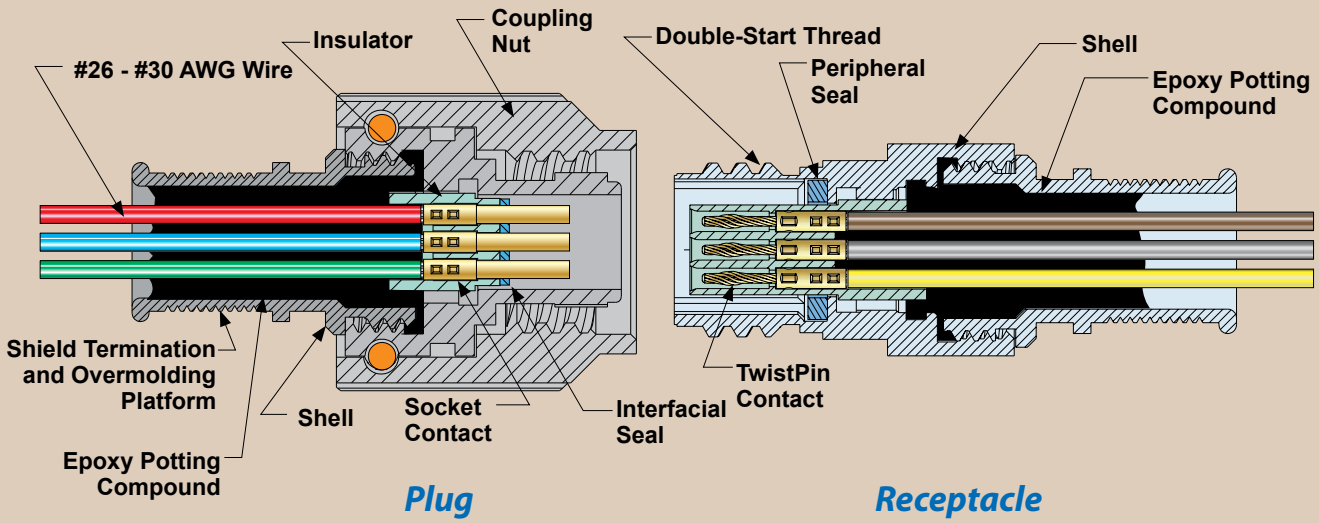

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

About TwistPin Contacts

Widely used for radars, missiles, avionics, and space vehicles, the Micro TwistPin is a spring pin composed of helically wound strands of copper alloy wire, welded into a bundle, then "bulged" and crimped to a copper alloy sleeve. These gold over nickel plated pins and sockets offer low, stable contact resistance even when subjected to temperature extremes and vibration. Designers of soldier systems electronics equipment have turned to the TwistPin contact in order to reduce the size and weight of warfighter electronics.

Unlike other microminiature contact systems, the TwistPin contact is terminated to wire with a military-approved four-indent crimp joint. Crimping results in a gas tight connection between the wire and the contact .

TwistPin Contact




TwistPin



Socket

Series 811 Mighty Mouse Hd Contact Arrangements

Pin insert shown, use reverse order for socket inserts.

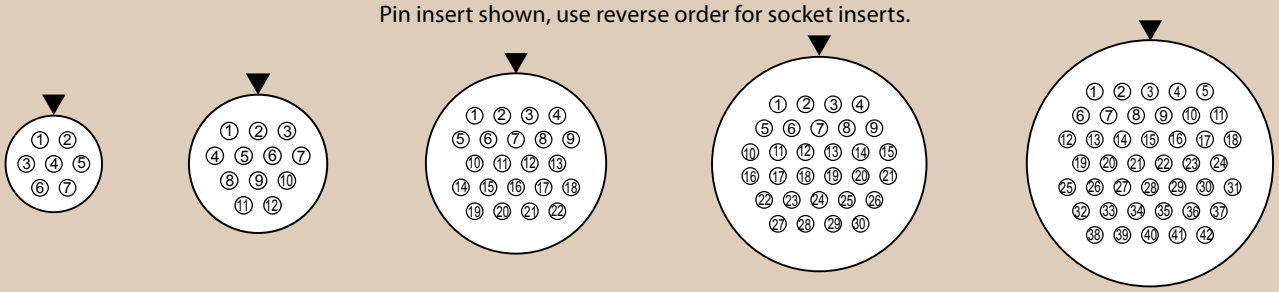

5-7
7 Contacts

6-12
12 Contacts

7-22
22 Contacts

8-30
30 Contacts

9-42
42 Contacts

MIL-STD-681 Color Code Chart

PIN NO.	MIL-STD-681 NUMBER	Base Color	First Stripe	Second Stripe	PIN NO.	MIL-STD-681 NUMBER	Base Color	First Stripe	Second Stripe
1	0	BLK			**22**	903	WHT	BLK	ORN
2	1	BRN			**23**	904	WHT	BLK	YEL
3	2	RED			**24**	905	WHT	BLK	GRN
4	3	ORN			**25**	906	WHT	BLK	BLU
5	4	YEL			**26**	907	WHT	BLK	VIO
6	5	GRN			**27**	908	WHT	BLK	GRY
7	6	BLU			**28**	912	WHT	BRN	RED
8	7	VIO			**29**	913	WHT	BRN	ORN
9	8	GRY			**30**	914	WHT	BRN	YEL
10	9	WHT			**31**	915	WHT	BRN	GRN
11	90	WHT	BLK		**32**	916	WHT	BRN	BLU
12	91	WHT	BRN		**33**	917	WHT	BRN	VIO
13	92	WHT	RED		**34**	918	WHT	BRN	GRY
14	93	WHT	ORN		**35**	923	WHT	RED	ORN
15	94	WHT	YEL		**36**	924	WHT	RED	YEL
16	95	WHT	GRN		**37**	925	WHT	RED	GRN
17	96	WHT	BLU		**38**	926	WHT	RED	BLU
18	97	WHT	VIO		**39**	927	WHT	RED	VIO
19	98	WHT	GRY		**40**	928	WHT	RED	GRY
20	901	WHT	BLK	BRN	**41**	934	WHT	ORN	YEL
21	902	WHT	BLK	RED	**42**	935	WHT	ORN	GRN

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse HD with Double-Start ACME Mating Thread and .050" pitch (1.27mm) TwistPin Contact

Series 811 Mighty Mouse HD connector is a high density version of the Mighty Mouse Series 801 connector. The Series 811 connector features a quick-mating, damage-resistant double-start thread with the Glenair TwistPin contact system for increased circuit density.


Series 811 Mighty Mouse HD Connector Selector



In-Line Plugs
Page L-6



In-Line Receptacles
Page L-7




Square Flange Receptacles
Page L-8



Jam Nut Receptacles
Page L-10



Jam Nut PCB Receptacles
Page L-12



Square Flange PCB Receptacles
Page L-13



Overmolded Cordsets
Page L-15

Jam Nut Tightening Tool

Tightening tools fit Series 811 spanner nuts supplied with jam nut receptacle connectors. Use with square drive torque wrench. Torque to 20-25 inch-pounds (2.2 2.8 N m). Carbon steel, nickel plated.



Shell Size	Jam Nut Tool Part Number	Drive Square
5	600-146-02	¼" Drive
6	600-146-03	¼" Drive
7	600-146-05	⅜" Drive
8	600-146-05	⅜" Drive
9	600-146-06	⅜" Drive

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Application Note:

Sand and Dust Exposure

Glenair TwistPin contacts can be damaged by sand and dust. Unmated connectors should be covered to prevent debris and contamination from accumulating inside the contact cavities. Protective covers are recommended.

Specifications	
Current Rating	3 AMPS
Dielectric Withstanding Voltage	600 VAC sea level, 150 VAC at 70,000 ft.
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Contact Resistance	8 milliohms maximum
Low Level Contact Resistance	32 milliohms maximum
Water Immersion, Mated	MIL-STD-810G, Method 512.5 1 meter for 1 hour
Water Ingress, Mated	Ingress protection 67
Helium Leak rate, Sealed PC tail Receptacles (811-006)	1 x 10^{-4} cc/sec at 1 atmos. pressure differential, following 5 cycles of thermal shock
Shock	300 g's (MIL-DTL-38999 para. 4.5.21.1)
Vibration, Sine	60 g's (MIL-DTL-38999 para. 4.5.23.2.1)
Vibration, Random	23 g's (MIL-DTL-38999 para. 4.4.23.1)
Humidity	EIA-364-31, Cond. IV
Altitude-Low Temperature	EIA-364-105
Durability	2000 cycles of mating
Magnetic Permeability	2 µ maximum
Corrosion (Salt Spray)	Electroless Nickel finish (ME) 96 hours Nickel-PTFE finish (MT) 500 hours Black Zinc-Nickel (ZR) 500 hours Zinc-Nickel-PTFE with Black Chromate (ZNU) 1,000 hours
Shielding Effectiveness	55 dB minimum from 100MHz to 1000MHz.


Materials and Finishes	
Shell, Jam Nut, Coupling Nut	Aluminum alloy or SST
Contact	Copper alloy, 50 µ inch gold over nickel plated
Insulator	High grade rigid dielectric
Interfacial Seal, O-ring, Peripheral Seal	Fluorosilicone rubber

Series 811 Recommended Torque Values


	Coupling Torque				Jam Nut Tightening			
	In-Lbs.		N-m		In-Lbs.		N-m	
Layout	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
5-7	25	35	2.8	4.0	20	25	2.2	2.8
6-12	35	40	4.0	4.5	20	25	2.2	2.8
7-22	35	40	4.0	4.5	20	25	2.2	2.8
8-30	40	50	4.5	5.7	20	25	2.2	2.8
9-42	40	50	4.5	5.7	20	25	2.2	2.8

Key Positions

Position	A°	B°
A	140°	220°
B	65°	220°
C	85°	240°
D	130°	285°
E	65°	285°
F	85°	220°



Plug




Receptacle

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 811 Mighty Mouse High Density (HD)
Pre-Wired Plug Connectors
811-001-06



Pre-Wired Plug Connectors Series 811 Mighty Mouse High Density plugs feature damage-resistant double-start ACME mating threads and integral shielding/overmolding platforms. These plugs are factory-terminated to insulated wire and backpotted with epoxy. The TwistPin contact system meets requirements of MIL-DTL-83513 and provides outstanding resistance to high levels of shock and vibration. Choose Type K general purpose Teflon® wire or Type J lightweight space-grade Tefzel® wire. 3A current rating, 600 VAC dielectric withstanding voltage.

How To Order									
Sample Part Number	**811-001-06**	**MT**	**5-7**	**P**	**A**	**6**	**K**	**7**	**-18**
Series	**811-001-06** = Plug with Standard Coupling								
Material/Finish	See Material and Finish Table								
Shell Size - Insert Arr.	**5-7** = 7 Contacts **6-12** = 12 Contacts **7-22** = 22 Contacts **8-30** = 30 Contacts **9-42** = 42 Contacts								
Contact Type	**P** = Pin Contacts **S** = Socket Contacts								
Key Position	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**								
Wire size	**6** = #26 AWG **8** = #28 AWG (color code 1 or 7 only) **0** = #30 AWG (Wire Type J, color code 1 or 7 only)								
Wire Type	**K** = M22759/11 **J** = M22759-33 **E** = NEMA HP3-EB								
Wire Color	**1** = White **5** = Color code per MIL-STD-681 (striped)* **7** = 10 Solid colors, repeating								
Wire Length (inches)	**12**, **18**, **36**, **72** Specify any length from 2 inches to 144 inches								

*Size 28 AWG and Size 30 AWG J type wire not available in striped color code 5

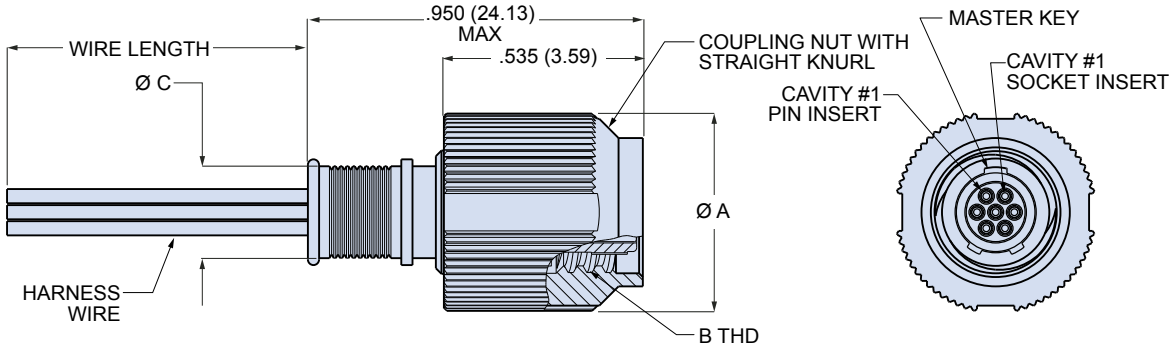

Material and Finish		
Code	Material	Finish
ME	Aluminum	Electroless Nickel
ZNU	Aluminum	Zinc-Nickel-PTFE with Black Chromate
MT	Aluminum	Nickel-PTFE
ZR	Aluminum	Zinc-Nickel with Black Chromate
Z1	Stainless Steel	Passivated
ZR plating is RoHS compliat and non-reflective.		
ZNU plateing is non-reflective and passes 1,000 hours salt spray testing		

Dimensions					
Shell Size	Ø A		B Thread	Ø C	
	In.	mm.		In.	mm.
5	.540	13.72	.3125-.05P-.1L-2B	.246	6.25
6	.600	15.24	.375-.05P-.1L-2B	.286	7.26
7	.730	18.54	.4375-.05P-.1L-2B	.391	9.93
8	.800	20.32	.5000-.05P-.1L-2B	.443	11.25
9	.862	21.89	.5625-.05P-.1L-2B	.498	12.65


Rev 11/14/17

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD) Pre-Wired In-Line Receptacle Connectors


811-003-01



In-Line Pigtail Receptacles Series 811 Mighty Mouse High Density in-line receptacles feature damage-resistant double-start ACME mating threads and integral shielding/overmolding platforms. These receptacles are factory-terminated to insulated wire and backpotted with epoxy. The TwistPin contact system meets requirements of MIL-DTL-83513 and provides outstanding resistance to high levels of shock and vibration. Choose Type K general purpose Teflon® wire or Type J lightweight space-grade Tefzel® wire. 3A current rating, 600 VAC dielectric withstanding voltage.

How To Order									
Sample Part Number	811-003-01	MT	5-7	S	A	8	K	7	-18
Series	**811-003-01** = Inline								
Material/Finish	See Material and Finish Table								
Shell Size - Insert Arr.	**5-7** = 7 Contacts **6-12** = 12 Contacts **7-22** = 22 Contacts **8-30** = 30 Contacts **9-42** = 42 Contacts								
Contact Type	**P** = Pin Contacts **S** = Socket Contacts								
Key Position	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**								
Wire size	**6** = #26 AWG **8** = #28 AWG (color code 1 or 7 only) **0** = #30 AWG (Wire Type J, color code 1 or 7 only)								
Wire Type	**K** = M22759/11 **J** = M22759-33 **E** = NEMA HP3-EB								
Wire Color	**1** = White **5** = Color code per MIL-STD-681 (striped)* **7** = 10 Solid colors, repeating								
Wire Length (inches)	**12**, **18**, **36**, **72** Specify any length from 2 inches to 144 inches								

*Size 28 AWG and Size 30 AWG J type wire not available in striped color code 5

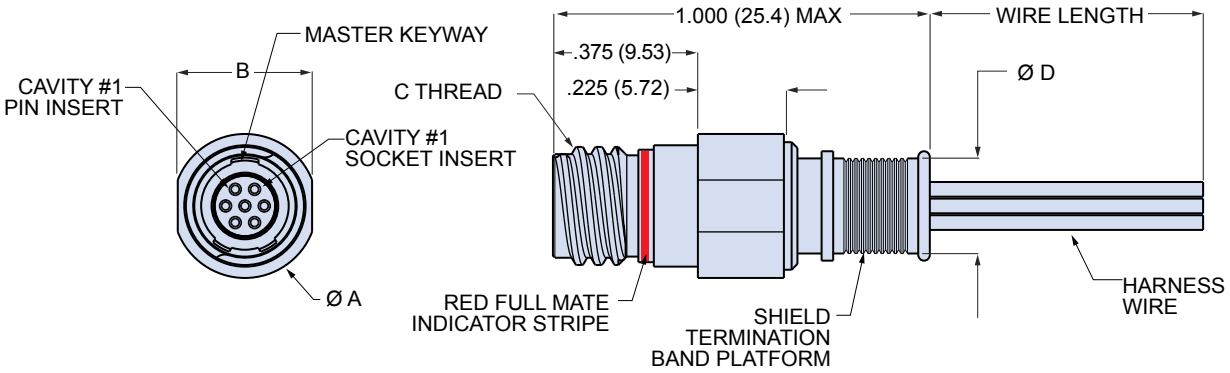

Material and Finish		
Code	Material	Finish
ME	Aluminum	Electroless Nickel
ZNU	Aluminum	Zinc-Nickel-PTFE with Black Chromate
MT	Aluminum	Nickel-PTFE
ZR	Aluminum	Zinc-Nickel with Black Chromate
Z1	Stainless Steel	Passivated
ZR plating is RoHS compliat and non-reflective. ZNU plateing is non-reflective and passes 1,000 hours salt spray testing		


Dimensions							
Shell Size	Ø A		B Flat		C Thread	Ø D	
	In.	mm.	In.	mm.		In.	mm.
5	.375	9.53	.350	8.89	.3125-.05P-.1L-2A	.246	6.25
6	.415	10.54	.390	9.91	.3750-.05P-.1L-2A	.286	7.26
7	.500	12.70	.475	12.07	.4375-.05P-.1L-2A	.391	9.93
8	.580	14.73	.555	14.10	.5000-.05P-.1L-2A	.443	11.25
9	.635	16.13	.610	15.49	.5625-.05P-.1L-2A	.498	12.65

Rev 11/14/17

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD)
Pre-Wired Square Flange Receptacle Connectors
811-003-02 and 811-004-02





Square Flange Pigtail Receptacles series 811 Mighty Mouse High Density panel mount receptacles feature damage-resistant double-start ACME mating threads. These receptacles are factory-terminated to insulated wire and backpotted with epoxy. The TwistPin contact system meets requirements of MIL-DTL-83513 and provides outstanding resistance to high levels of shock and vibration. Choose Type K general purpose Teflon® wire or Type J lightweight space-grade Tefzel® wire. 3A current rating, 600 VAC dielectric withstanding voltage.

How To Order									
Sample Part Number	**811-003-02**	**MT**	**5-7**	**P**	**A**	**6**	**K**	**7**	**-18**
Series	**811-003-02** = Panel Mount Square Flange Receptacle Connector with Termination Platform for Shield Attachment or Overmolding **811-004-02** = Low Profile Panel Mount Square Flange Receptacle Connector								
Material/Finish	See Material and Finish Table								
Shell Size - Insert Arr.	**5-7** = 7 Contacts **6-12** = 12 Contacts **7-22** = 22 Contacts **8-30** = 30 Contacts **9-42** = 42 Contacts								
Contact Type	**P** = Pin Contacts **S** = Socket Contacts								
Key Position	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**								
Wire size	**6** = #26 **8** = #28 (Color code 1 or 7 only) **0** = #30 (Wire Type J, color code 1 or 7 only)								
Wire Type	**K** = M22759/11 **J** = M22759-33 **E** = NEMA HP3-EB								
Wire Color	**1** = White **5** = Color code per MIL-STD-681 (striped)* **7** = 10 Solid colors, repeating								
Wire Length (inches)	**12**, **18**, **36**, **72** Specify any length from 2 inches to 144 inches								

*Size 28 AWG and Size 30 AWG J type wire not available in striped color code 5

Material and Finish		
Code	Material	Finish
ME	Aluminum	Electroless Nickel
ZNU	Aluminum	Zinc-Nickel-PTFE with Black Chromate
MT	Aluminum	Nickel-PTFE
ZR	Aluminum	Zinc-Nickel with Black Chromate
Z1	Stainless Steel	Passivated
ZR plating is RoHS compliat and non-reflective. ZNU plateing is non-reflective and passes 1,000 hours salt spray testing		


Table I: Series	
	
811-005-02 Receptacle with Banding Platform	**811-004-02** Low Profile Receptacle with Banding Platform

Rev 11/14/17


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Square flange receptacle, low profile or with band platform

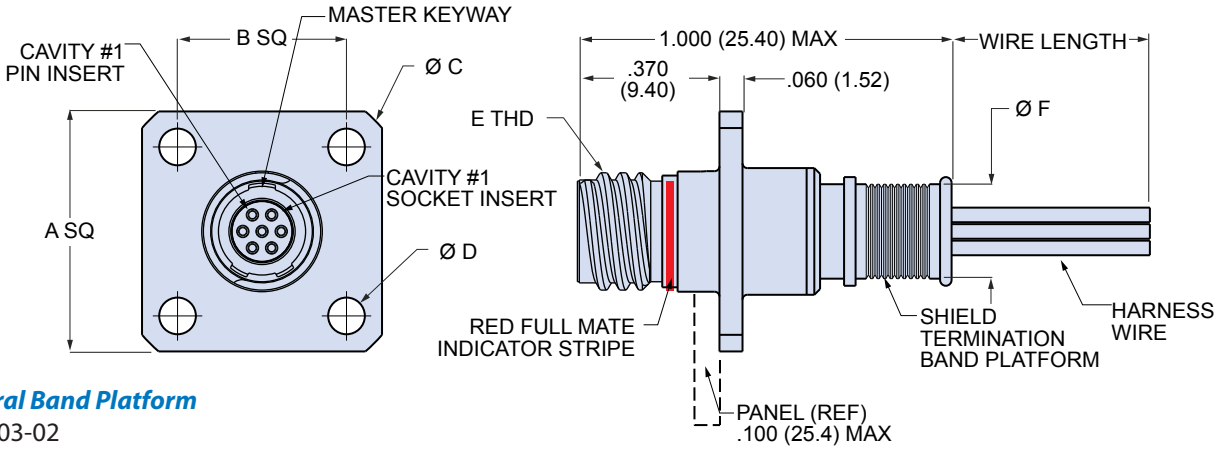


Integral Band Platform
811-003-02

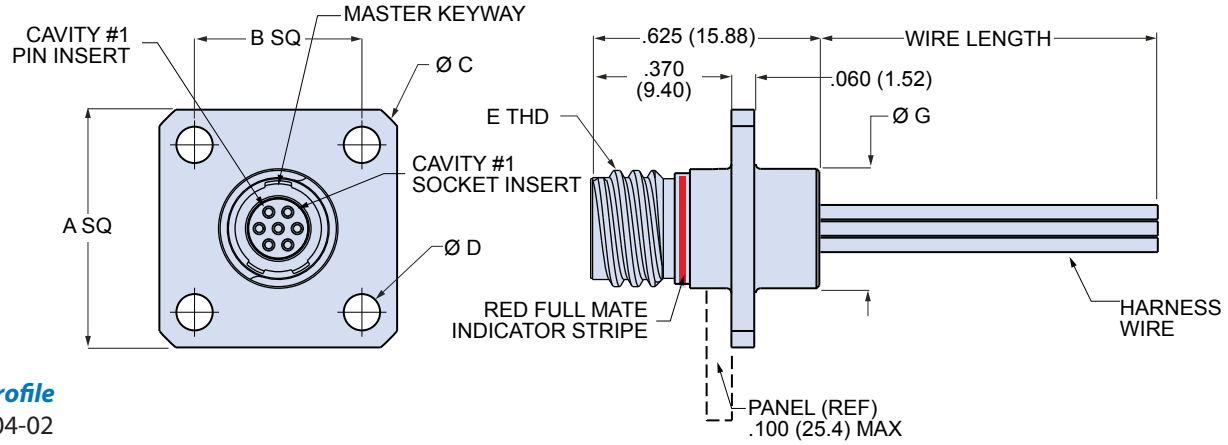

Low Profile
811-004-02

Dimensions													
Shell Size	A Square		B Square		Ø C		Ø D		E Thread	Ø F		Ø G	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.
5	.625	15.88	.440	11.18	.825	20.96	.093	2.36	.3125-.05P-.1L-2A	.246	6.25	.320	8.13
6	.725	18.42	.530	13.46	.950	24.13	.093	2.36	.3750-.05P-.1L-2A	.286	7.26	.375	9.53
7	.800	20.32	.600	15.24	1.050	26.67	.093	2.36	.4375-.05P-.1L-2A	.391	9.93	.480	12.19
8	.850	21.59	.650	16.51	1.125	28.58	.093	2.36	.5000-.05P-.1L-2A	.443	11.25	.540	13.72
9	.950	24.13	.750	19.05	1.250	31.75	.093	2.36	.5625-.05P-.1L-2A	.498	12.65	.600	15.24

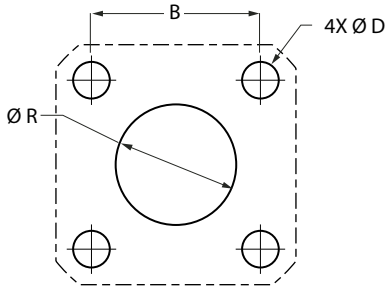

Panel Cutout		
Shell Size	Ø R	
	In.	mm.
5	.350	8.89
6	.390	9.91
7	.500	12.70
8	.560	14.22
9	.620	15.75

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD) Pre-Wired Jam Nut Receptacle Connectors

811-003-07 and 811-004-07





Jam Nut Pigtail Receptacles Series 811 Mighty Mouse High Density rear panel mount jam nut receptacles feature damage-resistant double-start ACME mating threads. These receptacles are factory-terminated to insulated wire and backpotted with epoxy. The TwistPin contact system meets requirements of MIL-DTL-83513 and provides outstanding resistance to high levels of shock and vibration. Choose Type K general purpose Teflon® wire or Type J lightweight space-grade Tefzel® wire. 3A current rating, 600 VAC dielectric withstanding voltage.

How To Order									
Sample Part Number	**811-003-07**	**MT**	**5-7**	**P**	**A**	**6**	**K**	**7**	**-18**
Series	**811-003-07** = Jam Nut Mount with Band Platform **811-004-07** = Low Profile Jam Nut Mount, no Band Platform								
Material/Finish	See Material and Finish Table								
Shell Size - Insert Arr.	**5-7** = 7 Contacts **6-12** = 12 Contacts **7-22** = 22 Contacts **8-30** = 30 Contacts **9-42** = 42 Contacts								
Contact Type	**P** = Pin Contacts **S** = Socket Contacts								
Key Position	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**								
Wire size	**6** = #26 AWG **8** = #28 AWG (Color code 1 or 7 only) **0** = #30 AWG (Wire Type J, color code 1 or 7 only)								
Wire Type	**K** = M22759/11 **J** = M22759-33 **E** = NEMA HP3-EB								
Wire Color	**1** = White **5** = Color code per MIL-STD-681 (striped)* **7** = 10 Solid colors, repeating								
Wire Length (inches)	**12**, **18**, **36**, **72** Specify any length from 2 inches to 144 inches								

*Size 28 AWG and Size 30 AWG J type wire not available in striped color code 5

Material and Finish		
Code	Material	Finish
ME	Aluminum	Electroless Nickel
ZNU	Aluminum	Zinc-Nickel-PTFE with Black Chromate
MT	Aluminum	Nickel-PTFE
ZR	Aluminum	Zinc-Nickel with Black Chromate
Z1	Stainless Steel	Passivated
ZR plating is RoHS compliat and non-reflective. ZNU plateing is non-reflective and passes 1,000 hours salt spray testing		


Table I: Series	
	
811-003-07 Panel Mount Jam Nut Receptacle Banding Platform	**811-004-07** Low Profile Panel Mount Jam Nut Receptacle, No Band Platform

Rev 11/14/17


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam Nut, low profile receptacle with or without shield termination band platform

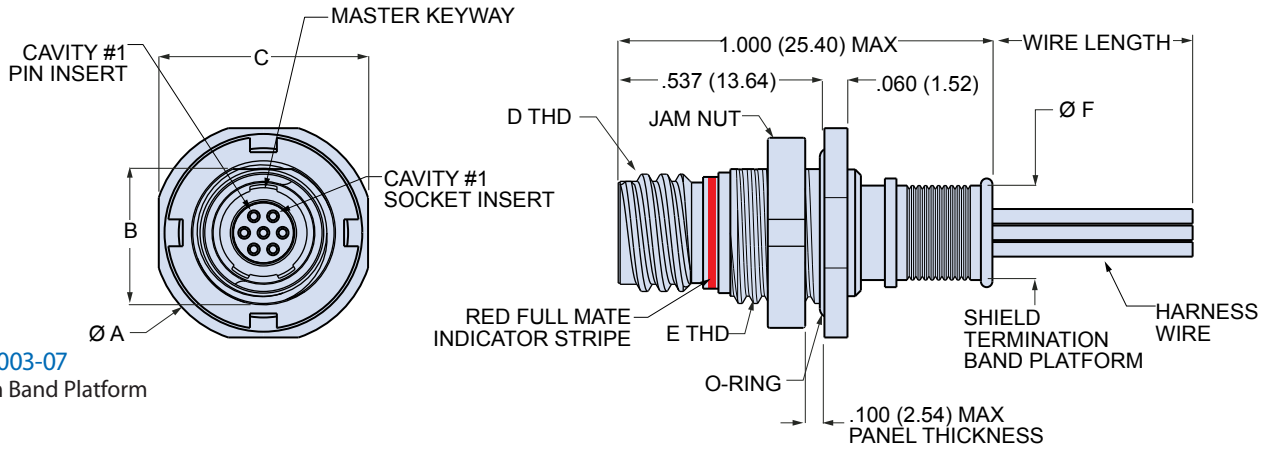


811-003-07
With Band Platform

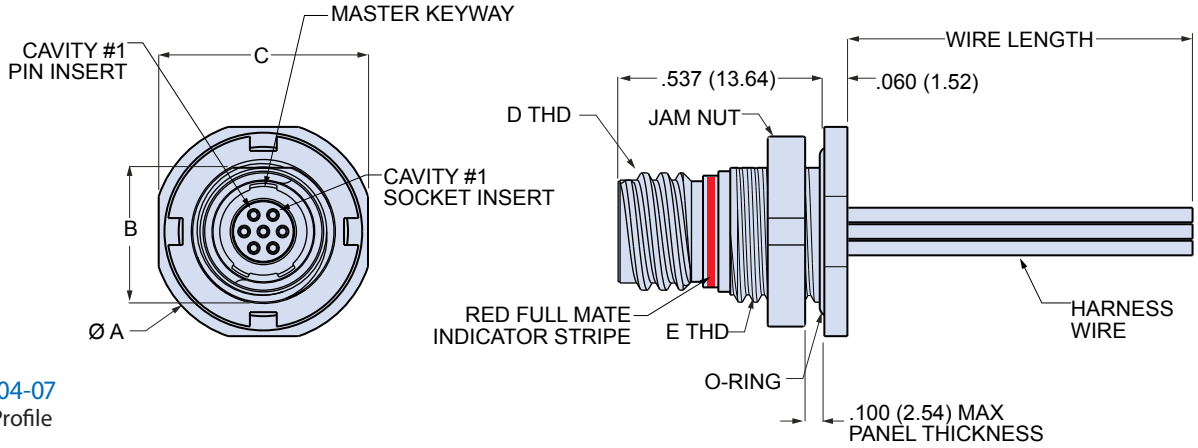

811-004-07
Low Profile

Dimensions										
Shell Size	Ø A		B		C		D Thread	E THD UN-2A	Ø F	
	In.	mm.	In.	mm.	In.	mm.			In.	mm.
5	.575	14.61	.350	8.89	.545	13.84	.3125-.05P-.1L-2A	.375-28	.246	6.25
6	.635	16.13	.410	10.41	.595	15.11	.3750-.05P-.1L-2A	.4375-28	.286	7.26
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-.1L-2A	.5625-32	.391	9.93
8	.755	19.18	.536	13.61	.723	18.36	.5000-.05P-.1L-2A	.5625-32	.443	11.25
9	.830	21.08	.596	15.14	.790	20.07	.5625-.05P-.1L-2A	.625-28	.498	12.65




Panel Cutout				
Shell Size	A		B Ø	
	In.±.002	mm.±0.05	In.±.002	mm.±0.05
5	.356	9.04	.385	9.78
6	.416	10.57	.447	11.35
7	.542	13.77	.572	14.53
8	.542	13.77	.572	14.53
9	.602	15.29	.635	16.13

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD)
Jam Nut PCB Receptacle Connectors
811-005-07 and 811-006-07 with PC Tails




Jam Nut PC Tail Receptacles Series 811 Mighty Mouse High Density jam nut PCB receptacles have straight PC tails for termination to flex circuits or rigid boards. These receptacles are backpotted with epoxy. The TwistPin contact system meets requirements of MIL-DTL-83513 and provides outstanding resistance to high levels of shock and vibration. Choose solder-dipped or gold-plated tails. Select 811-006-07 with enhanced waterblocking for open face (unmated) immersion requirements. Molded plastic endcap has standoffs. 3A current rating, 600 VAC dielectric withstanding voltage.

How To Order

Sample Part Number	811-005-07	MT	5-7	P	A	3	-.125

Series	**811-005-07** Series 811 rear panel mount jam nut receptacle, straight pc tails, standard epoxy sealing **811-006-07** Series 811 rear panel mount jam nut receptacle, straight pc tails, enhanced water blocking for open face (unmated) water immersion
Material/Finish*	**ME** = Aluminum/Electroless Nickel **ZNU** = Aluminum/Black Zinc-Nickel **MT** = Aluminum/Nickel-PTFE **ZR** = Aluminum/Black Zinc-Nickel **Z1** = Stainless Steel/Passivated
Shell Size - Insert Arr.	**5-7** = 7 Contacts **7-22** = 22 Contacts **9-42** = 42 Contacts **6-12** = 12 Contacts **8-30** = 30 Contacts
Contact Type	**P** = Pin Contacts **S** = Socket Contacts
Key Position	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**
PC Tail Finish	**3** = Solder-Dipped in 63/37 Tin-Lead **4** = Gold Plated
PC Tail Length	**.090**, **.125**, **.250** (Other lengths are readily available)

* **ZR** plating is RoHS compliant and non-reflective, **ZNU** plateing is non-reflective and passes 1,000 hours salt spray testing

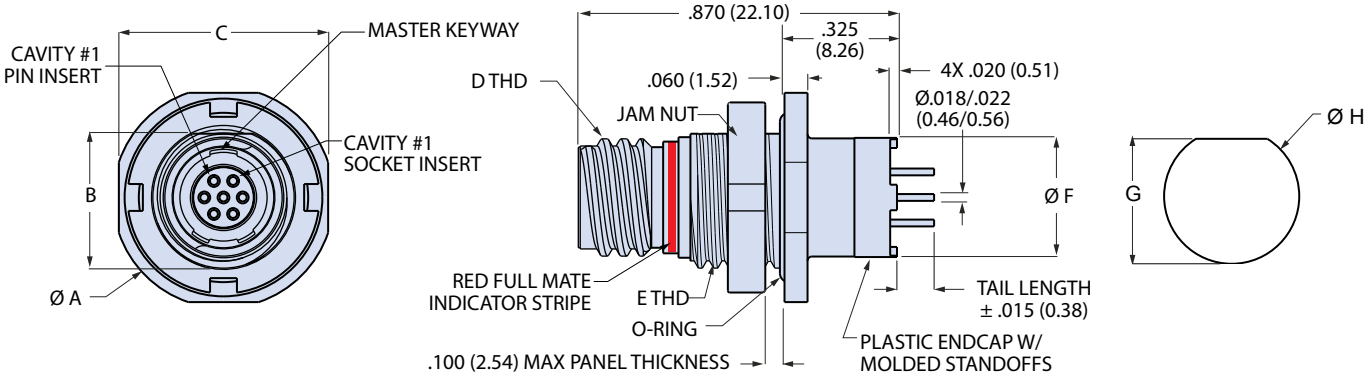

Dimensions

Shell Size	Ø A		B		C		D Thread	E THD UN-2A	Ø F	
	In.	mm.	In.	mm.	In.	mm.			In.	mm.
5	.575	14.61	.350	8.89	.545	13.84	.3125-.05P-.1L-2A	.375-28	.350	8.89
6	.635	16.13	.410	10.41	.602	15.29	.3750-.05P-.1L-2A	.4375-28	.490	12.45
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-.1L-2A	.5625-32	.600	15.24
8	.755	19.18	.536	13.61	.723	18.36	.5000-.05P-.1L-2A	.5625-32	.670	17.02
9	.830	21.08	.596	15.14	.791	20.09	.5625-.05P-.1L-2A	.625-28	.770	19.56


Panel Cutout

Shell Size	G		H Ø	
	In.±.002	mm.±0.05	In.±.002	mm.±0.05
5	.356	9.04	.385	9.78
6	.416	10.57	.447	11.35
7	.542	13.77	.572	14.53
8	.542	13.77	.572	14.53
9	.602	15.29	.635	16.13

Rev 11/14/17

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.




Square Flange PC Tail Receptacles Series 811 Mighty Mouse High Density jam nut PCB receptacles have straight PC tails for termination to flex circuits or rigid boards. These receptacles are backpotted with epoxy. The TwistPin contact system meets requirements of MIL-DTL-83513 and provides outstanding resistance to high levels of shock and vibration. Choose solder-dipped or gold-plated tails. Select 811-006-02 with enhanced waterblocking for open face (unmated) immersion requirements. Molded plastic endcap has standoffs. 3A current rating, 600 VAC dielectric withstanding voltage.

How To Order

Sample Part Number	811-005-02	MT	5-7	P	A	3	-.125

Series	**811-005-02** Series 811 Rear Panel Mount Square Flange Receptacle, Straight PC Tails, Standard Epoxy Sealing **811-006-02** Series 811 Rear Panel Mount Square Flange Receptacle, Straight PC Tails, Enhanced Water Blocking for Open Face (Unmated) Water Immersion
Material/Finish *	**ME** = Aluminum/Electroless Nickel **ZNU** = Aluminum/ Black Zinc-Nickel **MT** = Aluminum/Nickel-PTFE **ZR** = Aluminum/Black Zinc-Nickel **Z1** = Stainless Steel/Passivated
Shell Size - Insert Arr.	**5-7** = 7 Contacts **7-22** = 22 Contacts **9-42** = 42 Contacts **6-12** = 12 Contacts **8-30** = 30 Contacts
Contact Type	**P** = Pin Contacts **S** = Socket Contacts
Key Position	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**
PC Tail Finish	**3** = Solder-Dipped in 63/37 Tin-Lead **4** = Gold Plated
PC Tail Length	**.090**, **.125**, **.250** (Other lengths are readily available)

* **ZR** plating is RoHS compliant and non-reflective, **ZNU** plateing is non-reflective and passes 1,000 hours salt spray testing

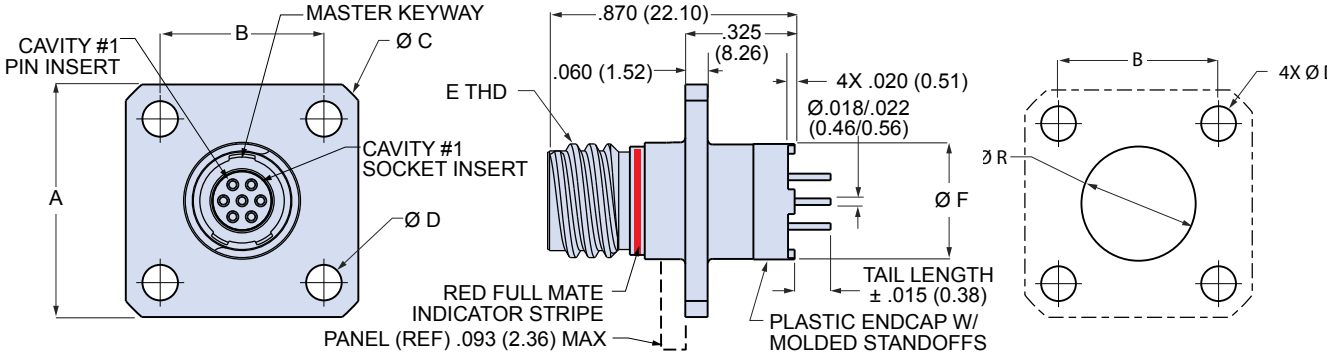

Dimensions

Shell Size	A Square		B Square		Ø C		Ø D		E Thread	Ø F	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.
5	.625	15.88	.440	11.18	.825	20.96	.093	2.36	.3125-.05P-.1L-2A	.350	8.89
6	.725	18.42	.530	13.46	.950	24.13	.093	2.36	.3750-.05P-.1L-2A	.490	12.45
7	.800	20.32	.600	15.24	1.050	26.67	.093	2.36	.4375-.05P-.1L-2A	.600	15.24
8	.850	21.59	.650	16.51	1.125	28.58	.093	2.36	.5000-.05P-.1L-2A	.670	17.02
9	.950	24.13	.750	19.05	1.250	31.75	.093	2.36	.5625-.05P-.1L-2A	.770	19.56

Panel Cutout















Shell Size	Ø G	
	In.	mm.
5	.360	9.14
6	.410	10.41
7	.520	13.21
8	.570	14.48
9	.660	16.76

Rev 11/14/17

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD)
PCB Receptacle Connector Hole Patterns
811-005 and 811-006

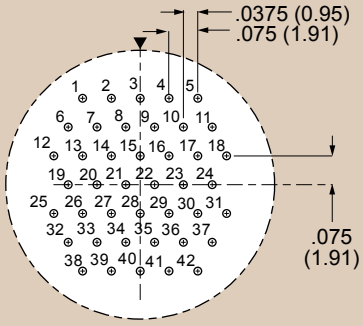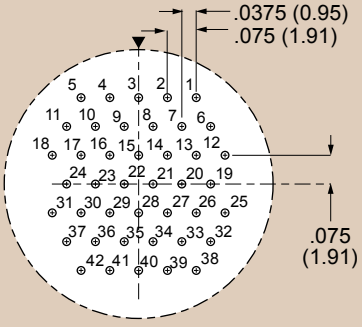Component Mounting Side of PCB		
 Pin Insert Engaging Face 5-7	 Pin Connector	 Socket Connector
 Pin Insert Engaging Face 6-12	 Pin Connector	 Socket Connector
 Pin Insert Engaging Face 7-22	 Pin Connector	 Socket Connector
 Pin Insert Engaging Face 8-30	 Pin Connector	 Socket Connector
 Pin Insert Engaging Face 9-42	 Pin Connector	 Socket Connector

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.



Harsh Environment Cordsets Overmolded Series 811 cordsets withstand abrasion and chemical exposure. Cable construction features silver coated stranded conductors with TFE insulation, tinned copper braid shield and extruded black polyurethane jacket. Choose single-ended pigtails or double-ended "back-to-back" cables. Semi-rigid polyamide overmold provides strain relief and environmental sealing.

- **Tough polyurethane jacket, low-smoke, zero halogen**
- **Shielded with 90% minimum tinned copper braid**
- **Water-resistant to 1 meter**
- **Straight or right angle**
- **100% electrically tested**
- **Easy to order, quick delivery**

L

How To Order

Sample Part Number	811-007	-A	S	C	S	6	MT	5-7	P	A	-60


Series	**811-007** = Overmoled Cordset
End "A" Connector	**-A** = Plug with Female Socket Contacts **-B** = Plug with Male Pin Contacts **-C** = Receptacle with Male Pin Contacts **-D** = Receptacle with Female Socket Contacts
End "A" Configuration	**S** = Straight **R** = Right Angle
End "B" Connector	**A** = Plug with Female Socket Contacts **B** = Plug with Male Pin Contacts **C** = Receptacle with Male Pin Contacts **D** = Receptacle with Female Socket Contacts **N** = No Connector (Single-Ended Pigtail)
End "B" Configuration	**S** = Straight **R** = Right Angle (Omit For Single-Ended Pigtail)
Wire Size	**6** = #26 Awg
Shell Finish	**ME** = Aluminum/Electroless Nickel **MT** = Aluminum/Nickel-PTFE **ZR** = Aluminum/Black Zinc-Nickel **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **Z1** = Stainless Steel/Passivated
Layout (Shell Size-Cont.)	**5-7**, **6-12**, **7-22**, **8-30**, **9-42**
Protective Cover	**P** = Metal Protective Covers Included **N** = No Protective Covers
Key Postion	**A** = Normal Alternate Key Positions: **B**, **C**, **D**, **E**, **F**
Length in Inches	Overall Length In Inches (12 Inch Minimum)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD) Harsh Environment Cordsets

811-007

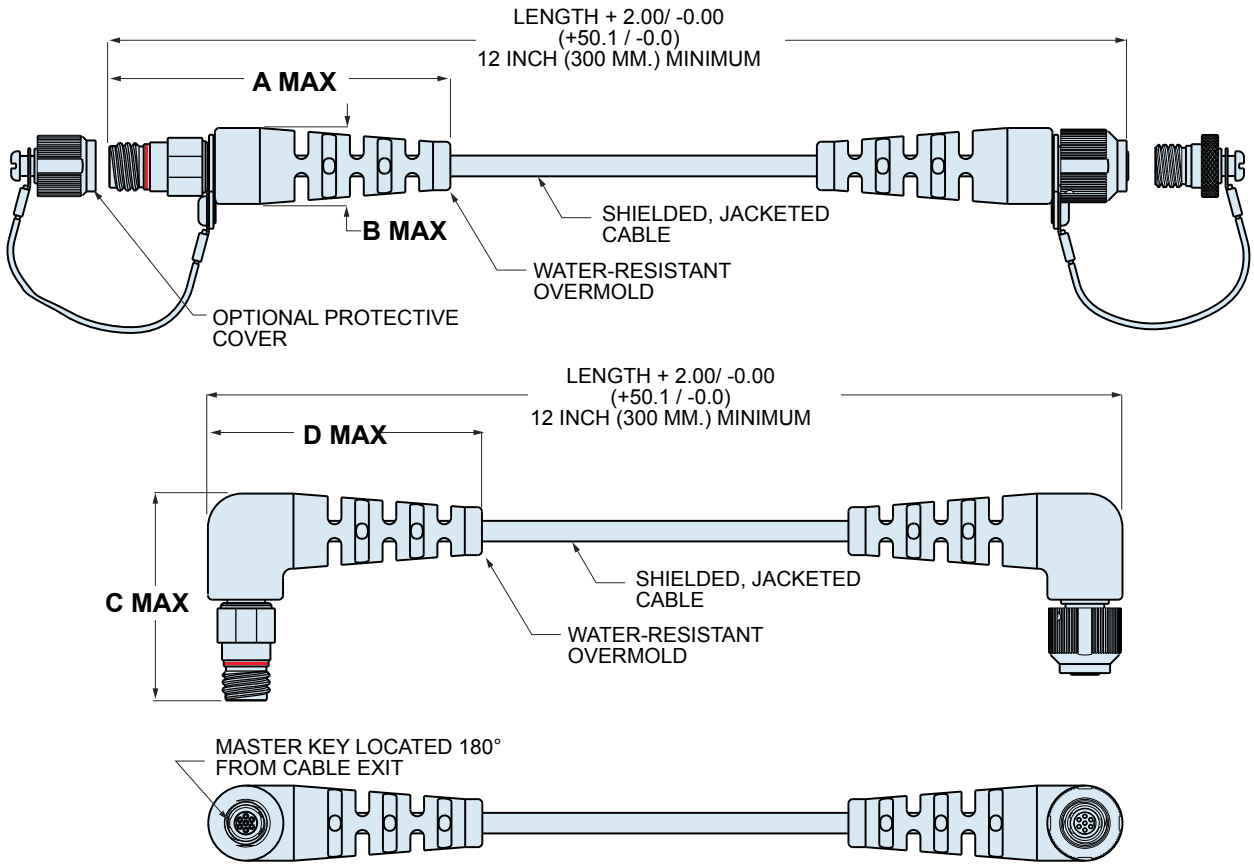

Dimensions								
Shell Size	A Max.		B Max.		C Max.		D Max.	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	2.50	63.5	0.60	15.3	2.20	55.9	1.50	38.1
6	2.50	63.5	0.60	15.3	2.20	55.9	1.50	38.1
7	2.50	63.5	0.70	17.8	2.40	61.0	1.50	38.1
8	2.60	66.0	0.75	19.1	2.50	63.5	1.60	40.7
9	2.90	73.7	0.85	21.6	2.70	68.6	1.90	48.3

NOTES

Material and Finishes

- Cable Jacket Material: Thermoplastic Polyurethane, Black, Low-Smoke, Zero-Halogen
- Cable Shield: Tin-Coated Copper Braid, 90% Minimum Coverage
- Conductors: Silver Coated Stranded Wire, TFE Insulated, Per M22759/11
- Band-Master™ ATS Shield Termination Band: Stainless Steel
- Current Rating: 3 A.
- Test Voltage (Dielectric Withstanding Voltage): 600 VAC Sea Level
- Insulation Resistance: 200 megohms minimum
- Operating Temperature: -30° C. to +105° C.
- Solvent Resistance, Polyamide Overmold: Excellent Resistance to Most Solvents, Fuels, and Oils; Poor Resistance to Strong Acids and Bipolar Solvents (Alcohol)
- Shielding Effectiveness: 50 dB minimum from 100MHz to 1000MHz.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

SERIES 80
AND STINGER
CONTACTS

MIGHTY MOUSE

Stinger equipped Mighty Mouse connectors offer HD performance in a front release crimp contact format



Mighty Mouse 841, 844, and 845 Stinger™ equipped connectors provide a light weight, high density solution on .050 centers. Unique HD front release design allows for in-house cable termination or field repairs by technicians. These contacts are available for Mighty Mouse series 801, 804 and 805 connectors .

Features Include:

- Integrated retention clip and o-ring sealing
- Contacts meet all applicable SAE AS39029 requirements
- Contacts accommodate wire range of 30-24 AWG (.042 max diameter)
- Low mating force, 1/3 insertion force of typical fixed Micro-D TwistPin
- Minimum of 2 guide pins to prevent damage to contact pin

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



Series 841 Stinger™ Equipped Plug and Receptacle
Connectors are supplied with size #28 AWG front release crimp Stinger™ contacts on .050 centers. Plugs feature double–start threads and integral banding platform or accessory thread for attachment of backshells or strain reliefs.

Page M-4

M



Series 844 Push-Pull Stinger™ Equipped Plug and Receptacle
Connectors are supplied with size #28 AWG front release crimp Stinger™ contacts on .050 centers. Connectors feature push-pull style mating and integral banding platform or accessory thread for attachment of backshells or strain reliefs.

Page M-10



Series 845 Stinger™ Equipped Plug and Receptacle
Connectors are supplied with size #28 AWG front release crimp Stinger™ contacts on .050 centers. Plugs feature triple–start threads and integral banding platform or accessory thread for attachment of backshells or strain reliefs.

Page M-16



Series 80 Stinger™ Tools
Contact removal and crimp tools for series 84 contacts

Page M-23

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 841, 844 and 845 Mighty Mouse Stinger™ Equipped Connectors

General Information



- **Front-release crimp contact solution**
- **High-density .050" centers**
- **Integrated retention clip and O-ring sealing**
- **Available for Series 801 (threaded stub-ACME), 804 (push-pull) and 805 (triple-start) connectors**
- **Stinger™ contacts meet all applicable requirements of SAE AS39029**
- **Low mating force, 1/3 insertion force of typical fixed Micro-D twist pin**


M

High-Density Stinger™ Front Release Crimp Contact Equipped Series 841, 844 and 845 Connectors


The Glenair size #28 Stinger™ contact system is now available for series 801, 804 and 805 connectors for applications that require high density (.050" center) insert arrangements with convenient front-release crimp-contact termination. Stinger™ contacts accommodate a wire range from 30-24 AWG and feature an integrated O-ring seal and retention clip. Unlike the Glenair Series 811 High-Density solution with its pot-in-place TwistPin contacts, Stinger™ crimp removable contacts allow users to terminate cables, populate connectors and build high-density wire harnesses in-house.

Part No.	Description	Part No.	Description
850-200	Size #28 Crimp Stinger™ Pin Contact	850-201	Size #28 Crimp Style Stinger™ Socket Contact

Plug Cross-Section (841 shown)

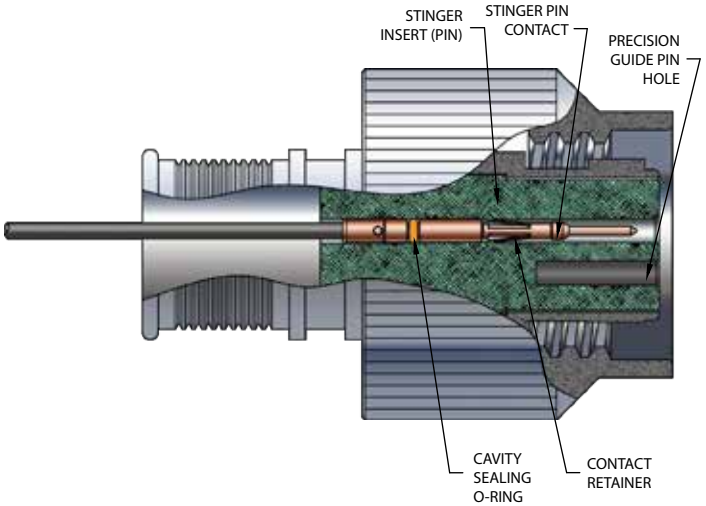

Receptacle Cross-Section (841 shown)

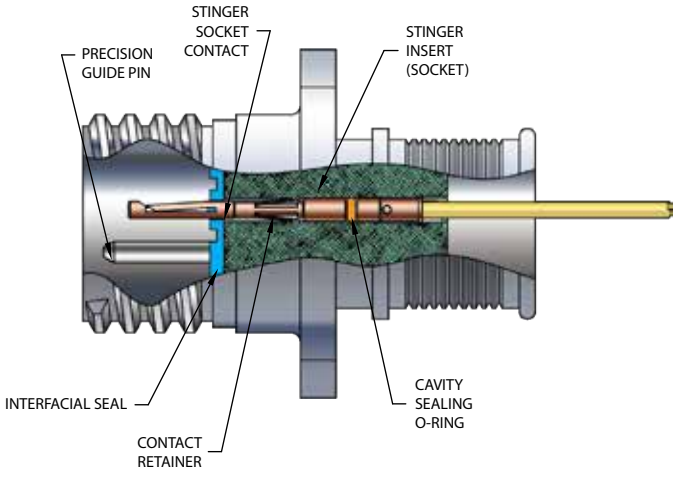

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 841, 844 and 845 Mighty Mouse Stinger™ Equipped Connectors

Insert Arrangements


Series 844 Specifications			
Insulation Resistance	5,000 Megohm Min.	Durability	2000 cycles
Dielectric Withstanding Voltage	500 VAC at sea level	Contact Retention	2 lbs. axial force
Low Level Contact Resistance	50 milliohms Max per AS39029	Contact Engagement Force	3.6 ounces Max
Contact Resistance	54 millivolts Max per AS39029	Contact Separation Force	0.4 ounces Min
Current Carrying Capacity	1.5 Amps	Please consult factory for higher current carrying capacity	

Insert Arrangements




(2x Guide Pins)

Series 841	5-5: 5x #28 Contacts
Series 844	5-5: 5x #28 Contacts
Series 845	N/A




(2x Guide Pins)

Series 841	6-10: 10x #28 Contacts
Series 844	6-10: 10x #28 Contacts
Series 845	8-10: 10x #28 Contacts




(2x Guide Pins)

Series 841	7-20: 20x #28 Contacts
Series 844	7-20: 20x #28 Contacts
Series 845	9-20: 20x #28 Contacts




(2x Guide Pins)

Series 841	8-28: 28x #28 Contacts
Series 844	8-28: 28x #28 Contacts
Series 845	10-28: 28x #28 Contacts




(2x Guide Pins)

Series 841	9-40: 40x #28 Contacts
Series 844	9-40: 40x #28 Contacts
Series 845	11-40: 40x #28 Contacts



(3x Guide Pins)

Series 841	10-58: 58x #28 Contacts
Series 844	10-58: 58x #28 Contacts
Series 845	12-58: 58x #28 Contacts



(3x Guide Pins)

Series 841	11-71: 71x #28 Contacts
Series 844	11-71: 71x #28 Contacts
Series 845	13-71: 71x #28 Contacts

M

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 841 Stinger™ Mighty Mouse Double-Start ACME Thread Plug

841-001 and 841-002 Ordering Information





Series 841 Mighty Mouse Plug with Stinger™ Contacts these durable, low insertion force front release size #28 contacts feature integrated retention clips and O-ring sealing for optimized performance. All 841 series shells feature a double–start modified stub ACME mating thread for improved protection against cross–mating and thread damage. Connector shells are machined aluminum or stainless steel. Available in shell sizes 5 through 11 in 7 contact arrangements, all arrangements include a minimum of two guide pins.

M

How To Order							
Sample Part Number		841-001	-16	M	6-10	P	A
Series (See Table I)	**841-001** = Plug with Integral Banding Porch **841-002** = Plug with Accessory Thread						
Shell Style	**-16** = Plug with Anti-Decoupling Spring **-26** = Self-Locking Plug with Ratchet Mechanism						
Shell Material and Finish	**M** = Aluminum/Electroless Nickel RoHS Compliant **MT** = Aluminum/ Nickel-PTFE RoHS Compliant **NF** = Aluminum/Cadmium with Olive Drab Chromate **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **Z1** = Stainless Steel/Passivated RoHS Compliant						
Shell Size - Insert Arrangement	**5-5**, **6-10**, **7-20**, **8-28**, **9-40**, **10-58**, **11-71**						
Contact Type	**P** = Pin with O-ring **S** = Socket with O-ring						
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F						


Table I: Series

	
841-001 Banding Platform	**841-002** Rear Accessory Thread

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

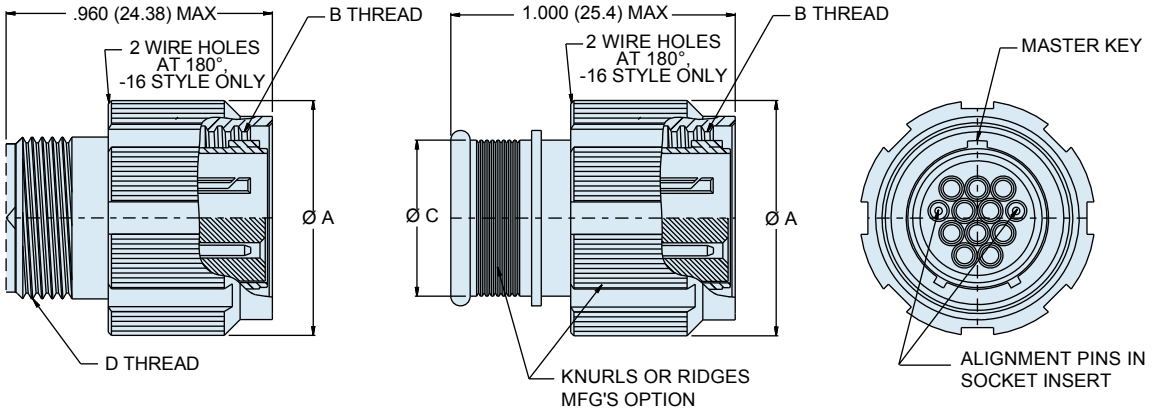


Accessory Thread
841-002-01

Integral Band Platform
841-001-01

FACE VIEW OF PLUG
AS VIEWED FROM ENGAGING END.
6-10 ARRANGEMENT SHOWN

Dimensions								
Shell Size	Ø A Shell Style 16		Ø A Shell Style 26		B Thread	Ø C		D Thread
	In.	mm.	In.	mm.		In.	mm.	
5	0.54	13.72	0.65	16.51	.3125-.05P-.1L-DS-2B	.245	6.22	.2500-32 UNEF-2A
6	0.60	15.24	0.69	17.53	.3750-.05P-.1L-DS-2B	.290	7.37	.3125-32 UNEF-2A
7	0.69	17.53	0.79	20.07	.4375-.05P-.1L-DS-2B	.390	9.91	.4375-28 UNEF-2A
8	0.75	19.05	0.83	21.08	.5000-.05P-.1L-DS-2B	.445	11.30	.5000-28 UNEF-2A
9	0.81	20.57	0.92	23.37	.5625-.05P-.1L-DS-2B	.500	12.70	.5625-24 UNEF-2A
10	0.88	22.35	0.98	24.89	.6250-.05P-.1L-DS-2B	.560	14.22	6250-24 UNEF-2A
11	0.92	23.37	1.02	25.91	.6875-.05P-.1L-DS-2B	.605	15.37	6875-24 UNEF-2A

Table I: Key Positions			
	A°	B°	
A	150°	210°	
B	75°	210°	
C	95°	230°	
D	140°	275°	
E	75°	275°	
F	95°	210°	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 841 Stinger™ Mighty Mouse Double-Start ACME Thread Receptacle

841-003 and 841-004 Ordering Information



In-Line
Shell Style 01

Rear Panel Jam Nut Mount (Shown)
Shell Style 07

Square Flange Mount
Shell Style 02/12

How To Order

Sample Part Number	841-003	-07	ZNU	6-10	P	A
Series (See Table I)	**841-003** = Receptacle with Integrated Banding Porch **841-004** = Receptacle with Accessory Thread					
Shell Style (See Table II)	**-01** = In-Line Receptacle for Free-Hanging Cables **-02** = Thru Hole Square Flange Receptacle for Front or Rear Panel Mounting **-12** = Square Flange Receptacle for Rear Panel Mounting with "Non-Locking" Clinch Nuts **-22** = Square Flange Receptacle for Rear Panel Mounting with "Locking" Clinch Nuts **-07** = Jam Nut Receptacle for Rear Panel Mounting					
Material and Finish	**M** = Aluminum/Electroless Nickel RoHS Compliant **MT** = Aluminum/Nickel-PTFE RoHS Compliant **NF** = Aluminum/Cadmium with Olive Drab Chromate **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **Z1** = Stainless Steel/Passivated RoHS Compliant					
Shell Size - Insert Arrangement	**5-5**, **6-10**, **7-20**, **8-28**, **9-40**, **10-58**, **11-71**					
Contact Type	**P** = Pin with O-ring **S** = Socket with O-ring					
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series



	
841-003 Banding Platform	**841-004** Rear Accessory Thread

Table II: Shell Style





		
Style -01 In-line	**Style -02/-12/-22** Square Flange	**Style -07** Jam Nut

Table III: Key Positions


	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Inline receptacle - shell style 01

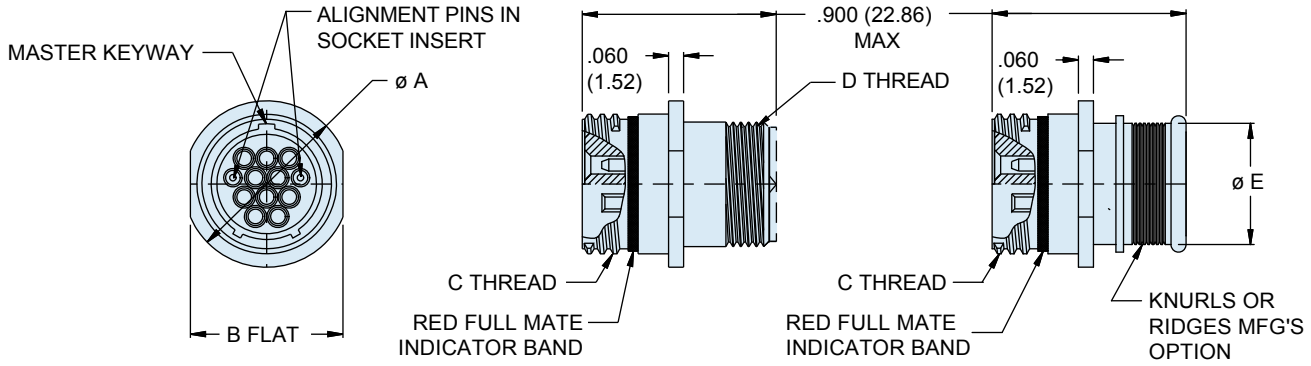


Accessory Thread
841-004-01

Integral Band Platform
841-003-01

Dimensions								
Shell Size	ø A		B Flat		C Thread	D Thread	øE	
	in	mm	in	mm			in	mm
5	0.355	9.02	0.325	8.26	.3125-.05P-.1L-DS-2A	.2500-32 UNEF-2A	0.245	6.22
6	0.415	10.54	0.385	9.78	.3750-.05P-.1L-DS-2A	.3125-23 UNEF-2A	0.290	7.37
7	0.480	12.19	0.445	11.30	.4375-.05P-.1L-DS-2A	.4375-28 UNEF-2A	0.390	9.91
8	0.540	13.72	0.510	12.95	.5000-.05P-.1L-DS-2A	.5000-28 UNEF-2A	0.445	11.30
9	0.605	15.37	0.575	14.61	.5625-.05P-.1L-DS-2A	.5625-24 UNEF-2A	0.500	12.70
10	0.665	16.89	0.635	16.13	.6250-.05P-.1L-DS-2A	.6250-24 UNEF-2A	0.560	14.22
11	0.730	18.54	0.700	17.78	.6875-.05P-.1L-DS-2A	.6875-24 UNEF-2A	0.605	15.37

Square flange, front or rear mount receptacle - shell style 02

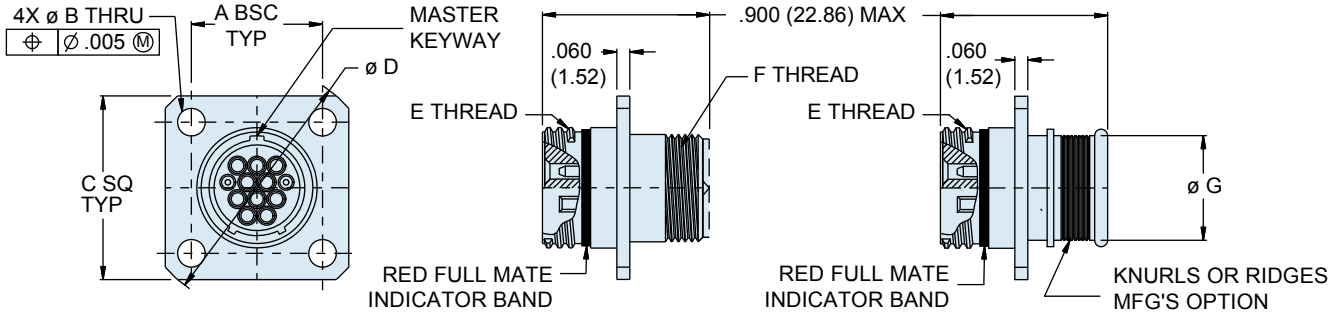

Accessory Thread
841-004-02

Integral Band Platform
841-003-02

Dimensions												
Shell Size	A BSC		B Holes		C SQ		ø D		E Thread	F Thread	ø G	
	in	mm	in	mm	in	mm	in	mm			in	mm
5	0.363	9.22	.096 .091	2.44 2.31	0.530	13.46	0.680	17.27	.3125-.05P-.1L-DS-2A	.2500-32 UNEF-2A	0.245	6.22
6	0.423	10.74			0.590	14.99	0.750	19.05	.3750-.05P-.1L-DS-2A	.3125-23 UNEF-2A	0.290	7.37
7	0.483	12.27			0.650	16.51	0.850	21.59	.4375-.05P-.1L-DS-2A	.4375-28 UNEF-2A	0.390	9.91
8	0.545	13.84			0.712	18.08	0.938	23.83	.5000-.05P-.1L-DS-2A	.5000-28 UNEF-2A	0.445	11.30
9	0.607	15.42	.130 .126	3.30 3.20	0.850	21.59	1.125	28.58	.5625-.05P-.1L-DS-2A	.5625-24 UNEF-2A	0.500	12.70
10	0.670	17.02			0.890	22.61	1.188	30.18	.6250-.05P-.1L-DS-2A	.6250-24 UNEF-2A	0.560	14.22
11	0.715	18.16			0.935	23.75	1.250	31.75	.6875-.05P-.1L-DS-2A	.6875-24 UNEF-2A	0.605	15.37


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 841 Stinger™ Mighty Mouse Double-Start ACME Thread Receptacle

841-003 and 841-004 - Shell Style 07 Dimensions

Jam nut, rear panel mount receptacle - shell style 07

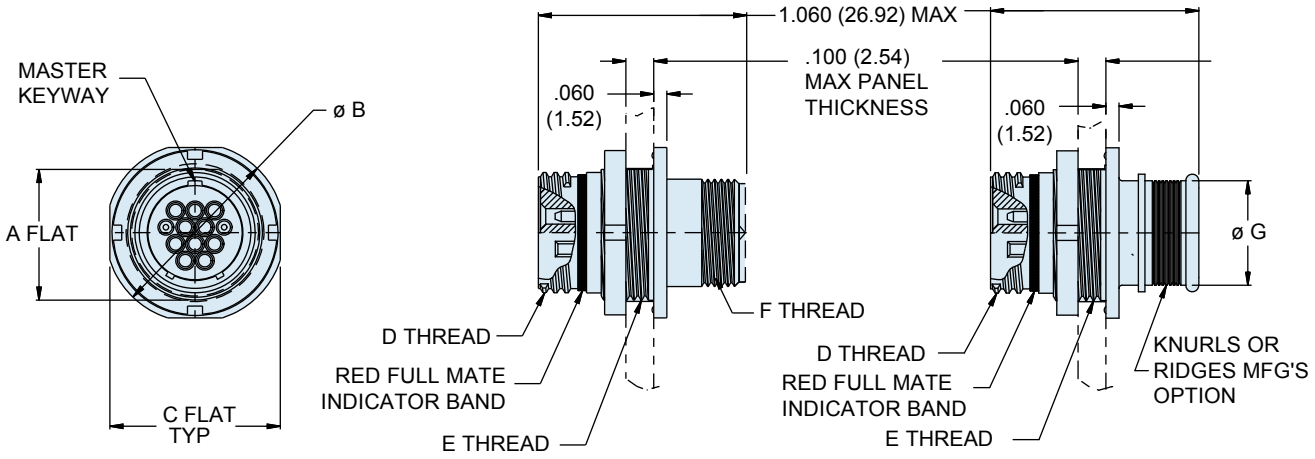


Accessory Thread
841-004-07

Integral Band Platform
841-003-07

Dimensions											
Shell Size	A Flat		Ø B		C Flat		D Thread	E Thread	F Thread	Ø G	
	In	mm	In	mm	In	mm				In	mm
5	0.350	8.89	0.575	14.61	0.545	13.84	.3125-.05P-.1L-DS-2A	.3750-28 UN-2A	.2500-32 UNEF-2A	.245	6.22
6	0.410	10.41	0.635	16.13	0.595	15.11	.3750-.05P-.1L-DS-2A	.4375-28 UNEF-2A	.3125-32 UNEF-2A	.290	7.37
7	0.536	13.61	0.755	19.18	0.723	18.36	.4375-.05P-.1L-DS-2A	.5625-32 UN-2A	.4375-28 UNEF-2A	.390	9.91
8	0.536	13.61	0.755	19.18	0.723	18.36	.5000-.05P-.1L-DS-2A	.5625-32 UN-2A	.5000-28 UNEF-2A	.445	11.30
9	0.596	15.14	0.830	21.08	0.790	20.07	.5625-.05P-.1L-DS-2A	.6250-28 UN-2A	.5625-24 UNEF-2A	.500	12.70
10	0.658	16.71	0.890	22.61	0.855	21.72	.6250-.05P-.1L-DS-2A	.6875-28 UN-2A	.6250-24 UNEF-2A	.560	14.22
11	0.718	18.24	0.960	24.38	0.925	23.50	.6875-.05P-.1L-DS-2A	.7500-28 UN-2A	.6875-24 UNEF-2A	.605	15.37

Panel Cutout Dimensions				
N Flat		Ø P		
in	mm	in	mm	
.358 .354	9.09 8.99	.385	9.78	
.418 .414	10.62 10.52	.448	11.38	
.544 .540	13.82 13.72	.573	14.55	
.544 .540	13.82 13.72	.573	14.55	
.604 .600	15.34 15.24	.635	16.13	
.668 .664	16.97 16.87	.698	17.73	
.728 .724	18.49 18.39	.760	19.30	

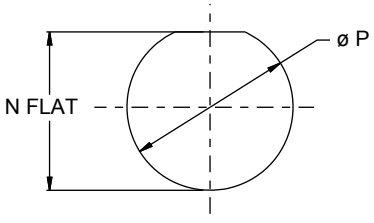


-07 JAM NUT
PANEL CUTOUT

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Square flange, rear panel mount receptacle - shell style 12/22

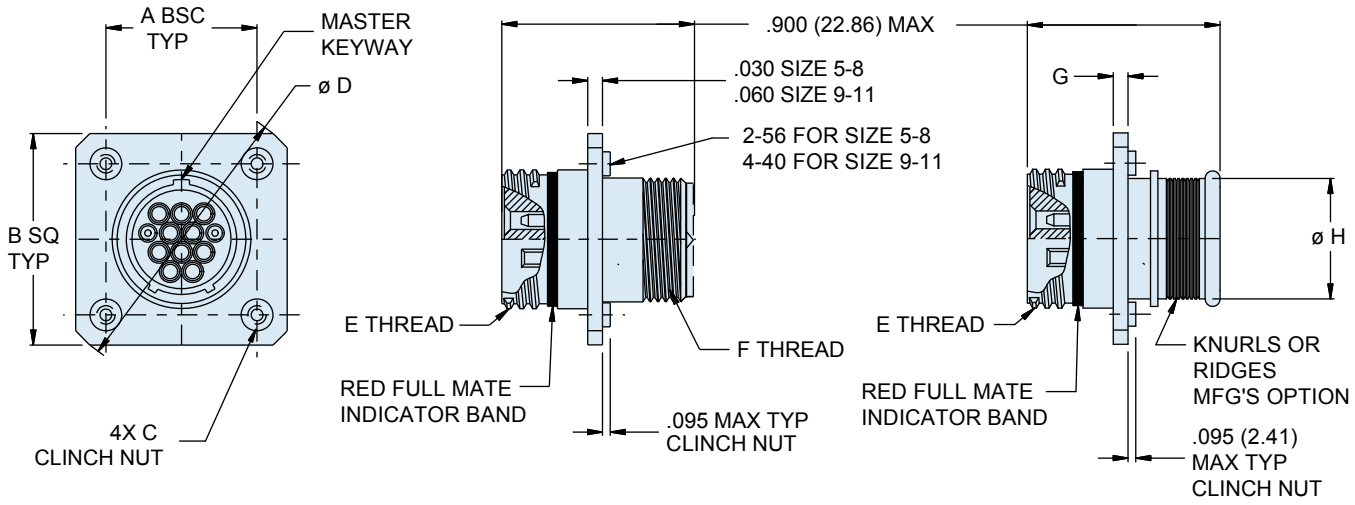


Accessory Thread
841-004-12 and 841-004-22

Integral Band Platform
841-003-12 and 841-003-22

Dimensions												
Shell Size	A BSC		B Sq		C Clinch	Ø D		E Thread	F Thread	G		Ø H	
	in	mm	in	mm		in	mm			in	mm	in	mm
5	0.363	9.22	0.623	15.82	2-56	.774	19.66	.3125-.05P-.1L-DS-2A	.2500-32 UNEF-2A	.030	.76	0.245	6.22
6	0.423	10.74	0.683	17.35		.860	21.84	.3750-.05P-.1L-DS-2A	.3125-23 UNEF-2A			0.290	7.37
7	0.483	12.27	0.743	18.87		.944	23.98	.4375-.05P-.1L-DS-2A	.4375-28 UNEF-2A			0.390	9.91
8	0.545	13.84	0.805	20.45		1.032	26.21	.5000-.05P-.1L-DS-2A	.5000-28 UNEF-2A			0.445	11.30
9	0.607	15.42	0.927	23.55	4-40	1.180	29.97	.5625-.05P-.1L-DS-2A	.5625-24 UNEF-2A	.060	1.52	0.500	12.70
10	0.670	17.02	0.990	25.15		1.268	32.21	.6250-.05P-.1L-DS-2A	.6250-24 UNEF-2A			0.560	14.22
11	0.715	18.16	1.035	26.29		1.331	33.81	.6875-.05P-.1L-DS-2A	.6875-24 UNEF-2A			0.605	15.37

Panel Cutout Dimensions						
Shell Size	Ø J		Ø K		L BSC	
	in	mm	in	mm	in	mm
5	.096 .091	2.44 2.31	.328	8.33	.363	9.22
6			.390	9.91	.423	10.74
7			.453	11.51	.483	12.27
8			.515	13.08	.545	13.84
9	.130 .126	3.30 3.20	.578	14.68	.607	15.42
10			.640	16.26	.670	17.02
11			.703	17.86	.715	18.16

-02 FLANGE
-12 & 22 FLANGE
PANEL CUTOUT

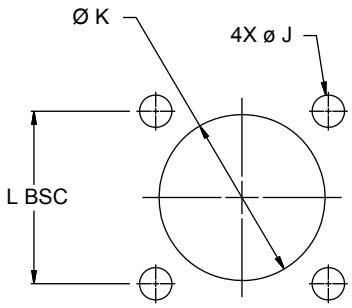

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 844 Stinger™ Mighty Mouse Push-Pull Plug

844-001 and 844-002 - Shell Style 06 Dimensions





Series 844 Mighty Mouse Plug with Stinger™ Contacts these durable, low insertion force front release size #28 contacts feature integrated retention clips and O-ring sealing for optimized performance. Series 844 shells feature a push-pull interface ideal for breakaway connections. The QDC connector employs a stainless steel spring in the receptacle and a detent on the plug body and are well suited for use in headsets, radios, weapons and other applications, while providing excellent durability. The gold-plated spring provides low shell-to-shell resistance for excellent EMI shielding. Connector shells are machined aluminum or stainless steel. Available in shell sizes 5 through 11 in 7 contact arrangements, all arrangements include a minimum of two guide pins.

M

How To Order						
Sample Part Number	**844-001**	**-06**	**M**	**6-10**	**P**	**A**
Series (See Table I)	**844-001** = Plug with Integrated Banding Porch **844-002** = Plug with Accessory Thread					
Shell Style	**-06** = Plug with Anti-Decoupling Spring					
Shell Material and Finish	**C** = Black Anodize Finish **M** = Aluminum/Electroless Nickel RoHS Compliant **NF** = Aluminum/Olive Drab Cadnium over Electroless Nickel Finish **ZN** = AluminumZinc-Nickel/Olive Drab over Electroless Nickel **Z1** = Stainless Steel/Passivated RoHS Compliant **ZB** = Olive Drab Chromate over Cadnium **ZC** = Stainless Steel/Zinc Cobalt Alloy/Black Chromate					
Shell Size - Insert Arrangement	**5-5**, **6-10**, **7-20**, **8-28**, **9-40**, **10-58**, **11-71**					
Contact Type	**P** = Pin with O-ring **S** = Socket with O-ring					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F Omit character for single key (non-polarized)					

Table I: Series


	
844-001 Plug with Banding Platform	**844-002** Plug with Accessory Thread

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 844 Stinger™ Mighty Mouse Push-Pull Plug

844-001 and 844-002 - Shell Style 06 Dimensions

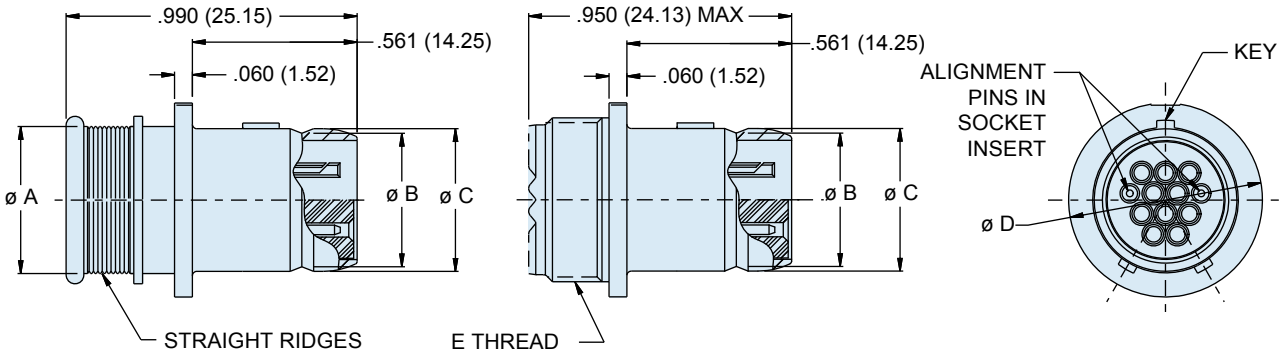


Integral Band Platform
841-001-06

Accessory Thread
841-002-06

M

Dimensions									
Shell Size	Ø A		Ø B		Ø C		Ø D Max		E Thread
	In	mm	In	mm	In	mm	In	mm	
5	0.246	6.25	0.219	5.56	0.250	6.35	0.427	10.85	.2500-32 UNEF-2A
6	0.286	7.26	0.282	7.16	0.313	7.95	0.495	12.57	.3125-32 UNEF-2A
7	0.390	9.91	0.351	8.92	0.383	9.73	0.575	14.61	.4375-28 UNEF-2A
8	0.442	11.23	0.398	10.11	0.429	10.90	0.614	15.60	.5000-28 UNEF-2A
9	0.500	12.70	0.454	11.53	0.486	12.34	0.670	17.02	.5625-24 UNEF-2A
10	0.564	14.33	0.529	13.44	0.563	14.30	0.745	18.92	.6250-24 UNEF-2A
11	0.608	15.44	0.587	14.91	0.618	15.70	0.795	20.19	.6875-24 UNEF-2A

Table II: Key Positions		
	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 844 Stinger™ Mighty Mouse Push-Pull Receptacle

844-003 and 844-004 - Ordering Information



In-Line
Shell Style 01

Front Panel Mount Jam Nut (Shown)
Shell Style 00

Rear Panel Mount Jam Nut Mount
Shell Style 07

M

How To Order						
Sample Part Number	**844-003**	**-00**	**ZNU**	**6-10**	**P**	**A**
Series	**844-003** = Receptacle with Integrated Banding Porch **844-004** = Receptacle with Accessory Thread					
Shell Style	**-00** = Front Panel Mount Jam Nut (See Table V) **-01** = In-Line **-07** = Rear Panel Mount Jam Nut (See Table IV)					
Material and Finish	**C** = Black Anodize Finish **M** = Aluminum/Electroless Nickel RoHS Compliant **NF** = Aluminum/Olive Drab Cadnium over Electroless Nickel Finish **ZN** = AluminumZinc-Nickel/Olive Drab over Electroless Nickel **Z1** = Stainless Steel/Passivated RoHS Compliant **ZB** = Olive Drab Chromate over Cadnium **ZC** = Stainless Steel/Zinc Cobalt Alloy/Black Chromate					
Shell Size - Insert Arrangement	**5-5**, **6-10**, **7-20**, **8-28**, **9-40**, **10-58**, **11-71**					
Contact Type	**P** = Pin with O-ring **S** = Socket with O-ring					
Shell Key Positions (See Table I)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series






	
844-003 Banding Platform	**844-004** Rear Accessory Thread


Table II: Shell Style

		
-00 Jam Nut for Front Panel Mounting	**-01** In-Line for Free-Hanging Cable	**-07** Jam Nut for Rear Panel Mounting

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Front panel mount receptacle - shell style 00

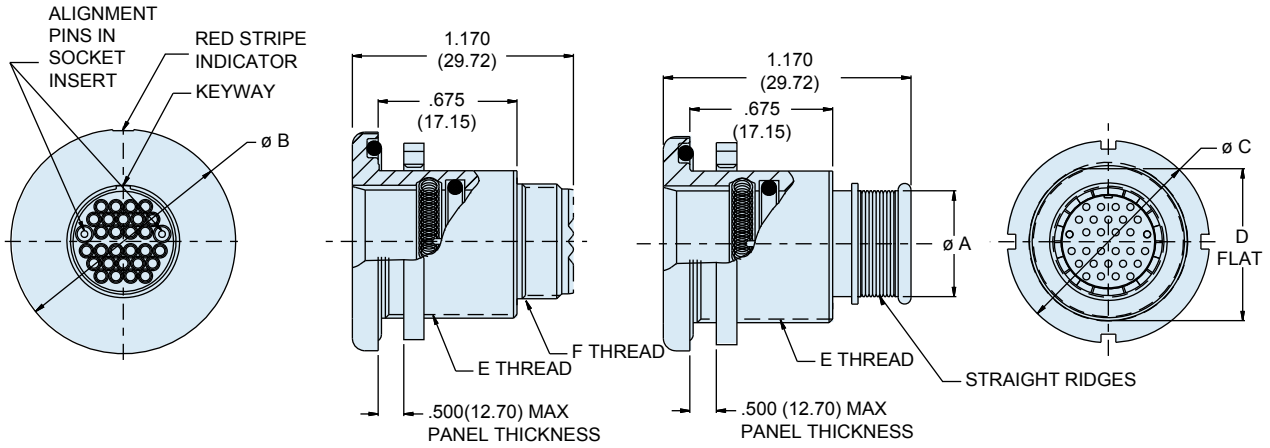

Accessory Thread
841-004-00

Integral Band Platform
841-003-00

Dimensions														
Shell Size	Ø A		Ø B		Ø C		D Flat		E Thread	T Thread	P Flat		Ø R	
	in	mm	in	mm	in	mm	in	mm			in	mm	in	mm
5	.246	6.25	0.830	21.08	0.625	15.88	0.470	11.94	.5000-32 UN-2A	.5000-32 UNEF-2A	.482 .478	12.24 12.14	0.510	12.95
6	.286	7.26	0.885	22.48	0.688	17.48	0.530	13.46	.5625-28 UN-2A	.3125-32 UNEF-2A	.542 .538	13.77 13.67	0.575	14.61
7	.390	9.91	0.995	25.27	0.812	20.62	0.663	16.84	.6875-28 UN-2A	.4375-28 UNEF-2A	.676 .671	17.17 17.04	0.698	17.73
8	.442	11.23	0.995	25.27	0.812	20.62	0.663	16.84	.6875-28 UN-2A	.5000-28 UNEF-2A	.676 .671	17.17 17.04	0.698	17.73
9	.500	12.70	1.075	27.31	0.875	22.23	0.720	18.29	.7500-28 UN-2A	.5625-24 UNEF-2A	.732 .728	18.59 18.49	0.760	19.30
10	.564	14.33	1.140	28.96	0.938	23.83	0.788	20.02	.8125-28 UN-2A	.6250-24 UNEF-2A	.801 .796.	20.35 20.22	0.822	20.88
11	.608	15.44	1.190	30.23	1.000	25.40	0.843	21.41	.8750-28 UN-2A	.6875-24 UNEF-2A	.855 .851	21.72 21.62	0.885	22.48



RECOMMENDED PANEL CUTOUT FOR
FRONT MOUNT JAM NUT RECEPTACLE


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 844 Stinger™ Mighty Mouse Push-Pull Receptacle

844-003 and 844-004 - Shell Style 01 Dimensions

Inline cable receptacle - shell style 01

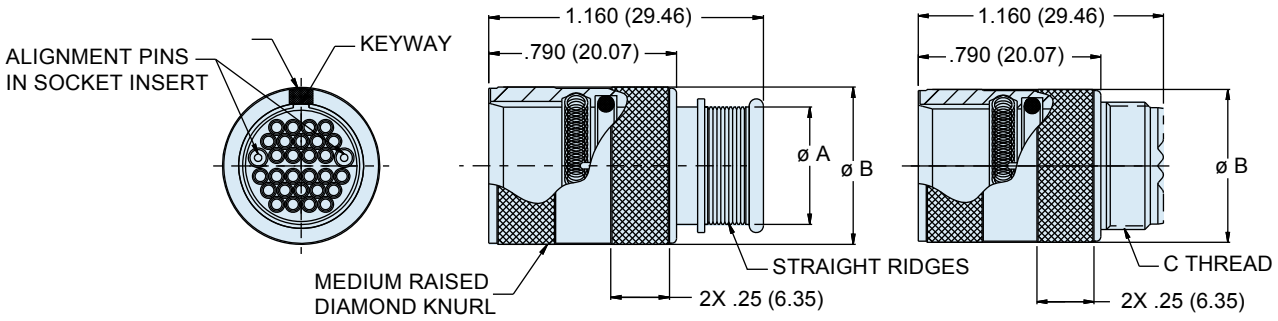

Integral Band Platform
844-003-01


Accessory Thread
841-004-01

Dimensions					
Shell Size	Ø A		Ø B		C Thread
	in	mm	in	mm	
5	.246	6.25	0.450	11.43	.5000-32 UNEF-2A
6	.286	7.26	0.480	12.19	.3125-32 UNEF-2A
7	.390	9.91	0.580	14.73	.4375-28 UNEF-2A
8	.442	11.23	0.603	15.32	.5000-28 UNEF-2A
9	.500	12.70	0.695	17.65	.5625-24 UNEF-2A
10	.564	14.33	0.735	18.67	.6250-24 UNEF-2A
11	.608	15.44	0.810	20.57	.6875-24 UNEF-2A

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Rear panel mount receptacle - shell style 07

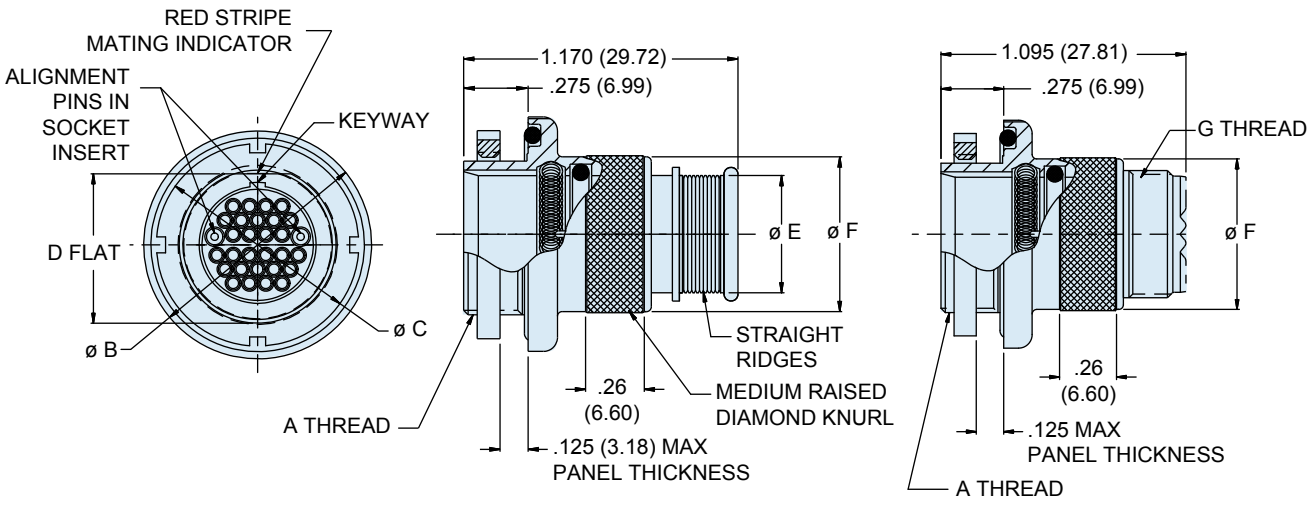

Integral Band Platform
844-003-07

Accessory Thread
841-004-07

Dimensions																
Shell Size	A Thread	Ø B		Ø C		D-Flat		Ø E		Ø F		G Thread	M Flat		Ø N	
		in	mm	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm
5	.4375-32 UN-2A	0.790	20.07	0.562	14.27	0.415	10.54	.246	6.25	0.450	11.43	.5000-32 UNEF-2A	.427 .423	10.85 10.74	0.448	11.38
6	.5000-32 UN-2A	0.830	21.08	0.625	15.88	0.467	11.86	.286	7.26	0.480	12.19	.3125-32 UNEF-2A	.479 .475	12.17 12.07	0.510	12.95
7	.6250-28 UN-2A	0.900	22.86	0.750	19.05	0.594	15.09	.390	9.91	0.580	14.73	.4375-28 UNEF-2A	.606 .602	15.39 15.29	0.635	16.13
8	.6250-28 UN-2A	0.955	24.26	0.750	19.05	0.594	15.09	.442	11.23	0.603	15.32	.5000-28 UNEF-2A	.606 .602	15.39 15.29	0.635	16.13
9	.6875-28 UN-2A	1.000	25.40	0.812	20.62	0.655	16.64	.500	12.70	0.695	17.65	.5625-24 UNEF-2A	.667 .663	16.94 16.84	0.695	17.65
10	.7500-28 UN-2A	1.085	27.56	0.875	22.23	0.721	18.31	.564	14.33	0.735	18.67	.6250-24 UNEF-2A	.734 .729	18.64 18.52	0.760	19.30
11	.8125-28 UN-2A	1.135	28.83	0.938	23.83	0.788	20.02	.608	15.44	0.810	20.57	.6875-24 UNEF-2A	.801 .796	20.35 20.22	0.822	20.88



RECOMMENDED PANEL CUTOUT FOR
REAR MOUNT JAM NUT RECEPTACLE

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 845 Stinger™ Mighty Mouse Triple–Start ACME Thread Plug

845-001 and 845-002 Ordering Information





Series 845 Mighty Mouse Plug with Stinger™ Contacts these durable, low insertion force front release size #28 contacts feature integrated retention clips and O-ring sealing for optimized performance. Series 845 shells feature a Triple–start stub ACME mating thread for improved protection against cross–mating and thread damage. Connector shells are machined aluminum or stainless steel. Available in shell sizes 8 through 13 in 6 contact arrangements, all arrangements include a minimum of two guide pins.

M

How To Order							
Sample Part Number		**845-001**	**-16**	**M**	**8-10**	**P**	**A**
Series (See Table I)	**845-001** = Plug with Integrated Banding Porch **845-002** = Plug with Accessory Thread						
Shell Style	**-16** = Plug with Anti-Decoupling Spring						
Shell Material and Finish	**M** = Aluminum/Electroless Nickel RoHS Compliant **MT** = Aluminum/Nickel-PTFE RoHS Compliant **NF** = Aluminum/Cadmium with Olive Drab Chromate **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **Z1** = Stainless Steel/Passivated RoHS Compliant						
Shell Size - Insert Arrangement	**8-10**, **9-20**, **10-28**, **11-40**, **12-58**, **13-71**						
Contact Type	**P** = Pin with O-ring **S** = Socket with O-ring						
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F						

Table I: Series


	
845-001 Plug with Banding Platform	**845-002** Plug with Accessory Thread

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **E-Mail: sales@glenair.com**

In–Line plug - shell style 16

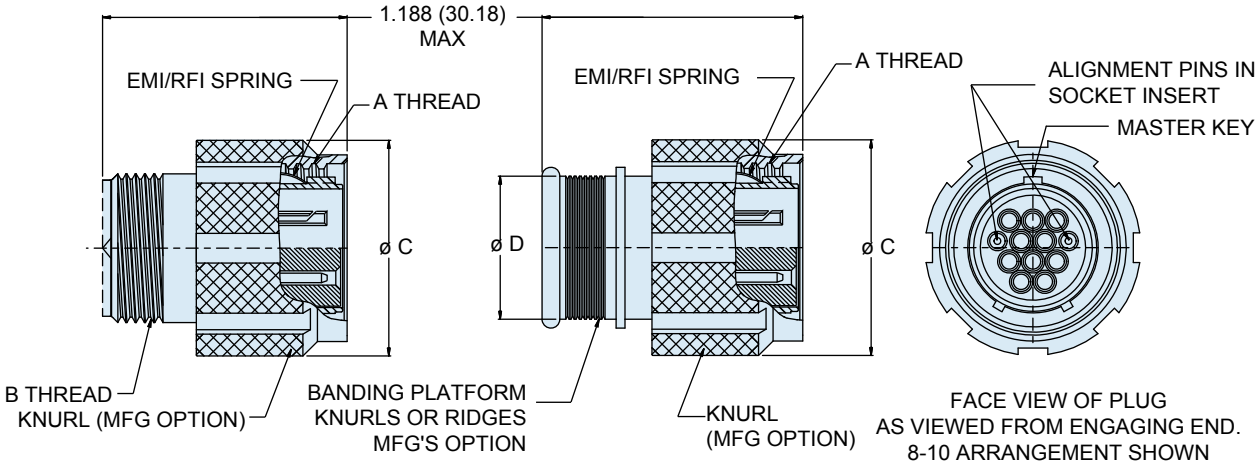

Accessory Thread
845-002-16

Integral Band Platform
845-001-16

Table I

Shell Size	A Thread	B Thread	Ø C		Ø D	
			In	mm	In	mm
8	.5000-.1P-.3L-TS-2B	.3750-32 UNEF-2A	0.692	17.58	.316	8.03
9	.5625-.1P-.3L-TS-2B	.4375-28 UNEF-2A	0.789	20.04	.397	10.08
10	.6250-.1P-.3L-TS-2B	.5000-28 UNEF-2A	0.827	21.01	.472	11.99
11	.6875-.1P-.3L-TS-2B	.5625-24 UNEF-2A	0.918	23.32	.519	13.18
12	.7500-.1P-.3L-TS-2B	.6250-24 UNEF-2A	0.984	24.99	.585	14.86
13	.8125-.1P-.3L-TS-2B	.6875-24 UNEF-2A	1.047	26.59	.646	16.41

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 845 Stinger™ Mighty Mouse Triple–Start ACME Thread Receptacle

845-003 and 845-004 Ordering Information



In-Line
Shell Style 01

Rear Panel Jam Nut Mount (Shown)
Shell Style 07

Square Flange Mount
Shell Style 02/12

M

How To Order

Sample Part Number	845-004	-07	M	8-10	P	A
Series (See Table I)	**845-003** = Plug with Integral Banding Porch **845-004** = Plug with Accessory Thread					
Shell Style (See Table II	**-01** = In-line **-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut for Rear Panel Mounting					
Shell Material and Finish	**C** = Aluminum/Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum/Electroless Nickel; RoHS Compliant **MT** = Aluminum/Nickel-PTFE RoHS Compliant **NF** = Aluminum/Cadmium with Olive Drab Chromate **ZN** = Aluminum/Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **Z1** = Stainless Steel/Passivated; RoHS Compliant **ZB** = Stainless Steel/Olive Drab Chromate over Cadmium **ZC** = Stainless Steel/Zinc Cobalt Alloy/Black Chromate					
Shell Size - Insert Arrangement	**8-10**, **9-20**, **10-28**, **11-40**, **12-58**, **13-71**					
Contact Type	**P** = Pin with O-ring **S** = Socket with O-ring					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series






	
845-003 Receptacle with Banding Platform	**845-004** Receptacle with Accessory Thread


Table II: Shell Style

		
-01 Receptacle with Banding Platform	**-02, -12, -22** Square Flange	**-07** Jam Nut

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In–line receptacle - shell style 01

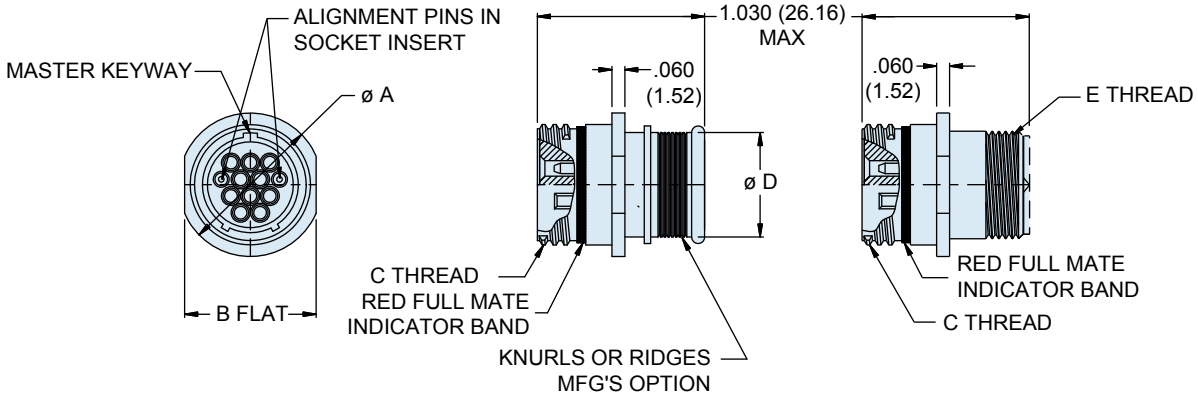

Integral Band Platform
845-003-01

Accessory Thread
845-004-01

Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread
	In	mm	In	mm		in	mm	
8	0.540	13.72	0.510	12.95	.5000-.1P-.3L-TS-2A	.316	8.03	.3750-32 UNEF-2A
9	0.605	15.37	0.575	14.61	.5625-.1P-.3L-TS-2A	.397	10.08	.4375-28 UNEF-2A
10	0.668	16.97	0.638	16.21	.6250-.1P-.3L-TS-2A	.472	11.99	.5000-28 UNEF-2A
11	0.730	18.54	0.700	17.78	.6875-.1P-.3L-TS-2A	.519	13.18	.5625-24 UNEF-2A
12	0.793	20.14	0.763	19.38	.7500-.1P-.3L-TS-2A	.585	14.86	.6250-24 UNEF-2A
13	0.855	21.72	0.825	20.96	.8125-.1P-.3L-TS-2A	.646	16.41	.6875-24 UNEF-2A


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 845 Stinger™ Mighty Mouse Triple-Start ACME Thread Receptacle

845-003 and 845-004 - Shell Style 02 Dimensions


Square flange receptacle for front or rear panel mounting - shell style 02

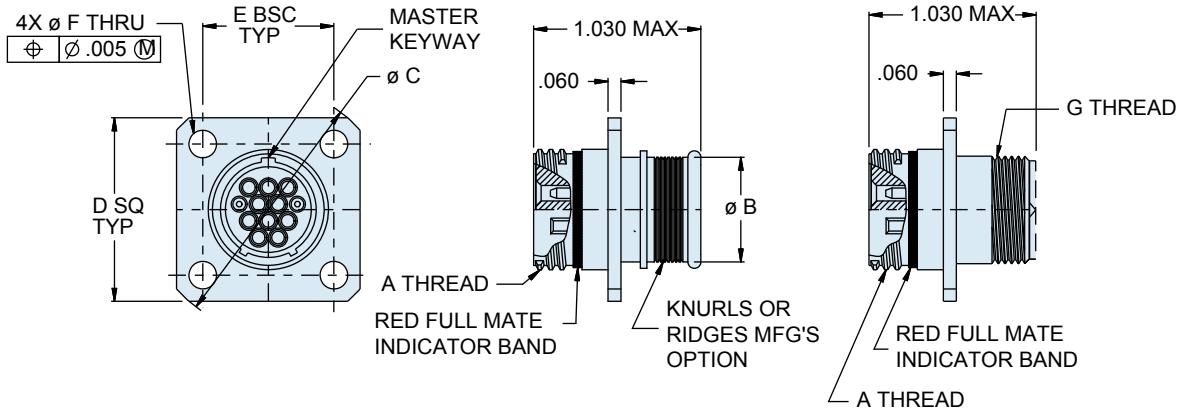

Integral Band Platform
845-003-02

Accessory Thread
845-004-02

Dimensions												
Shell Size	A Thread	Ø B		Ø C		Ø D Sq		E BSC		F Holes		G Thread
		In	mm	In	mm	In	mm	In	mm	In	mm	
8	.5000-.1P-.3L-TS-2A	.316	8.03	1.150	29.21	0.850	21.59	0.660	16.76	.096 .091	2.43 2.31	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.397	10.08	1.230	31.24	0.913	23.19	0.723	18.36			.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2A	.472	11.99	1.330	33.78	0.975	24.77	0.785	19.94			.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.519	13.18	1.410	35.81	1.039	26.39	0.848	21.54			.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.585	14.86	1.500	38.10	1.099	27.91	0.909	23.09			.6250-24 UNEF-2A
13	.8125-.1P-.3L-TS-2A	.646	16.41	1.590	40.39	1.163	29.54	0.973	24.71			.6875-24 UNEF-2A

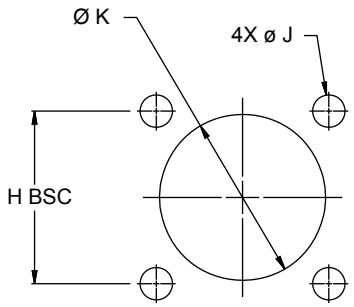


Panel Cut Out Dimensions						
Shell Size	H Bsc		Ø J		Ø K	
	In	mm	In	mm	In	mm
8	.660	16.76	.096 .091	2.44 2.31	.515	13.08
9	.723	18.36			.578	14.68
10	.785	19.94			.640	16.26
11	.848	21.54			.703	17.86
12	.909	23.09			.765	19.43
13	.973	24.71			.828	21.03

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Jam nut receptacle for rear panel mounting - shell style 07

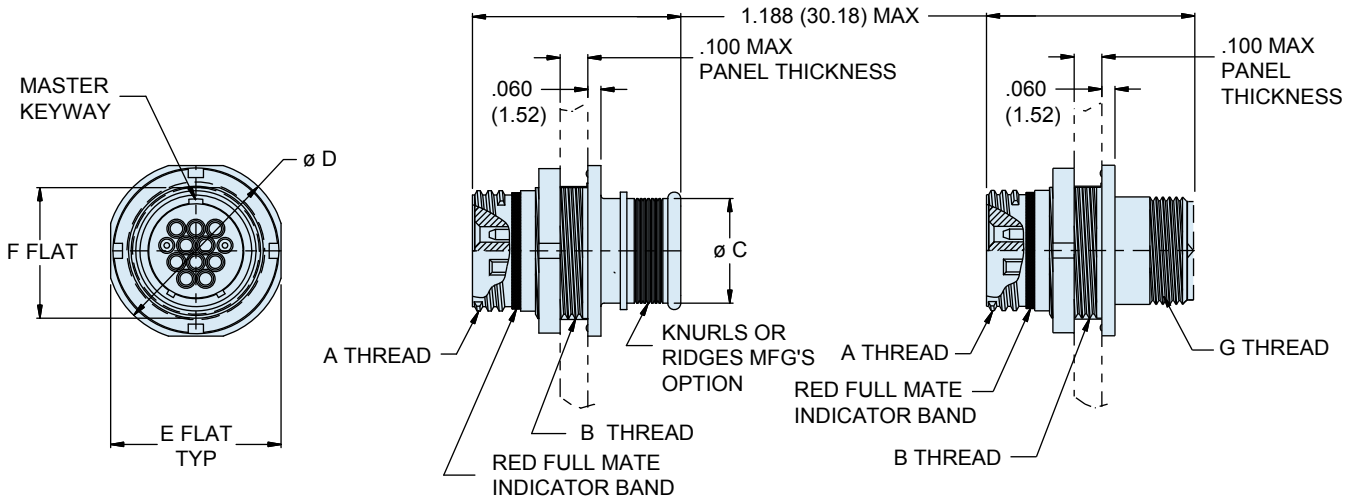

Integral Band Platform
845-003-07

Accessory Thread
845-004-07

Dimensions											
Shell Size	A Thread	B Thread	Ø C		Ø D		E Flat		F Flat		G Thread
			in	mm	in	mm	in	mm	in	mm	
8	.5000-.1P-.3L-TS-2A	.5625-28 UNEF-2A	.316	8.03	0.760	19.30	0.730	18.54	0.535	13.59	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.6875-28 UN-2A	.397	10.08	0.880	22.35	0.850	21.59	0.661	16.79	.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2A	.6875-28 UN-2A	.472	11.99	0.880	22.35	0.850	21.59	0.661	16.79	.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.7500-28 UN-2A	.519	13.18	0.955	24.26	0.925	23.50	0.721	18.31	.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.8125-28 UN-2A	.585	14.86	1.060	26.92	1.035	26.29	0.784	19.91	.6250-24 UNEF-2A
13	.8125-.1P-.3L-TS-2A	.8750-28 UN-2A	.646	16.41	1.120	28.45	1.090	27.69	0.843	21.41	.6875-24 UNEF-2A

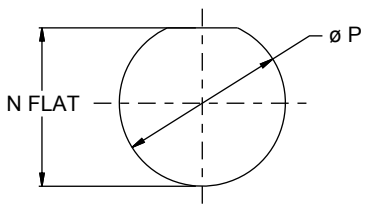

Panel Cut Out Dimensions				
Shell Size	Ø N		Ø P	
	In	mm	In	mm
8	.547 .543	13.89 13.79	.575 .571	14.61 14.50
9	.673 .669	17.09 16.99	.700 .696	17.78 17.68
10	.673 .669	17.09 16.99	.700 .696	17.78 17.68
11	.733 .729	18.62 18.52	.762 .758	19.35 19.25
12	.796 .792	20.22 20.12	.825 .821	20.96 20.85
13	.853 .849	21.67 21.56	.887 .883	22.53 22.43


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 845 Mighty Mouse Stinger™ Triple-Start ACME Thread Receptacle

845-003 and 845-004 Shell Style 12/22 Ordering Information


Square flange receptacle for front or rear panel mounting - shell style 12 or 22

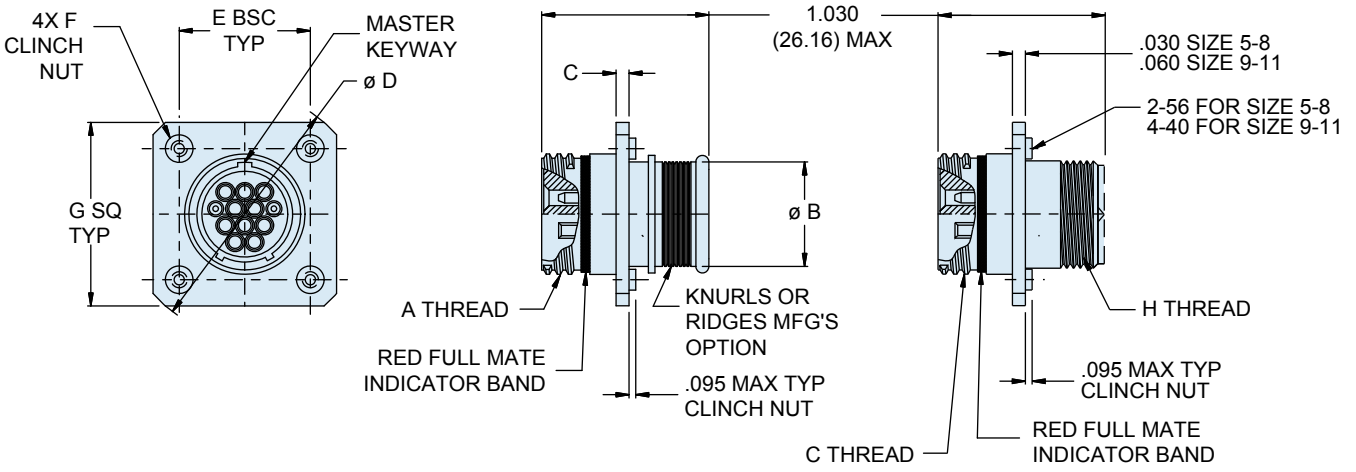

Integral Band Platform
845-003-12/22

Accessory Thread
845-004-12/22

Dimensions												
Shell Size	A Thread	Ø B		C	Ø D		E BSC		F Clinch	G SQ		H Thread
		in	mm				in	mm		in	mm	
8	.5000-.1P-.3L-TS-2A	.316	8.03	.030 (.76)	1.194		0.660	16.76	2-56	0.920		.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.397	10.08		1.283		0.723	18.36		0.983		.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2A	.472	11.99		1.371		0.785	19.94		1.045		.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.519	13.18		1.460		0.848	21.54		1.104		.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.585	14.86		1.546		0.909	23.09		1.169		.6250-24 UNEF-2A
13	.8125-.1P-.3L-TS-2A	.646	16.41		1.637		0.973	24.71		1.233		.6875-24 UNEF-2A

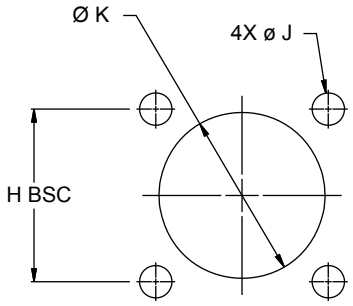

Panel Cut Out Dimensions						
Shell Size	H Bsc		Ø J		Ø K	
	In	mm	In	mm	In	mm
8	.660	16.76	.096 .091	2.44 2.31	.515	13.08
9	.723	18.36			.578	14.68
10	.785	19.94			.640	16.26
11	.848	21.54			.703	17.86
12	.909	23.09			.765	19.43
13	.973	24.71			.828	21.03

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Termination tools for size #28 contacts



These crimp tools perform precision eight indent crimps for gas-tight wire terminations and excellent tensile strength. Adjustment wheel has 8 settings. Ratchet mechanism prevents improper crimps. Use with bayonet-type positioners. Check calibration with M22520/3 gages. Length is 6.75 inches, weight is approx. 10 oz.

A Standard M22520/2-01 crimper. Use with size #28 Stinger™ Mighty Mouse contacts. Requires positioner, ordered separately.



B Positioner. Use with **A** crimper, ordered separately. Positioner holds contact at proper depth. Contact to remain in protective sleeve during crimping.

Figure	Part Number	Military Part Number	Daniels Part Number
A	809-015	M22520/2-01	AFM8
B	859-077	(none)	K267-4

M

Stinger™ Contact tools



Tooling for Size #28 Contact Sytem		
Tool	Glenair part Number	Reference view
Insertion Tool	859-078-000	 (shown less protective cover)
Extraction Tool With Protective Cover	859-079-000	 (shown less protective cover)
Extraction Tool Protective Cover Only (Spare/Extra)	859-079-001	
Extraction Tool Replaceable Tip (Spare/ Extra)	859-079-002	

Notes:
1. All tools are the same for both pin and socket contacts
2. Insertion tool is recommended for contact with O-ring seal, contacts without O-ring seal are insertable by hand, without tool
3. Insertion tool is designed for wire diameter of .035 inches maximum

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SERIES 80
HIGH SPEED

MIGHTY MOUSE

High-Speed performance and reliable signal integrity in a lightweight, ultraminiature package



Glenair has expanded the Mighty Mouse line to include connectors optimized for high-speed digital applications. A wide range of interconnect technologies are available, including

- High-Speed series 80 with DuPont™ Teflon® insulators for superior electrical performance in protocol-specific applications like eSATA and USB 2.0/3.0.
- Mighty Mouse Ultra-Twinax connectors utilizing size #12 Twinax contacts for differential pair applications such as LVDS and CML.
- Size #8 Quadrax and differential Twinax technologies for high-speed 100BASE-T Ethernet applications



Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

MIGHTY MOUSE


HIGH SPEED, HIGH BANDWIDTH PERFORMANCE

for Military Grade Connectors and Cables

In response to requests for ruggedized, shielded connectors and cables to replace unshielded systems for high-speed serial data, Glenair developed its Mighty Mouse line of high speed serial data cordsets. Available for 100BASE-T, 1000BASE-T Gigabit Ethernet, IEE 1394, USB 2.0 and CAN Bus applications, these cordsets combined aerospace-grade data cables with Series 80 Mighty Mouse harsh environment connectors for maximum performance and minimum size. These cables, which used our standard Series 80 Mighty Mouse connectors with High grade rigid dielectric insulators, have been successfully used in hundreds of Ethernet and other high speed data protocol applications. Now Glenair is proud to introduce our latest High-Speed Mighty Mouse innovation, a Fluoropolymer PFA Insulator equipped Mighty Mouse connector series that delivers even better impedance, VSWR and insertion loss performance in 100 Ohm, balanced impedance applications.

Series 80 Mighty Mouse *High Speed* Connectors with Fluoropolymer PFA Insulators

The new High-Speed Mighty Mouse connectors and ASAP cordsets presented in

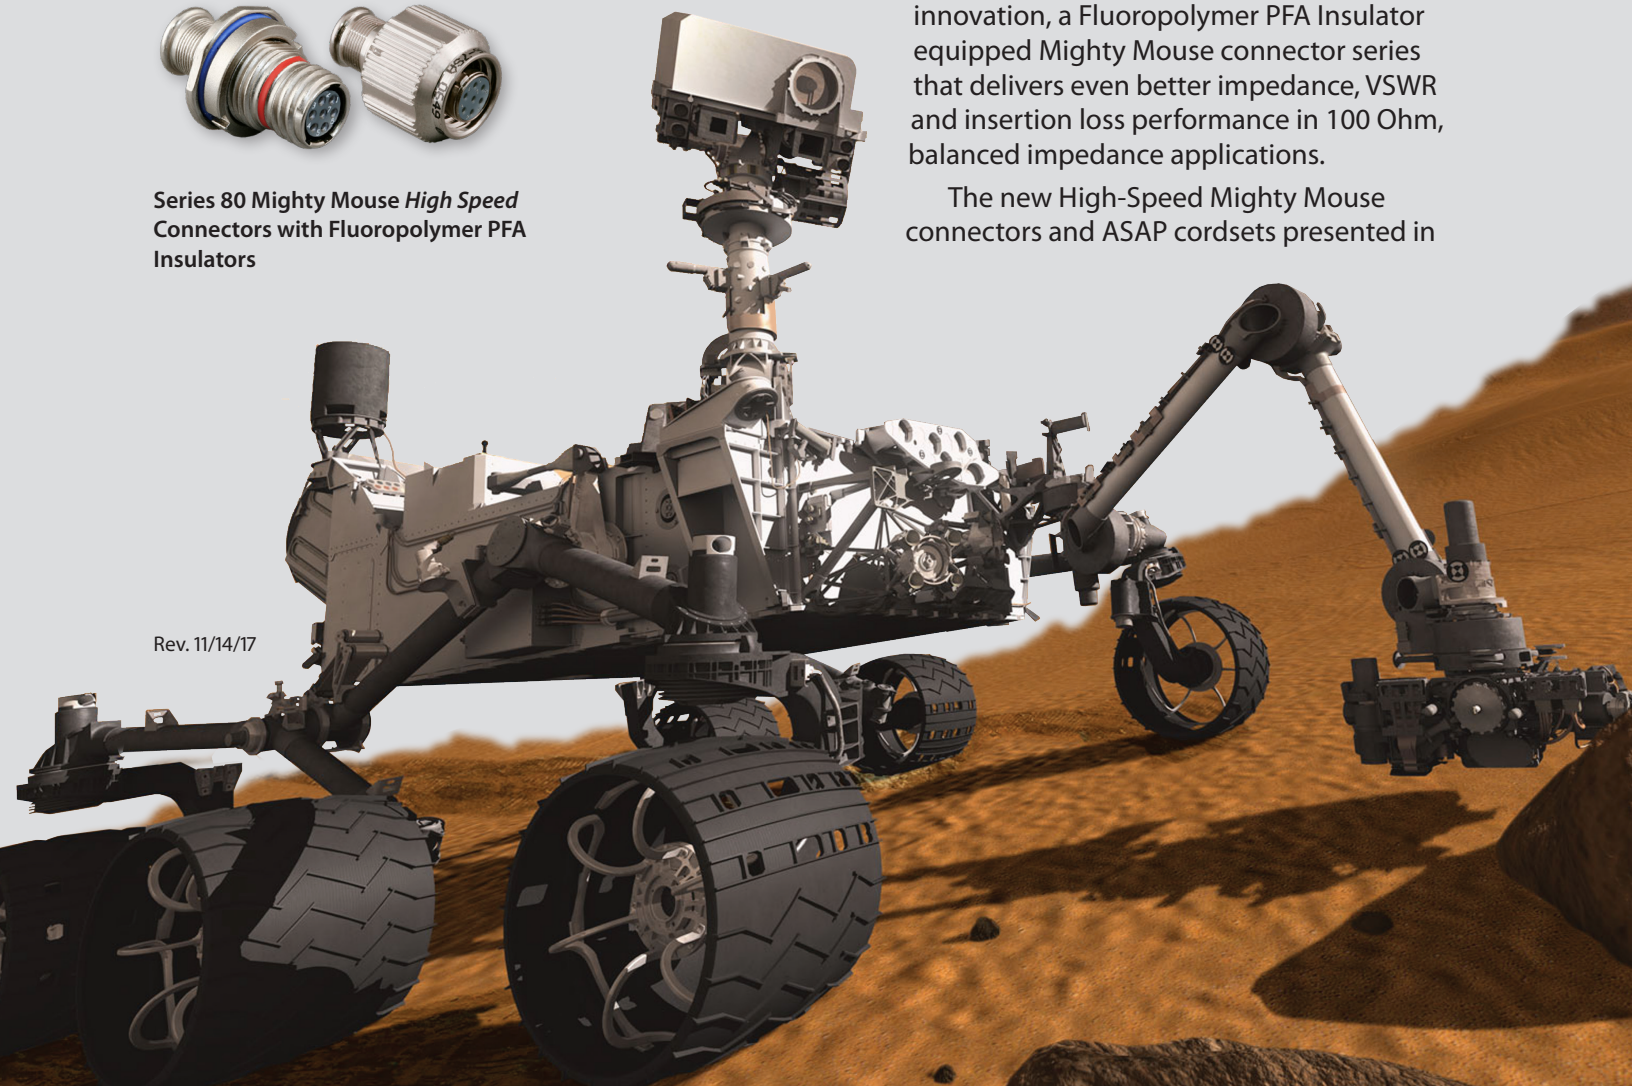

Rev. 11/14/17

Introduction to *High-Speed*, Balanced Impedance Connectors and Cables for SATA and Other Differential Data Bus Applications

this catalog offer the same space and weight savings as our original High grade rigid dielectric versions with superior performance in SATA and 2, 3, and 4 pair differential cable applications. These miniaturized connectors and cordsets are ideal for ultra high bandwidth data switches requiring high density packaging. Performance measurements for impedance, VSWR and insertion loss indicate that the special PFA (Fluoropolymer) insulator-equipped connectors, combined with our high-performance high-speed differential 963-001 Series cable, deliver performance levels not available in other ultraminiature military-grade interconnection assemblies.

High Speed Performance	
Impedance	100 OHMS ±7 OHMS at 100-Picosecond
VSWR	<1.4 up to 4-GHz

Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

High-Speed Data Protocols

Ethernet

Avionic and other military vehicle data transfer systems are growing increasingly complicated—the number of data paths, data rates and the quantity and sophistication of subsystems continue to escalate. In addition to transmission speed, accuracy and reliability are tremendously important. Ethernet communication technology, with its huge installed base and history of reliability, is ideally suited for military vehicles and other field applications. Although there are many MIL-STD-1553 bus architecture and data link systems in use, applications such as tactical radar require faster data rates than older architectures can deliver.

Basic Ethernet protocol is referred to as "CSMA/DC" (Carrier Sense, Multiple Access and Collision Detection). To define some terms: "Carrier Sense," the hosts can detect whether the medium is idle or busy; "Multiple Access," multiple hosts are connected to the common medium; and "Collision Detection," when a host transmits, the protocols can determine whether its transmission has collided with the transmission of another host. If two or more information packets are sent simultaneously, a collision occurs and neither transmission is successful—collision detection instructs the system to retransmit the colliding packets. Legacy Ethernet is half-duplex, meaning information can move in only one direction at a time, and is less-than-ideal for many avionic applications, as fastest-possible communication is not guaranteed. The collision problem occurs in any bus-oriented architecture, such as MIL-STD-1553.

Full-duplex, switched Ethernet eliminates the collision problem by employing links that are point-to-point (not a bus) with a separate twisted pair for transmission and reception. Full-duplex also has the ability to send and receive data at the same time by employing a network of Ethernet switches able to forward incoming packets to their appropriate destinations. Gigabit Ethernet transfers data on four pairs of wires instead of only two pairs under legacy Ethernet forms. Further, transmission coding is enhanced for Gigabit Ethernet so that the standard clock rate of 125 MHz that produces 100 mbps data transfer rates in so-called "Fast Ethernet" is supercharged to 1,000 mbps. Gigabit Ethernet can fit an order of magnitude more data into the same cable than can Fast Ethernet, but employs the same transmission schemes and frame format as the earlier Ethernet versions.

IEEE 1394

In the early 1990s, Apple Computer and Texas Instruments worked with the Institute of Electrical and Electronics Engineers (IEEE) to establish a very fast serial bus interface standard that supports data transfer rates of up to 400 mbps (in 1394a) and 800 mbps (in 1394b). Products supporting the 1394 standard go under different names, depending on the company. Apple uses the name FireWire, Texas Instrument uses Lynx and Sony uses i.link to describe their 1394 products. A single 1394 port can be used to connect up 63 external devices. In addition to its high speed, 1394 also supports isochronous data, delivering data at a guaranteed rate. This isochronous feature makes it ideal for devices that need to transfer high levels of data in real-time, such as video and audio applications. 1394 makes full use of all SCSI (Small Computer System Interface, a parallel interface standard used for attaching peripheral devices to computers).

Introduction to *High-Speed*, Balanced Impedance Connectors and Cables for SATA and Other Differential Data Bus Applications

Series 80
High Speed
Mighty Mouse

MIL-STD-1553


MIL-STD-1553 defines all aspects of the serial digital multiplex data bus for military vehicles. Multiplexing combines two or more information channels on to a common transmission medium. When compared to older analog point-to-point wire bundles, multiplexing allows for weight reduction, simplicity of system design, standardization and flexibility. The 1553 data bus provides integrated, centralized system control and a standard interface for all interconnected equipment. Devices connect using twisted, shielded pairs of wires to maintain message integrity. All devices in the system are connected to a redundant pair of buses to provide a second path of traffic should one of the buses become damaged. Data rates of 1 megabit per second (mbps) are standard under MIL-STD-1553. MIL-STD-1773 contains the requirements for fiber optic cabling systems as a 1553 bus transmission medium.

SATA

Serial ATA (SATA or Serial Advanced Technology Attachment) is a computer bus interface for connecting host bus adapters to mass storage devices such as hard disk drives and optical drives. Serial ATA was designed to replace the older ATA (AT Attachment) standard (also known as EIDE), offering several advantages over the older parallel ATA (PATA) interface: reduced cable-bulk and cost (7 conductors versus 40), native hot swapping, faster data transfer through higher signalling rates, and more efficient transfer through an optional I/O queuing protocol. SATA is an emerging standard in C4ISR and other forms of battlefield communications and data transmission electronics.



SATA host-adapters and devices communicate via a high-speed serial cable over two pairs of conductors.

















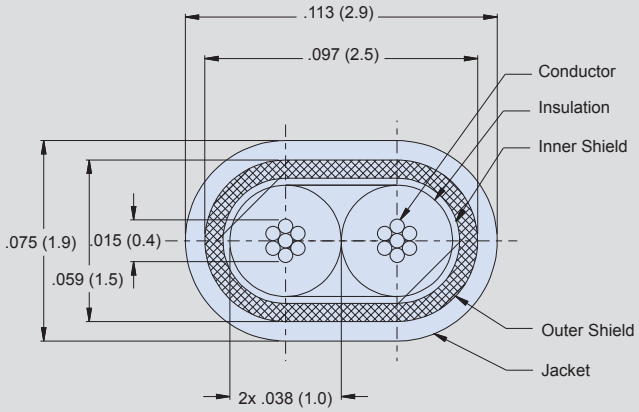




















Cross-section of Glenair high-performance series 963-001 100 Ohm differential parallel pair cable (standalone cable 963-013 used for SATA).

Series 963-001 Cable Construction Details	
Conductor	28 AWG Silver Plated High Strength Copper Alloy
Insulation	Extruded Foamed Fluoropolymer Color: Blue and White
Inner Shield	Aluminum/Polyester Tape, 100% Coverage
Outer Shield	Round Silver Plated Copper Braid, 90% Coverage
Jacket	Extruded FEP Color: Transparent Blue

Series 963-001 Cable Properties	
Impedance	100 ± 10 Ohms
Capacitance	12.0 pF/Ft (Nom)
V.O.P.	80%
Attenuation	0.25 dB/m @ 100 MHz 0.75 dB/m @ 500 MHz 1.25 dB/m @ 1000 MHz
Temperature Rating	150° C

High-Speed Protocol

	Glenair Connectors Suitable for Use in High-Speed Applications*			
	Series 80 Mighty Mouse	Series 80 Mighty Mouse High Speed	Series 811 Mighty Mouse High Density	Series 79 MicroCrimp
Up to: Cat 5e (1000BASE-T)	 7-10	 7-10	 6-12	 B-9
Up To: Cat 6A (10GBASE-T)	Not suitable	 7-10	 6-12	Not suitable
USB 2.0	 6-4	 6-4	 5-7	 A-5
USB 3.0	Not suitable	 7-10	Not suitable	Not suitable
eSATA/SATA	Not suitable	 6-7	 5-7	Not suitable
DVI-D	 10-26	 10-26	 8-30	 G-33
HDMI	 9-19	 9-19	 7-22	 E-19
Display Port	Not suitable	 10-26	 7-22	Not suitable

Glenair Connectors Suitable for Use in High-Speed Applications®				
MIL-DTL-83513 Micro-D	MIL-DTL-32139 Nano (2:1 scale)	Series 88 SuperFly™ (2:1 scale)		
 9P/9S	 9P/9S	 C-10N	 G-10M	 H-10W
 9P/9S	 9P/9S	 C-10N	 G-10M	 H-10W
 9P/9S	 9P/9S	 C-2M2N	 D2W2N	
Not suitable	Not suitable	 G-10M	 H-10W	
 9P/9S	 9P/9S	 B-7N	 F-7M	 G-7W
 25P/25S	 25P/25S	 H-37N	 J-7W19N	 K-13M19N
 21P/21S	 21P/21S	 E-19N	 K-19M	 *Consult factory for MIL-DTL-38999, Series 80 Mighty Mouse and MIL-DTL-5015 solutions that incorporate RJ45 and USB high-speed connectors
 21P/21S	 21P/21S	 F-22N	 L-22M	**©2014 GLENAIR, INC. 1211 AIR WAY GLENDALE, CA 91201-2497 818-247-6000 FAX 818-500-9912 www.glenair.com E-Mail: sales@glenair.com**

High-Performance, High-Speed Differential Technologies Available Now From Glenair



High Speed Series 80 Mighty Mouse Connectors with Fluoropolymer PFA Insulators

The Series 80 *High Speed* Mighty Mouse is Glenair's latest entry in our world of *high-speed* interconnect solutions. The connector is equipped with special PFA (Fluoropolymer) insulators and is optimized for use with high-speed differential wire such as our 963-001 series cable. Five insert arrangements are offered with 4, 7,10, 19 and 26 size #23 contacts. The high-density, small form factor connector is suited for applications where traditional military circular connectors are too large or too heavy, and where the demands for high bandwidth, balanced impedance performance are at their highest. Other Glenair *High Speed* Solutions include:

High-Bandwidth Fiber Optic Connectors, Cables, and Termini



From our QPL MIL-PRF-28876 fiber optic connectors to our MIL-DTL-38999 type solutions, Glenair produces advanced performance fiber optic interconnection systems for every military and commercial standard. Fiber optic connectors, termini and cabling deliver secure high speed data in applications that require superior insertion loss and high data throughput. Fiber optic interconnect systems offer exponentially larger bandwidth compared to standard electrical cabling. Glenair manufactures a solution for every branch of the military and every mission-critical commercial application. Series #16 AWG Mighty Mouse fiber optic solutions are also now available.



High-Performance Shielded Contact Connectors

High-speed differential impedance contacts, such as those used in advanced digital communications applications, are another key specialty at Glenair. Our Twinax and Quadrax contacts are exactingly engineered and manufactured using the best available materials and manufacturing processes. Conductive elements are gold-plated copper alloy. Dielectrics are high performance fluorocarbon. Most Glenair cylindrical connectors, including our D38999 type, can accommodate shielded contacts that deliver balanced impedance performance for application frequencies above 1GHz.

Field-Ready, Integrated RJ-45 and USB Connectors



Glenair integrates commercial connection devices that traditionally deliver datalinks for high-speed protocols into standard MS type connector shells. We offer rugged field-ready circular connectors that enclose single and double RJ-45 or USB connectors. Users of these standard products need not worry about damaging delicate high bandwidth connections in harsh conditions when these connectors are deployed in place of standard, non-protected solutions. The MIL-DTL-5015 or MIL-DTL-26482 type connector shells provide impact resistance, ingress protection and positive coupling.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Mighty Mouse High-Speed and Ultra-Twinax connectors: rugged environmental sealing and high-speed matched impedance electrical performance in an ultraminiature package

Glenair Series 80 Mighty Mouse connectors are the new industry standard for high-performance ultraminiature connectors. Now Glenair expands the Mighty Mouse line to include connectors optimized for high-speed matched impedance performance. The Mighty Mouse High-Speed product line features Fluoropolymer insulators for superior electrical performance in protocol-specific applications like eSATA and USB 2.0/3.0. Mighty Mouse Ultra-Twinax connectors utilize size #12 Twinax contacts for ultra-high speed differential pair applications such as LVDS and CML.

MIGHTY MOUSE *HIGH-SPEED*



Series 80 Mighty Mouse *High Speed* Connectors with Fluoropolymer PFA Insulators

- **For high-speed protocols: eSATA, 10GBASE-T, USB 2.0 / 3.0**
- **Fluoropolymer PFA insulators for superior insertion loss and balanced impedance**
- **Series 801 double-start ACME thread and Series 804 push-pull quick disconnect connectors available**
- **Discrete components or overmolded cordsets**

MIGHTY MOUSE *ULTRA-TWINAX*



Series 80 Mighty Mouse *Ultra-Twinax* Connectors with Size #12 Twinax contacts

- **For ultra high-speed differential pair applications: LVDS, CML**
- **Size #12 Twinax and hybrid contact arrangements**
- **Series 801 double-start ACME thread connectors**
- **Discrete components or overmolded cordsets**

MIGHTY MOUSE WITH SIZE #8 QUADRAX AND DIFFERENTIAL TWINAX CONTACTS




Series 805 Mighty Mouse plug with size 8 Quadrax contacts

- **Differential Twinax contacts for 100 Ohm serial data transmission**
- **Quadrax contacts for 100BASE-T Ethernet**
- **Arrangements for 1, 2, 3, 4 or 5 snap-in, rear-release contacts**
- **Lightweight, low profile**
- **Comprehensive range of assembly tooling**
- **Available for Series 801 (double-start) and 805 (triple-start) Mighty Mouse connectors**





© 2014 Glenair, Inc.







Series 80 *High Speed* Mighty Mouse Connectors and Cables
Product Overview





This table compares contact and wire spacing and bandwidth performance in miniaturized interconnect applications. As contact density increases, the performance of the interconnect improves. Note the position of the High-Speed and Size #8 Mighty Mouse compared to standard Mighty Mouse, and the position of the Ultra-Twinax Mighty Mouse with performance up to 10 GHz. The density of the Ultra-Twinax contacts is measured between the two components in each contact—so although the #12 contact is larger overall, the effective contact density is higher.

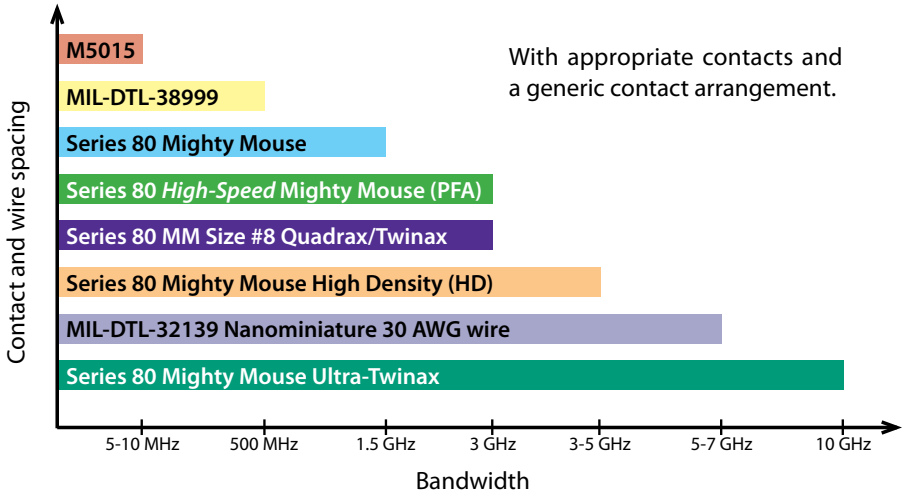

With appropriate contacts and a generic contact arrangement.


Mighty Mouse *High Speed* Contact Arrangements Mating Face View of Pin Connector (Socket Connector Numbers are Reversed)				
 6 - 4	 6 - 7	 7 - 10	 9 - 19	 10 - 26
Shell Size 6 4 Size #23 Contacts	Shell Size 6 7 Size #23 Contacts	Shell Size 7 10 Size #23 Contacts	Shell Size 9 19 Size #23 Contacts	Shell Size 10 26 Size #23 Contacts

Mighty Mouse *Ultra Twinax* Size #12 Differential Twinax Contact Arrangements (Mating Face/Pin Connector)						
 7-1	 10-2	 16-5	 17-7	 21-12	 10-201	 10-200
Shell Size 7 1 Size #12 Twinax Contact	Shell Size 10 2 Size #12 Twinax Contacts	Shell Size 16 5 Size #12 Twinax Contacts	Shell Size 17 7 Size #12 Twinax Contacts	Shell Size 21 12 Size #12 Twinax Contacts	Shell Size 10 2 Size #12 Twinax 4 Size #23 Contacts	Shell Size 10 1 Size #12 Twinax 12 Size #23 Contacts


Mighty Mouse #8 Quadrax / Differential Twinax Contact Arrangements					
Mating Face					
Series 801	Shell Size 8 1 Size # 8 Contact	Shell Size 10 2 Size #8 Contacts	Shell Size 17 3 Size #8 Contacts	Shell Size 19 4 Size #8 Contacts	Shell Size 21 5 Size #8 Contacts
Series 805	Shell Size 10 1 Size #8 Contact	Shell Size 18 2 Size #8 Contacts	Shell Size 19 3 Size #8 Contacts	Shell Size 21 4 Size #8 Contacts	Shell Size 23 5 Size #8 Contacts

© 2014 Glenair, Inc.


MIGHTY MOUSE *HIGH-SPEED* PLUG AND RECEPTACLE CUTAWAY

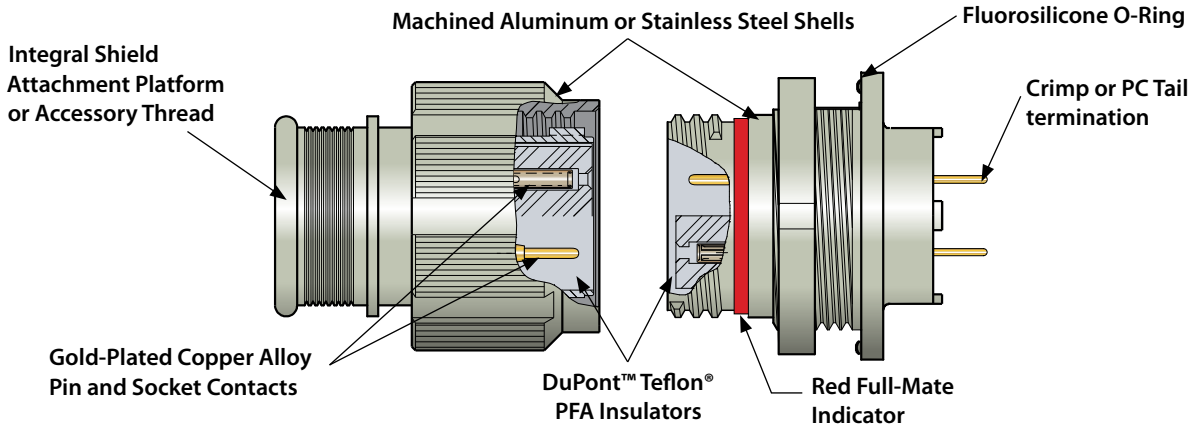

MIGHTY MOUSE *ULTRA-TWINAX* PLUG AND RECEPTACLE CUTAWAY

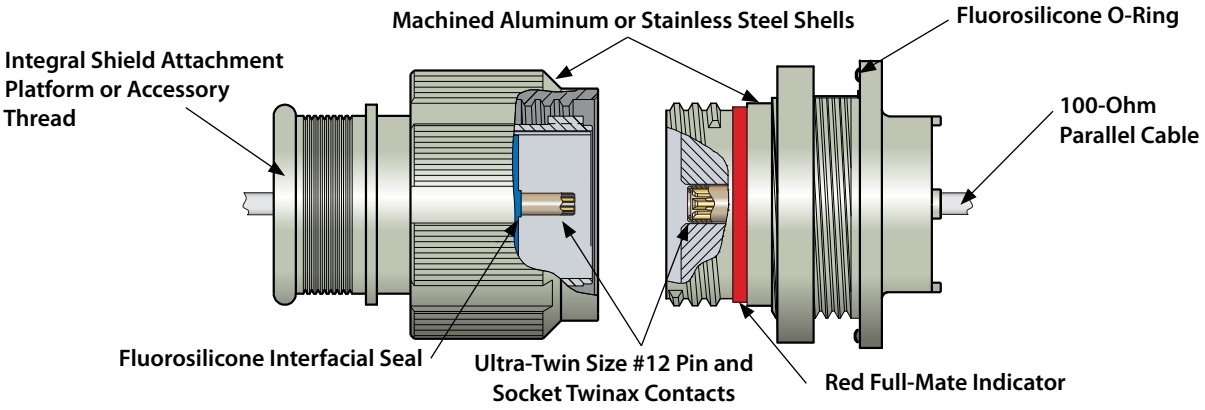

MIGHTY MOUSE WITH *SIZE 8 CONTACTS* PLUG AND RECEPTACLE CUTAWAY

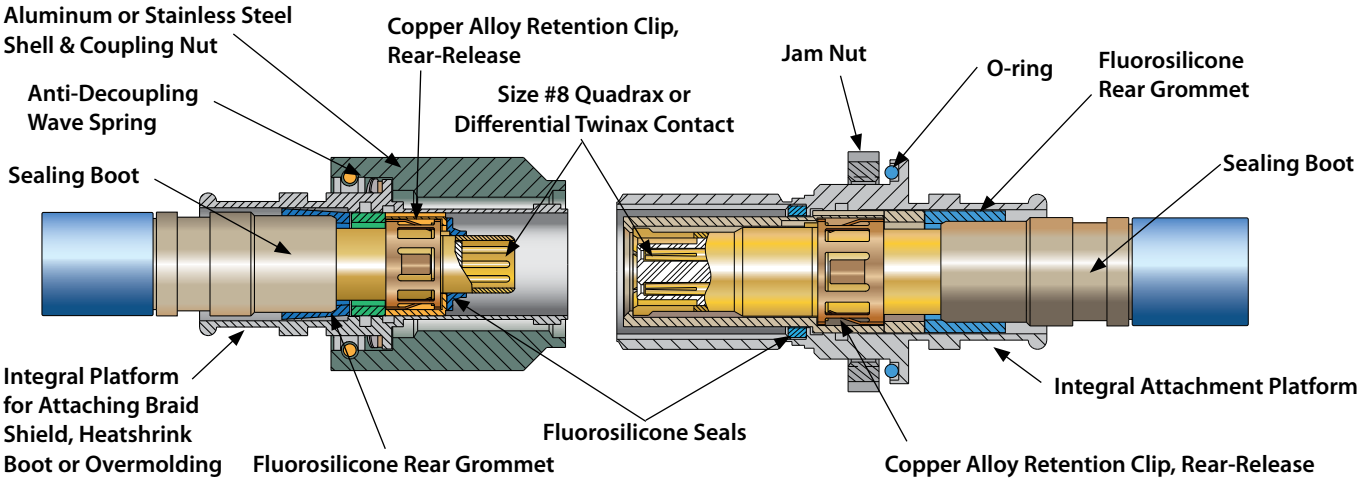

© 2014 Glenair, Inc.

Size #23 Crimp Contacts for Series 80 *High-Speed* Mighty Mouse Connectors

SIZE #23 CRIMP CONTACTS

Standard size #23 contacts accept #22 to #28 AWG wire. Choose "small bore" versions for #26 to #30 AWG wire. Contacts are bulk packaged. Terminate with standard M22520 crimper with special positioner.





#23 Pin Contact



#23 Socket Contact

Contact Type	Wire Size	Material	Part Number	Ø A		Color Band	Tool Code
				In.	mm.		
Pin	#22 – #28	BeCu	809-001	.0335-.0355	0.851-0.902	None	A, C
Pin	#26 – #30	BeCu	809-042	.0229-.0245	0.582-0.622	Blue	A, D
Socket	#22 – #28	BeCu	809-002	.0335-.0355	0.851-0.902	None	A, C
Socket	#26 – #30	BeCu	809-043	.0229-.0245	0.582-0.622	Blue	A, D

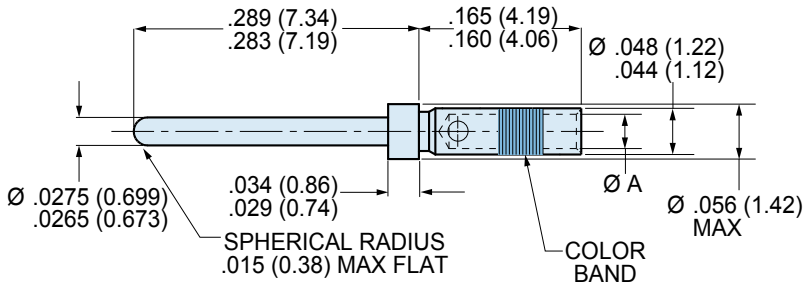

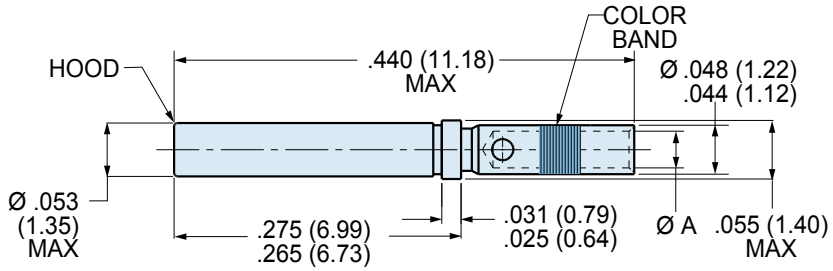

Crimp Tensile Strength		
Values are in pounds and are minimums.		
Wire Gage	Silver or Tin Coated Copper Wire	Nickel Coated Copper Wire
#22	12	8
#24	8	6
#26	5	3
#28	3	2
#30	1.5	1.5

Material and Finish

Beryllium copper alloy per ASTM B196 or B197, 50 microinches gold plated per ASTM B488 Type II Code C Class 1.25 over nickel plate per QQ-N-290 Class 2, 50-100 microinches.
Socket contact hood: stainless steel, passivated per AMS-QQ-P-35.

Specifications

Current Rating: 5 Amps maximum
Voltage Drop (at 5 Amps and 25° C): 70 millivolts maximum
Temperature Range: -65° to + 200° C
Socket Contact Minimum Separation Force: 0.5 ounces

Crimp Tools and Insertion/Removal Tools

Crimper: 809-015
Positioner: 809-005 (standard). Use P/N 809-057 for small bore contacts 809-065 and 809-066
Standard Insertion/Removal Tool: 809-088

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

HOW TO TERMINATE, INSTALL AND REMOVE SIZE #23 CONTACTS

1 ***Set Up Crimp Tool.*** Install proper positioner into crimp tool. The label on the positioner shows the proper tool setting for each wire size. Turn the adjustment wheel to the correct setting.


2 ***Strip Wire.*** Remove wire insulation, taking care to avoid nicking or cutting wire strands. Strip wire to length shown.

3 ***Insert wire*** into contact. The wire should be visible in the inspection hole.

4 Insert contact into crimp tool as shown. Make sure that the contact is fully inserted into the tool. Squeeze handle completely. The ratchet mechanism will not allow a partial crimp. Release handle and remove contact.


5 ***Inspect crimped contact***. Wire should be fully inserted and the crimp should be uniform in appearance.


Insertion/Extraction Tool 809-088





6 ***Install contact into connector***. Push the contact through the rear grommet until the contact locks into place. This can usually be done by hand without the need for a tool. If the wire gage is #26 or smaller, a tool is helpful. There are two techniques for installing contacts with a tool. One method is to push the contact in by hand, then use the tool to finish the insertion. The other method is to position the insertion tip against the contact shoulder, then insert the contact. Use insertion/extraction tool 809-088 to install contacts. Slide the wire into the groove on the blue end of the tool. Slide the tool tip up the contact until it touches the contact shoulder. **USE CARE TO AVOID DAMAGING THE CONNECTOR.**


7 ***Contact Extraction.*** Use tool 809-088. The white end is used for contact extraction. First, push the wire into the groove of the metal tip. Slide the tip of the tool into the connector. Push the tool into the connector cavity until the tip bottoms in the connector. Avoid wiggling or rocking the tip. This may damage the cavity. A straight push is best. Pinch the wire between your finger and the white plastic grip and slide the tool and contact out of the connector. **Wire insulation diameter greater than 0.045 inches (1.14mm) is too large to work properly with the extraction tool. connector damage is possible.**

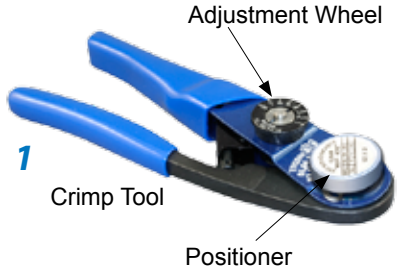





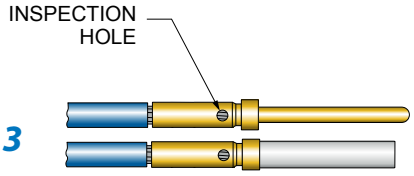

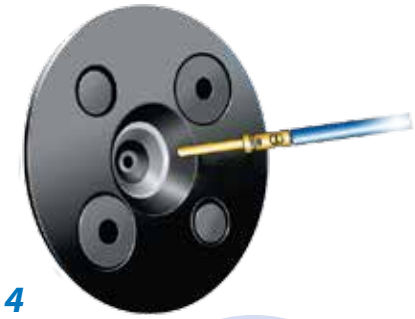

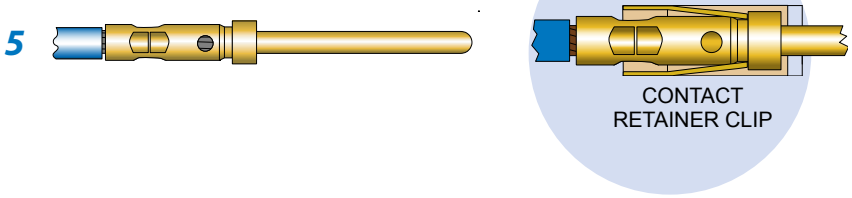

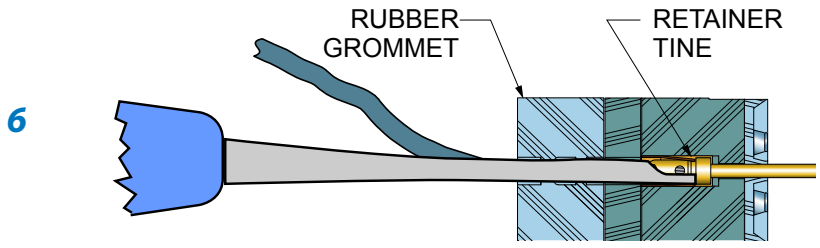

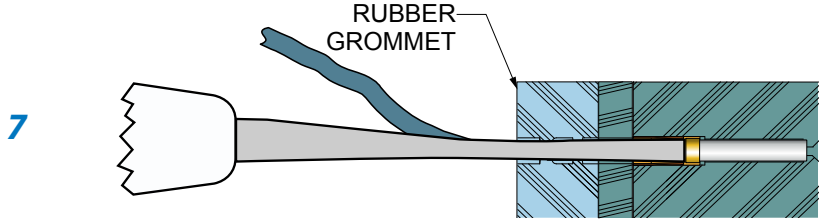


N

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Size #23 Crimp Contact Sealing Plugs and Tools for Series 80 *High-Speed* Mighty Mouse Connectors

GROMMET SEALING PLUGS

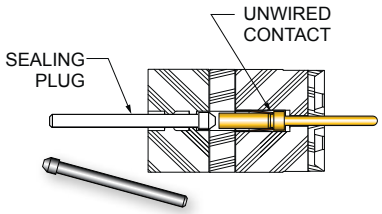

Grommet sealing plugs are used to seal unwired contact cavities. The size #23 sealing plug is specially designed to fit Glenair Series 80 grommets. After installing unwired contacts into unused cavities, insert knob end of sealing plug into grommet until it bottoms against the unwired contact per illustration. Install sealing plugs with standard contact insertion/extraction tools . The size #23 plug is polyphenylsulphone.

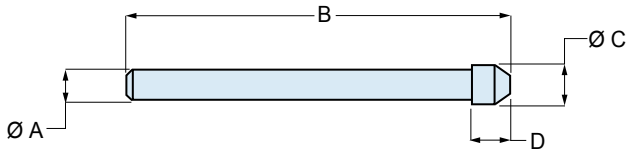

Size	Color	Part Number	Military Part Number	Insertion/ Removal Tool	A Ref.		B Ref.		C Ref.		D Ref.	
					in.	mm.	in.	mm.	in.	mm.	in.	mm.
#23	Black	809-155	(None)	M81969/14-01	.040	1.02	.51	13.0	.052	1.32	.050	1.27


MINIATURE ADJUSTABLE CRIMP TOOLS



Standard M22520/2-01 crimper for use with standard size #23 Mighty Mouse contacts. Crimp tools perform precision eight indent crimps for gas-tight wire terminations and excellent tensile strength. Adjustment wheel has 8 settings. Ratchet mechanism prevents improper crimps. Use with bayonet-type positioners. Check calibration with M22520/3 gages. Length is 6.75 inches, weight is approx. 10 oz.

Part Number	Military Part Number	Daniels Part Number	Tool Code
809-015	M22520/2-01	AFM8	A

POSITIONERS FOR USE WITH MINIATURE ADJUSTABLE CRIMP TOOLS

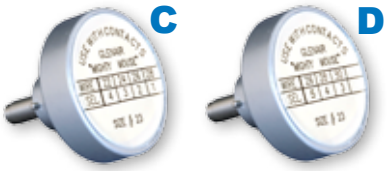

These bayonet-type positioners hold contacts at correct height for crimping with M22520/2 type miniature step adjustable tools, above. Face plate shows correct tool settings. "C" Positioner is for standard size #23 contacts. #22-#28 AWG. Use with 809-015 crimp tool. "D" Positioner is for small bore size #23 contacts. #26-#30 AWG. Use with 809-015 crimp tool.

Figure	Part Number	Military Part Number	Daniels Part Number	Tool Code
C	809-005	(none)	K1461	C
D	809-057	(none)	(none)	D

CONTACT INSERTION AND REMOVAL TOOL



Insertion/Extraction Tool for #23 Contacts. This tool features molded plastic grips and sturdy stainless steel tips. Blue/White molded handle.

Size	Type	Part Number	Military Part Number	Daniels Part Number
#23	Insertion/Extraction	809-088	(None)	(None)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

PRODUCT SELECTION GUIDE



801-036 and 801-039
Plug Connectors
Page P-4



801-037 and 801-040
Crimp Receptacles
Page P-6



801-038
PCB Receptacles
Page P-10



801-045, -046, -047, -076, -077, -078, -081
Series 801 Overmolded Cordsets for eSATA, Ethernet, USB and SATA
Mighty Mouse Back-to-Back and Mighty Mouse - Commercial
Page P-13

P

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.






Series 801 *High-Speed* Mighty Mouse Plug and Receptacle Connectors

The 801 Series *High-Speed* Mighty Mouse is ideal for use in USB 2.0, eSATA and other high-speed databus applications. The connector is equipped with special PFA (Fluoropolymer) insulators and is optimized for use with high-speed differential wire such as our 963-001 Series cable. Five insert arrangements are offered with 4, 7, 10, 19 and 26 size #23 contacts. The high-density, small form factor connector is suited for applications where traditional military circular connectors are too large or too heavy. The double-start threads provide full mating in 1½ turns, and the plug features an anti-decoupling spring for vibration resistance. The unique integral molding/band platform allows direct shield attachment and cable overmolding. Receptacles are available with printed circuit board contacts. Plugs have anti-decoupling wave spring, or specify ratchet mechanism for added security.

- **Double-Start ACME Thread with anti-decoupling spring or ratchet**
- **Special Purpose PFA (Fluoropolymer) Insulators**
- **Crimp Rear Release Contacts**
- **Integral Band Platform**
- **Supplied with Size #23 Gold-Plated Copper Alloy Crimp, PCB, or Solder Cup Contacts**
- **Environmentally Sealed**



Factory-terminated overmolded cordsets for optimal high-speed performance and environmental sealing: See page B-12

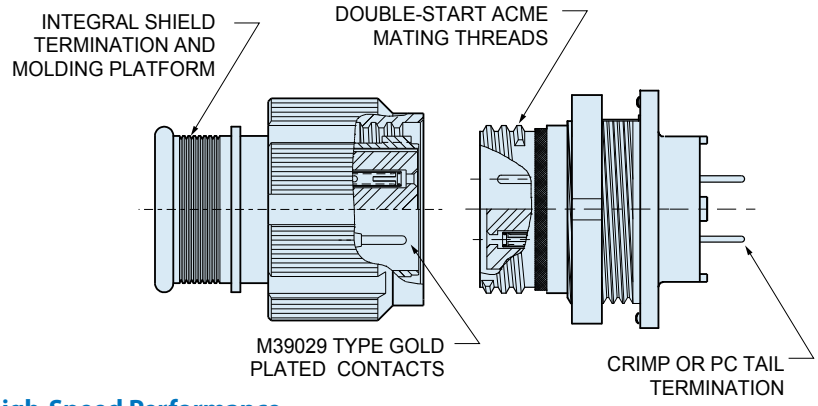

High-Speed Performance

Series 801 *High-Speed* Mighty Mouse connectors are constructed with a rear grommet for environmental sealing. This grommet can be removed in order to maintain the construction of the matched impedance pair cable for a longer distance inside the connector for improved high-speed performance (see tables below.) However, removal of the grommet affects environmental sealing. For optimal high-speed performance and environmental sealing, Glenair recommends our factory-terminated overmolded cordsets. Full ordering information begins on page P-13.

With Grommet Removed	
High Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Double-Start ACME Threads resist cross-threading and shearing. These aerospace-grade Series 801 plugs feature 1½ turns of the coupling nut to full mating.

Two Shell Styles: Integral platform for direct shield attachment using Band-Master™ ATS advanced termination system, or accessory thread for attaching a strain relief.

Crimp, Rear Release contact system, with #23 contacts.

Printed Circuit Board and Solder Cup versions with precision machined low profile shells.


Harsh Environment: fluorosilicone seals, aluminum or stainless steel shells, and gold-plated copper alloy contacts for superior performance in demanding applications.

High Speed: Special purpose PFA (Fluoropolymer) insulators deliver superior impedance, VSWR and insertion loss values.


Specifications	
Current Rating	5 AMPS
Dielectric Withstanding Voltage	500 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum from 100MHz to 1000MHz.
Durability	2000 mating cycles

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	PFA
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber


Mighty Mouse *High Speed* Contact Arrangements
Mating Face View of Pin Connector (Socket Connector Numbers are Reversed)




6 - 4
Shell Size 6
4 Size #23 Contacts




6 - 7
Shell Size 6
7 Size #23 Contacts



7 - 10
Shell Size 7
10 Size #23 Contacts




9 - 19
Shell Size 9
19 Size #23 Contacts



10 - 26
Shell Size 10
26 Size #23 Contacts

Table IV: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

P

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 801 Mighty Mouse *High-Speed* Double-Start ACME Threads Plug Connector

801-036 and 801-039 Ordering Information



Glenair Series 801 Mighty Mouse *High-Speed* connectors feature double-start modified stub ACME mating threads for improved protection against cross-mating and thread damage. Connector shells are machined aluminum or stainless steel. The connector is equipped with special PFA (Fluoropolymer) insulators and is optimized for use with high-speed differential wire such as our 963-001 cable. Five insert arrangements are offered with 4, 7, 10, 19 and 26 #23 AWG contacts, packaged separately. Terminate contacts with standard M22520 tools. Metal clips inside the connector body lock contact into place. Contacts are removable. Fluorosilicone seals and rear grommet protect connector from water ingress. Terminate cable shield directly to connector body with Band-Master™ ATS strap, or choose rear accessory thread to attach optional cable clamp or backshell.

P

How To Order

Sample Part Number	801-036	-16	M	7-10	P	A

Series (See Table I)	**801-036** = Banding Platform **801-039** = Rear Accessory Thread
Shell Style	**-16** = Plug with Anti-Decoupling Spring **-26** = Self-Locking Plug with Ratchet Mechanism
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement (See Table II	**6-4**, **6-7**, **7-10**, **9-19**, **10-26**
Contact Type	**Connector supplied with contacts** **P** = Pin **S** = Socket **Connector supplied without contacts** **A** = Pin Connector, less contacts **B** = Socket Connector, less contacts Connectors with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F

Table I: Series









	
801-036 Plug with Banding Platform	**801-039** Plug with Accessory Thread

Table II: Shell Size – Insert Arrangement


				
6-4	**6-7**	**7-10**	**9-19**	**10-26**

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

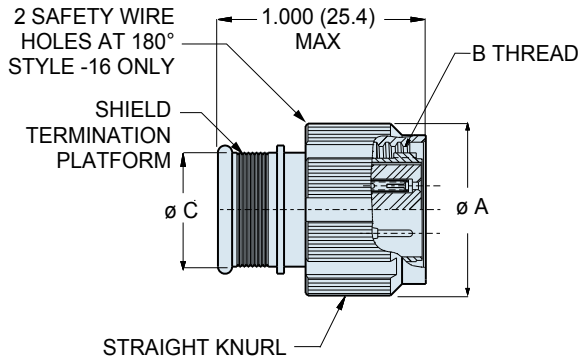


Integral Band Platform
801-036

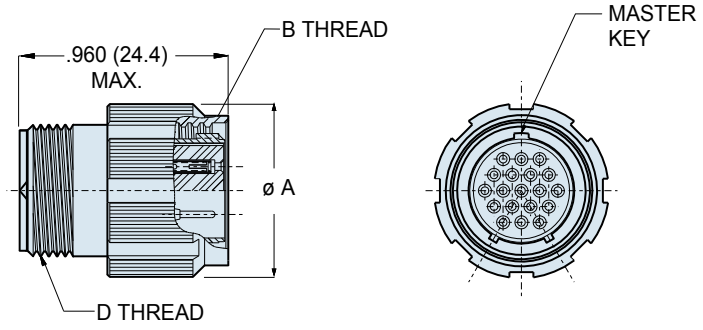

Accessory Thread
801-039

Table III: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions

Shell Size	Style 16 Ø A		Style 26 Ø A		B Thread	Ø C		D Thread UNEF-2A
	In.	mm.	In.	mm.		In.	mm.	
6	.60	15.2	.70	17.8	.3750-.05P-1L-2B	.290	7.4	.3125-32
7	.69	17.5	.79	20.1	.4375-.05P-1L-2B	.390	9.9	.4375-28
9	.81	20.6	.92	23.4	.5625-.05P-1L-2B	.500	12.7	.5625-24
10	.88	22.4	.98	24.9	.6250-.05P-1L-2B	.560	14.2	.6250-24

With Grommet Removed	
High Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

NOTES

Material and Finish

- Plug Barrel, Coupling Nut: Aluminum Alloy or Stainless Steel
- Insulator: PFA
- Interfacial Seal, Grommet Seal: Fluorosilicone
- Contact: Copper Alloy, 50 Microinch Gold Plated per ATSM B 488, Type II, Code C, Class 1.25 (.00005 Min THK), over a suitable underplate.

P

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 801 Mighty Mouse *High-Speed* Connectors

Crimp Receptacle Connector with Double-Start ACME Threads
801-037 and 801-040 Ordering Information



In-Line
Shell Style 01



Rear Panel Jam Nut Mount
Shell Style 07




Square Flange Mount
Shell Style 02

How To Order

Sample Part Number	801-037	-02	Z1	6-4	S	A


Series (See Table I)	**801-037** = Receptacle with Banding Platform **801-040** = Receptacle with Accessory Thread		
Shell Style (See Table II)	**-01** = In-Line For Free-Hanging Cables **-02** = Square Flange For Front or Rear Mounting **-07** = Jam Nut For Rear Panel Mounting		
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant		
Shell Size - Insert Arrangement (See Table III)	**6-4**, **6-7**, **7-10**, **9-19**, **10-26**		
Contact Type	**Connector supplied with contacts** **P** = Pin **S** = Socket	**Connector supplied without contacts** **A** = Pin Connector **B** = Socket Connector	**Connector Supplied with 30 AWG Crimp Barrel** **G** = Pin **H** = Socket
Shell Key Positions (See Table IV)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F		

Table I: Series




801-037	801-040
Receptacle with Banding Platform	Receptacle with Accessory Thread

Table II: Shell Style




-01	-02	-07
In-Line	Square Flange	Jam Nut for Rear Panel Mounting

Table III: Shell Size – Insert Arrangement

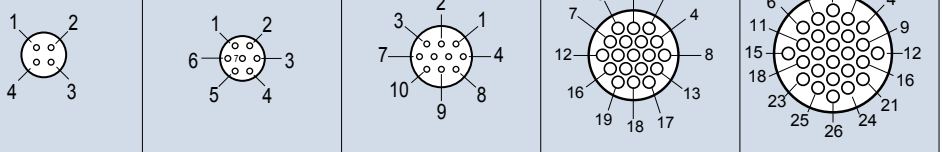

6-4	6-7	7-10	9-19	10-26

Table IV: Shell Key Positions




Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

In–line receptacle - shell style 01

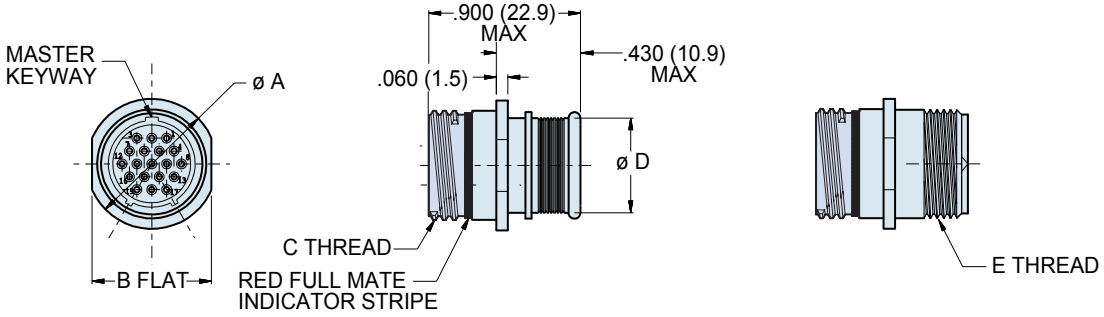

Integral Band Platform
801-037-01

Accessory Thread
801-040-01

Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread UNEF-2A
	In.	mm.	In.	mm.		In.	mm.	
6	.415	10.54	.385	9.78	.375-.05P-.1L-2A	.290	7.37	.3125-32
7	.480	12.19	.445	11.30	.4375-.05P-1L-2A	.390	9.91	.4375-28
9	.605	15.37	.575	14.61	.5625-.05P-1L-2A	.500	12.70	.5625-24
10	.655	16.64	.635	16.13	.6250-.05P-1L-2A	.560	14.22	.6250-24

With Grommet Removed	
High Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

NOTES

Material and Finish

- Plug Barrel, Coupling Nut: Aluminum Alloy or Stainless Steel
- Insulator: PFA
- Interfacial Seal, Grommet Seal: Fluorosilicone
- Contact: Copper Alloy, 50 Microinch Gold Plated per ATSM B 488, Type II, Code C, Class 1.25 (.00005 Min THK), over a suitable underplate.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse *High-Speed* Double-Start ACME Thread Receptacle

801-037 and 801-040 Shell Style-02 Dimensions

Square flange, front or rear mount receptacle - shell style 02

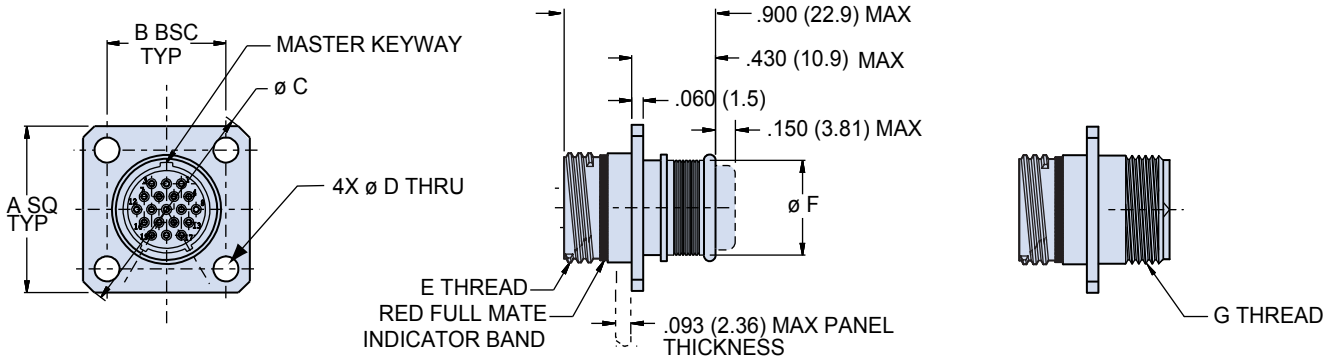

Integral Band Platform
801-037-02

Accessory Thread
801-040-02


Dimensions												
Shell Size	A SQ		B BSC		Ø C		D Thread	Ø E		F Thread UNEF-2A	Ø G	
	In.	mm.	In.	mm.	In.	mm.		In.	mm.		In.	mm.
6	.590	14.99	.423	10.74	.750	19.05	.3750-.05P-.1L-2A	.290	7.37	.3125-32	.096	2.44
7	.650	16.51	.483	12.27	.850	21.59	.4375-.05P-1L-2A	.390	9.91	.4375-28	.091	2.31
9	.850	21.59	.607	15.4	1.125	28.56	.5625-.05P-.1L-2A	.500	12.70	.5625-24	.130	3.30
10	.890	22.61	.670	17.0	1.188	30.18	.6875-.05P-.1L-2A	.560	14.22	.6250-24	.126	3.20

With Grommet Removed	
High Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

Panel Cutout Dimensions



Shell Size	Ø G		Ø H Bsc		Ø R	
	In.	mm.	In.	mm.	In.	mm.
6	.096	2.44	.423	10.74	.390	9.91
7	.091	2.31	.483	12.27	.450	11.43
9	.130	3.30	.607	15.42	.575	14.61
10	.126	3.20	.670	17.02	.640	16.26

NOTES


Material and Finish

- Plug Barrel, Coupling Nut: Aluminum Alloy or Stainless Steel
- Insulator: PFA
- Interfacial Seal, Grommet Seal: Fluorosilicone
- Contact: Copper Alloy, 50 Microinch Gold Plated per ATSM B 488, Type II, Code C, Class 1.25 (.00005 Min THK), over a suitable underplate.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Jam nut, rear panel mount receptacle - shell style 07

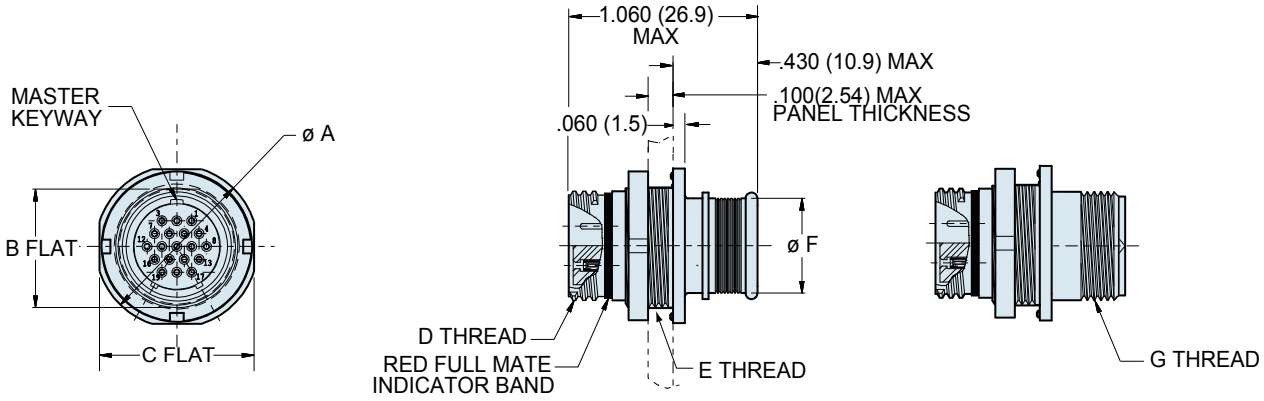

Integral Band Platform
801-037-07

Accessory Thread
801-040-07


Dimensions												
Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread	Ø F		G Thread UN-2A	
	In.	mm.	In.	mm.	In.	mm.			In.	mm.		
6	.635	16.13	.410	10.41	.595	15.11	.3750-.05P-.1L-2A	.4375-28 UNEF-2A	.290	7.37	.3125-32	.3125-32
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-.1L-2A	.5625-32 UN-2A	.390	9.91	.4375-28	.4375-28
9	.830	21.08	.596	15.14	.790	20.07	.5625-.05P-.1L-2A	.6250-28 UN-2A	.500	12.70	.5625-24	.5625-24
10	.890	22.61	.658	16.71	.855	21.72	.6250-.05P-.1L-2A	.6875-28 UN-2A	.560	14.22	.6250-24	.6250-24

With Grommet Removed	
High Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

Series 801 Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
6	.418 .414	10.62 10.52	.448	11.37
7	.544 .540	13.82 13.72	.573	14.55
9	.604 .600.	13.34 15.24	.635	16.13
10	.668 .664	16.97 16.87	.698	17.73

NOTES

Material and Finish

- Plug Barrel, Coupling Nut: Aluminum Alloy or Stainless Steel
- Insulator: PFA
- Interfacial Seal, Grommet Seal: Fluorosilicone
- Contact: Copper Alloy, 50 Microinch Gold Plated per ATSM B 488, Type II, Code C, Class 1.25 (.00005 Min THK), over a suitable underplate.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse *High-Speed* Double-Start ACME Threads

801-038 PCB Receptacle Ordering Information



Printed Circuit Board Receptacles feature low profile shells for minimum protrusion inside enclosures and integral standoffs for board washout. The connector is equipped with special PFA (Fluoropolymer) insulators and is optimized for use with high-speed differential wire such as our 963-001 Series cable. Five insert arrangements are offered with 4, 7, 10, 19 and 26 PC tail or solder cup terminations. Contacts are non-removable.

Water Immersion, Unmated Specify 801-038 connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify 801-041 watertight connectors . These 801-041 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40° C to +70° C.

How To Order

Sample Part Number	801-038	-07	M	7-10	P	A
Series	**801-038** = PCB or Solder Cup Terminated Receptacle with Standard Epoxy Potting. **801-041** = Receptacle for Solder Cup or PCB Termination with Special Mod Code 518 Sealing for Open Face (Unmated) Water Immersion Requirements. 100% Leak Tested.					
Shell Style (See Table I)		**-02** = Square Flange For Front or Rear Mounting **-07** = Jam Nut For Rear Panel Mounting				
Shell Material and Finish			**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant			
Shell Size - Insert Arrangement				**6-4**, **6-7**, **7-10**, **9-19**, **10-26** (See page P-3)		
Contact Type					**P** = Pin, PC Tail **S** = Socket , PC Tail	**E** = Pin, Solder Cup **F** = Socket, Solder Cup
Shell Key Positions						**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F (See Page P-3)

Table I: Shell Style







	
-02 Square Flange	**-07** Jam Nut


Table II: Shell Size – Insert Arrangement

				
6-4	**6-7**	**7-10**	**9-19**	**10-26**

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Square flange front or rear panel mount receptacle - shell style 02

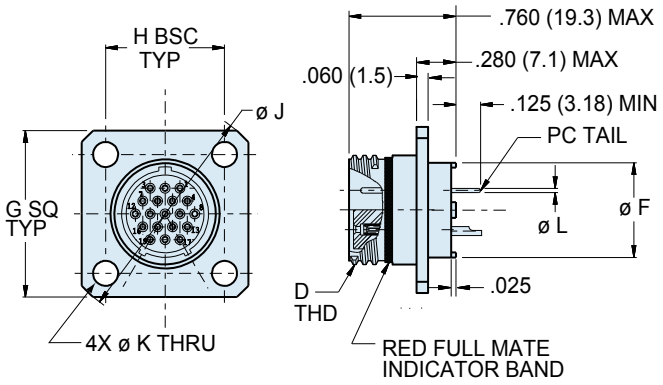

801-038-02
Square Flange


Square Flange Panel Cutout



02 Square Flange


Shell Size	Ø A		B BSC		Ø C	
	In.	mm.	In.	mm.	In.	mm.
6	.390	9.91	.423	10.74	.096	2.44
7	.450	11.43	.483	12.27	.091	2.31
9	.575	14.61	.607	15.42	.130	3.30
10	.640	16.26	.670	17.02	.126	3.20

Jam nut rear panel mount receptacle - shell style 07

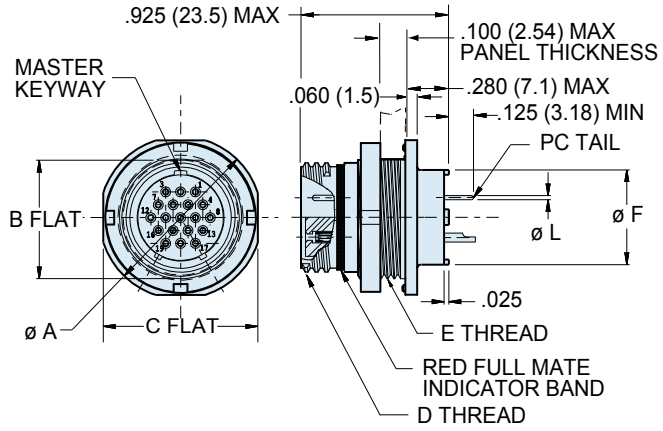

Jam Nut
801-038-07

Jam Nut Panel Cutout



07 Jam Nut

Shell Size	D Flat		Ø E	
	In. ± .002	mm.	In. ± .002	mm. ± 0.0
6	.416	10.57	.448	11.38
7	.542	13.77	.573	14.55
9	.602	15.29	.635	16.13
10	.666	16.92	.698	17.73

Dimensions

Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread	Ø F		G Sq.		H BSC		Ø J		K Holes		Ø L Tail Dia.
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	
6	.635	16.13	.410	10.41	.595	15.11	.3750-.05P-.1L-2A	.4375-28 UNEF-2A	.330	8.38	.590	14.99	.423	10.74	.750	19.05	.096	2.44	#23 .018/.022 (0.46/0.56)
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-.1L-2A	.5625-32 UN-2A	.432	10.97	.650	16.51	.483	12.27	.850	21.59	.091	2.31	
9	.830	21.08	.596	15.14	.790	20.07	.5625-.05P-.1L-2A	.6250-28 UN-2A	.551	14.00	.850	21.59	.607	15.42	1.125	28.58	.130	3.30	
10	.890	22.61	.658	16.71	.855	21.72	.6250-.05P-.1L-2A	.6875-28 UN-2A	.620	15.75	.890	22.61	.670	17.02	1.188	30.18	.126	3.20	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Series 801 Mighty Mouse *High-Speed* Double-Start ACME Threads

801-038-02 Square Flange and 801-038-07 Jam Nut Dimensions


Square flange and jam nut PCB footprints

Straight PCB Pin Footprints (socket connector numbers are reversed)


Pin Connector 6-4




Pin Connector 6-7




Socket Connector 7-10



Pin Connector 9-19



Pin Connector 10-26



NOTES

Material and Finish

- Plug Barrel, Coupling Nut: Aluminum Alloy or Stainless Steel
- Insulator: PFA
  Potting Compound: Epoxy
- Interfacial Seal, Grommet Seal: Fluorosilicone
- Contact: Copper Alloy/Gold Plate

High Speed Performance	
Impedance	100 Ω ±20 Ω at 200-Picosecond
Insertion Loss	
500 MHz	.71 dB
1 GHz	1.55 dB
1.5 GHz	2.75 dB
2 GHz	1.00 dB

Note:

See Glenair test report QTR-013 for full high–speed characterization

P


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.




Series 801 *High-Speed* cordsets

For optimal data transmission performance and environmental sealing, choose Glenair high-speed cordsets. Factory-terminated connectors have rear grommets removed to maintain the construction of the matched-impedance pair cable through the connector for improved high-speed performance. Choose "Back to Back" versions with Series 80 Mighty Mouse *High-Speed* connectors on both ends, or cordsets terminated to industry-standard commercial connectors. Order with or without metal protective covers. All cordsets are 100% electrically tested.

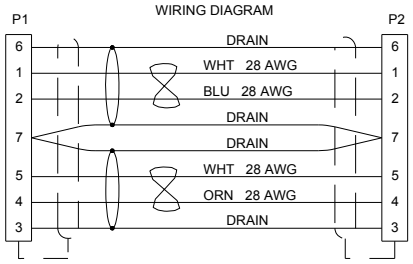

801-045: Series 801 Mighty Mouse *High-Speed* eSATA Overmolded Cordset

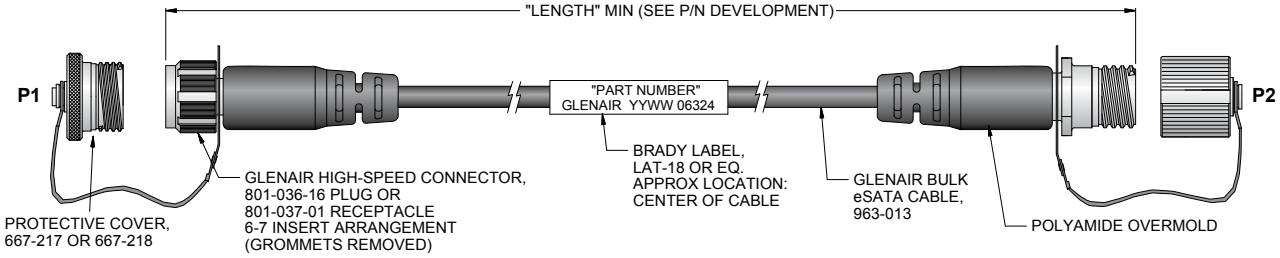

P

How To Order

Sample Part Number	801-045	-A	D	4	NF	6-7	N	A	-48
Series	**801-045** = Back-to-Back eSATA Overmolded cordset.								
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts								
P2 Connector	**A** = Plug with Pin Contacts **B** = Plug with Socket Contacts **C** = Receptacle with Pin Contacts **D** = Receptacle with Socket Contacts **N** = No Connector (Single-Ended)								
Wire Size	**4** = #28 AWG								
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant								
Insert Arr.	**6-7**								
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied								
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**								
Length	Overall Length In Inches 78" Max								

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 801 10GBASE-T Cat 6a Ethernet Cordsets

Mighty Mouse *High-Speed* Back-to-Back Connector with Double-Start ACME Threads

801-046 Ordering Information


801-046: Series 801 Mighty Mouse *High-Speed* 10GBASE-T Overmolded Cordset

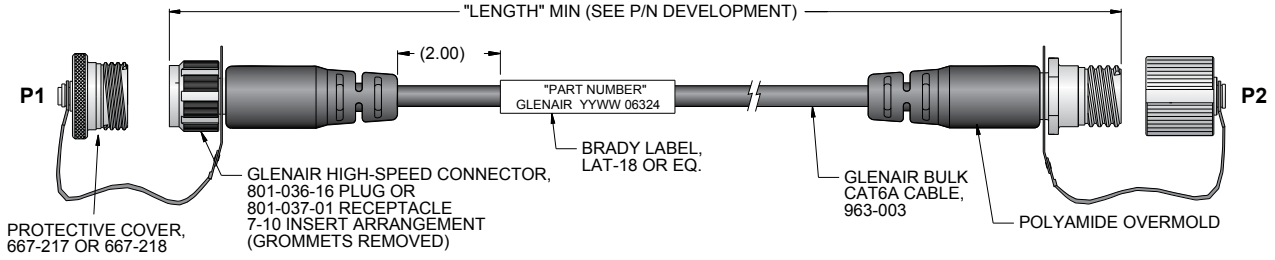


How To Order


Sample Part Number	801-046	-A	D	NF	N	A	-48
Series	**801-046** = Back-to-Back Cat 6a Overmolded cordset.						
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts						
P2 Connector	**A** = Plug with Pin Contacts **B** = Plug with Socket Contacts **C** = Receptacle with Pin Contacts **D** = Receptacle with Socket Contacts **N** = No Connector (Single-Ended)						
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied						
Shell Key Position (See Table I)	**A** (Normal), **B**, **C**, **D**, **E**, **F**						
Length	Overall Length In Inches						

Table I: Shell Key and Keyway Positions

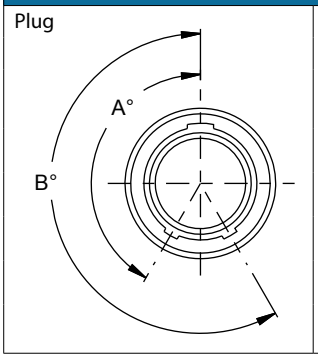

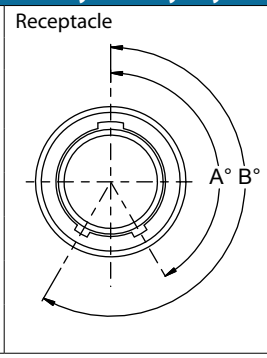

Code	Key Rotation A°	Key Rotation B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

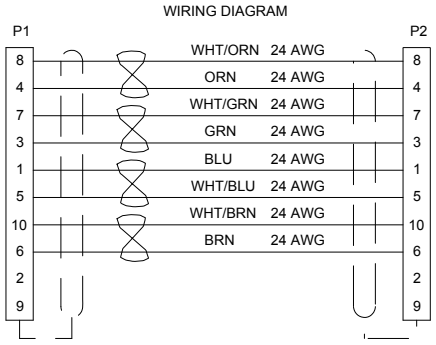

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 801 eSATA Cordsets

Mighty Mouse *High-Speed* Connector to L-COM eSATA Connector with Double-Start ACME Threads

801-076 Ordering Information


801-076: Series 801 Mighty Mouse *High-Speed* eSATA Overmolded Cordset

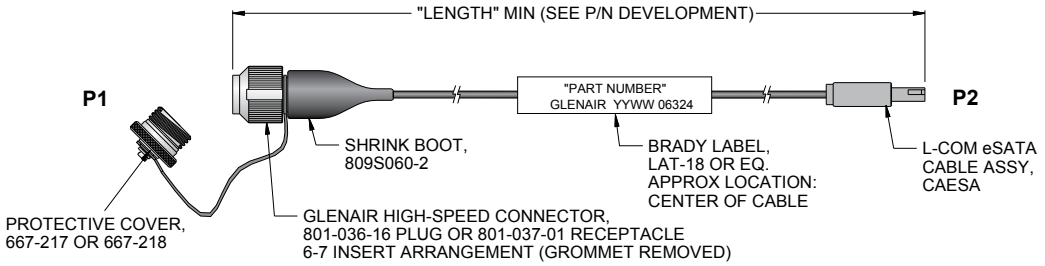


How To Order

Sample Part Number	801-076	-A	NF	N	A	-48
Series	**801-076** = Series 801 Mighty Mouse to L-COM eSATA cordset					
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts					
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied					
Shell Key Position (See Table I)	**A** (Normal), **B**, **C**, **D**, **E**, **F**					
Length	Overall Length In Inches 76" Max					

Table I: Shell Key Positions




Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

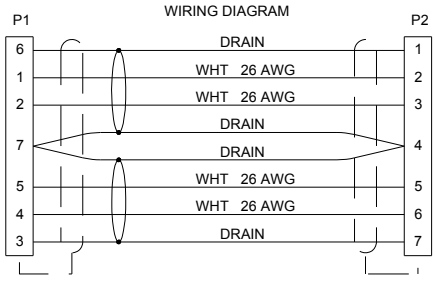

Dimensions in Inches (millimeters) are subject to change without notice.


801-077: Series 801 Mighty Mouse *High-Speed* 10Gbase-T Ethernet Overmolded Cordset

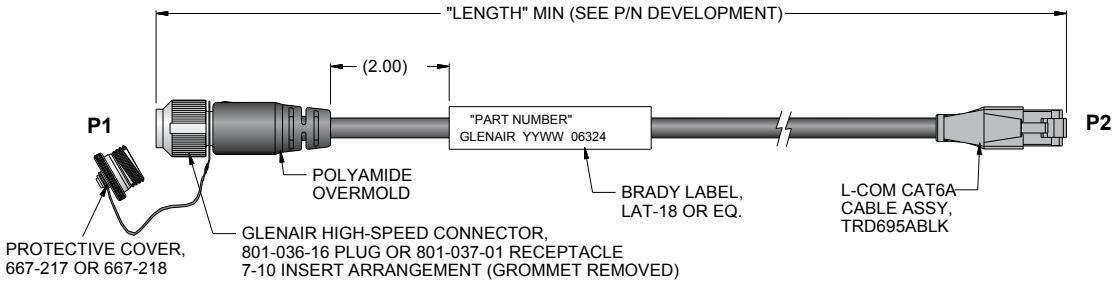

How To Order


Sample Part Number	801-077	-A	NF	N	A	-48
Series	**801-077** = Series 801 Mighty Mouse to L-COM Cat 6a cordset					
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts					
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied					
Shell Key Position (See Table I)	**A** (Normal), **B**, **C**, **D**, **E**, **F**					
Length	Overall Length In Inches					

Table I: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

WIRING DIAGRAM

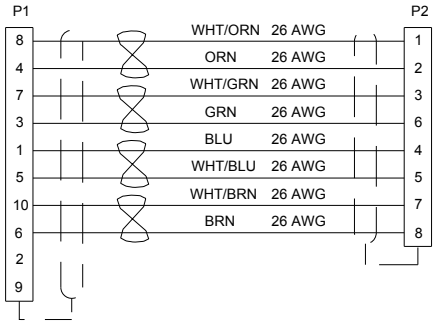

P

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 801 USB 3.0 Cordsets

Mighty Mouse *High-Speed* Connector to L-COM eSATA Connector with Double-Start ACME Threads

801-078 Odering Information


801-078: Series 801 Mighty Mouse *High-Speed* USB 3.0 Overmolded Cordset

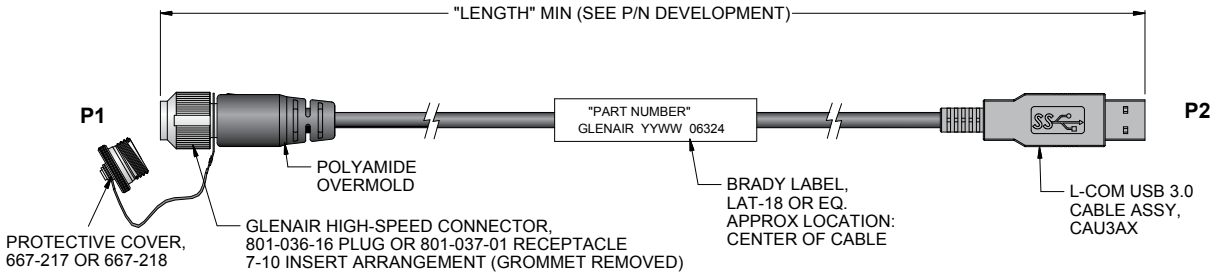

How To Order


Sample Part Number	801-078	-A	NF	N	A	-48	X
Series	**801-078** = Series 801 Mighty Mouse to L-COM USB 3.0 cordset						
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts						
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied						
Shell Key Position (See Table I)	**A** (Normal), **B**, **C**, **D**, **E**, **F**						
Length	Overall Length In Inches 115" Max						
Wiring	**X** = Crossover **Omit** = Standard						

Table I: Shell Key Positions




Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

WIRING DIAGRAM - STANDARD

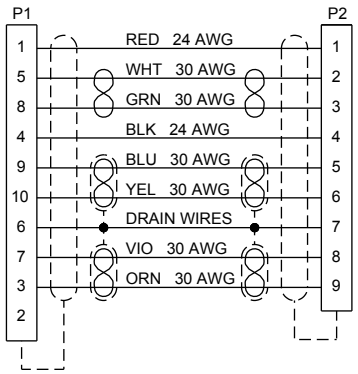

WIRING DIAGRAM - CROSSOVER

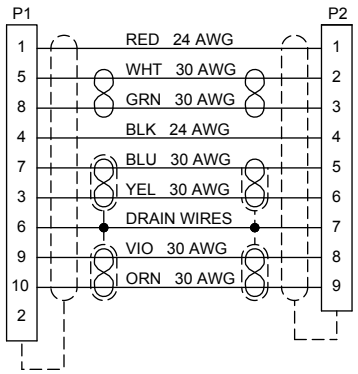

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

SERIES 804

PUSH-PULL *HIGH-SPEED* MIGHTY MOUSE



Environmental sealing and rugged design in a lightweight push-pull package designed for high bandwidth field applications



Ideal for breakaway connections, the Series 804 QDC connector features a stainless steel spring in the receptacle and a detent on the plug body. Used for headsets, radios, weapons and other applications, the QDC Mighty Mouse meets immersion requirements and provides excellent durability. The gold-plated spring provides low shell-to-shell resistance for excellent EMI shielding. A fluorosilicone o-ring provides a watertight seal when mated. Series 804 High-Speed Mighty Mouse connectors are equipped with special purpose PFA (Teflon®) inserts that deliver superior insertion loss and balanced impedance performance for high-speed Ethernet applications at frequencies above 1 GHz.

Glenair®

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



804-026 and 804-027
Plug Connectors

Page Q-4



804-028 and 804-029
Crimp Receptacles

Page Q-6



804-030
PCB Receptacles

Page Q-10



804-070, 804-071, 804-072, 804-073, 804-074, 804-075
Series 801 Overmolded Cordsets for eSATA, Ethernet, and USB
Mighty Mouse Back-to-Back and Mighty Mouse - Commercial

Page Q-12

Q

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.




Series 804 *High-Speed* Mighty Mouse Plug and Receptacle Connectors

Series 804 quick-disconnect offers environmental sealing and rugged design in a lightweight, push-pull package. Ideal for breakaway connections, the Series 804 QDC *High-Speed* connector features a stainless steel spring in the receptacle and a detent on the plug body. Used for headsets, radios, weapons and other applications, the QDC Mighty Mouse meets immersion requirements and provides excellent durability. The gold-plated spring provides low shell-to-shell resistance for excellent EMI shielding. A fluorosilicone o-ring provides a watertight seal when mated. PCB mount versions also available.


- **Push-to-Mate, Pull-to-Unmate**
- **Special Purpose PFA (Fluoropolymer) Insulators**
- **Gold-Plated Stainless Steel Spring**
- **Crimp Rear Release Contacts**
- **Integral Band Platform**
- **Supplied with Size #23 Gold-Plated Copper Alloy Crimp, PCB or Solder Cub Contacts**
- **Environmentally Sealed**



Factory-terminated overmolded cordsets for optimal high-speed performance and environmental sealing: See page Q-12

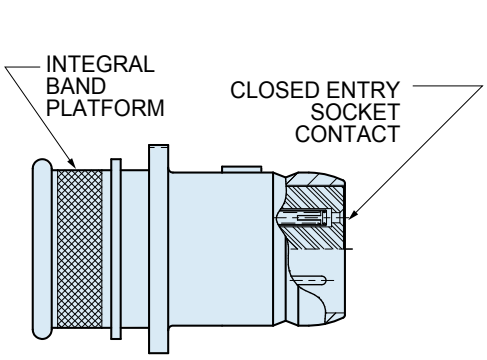

SERIES 804 PLUG

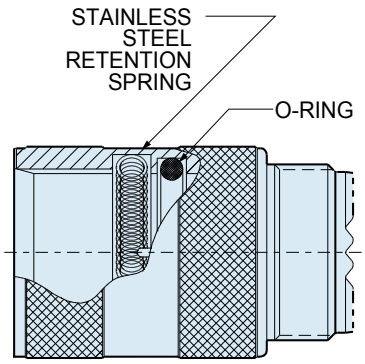

SERIES 804 RECEPTACLE

High-Speed Performance

Series 804 *High-Speed* Mighty Mouse connectors are constructed with a rear grommet for environmental sealing. This grommet can be removed in order to maintain the construction of the matched impedance pair cable for a longer distance inside the connector for improved high-speed performance (see tables below.) However, removal of the grommet affects environmental sealing. For optimal high-speed performance and environmental sealing, Glenair recommends our factory-terminated overmolded cordsets. Full ordering information begins on page Q-12.

With Grommet Removed	
High-Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High-Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Quick-Disconnect Mating Series 804 push-pull mating utilizes a stainless steel retention spring in the receptacle and a detent on the plug.

Two Shell Styles: Integral platform for direct shield attachment using Band-Master™ ATS advanced termination system, or accessory thread for attaching a strain relief.

Crimp, Rear Release contact system, with #23 contacts.

Printed Circuit Board and Solder Cup versions with precision machined low profile shells.

Harsh Environment:
Fluorosilicone seals, aluminum or stainless steel shells, and gold-plated copper alloy contacts for superior performance in demanding applications.


High-Speed:
Special purpose PFA (Fluoropolymer) insulators deliver superior impedance, VSWR and insertion loss values.

Specifications	
Current Rating	5 AMPS
Dielectric Withstanding Voltage	750 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness(1)	60 dB minimum from 100MHz to 1000MHz.
Durability	2000 mating cycles
(1)Tested with electroless nickel plating.	

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	PFA
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber
Spring	Gold plated stainless steel


Series 804 Unmate Force		
Layout	Average Force	
	Pounds	Newtons
6-4	10.8	48.0
6-7	11.4	50.7
7-10	12.0	53.4
9-19	13.8	61.4
10-26	15.2	67.6

Mighty Mouse *High-Speed* Contact Arrangements
Mating Face View of Pin Connector (Socket Connector Numbers are Reversed)




6 - 4

Shell Size 6
4 Size #23 Contacts




6 - 7

Shell Size 6
7 Size #23 Contacts




7 - 10

Shell Size 7
10 Size #23 Contacts



9 - 19

Shell Size 9
19 Size #23 Contacts



10 - 26

Shell Size 10
26 Size #23 Contacts

Q

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull *High-Speed* Mighty Mouse

Quick-Disconnect Plug Connector with #23 Crimp Rear Release Contacts 804-026 and 804-027 Ordering Information



Quick Disconnect These plugs snap securely into receptacle housings and release with a simple pull.

Two Keying Styles A single master key provides fast mating in low-light situations, or specify three keys for more polarizing options.

Two Shell Styles Integral platform for direct shield attachment using the Band-Master™ ATS termination system, or an accessory thread for attaching strain relief backshell.

How To Order

Sample Part Number	804-026	-06	M	6-7	P	A
Series (See Table I)	**804-026** = With Banding Platform **804-027** = With Accessory Thread					
Shell Style	**-06** = Plug					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement (See Table Ii)	**6-4**, **6-7**, **7-10**, **9-19**, **10-26**					
Contact Type	**Connector supplied with contacts** **P** = Pin **S** = Socket	**Connector supplied without contacts** **A** = Pin Connector **B** = Socket Connector	**Connector Supplied with 30 AWG Crimp Barrel** **G** = Pin **H** = Socket			
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series








	
804-026 Plug with Banding Platform	**804-027** Plug with Accessory Thread

Table II: Shell Size – Insert Arrangement


				
6-4	**6-7**	**7-10**	**9-19**	**10-26**

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **E-Mail: sales@glenair.com**

Rev. 10/09/2017

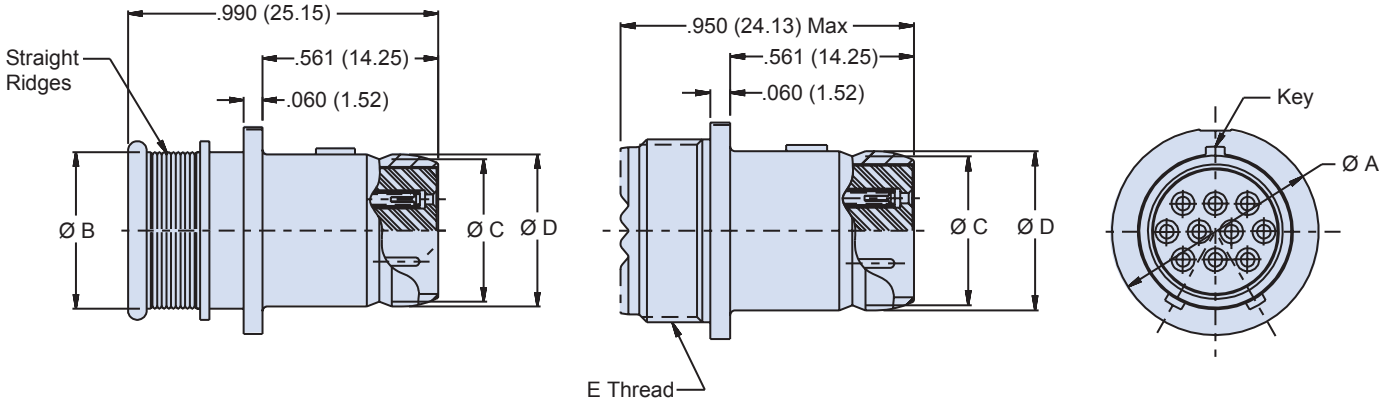


Integral Band Platform
804-026-06

Accessory Thread
804-027-06

Dimensions									
Shell Size	Ø A Max.		Ø B		Ø C		Ø D		E Threads
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	
6	.495	12.57	.286	7.26	.282	7.16	.313	7.95	.3125-32 UNEF-2A
7	.575	14.61	.390	9.91	.351	8.92	.383	9.73	.4375-28 UNEF-2A
9	.670	17.02	.500	12.70	.454	11.53	.486	12.34	.5625-24 UNEF-2A
10	.745	18.92	.564	14.33	.529	13.44	.563	14.30	.6250-24 UNEF-2A

Table III: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Q

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull *High-Speed* Mighty Mouse

Quick-Disconnect Receptacle Connector with size #23 Crimp Rear Release Contacts 804-028 and 804-029 Ordering Information



In-Line
804-028-01



Rear Panel Jam Nut Mount
804-028-07



Front Panel Jam Nut Mount
804-028-00

Integral Band Platform

for direct attachment of a cable shield. Install a boot, or overmold directly onto the band platform. Or, choose an accessory thread for attaching strain reliefs and backshells.

Three Shell Styles

Jam nut with O-ring for front or rear panel mounting, or in-line receptacles for free-hanging cables.


Watertight, Shielded

O-ring inside the receptacle provides a dynamic seal when mated. Gold-plated spring provides secure mechanical retention and low shell-to-shell resistance for excellent EMI shielding.


How To Order

Sample Part Number	**804-028**	**-07**	**M**	**6-7**	**P**	**A**
Series (See Table I)	**804-028** = With Banding Platform **804-029** = With Accessory Thread					
Shell Style	**-00** = Jam Nut, Front Panel Mount **-01** = In-Line for Free-Hanging Cable **-07** = Jam Nut, For Rear Panel Mounting					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement (See Table II)	**6-4**, **6-7**, **7-10**, **9-19**, **10-26**					
Contact Type	**Connector supplied with contacts** **P** = Pin **S** = Socket **Connector supplied without contacts** **A** = Pin Connector **B** = Socket Connector **Connector Supplied with 30 AWG Crimp Barrel** **G** = Pin **H** = Socket					
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series




804-028
Plug with Banding Platform




804-029
Plug with Accessory Thread


Table II: Shell Size – Insert Arrangement




6-4




6-7



7-10



9-19




10-26


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam nut, rear panel mount - shell style 07

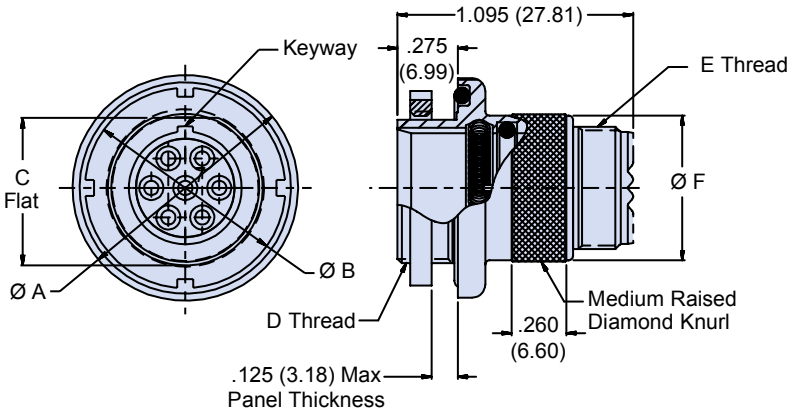


Accessory Thread
804-029-07

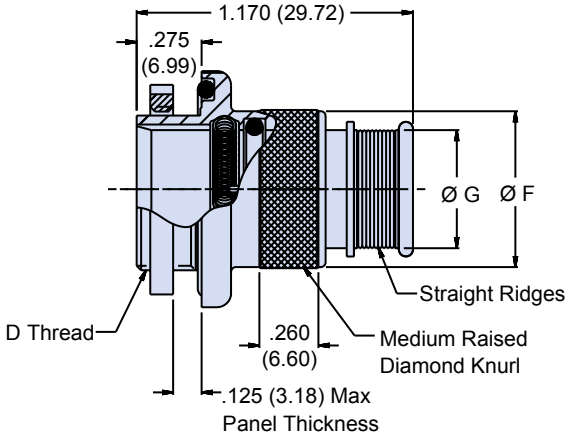

Integral Band Platform
804-028-07


Dimensions												
Shell Size	Ø A		Ø B		C Flat		D Threads	E Threads	Ø F		Ø G	
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	In.	mm.
6	.830	21.08	.625	15.87	.467	14.40	.5000-32 UN-2A	.3125-32 UNEF-2A	.520	13.21	.286	7.26
7	.910	23.11	.750	19.05	.594	15.09	.6250-28 UN-2A	.4375-28 UNEF-2A	.580	14.73	.390	9.91
9	1.000	25.40	.812	20.62	.655	16.64	.6875-28 UN-2A	.5625-24 UNEF-2A	.695	17.65	.500	12.70
10	1.085	27.48	.875	22.22	.721	18.31	.7500-28 UN-2A	.6250-24 UNEF-2A	.735	18.67	.564	14.33

Table III: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Rear Mount Jam Nut Panel Cutout

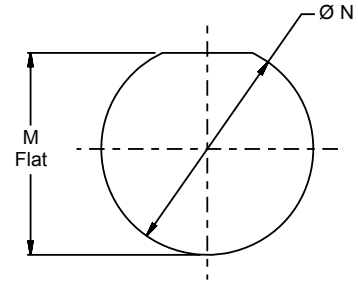

Shell Size	M Flat		Ø N	
	In.	mm.	In. ± .005	mm. ± 0.13
6	.479 .475	12.17 12.07	.510	12.95
7	.606 .602	15.39 15.29	.635	16.13
9	.667 .663	16.94 16.84	.698	17.73
10	.734 .729	18.64 18.52	.760	19.30

Q


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull *High-Speed* Mighty Mouse

Quick-Disconnect Receptacle Connector with size #23 Crimp Rear Release Contacts 804-028 and 804-029 Shell Style -00 Dimensions

Jam nut, front panel mount receptacle - shell style 00

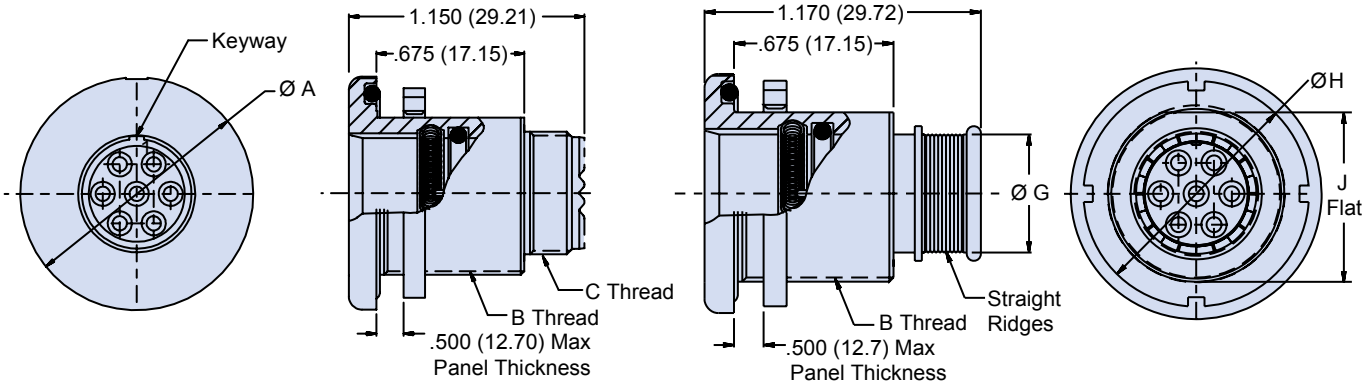


Accessory Thread
804-029-00

Integral Band Platform
804-028-00


Dimensions										
Shell Size	Ø A		B Threads	C Threads	Ø G		Ø H		J Flat	
	In.	mm.			In.	mm.	In.	mm.	In.	mm.
6	.885	22.48	.5625-32 UN-2A	.3125-32 UNEF-2A	.286	7.26	.688	17.47	.530	13.46
7	.995	25.27	.6875-28 UN-2A	.4375-28 UNEF-2A	.390	9.91	.812	20.62	.663	16.84
9	1.075	27.31	.7500-28 UN-2A	.5625-24 UNEF-2A	.500	12.70	.875	22.22	.720	18.29
10	1.140	28.95	.8125-28 UN-2A	.6250-24 UNEF-2A	.564	14.33	.938	23.82	.788	20.02

Table III: Receptacle Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Rear Mount Jam Nut Panel Cutout

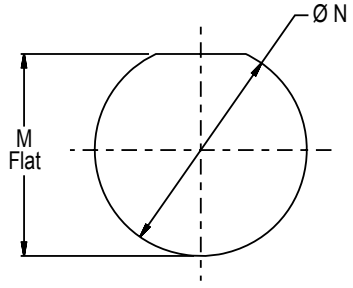


Shell Size	M Flat		Ø N	
	In.	mm.	In. ± .005	mm. ± 0.13
6	.479 .475	12.17 12.07	.510	12.95
7	.606 .602	15.39 15.29	.635	16.13
9	.667 .663	16.94 16.84	.698	17.73
10	.734 .729	18.64 18.52	.760	19.30


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Inline cable receptacle - shell style 01

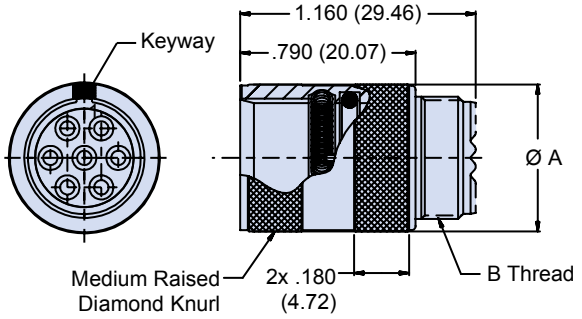


Accessory Thread
804-029-01

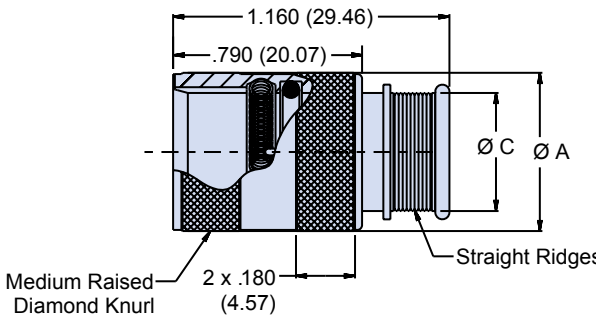

Integral Band Platform
804-028-01

Dimensions					
Shell Size	Ø A		B Threads	Ø C	
	In.	mm.		In.	mm.
6	.520	13.21	.3125-32 UNEF-2A	.286	7.26
7	.580	14.73	.4375-28 UNEF-2A	.390	9.91
9	.695	17.65	.5625-24 UNEF-2A	.500	12.70
10	.735	18.67	.6250-24 UNEF-2A	.564	14.33

Table III: Receptacle Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Q

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull *High-Speed* Mighty Mouse

Rear and Front Mount Jam-Nut PCB or Solder Cup Receptacle
804-030 and 804-031 Ordering Information



Panel Mount Receptacles feature factory-installed non-removable contacts. Choose solder cup or printed circuit board terminals. Front or rear panel mount versions available.

Water Immersion, Unmated Specify 804-030 connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify 804-031 watertight connectors . These 804-031 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1 x 10^{-4} cc/second at one atmosphere pressure differential from -40°C to +70°C.


High–Speed Performance	
Impedance	100 Ω± 20Ω at 200 Picoseconds
Insertion Loss	
500 MHz	.71 dB
1 GHz	1.55 dB
1.5 GHz	2.75 dB
2 GHz	4.00 dB

How To Order


Sample Part Number	804-030	-00	M	6-7	P	A

Series	**804-030** = Receptacle for Solder Cup or PCB Termination, With Standard Epoxy Potting **804-031** = Receptacle for Solder Cup or PCB Termination, With Special "MOD-518" Sealing For Open Face (unmated) Water Immersion Requirements. 100% Leak Tested.
Shell Style (See Table I)	**-00** = Jam Nut, Front Panel Mount **-07** = Jam Nut, Rear Panel Mounting
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy / Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement (See Table Ii)	**6-4**, **6-7**, **7-10**, **9-19**, **10-26**
Contact Type	**Connector supplied with contacts** **P** = Pin **E** = Pin, Solder Cup **S** = Socket **F** = Socket, Solder Cup
Shell Key Positions (See Table III)	Omit for Single Master Key **A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F

Table I: Shell Style




-00
Jam Nut, Front Panel Mount




-07
Jam Nut, Rear Panel


Table II: Shell Size – Insert Arrangement




6-4




6-7



7-10



9-19




10-26

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Rear panel jam nut 804-030/031 - shell style 07

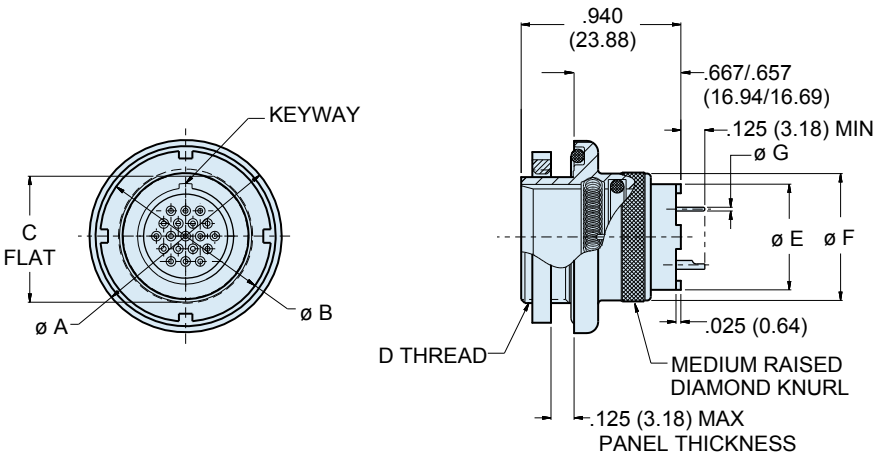


Dimensions													
Shell Size	Ø A		Ø B		C Flat		D Threads	Ø E		Ø F		Ø F Tail Dia.
	In.	mm.	In.	mm.	In.	mm.		In.	mm.	In.	mm.	
6	.730	18.54	.625	15.87	.467	14.40	.5000-32 UN-2A	.330	8.38	.483	12.27	.018/.022 (.46/.56)
7	.910	23.11	.750	19.05	.594	15.09	.6250-28 UN-2A	.432	10.97	.570	14.48	
9	1.000	25.40	.812	20.62	.655	16.64	.6875-28 UN-2A	.551	14.00	.685	17.40	
10	1.085	27.48	.875	22.22	.721	18.31	.7500-28 UN-2A	.620	15.75	.725	18.42	


Rear Mount Jam Nut Panel Cutout				
Shell Size	M Flat		Ø N	
	In.	mm.	In.	mm.
6	.479 .475	12.17 12.07	.510	12.95
7	.606 .602	15.39 15.29	.635	16.13
9	.667 .663	16.94 16.84	.698	17.73
10	.734 .729	18.64 18.52	.760	19.30



Receptacle Key Positions		
Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Front panel jam nut 804-030/031 - shell style 00

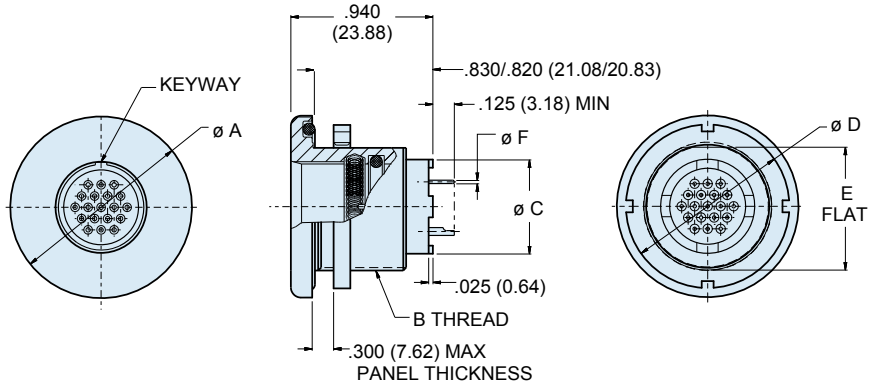

Dimensions										
Shell Size	Ø A		B Threads	Ø C		Ø D		E Flat		Ø F Tail Dia.
	In.	mm.		In.	mm.	In.	mm.	In.	mm.	
6	.885	22.48	.5625-28 UN-2A	.330	8.38	.688	17.47	.530	13.46	.018/.022 (.46/.56)
7	.995	25.27	.6875-28 UN-2A	.432	10.97	.812	20.62	.663	16.84	
9	1.075	27.31	.7500-28 UN-2A	.551	14.00	.875	22.22	.720	18.29	
10	1.140	28.95	.8125-28 UN-2A	.620	15.75	.938	23.82	.788	20.02	

Front Mount Jam Nut Panel Cutout				
Shell Size	P Flat		Ø R	
	In.	mm.	In.	mm.
6	.542 .538	13.77 13.67	.575	14.61
7	.676 .671	17.17 17.04	.698	17.73
9	.732 .728	18.59 18.49	.760	19.30
10	.801 .796	20.35 20.22	.822	20.88



Q

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 eSATA Cordsets

Mighty Mouse Back-to-Back *High-Speed* Push-Pull Connectors

804-070 Ordering Information




100 Ohm differential parallel pair cordsets optimized for eSATA, Ethernet, and USB protocols

Series 804 High-Speed cordsets

For optimal data transmission performance and environmental sealing, choose Glenair high-speed cordsets. Factory-terminated connectors have their rear grommets removed to maintain the construction of the matched-impedance pair cable through the connector for improved high-speed performance. Choose "Back to Back" versions with Series 80 Mighty Mouse *High-Speed* connectors on both ends, or cordsets terminated to industry-standard commercial connectors. Order with or without metal protective covers. All cordsets are 100% electrically tested.

804-070: Series 804 Mighty Mouse *High-Speed* eSata Overmolded Cordset

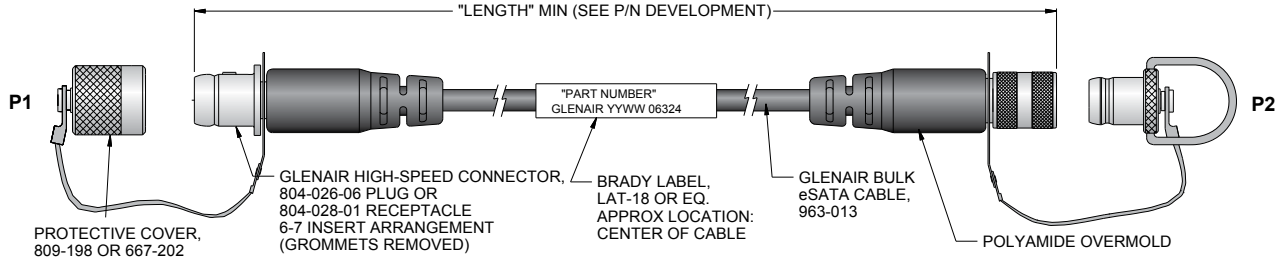


How To Order

Sample Part Number	804-070	-A	D	NF	N	A	-48

Series	**804-070** = Back-to-Back Series 804 Mighty Mouse eSATA Overmolded cordset
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts
P2 Connector	**A** = Plug with Pin Contacts **B** = Plug with Socket Contacts **C** = Receptacle with Pin Contacts **D** = Receptacle with Socket Contacts **N** = No Connector (Single-Ended)
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**
Length	Overall Length In Inches 78" Max


WIRING DIAGRAM

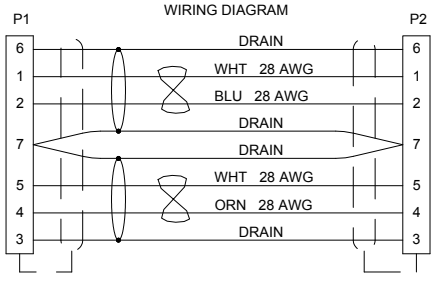

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

804-071: Series 804 Mighty Mouse *High-Speed* 10GBASE-T Overmolded Cordset

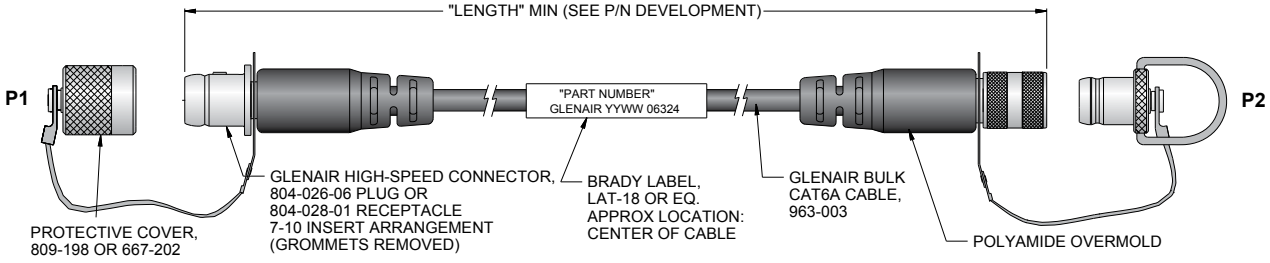


How To Order

Sample Part Number	804-071	-A	D	NF	N	A	-48

Series	**804-071** = Back-to-Back Series 804 Mighty Mouse 10GBASE-T CAT6A Ethernet Overmolded cordset
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts
P2 Connector	**A** = Plug with Pin Contacts **B** = Plug with Socket Contacts **C** = Receptacle with Pin Contacts **D** = Receptacle with Socket Contacts **N** = No Connector (Single-Ended)
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**
Length	Overall Length In Inches


WIRING DIAGRAM

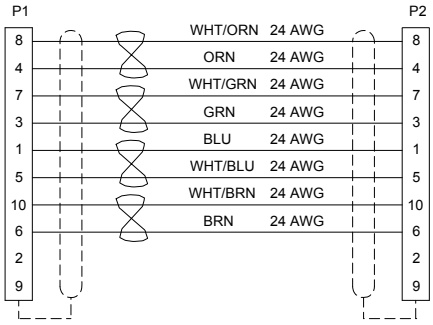

Q


Dimensions in Inches (millimeters) are subject to change without notice.

804-073: Series 804 Mighty Mouse *High-Speed* eSATA Overmolded Cordset

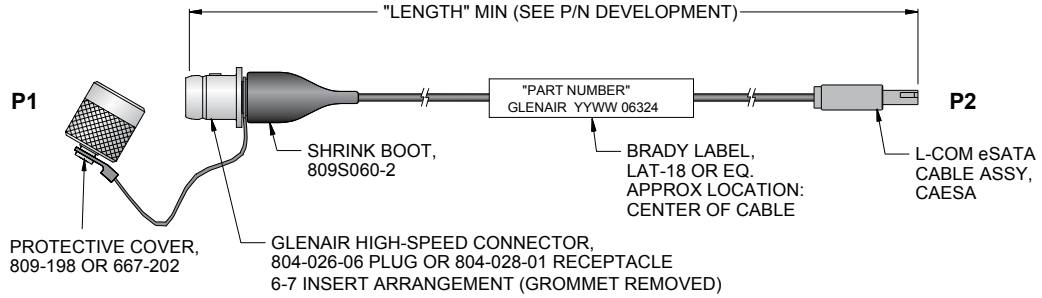

How To Order

Sample Part Number	804-073	-A	NF	N	A	-48
Series	**804-073** = Series 804 Mighty Mouse to L-COM eSATA cordset					
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts					
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied					
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**					
Length	Overall Length In Inches 76" Max					

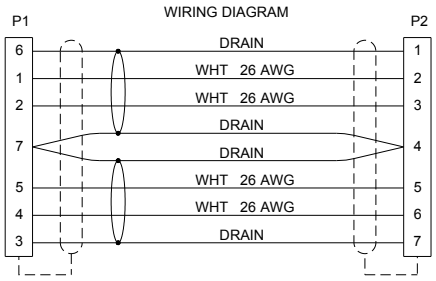


Q

Dimensions in Inches (millimeters) are subject to change without notice.

Series 804 10GBASE-T Ethernet Cat 6a Cordsets

Push-Pull Mighty Mouse *High-Speed* Connector to L-COM CAT6A 10GBASE-T Ethernet Connector 804-074 Ordering Information

804-074: Series 804 Mighty Mouse *High-Speed* 10GBASE-T Ethernet Overmolded Cordset

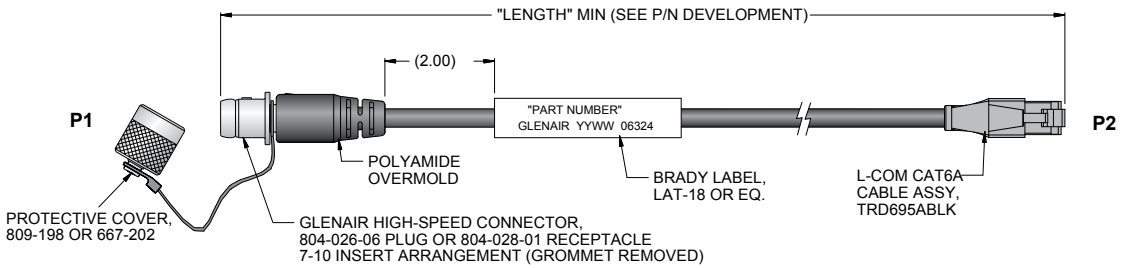


How To Order

Sample Part Number	804-074	-A	NF	N	A	-48

Series	**804-074** = Series 804 Mighty Mouse to L-COM CAT6A cordset
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**
Length	Overall Length In Inches

WIRING DIAGRAM

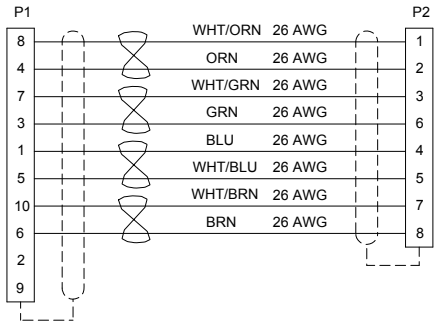

Q


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 SATA Cordsets

Mighty Mouse Push-Pull *High-Speed* Connector to L-COM SATA Connector 804-076 Ordering Information

804-076: Series 804 Mighty Mouse *High-Speed* SATA Cordset

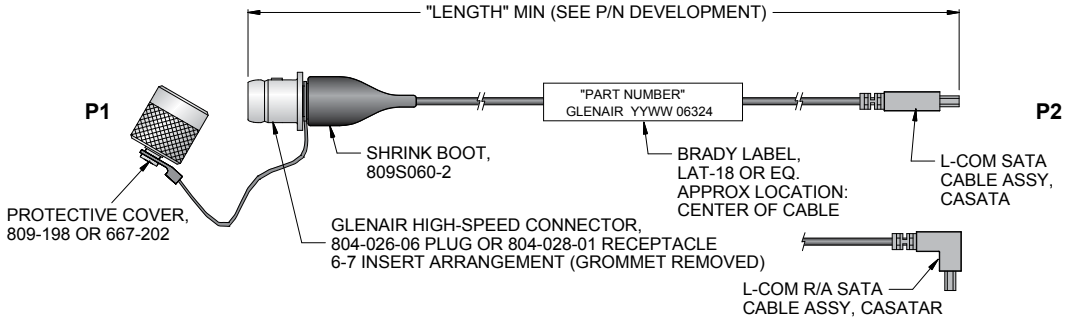

How To Order

Sample Part Number	804-076	-A	NF	N	A	S	-24
Series	**804-076** = Mighty Mouse to L-COM SATA cordset						
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts						
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied						
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**						
P2 Connector Configuration	**R** = Right Angle **S** = Straight						
Length	Overall Length in Inches 36" Max.						

Q

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

PRODUCT SELECTION GUIDE



805-020 and 805-021
Plug Connectors
Page R-4



805-022 and 805-023
Receptacles Connectors
Page R-6



805-112, 113, 114, 115, 116, 117, 118
Series 805 Mighty Mouse Overmolded Cordsets for CAT 6a, eSATA, Ethernet, USB and SATA. Single–Ended, Back–to–Back, or with Commercial USB/ Ethernet/e-SATA Connectors
Page R-11

R

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.




Series 805 *High-Speed* Mighty Mouse Plug and Receptacle Connectors

The 805 Series *High-Speed* Mighty Mouse is ideal for use in USB 2.0, eSATA and other high-speed databus applications. The connector is equipped with special PFA (Fluoropolymer) insulators and is optimized for use with high-speed differential wire such as our 963-001 Series cable. Five insert arrangements are offered with 4, 7, 10, 19 and 26 size #23 contacts. The high-density, small form factor connector is suited for applications where traditional military circular connectors are too large or too heavy. The triple-start threads provide full mating in 1 turn, and the plug features an anti-decoupling ratchet mechanism for severe vibration resistance. EMI performance is improved with a serpentine ground spring on the plug barrel. This nickel plated beryllium copper spring assures low shell-to-shell resistance.

- **Triple-Start ACME Thread with anti-decoupling spring or ratchet**
- **Special Purpose PFA (Fluoropolymer) Insulators**
- **Crimp Rear Release Contacts**
- **Integral Band Platform**
- **Supplied with Size #23 Gold-Plated Copper Alloy Crimp**
- **Environmentally Sealed**



Factory-terminated overmolded cordsets for optimal high-speed performance and environmental sealing: See page R-11

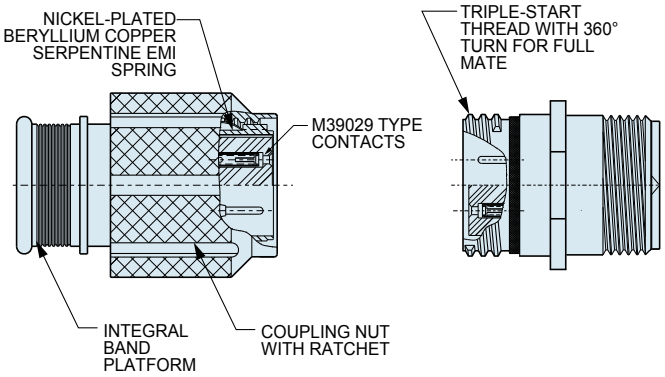

High-Speed Performance

Series 805 *High-Speed* Mighty Mouse connectors are constructed with a rear grommet for environmental sealing. This grommet can be removed in order to maintain the construction of the matched impedance pair cable for a longer distance inside the connector for improved high-speed performance (see tables below.) However, removal of the grommet affects environmental sealing. For optimal high-speed performance and environmental sealing, Glenair recommends our factory-terminated overmolded cordsets. Full ordering information begins on page R-11.

With Grommet Removed	
High-Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High-Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	2 dB
2 GHz	4 dB
3 GHz	3 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Triple–Start ACME Threads Resist cross threading and shearing. These aeropace–grade Series 805 plugs feature 1 full turn of the coupling nut to full mating.

Two Shell Styles: Integral platform for direct shield attachment using Band-Master™ ATS advanced termination system, or accessory thread for attaching a strain relief.

Crimp, Rear Release contact system, with #23 contacts.

Harsh Environment: fluorosilicone seals, aluminum or stainless steel shells, and gold-plated copper alloy contacts for superior performance in demanding applications.

High-Speed: Special purpose PFA (Fluoropolymer) insulators deliver superior impedance, VSWR and insertion loss values.

Specifications	
Current Rating	5 AMPS
Dielectric Withstanding Voltage	750 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum low frequency from 100MHz to 1000MHz. and 65 dB minimum high frequency from 1 GHz to 10GHz.
Durability	2000 mating cycles

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	PFA
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber


Mighty Mouse *High-Speed* Contact Arrangements
Mating Face View of Pin Connector (Socket Connector Numbers are Reversed)




8 - 4
Shell Size 8
4 Size #23 Contacts




8 - 7
Shell Size 8
7 Size #23 Contacts



9 - 10
Shell Size 9
10 Size #23 Contacts




11 - 19
Shell Size 11
19 Size #23 Contacts



12 - 26
Shell Size 12
26 Size #23 Contacts

Table IV: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

R

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse *High-Speed* Triple-Start ACME Threads Plug Connector

805-020 and 805-021 Ordering Information




Glenair Series 805 Mighty Mouse *High-Speed* connectors feature Triple-start modified stub ACME mating threads for improved protection against cross-mating and thread damage. Connector shells are machined aluminum or stainless steel. The connector is equipped with special PFA (Fluoropolymer) insulators and is optimized for use with high-speed differential wire such as our 963-001 cable. Five insert arrangements are offered with 4, 7, 10, 19 and 26 #23 AWG contacts, packaged separately. Terminate contacts with standard M22520 tools. Metal clips inside the connector body lock contact into place. Contacts are removable. Fluorosilicone seals and rear grommet protect connector from water ingress. Terminate cable shield directly to connector body with Band-Master™ ATS strap, or choose rear accessory thread to attach optional cable clamp or backshell.

How To Order


Sample Part Number	805-020	-16	M	9-10	P	A

Series (See Table I)	**805-020** = With Banding Platform **805-021** = With Accessory Thread
Shell Style	**-16** = Plug
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Shell Size - Insert Arrangement	**8-4**, **8-7**, **9-10**, **11-19**, **12-26** (See Page R-3)
Contact Type	**Connector supplied with contacts** **P** = Pin **S** = Socket **Connector supplied without contacts** **A** = Pin Connector, less contacts **B** = Socket Connector, less contacts **Connector supplied with 30 AWG Crimp Barrel** **G** = #23 Pin **H** = #23 Socket
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F

Table I: Series



805-020
Plug with Banding Platform




805-021
Plug with Accessory Thread

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Inline cable plug - shell style 16

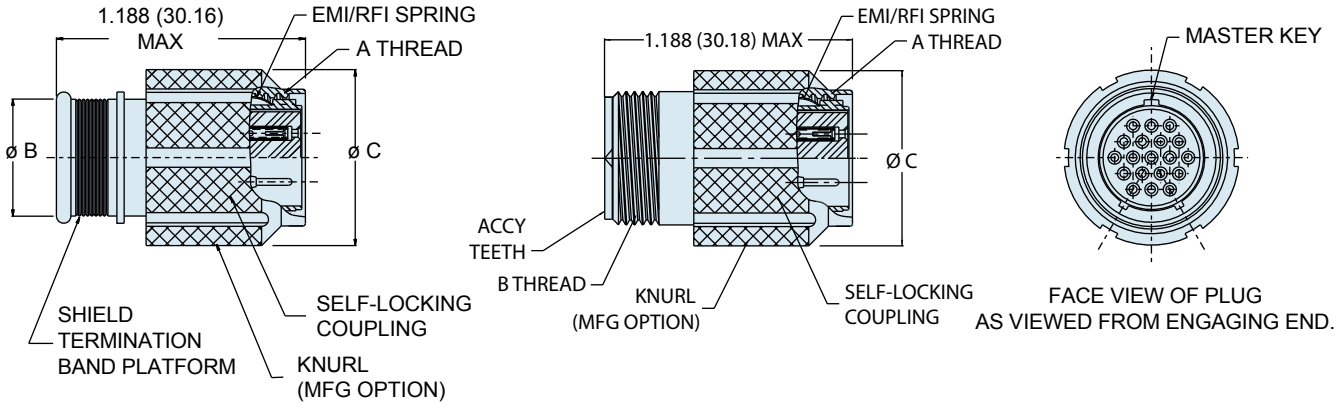

Integral Band Platform
805-020-16

Accessory Thread
805-021-16

Table II: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions				
Shell Size	A Thread	B Thread	ø B	ø C
8	.5000-.1P-.3L-TS-2B	.3750-32 UNEF-2A	0.316	0.692
9	.5625-.1P-.3L-TS-2B	.4375-28 UNEF-2A	0.397	0.789
11	.6875-.1P-.3L-TS-2B	.5625-24 UNEF-2A	0.519	0.918
12	.7500-.1P-.3L-TS-2B	.6250-24 UNEF-2A	0.585	0.984

With Grommet Removed	
High-Speed Performance	
Impedance	100 Ω ±7 Ω at 100-Picosecond
VSWR	<1.4 up to 4-GHz
Insertion Loss	
1 GHz	.51 dB
2 GHz	.53 dB
3 GHz	.57 dB
4 GHz	1.2 dB
5 GHz	1.25 dB

With Grommet Intact	
High-Speed Performance	
Impedance	100 Ω ±15 Ω at 100-Picosecond
VSWR	<1.5 up to 3-GHz
Insertion Loss	
1 GHz	.73 dB
2 GHz	.76 dB
3 GHz	.85 dB

In order to achieve high speed performance, this connector must be mated to another high speed Mighty Mouse connector.

R

NOTES

Material and Finish

- Plug barrel, coupling nut: aluminum alloy or stainless steel
- Insulator: PFA
- Interfacial seal, grommet seal: fluorosilicone
- Contact: copper alloy, 50 microinch gold plated per ATSM B 488, Type II, Code C, Class 1.25 (.00005 Min thk), over a suitable underplate
- EMI/RFI spring: beryllium copper/nickel plated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse *High-Speed* Triple-Start ACME Thread Receptacle Connector

805-022 and 805-023 Ordering Information



Three Shell Mounting Options: Jam nut with O-ring for rear panel mounting, square flange for front or rear panel mounting, or in-line receptacles for free-hanging cables.

Gold-Plated Crimp Contacts are held in place with beryllium copper retention clips. Contacts are removable.

Two Shell Styles: Choose integral band platform for direct attachment of a cable shield. Install a boot, or overmold a boot over the band platform. An accessory thread is available for attaching strain reliefs and backshells.

How To Order

Sample Part Number	805-023	-02	NF	9-10	P	A

Series (See Table I)	**805-022** = Receptacle with Banding Platform **805-023** = Receptacle with Accessory Thread
Shell Style (See Table II)	**-01** = In-line **-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut for Rear Panel Mounting
Shell Material and Finish	**M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant
Shell Size - Insert Arrangement	**8-4**, **8-7**, **9-10**, **11-19**, **12-26** (See Page R-3)
Contact Type	**With contacts**: **P** = Pin, **S** = Socket **Without contacts**: **A** = Pin Connector, less contacts, **B** = Socket Connector, less contacts **With 30 AWG Crimp Barrel**: **G** = #23 Pin, **H** = #23 Socket
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F

Table I: Series






	
805-022 Receptacle with Banding Platform	**805-023** Receptacle with Accessory Thread


Table II: Shell Style

		
-01 Receptacle with Banding Platform	**-02, -12, -22** Square Flange	**-07** Jam Nut

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


In-line cable receptacle - shell style 01

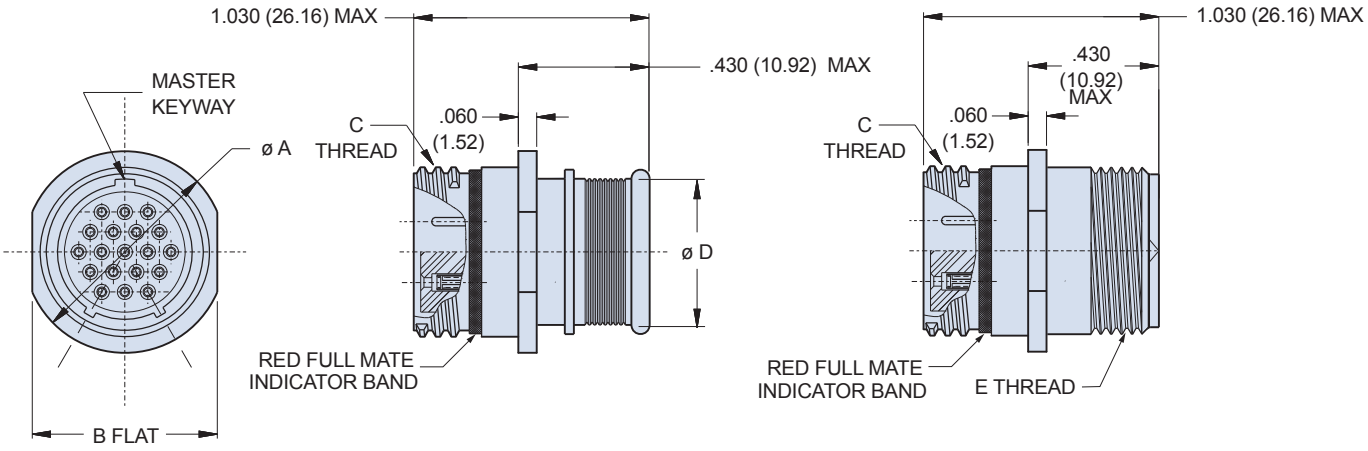

Integral Band Platform
805-022-01

Accessory Thread
805-023-01

Table III: Key Positions



Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions

Shell Size	Ø A		B Flat		C Thread	Ø D		E Accessory Thread
	In.	mm.	In.	mm.		In.	mm.	
8	.540	13.72	.510	12.95	.5000-.1P-.3L-TS-2A	.316	8.05	.3750-32 UNEF-2A
9	.605	15.37	.575	14.61	.5625-.1P-.3L-TS-2A	.397	10.08	.4375-28 UNEF-2A
11	.730	18.54	.700	17.78	.6875-.1P-.3L-TS-2A	.519	13.18	.5625-24 UNEF-2A
12	.793	20.14	.763	19.38	.7500-.1P-.3L-TS-2A	.585	14.86	.6250-24 UNEF-2A

NOTES

Performance Specifications

1. Immersion, mated: MIL-STD-810 Method 512. One meter for one hour.

Materials and Finishes

- Connector shell: aluminum or stainless steel
- Insulator: high grade rigid dielectric
- Seals: fluorosilicone rubber, blue
- Pin contact: copper alloy, gold over nickel plating
- Socket contact: copper alloy, gold over nickel plating, with SST hood
- Contact retainer clip: beryllium copper, unplated


R

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse *High-Speed*
Triple-Start ACME Thread Receptacle Connectors
805-022 and 805-023 Dimensions


Square flange, front or rear panel mount receptacle - shell style 02

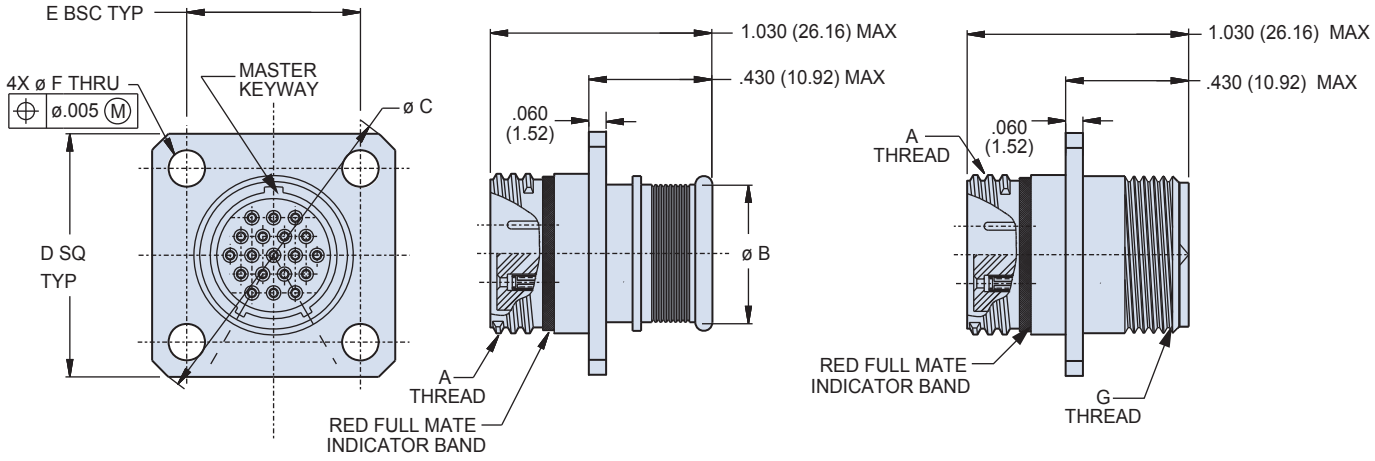

Integral Band Platform
805-022-02

Accessory Thread
805-023-02

Dimensions											
Shell Size	A Thread	Ø B		Ø C		D SQ TYP		E BSC		Ø F		G Accessory Thread
		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In. ± .003	mm. ± .08	
8	.5000-.1P-.3L-TS-2A	.316	8.05	1.150	29.21	.850	21.59	.660	16.76	.096 .091	2.44 2.31	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.397	10.08	1.230	31.24	.913	23.19	.723	18.36			.4375-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.519	13.18	1.410	35.81	1.039	26.39	.848	21.54			.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.585	14.86	1.500	38.10	1.099	27.91	.909	23.09			.6250-24 UNEF-2A

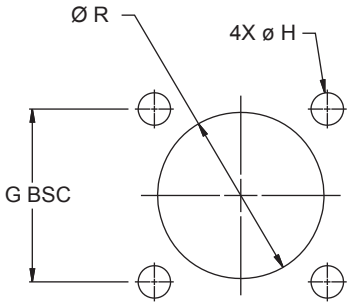


Square Flange Panel Cutout						
Shell Size	N Flat		Ø H		Ø P	
	In.	mm.	In.	mm.	In.	mm.
8	.660	16.76	.096 .091	2.44 2.31	.575 .571	14.61 14.50
9	.723	18.36			.700 .696	17.78 17.68
11	.848	21.54			.762 .758	19.35 19.25
12	.909	23.09			.825 .821	20.95 20.85

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.


Jam nut rear panel mount receptacle - shell style 07

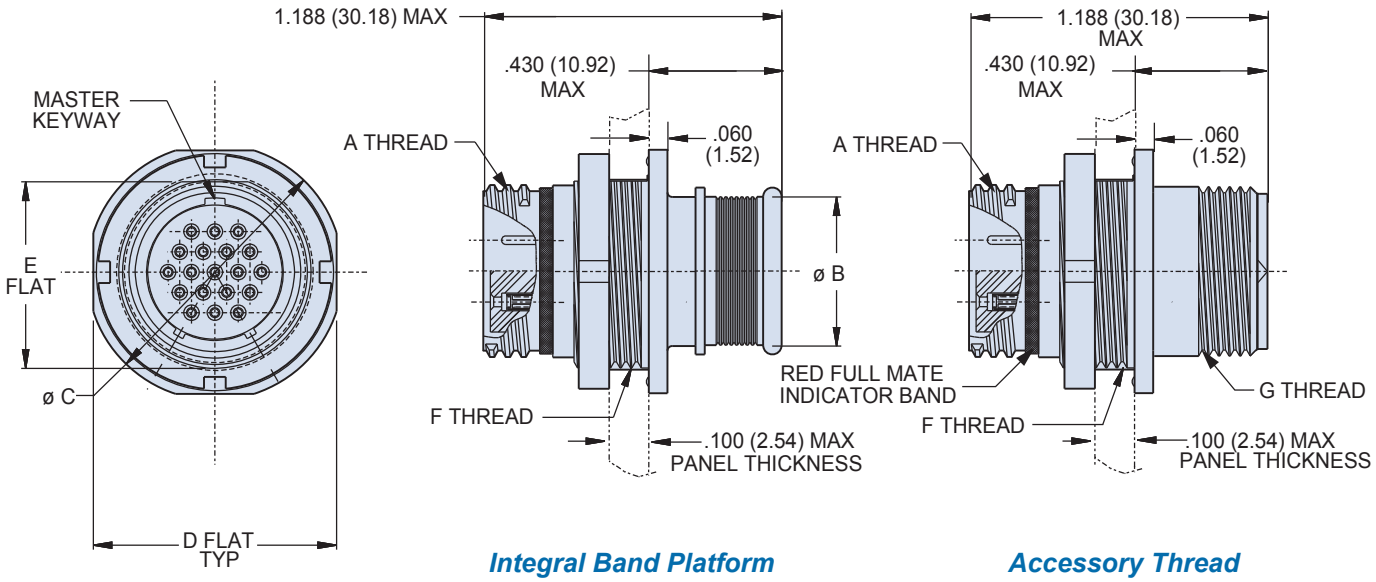

Integral Band Platform
805-022-07

Accessory Thread
805-023-07

Dimensions										
Shell Size	A Thread	Ø B		Ø C		D Flat		E Flat		F Thread	G Accessory Thread
		In.	mm.	In.	mm.	In.	mm.	In.	mm.		
8	.5000-.1P-.3L-TS-2A	.316	8.03	.760	19.30	.730	18.54	.535	13.59	.5625-28 UNEF-2A	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	.397	10.08	.880	22.35	.850	21.59	.661	16.79	.6875-28 UN-2A	.4375-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	.519	13.18	.955	24.26	.925	23.50	.721	18.31	.7500-28 UN-2A	.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	.585	14.86	1.060	26.92	1.035	26.29	.784	19.91	.8125-28 UN-2A	.6250-24 UNEF-2A

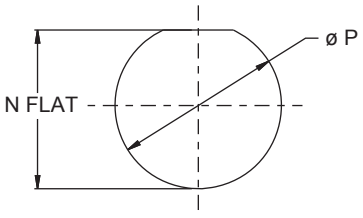

-07 JAM NUT

Jam Nut Panel Cutout				
Shell Size	N Flat		Ø P	
	In.	mm.	In.	mm.
8	.547 .543	13.89 13.79	.575 .571	14.61 14.50
9	.673 .669	17.09 16.99	.700 .696	17.78 17.68
11	.733 .729	18.62 18.52	.762 .758	19.35 19.25
12	.796 .792	20.22 20.12	.825 .821	20.95 20.85


R

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse *High-Speed*
Triple-Start ACME Thread Receptacle Connectors
805-022 and 805-023 Dimensions


Square flange, rear panel mount receptacle - shell style 12 or 22

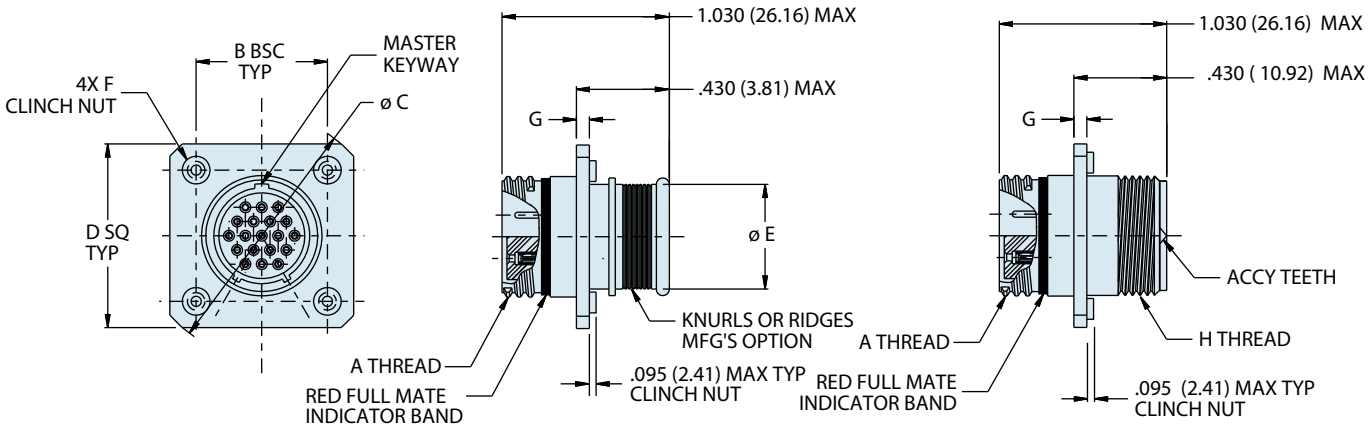

Integral Band Platform
805-022-12/22

Accessory Thread
805-023-12/22

Dimensions												
Shell Size	A Thread	B BSC		ØC		D SQ		Ø E		F Clinch Nuts	G	H Thread
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			
8	.5000-.1P-.3L-TS-2A	0.660	16.76	1.194	30.33	0.920	23.37	.316	8.03	2-56	.030 (.76)	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2A	0.723	18.36	1.283	32.59	0.983	24.97	.397	10.08			.4375-28 UNEF-2A
11	.6875-.1P-.3L-TS-2A	0.848	21.54	1.460	37.08	1.104	28.04	.519	13.18			.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2A	0.909	23.09	1.546	39.27	1.169	29.69	.585	14.86			.6250-24 UNEF-2A

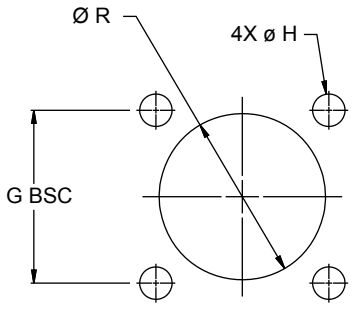

Square Flange Panel Cutout						
Shell Size	N Flat		Ø H		Ø P	
	In.	mm.	In.	mm.	In.	mm.
8	.660	16.76	.096 .091	2.44 2.31	.575 .571	14.61 14.50
9	.723	18.36			.700 .696	17.78 17.68
11	.848	21.54			.762 .758	19.35 19.25
12	.909	23.09			.825 .821	20.95 20.85

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.




100 Ohm differential parallel pair cordsets optimized for eSATA, Ethernet, and USB protocols

Series 805 High-Speed cordsets

For optimal data transmission performance and environmental sealing, choose Glenair high-speed cordsets. Factory-terminated connectors have their rear grommets removed to maintain the construction of the matched-impedance pair cable through the connector for improved high-speed performance. Cordsets are sealed with either rugged polyamide overmold or a factory-installed heat shrink boot for strain relief and environmental sealing against moisture and contamination. Choose "Back to Back" versions with Series 80 Mighty Mouse *High-Speed* connectors on both ends, or cordsets terminated to industry-standard commercial connectors. Order with or without metal protective covers. All cordests are 100% electrically tested for shorts, continuity, and IR 200 Megohms minimum.


805-112: Series 805 Mighty Mouse *High-Speed* eSata Overmolded Cordset

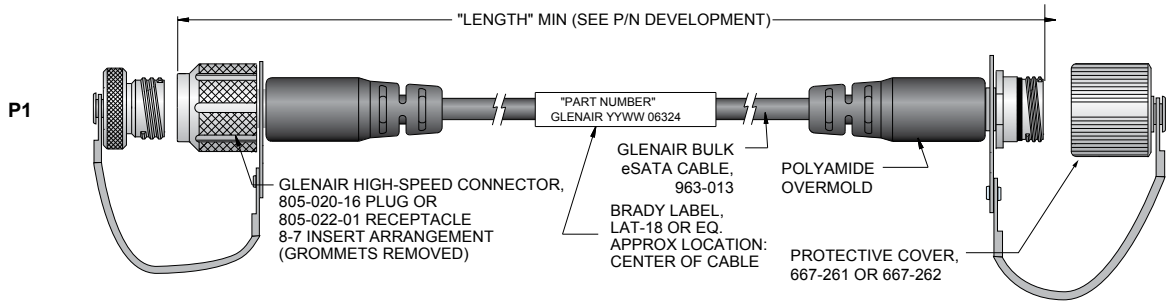

How To Order

Sample Part Number	805-112	-A	D	NF	N	A	-48

Series	**805-112** = Back-to-Back eSATA Overmolded cordset
P1 Connector	**-A** = Plug, Pin Contacts **-B** = Plug, Socket Contacts **-C** = Receptacle Pin Contacts **-D** = Receptacle, Socket Contacts
P2 Connector	**A** = Plug, Pin Contacts **B** = Plug, Socket Contacts **C** = Receptacle, Pin Contacts **D** = Receptacle, Socket Contacts **N** = No Connector (Single-Ended)
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**
Length	Overall Length In Inches 78" Max



Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 805 10Gbase-T Ethernet Cordsets

Mighty Mouse *High-Speed* Back–to–Back 10Gbase-T Cordset with Triple-Start ACME Threads


805-113 Ordering Information

805-113: Series 805 Mighty Mouse *High-Speed* 10Gbase-T Ethernet Overmolded Cordset

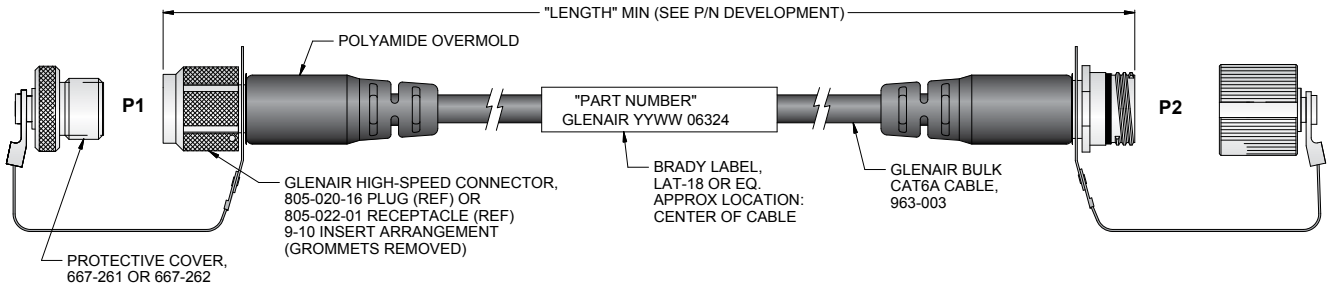

How To Order							
Sample Part Number	**805-113**	**-A**	**D**	**NF**	**N**	**A**	**-48**
Series	**805-113** = Back-to-Back 10Gbase-T Ethernet Overmolded cordset						
P1 Connector	**-A** = Plug, Contacts **-B** = Plug, Socket Contacts **-C** = Receptacle Pin Contacts **-D** = Receptacle, Socket Contacts						
P2 Connector	**A** = Plug, Pin Contacts **B** = Plug, Socket Contacts **C** = Receptacle, Pin Contacts **D** = Receptacle, Socket Contacts **N** = No Connector (Single-Ended)						
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied						
Shell Key Pos. (See Page N3)	**A** (Normal), **B**, **C**, **D**						
Length	Overall Length In Inches 78" Max						

WIRING DIAGRAM

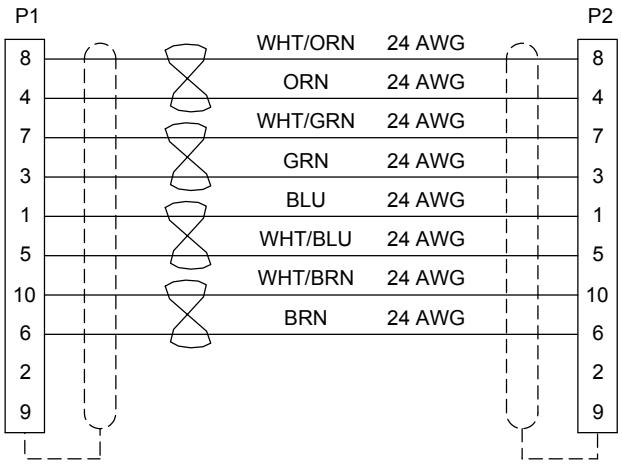

R

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 805 eSATA Cordsets


Mighty Mouse *High-Speed* Cordset with Triple-Start ACME Threads to Industry Standard L-COM Connector
805-115 Ordering Information




Series 805 *High-Speed* cordsets

For optimal data transmission performance and environmental sealing, choose Glenair high-speed cordsets. Factory-terminated connectors have their rear grommets removed to maintain the construction of the matched-impedance pair cable through the connector for improved high-speed performance. Cordsets are sealed with either rugged polyamide overmold or a factory-installed heat shrink boot for strain relief and environmental sealing against moisture and contamination. Cordsets are terminated to industry-standard commercial connectors. Order with or without metal protective covers. All cordests are 100% electrically tested for shorts, continuity, and IR 200 Megohms minimum.

805-115: Series 805 Mighty Mouse *High-Speed* eSATA Overmolded Cordset

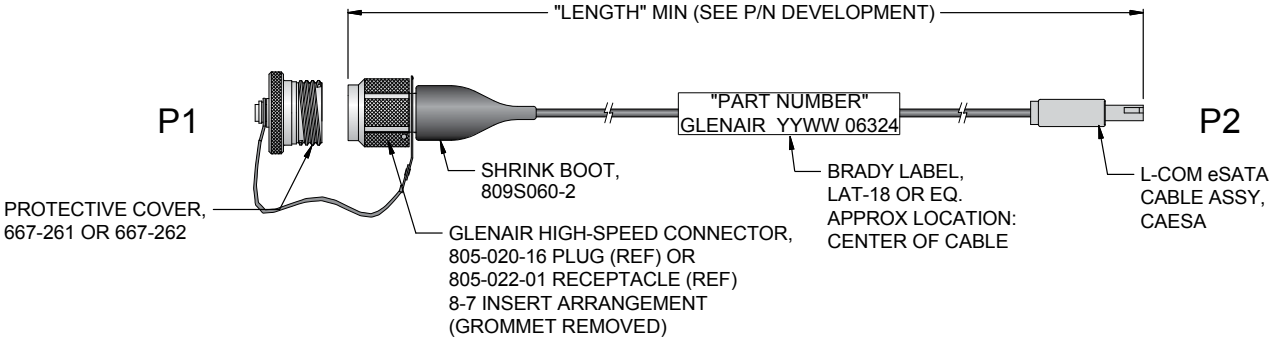

How To Order							
Sample Part Number		**805-115**	**-A**	**NF**	**N**	**A**	**-48**
Series	**805-115** = Back-to-Back eSATA Overmolded cordset.						
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts						
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied						
Shell Key Pos. (See Page Q3)	**A** (Normal), **B**, **C**, **D**, **E**, **F**						
Length	Overall Length In Inches 76" Max						

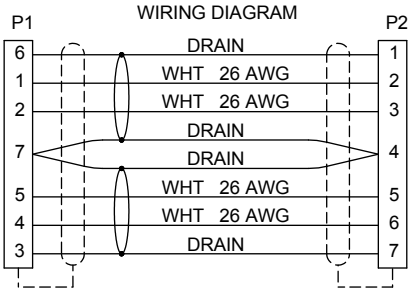

R

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 805 10GBASE-T Cat 6a Ethernet Cordsets

Mighty Mouse *High-Speed* Connector with Triple-Start ACME Threads to Industry Standard CAT 6A Connector

805-116 Ordering Information


805-116: Series 805 Mighty Mouse *High-Speed* 10GBASE-T Overmolded Cordset

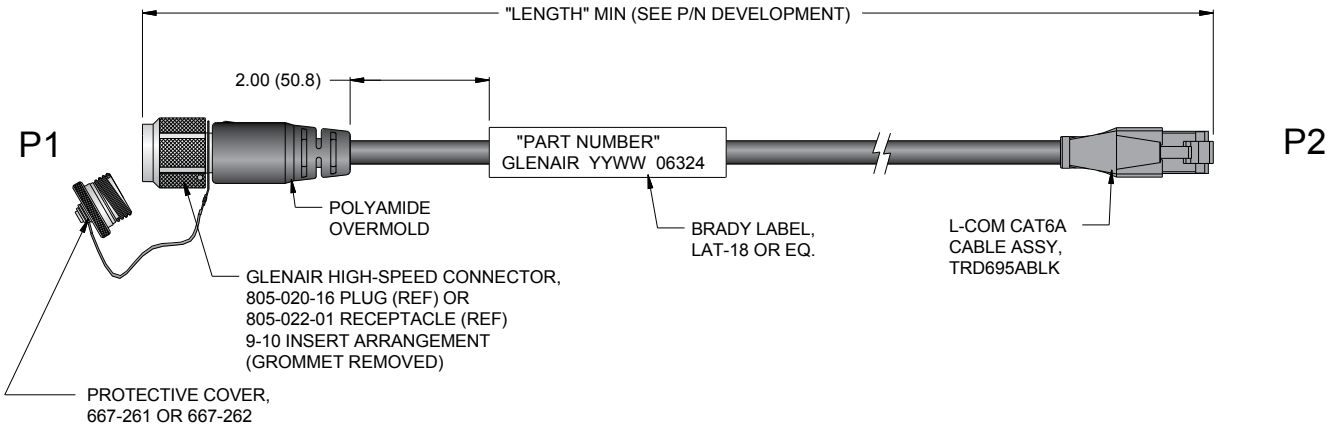

How To Order


Sample Part Number	805-116	-A	NF	N	A	-48
Series	**805-116** = Series 805 Mighty Mouse to CAT 6a Overmolded cordset.					
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts					
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied					
Shell Key Position (See Table I)	**A** (Normal), **B**, **C**, **D**, **E**, **F**					
Length	Overall Length In Inches					

Table I: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°


WIRING DIAGRAM

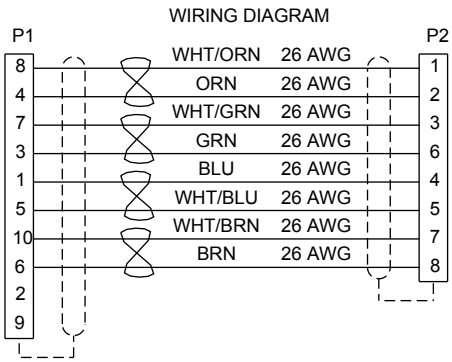

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

805-118: Series 805 Mighty Mouse *High-Speed* SATA Overmolded Cordset

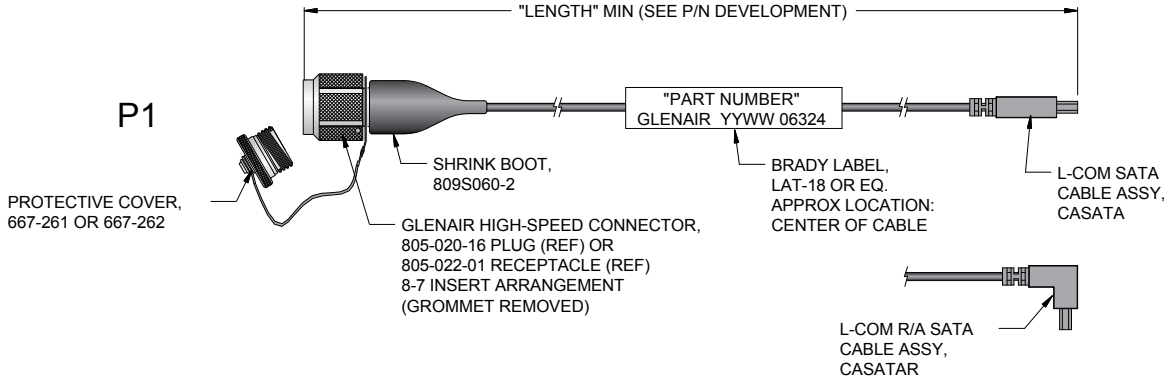


How To Order


Sample Part Number	805-118	-A	NF	N	A	S	-48

Series	**805-116** = Series 805 Mighty Mouse to SATA Overmolded cordset.
P1 Connector	**-A** = Plug with Pin Contacts **-B** = Plug with Socket Contacts **-C** = Receptacle with Pin Contacts **-D** = Receptacle with Socket Contacts
Shell Material / Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE, RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied
Shell Key Position (See Table I)	**A** (Normal), **B**, **C**, **D**, **E**, **F**
P2 Connector Configuration	**R** = Right-Angle **S** = Straight
Length	Overall Length In Inches

Table I: Shell Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

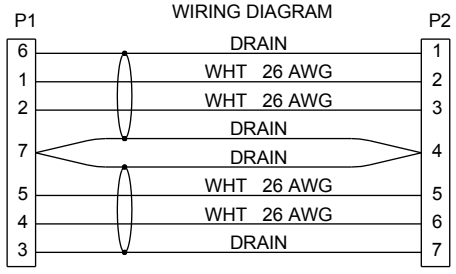

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SERIES 80
ULTRA-TWINAX

ULTRA-TWINAX
SIZE #12 MIGHTY MOUSE



The industry's smallest ruggedized impedance-matched twinax connector solution for multi-gigabit applications



Glenair high-speed differential impedance contacts are suited for multi-gigabit data rate applications such as CML, LVDS and other advanced digital communications protocols. Our Twinax contacts are exactingly engineered and manufactured using the best available materials and manufacturing processes. Conductive elements are gold-plated copper alloy. Dielectrics are high-performance fluorocarbon. These contacts are engineered for use with our ultraminiature Series 80 Mighty Mouse connectors—specifically for use in 100-ohm nominal impedance applications and Glenair 963-001 differential pair cable.

Glenair®

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



853-015 and 853-016
Size #12 Differential Twinax Cable Contacts and PC Tail contacts and Contact Assembly Instructions **Page S-4**



801-007 and 801-008
Plugs **Page S-10**



801-009 and 801-010
In-Line, Square Flange and Jam Nut Receptacles **Page S-12**

S

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 801 and 805 Ultraminiature Connectors with Size #12 Ultra-Twinax Contacts
General Information





Mighty Mouse connectors with size #12 Ultra-Twinax differential Twinax contacts


New Mighty Mouse contact arrangements accept size #12 Ultra-Twinax contacts for multi-gigabit dat rate applications. Series 801 Mighty Mouse connectors feature damage-resistant double-start ACME mating threads. Available with anti-decoupling feature or vibration-resistant ratchet mechanism. Order connectors supplied less contacts and purchase twinax contacts separately. Connector shells are aluminum or stainless steel, with thermoplastic insulators and fluorosilicone rubber seals.

About Keyed Contacts

Series 80 Mighty Mouse connectors with size #12 cavities have an alignment slot inside the contact cavity. Differential twinax contacts have an alignment key to properly orient the contact.

All Ultra-Twinax contacts must be ordered separately. Detailed contact ordering information can be found on pages S-4 and S-5 with assembly procedures immediately following.

Alignment Keys



NOTES

Basic Specifications: Series 80

- Current Rating Size #12 Twinax Contacts:1 Amp
- Voltage rating (DWV): 500 VAC Sea Level
- Insulation Resistance: 5000 megohms minimum
- Operating Temperature: -65° C. to +165° C.
- Shock: 300 g.
- Vibration: 37 g.
- Shielding Effectiveness: 55 dB minimum from 100MHz to 1000MHz.


See Section B for complete performance specifications.

Materials and Finishes: Series 80


- Shells, Jam Nuts: Aluminum alloy or stainless steel
- Size #12 Twinax contacts: Copper alloy, gold plated
- Insulator: High grade rigid dielectric
- Contact Retention Clip: Copper alloy
- Interfacial Seal, O-rings, Wire Sealing Grommet: Fluorosilicone rubber

See Section B for complete material/finish specs.

Series 80 Mighty Mouse Size #12 Differential Twinax Contact Arrangements

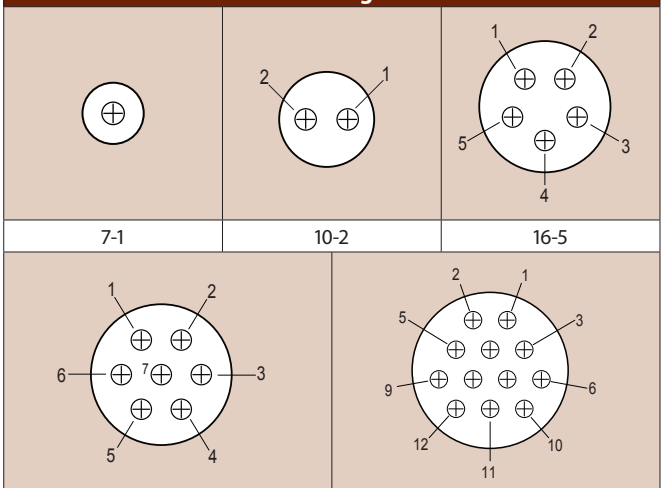

Series 80 Mighty Mouse Size #12 Differential Twinax Contact Arrangements

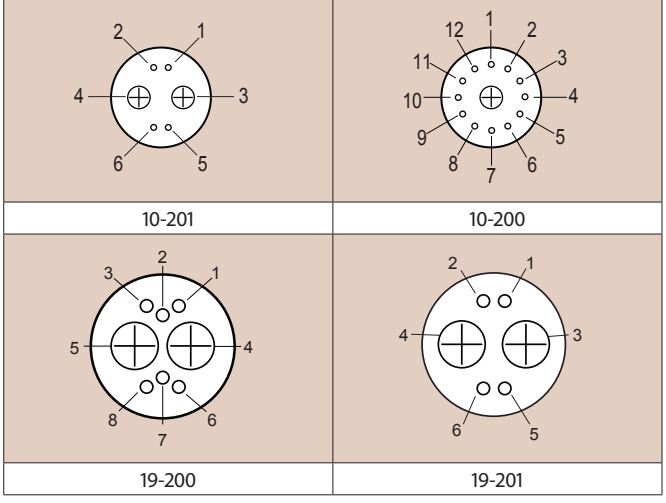


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Rev. 11.29.17 Printed in U.S.A.

Mighty Mouse size #12 Ultra-Twinax test data

TDR Impedance Measurement through Mated Pair of Contacts with 50 Picosecond Pulse (Equivalent to 20 Ghz)

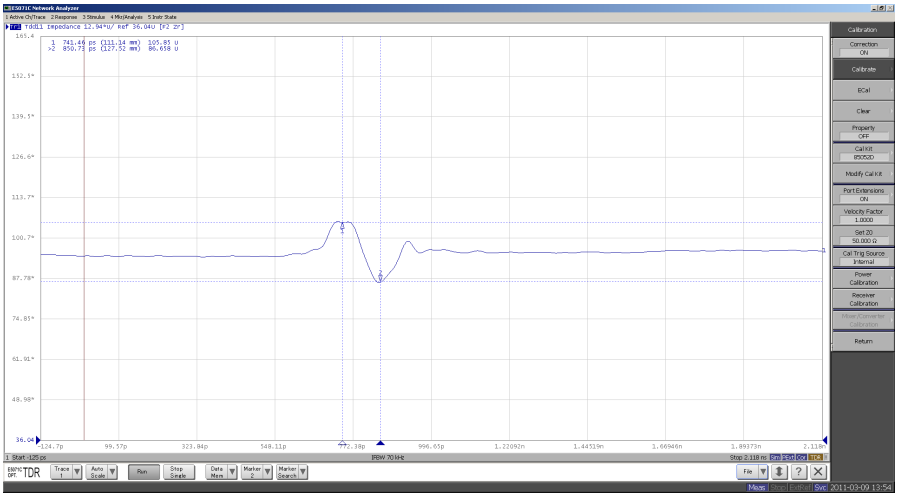

Eye Pattern Test With a Sata 1 Mask (1.5 Gbps/Second)

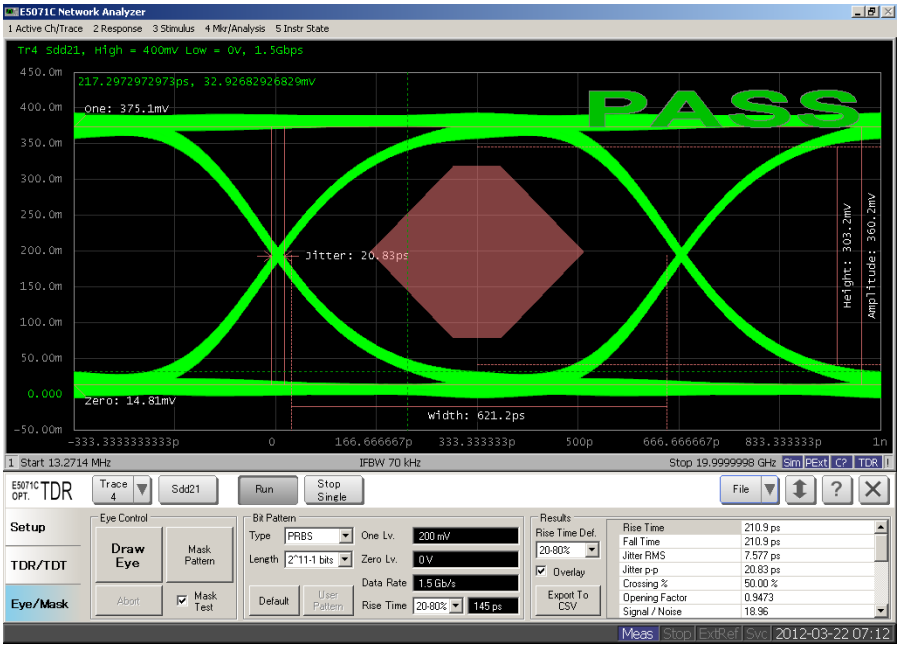

Double-Start ACME Threads
resist cross-threading and shearing. These aerospace-grade Series 801 plugs feature 1½ turns of the coupling nut to full mating.

Integrated Rear Accessory Threads:
for attaching a strain relief backshell.

Printed Circuit Board
versions with precision machined low profile shells.

Harsh Environment:
fluorosilicone seals, aluminum or stainless steel shells, and gold-plated copper alloy contacts for superior performance in demanding applications.

High Speed:
Size #12 Ultra-Twinax contacts are optimized for advanced digital communication protocols such as CML and LVDS.

S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Size #12 Differential Twinax Cable Socket Contact for Use with Mighty Mouse and Series 79 Micro-Crimp


853-015-01 Ordering Information

Size #12 differential twinax socket contact for multi-gigabit applications



These solder terminated #12 twinax socket contacts accept 100 ohm differential parallel pair data cable. Current rating is 1 Amp. DWV rating is 500 VAC sea level, 125 VAC at 70,000 feet. Contacts are packaged individually and shipped unassembled with instruction sheet. One contact consists of outer contact and insulator assembly. All contacts are gold-plated copper alloy. 5000 megohm insulation resistance at 200VDC. Mates with: 853-016-01 (cable pin). Consult factory for PC tail pin. Ideally suited for multi-gigabit data rate applications.

Type	Glenair Part No.	Military Part No.	AWG Wire Size	Cable Accommodation	Impedance	Frequency Range	VSWR	Insertion Loss
Socket	853-015-01	N/A	30	963-102-30	100-Ohms Nominal	DC to 10 GHz	1.1 + (.03 * F GHz)	1/3 *F GHz

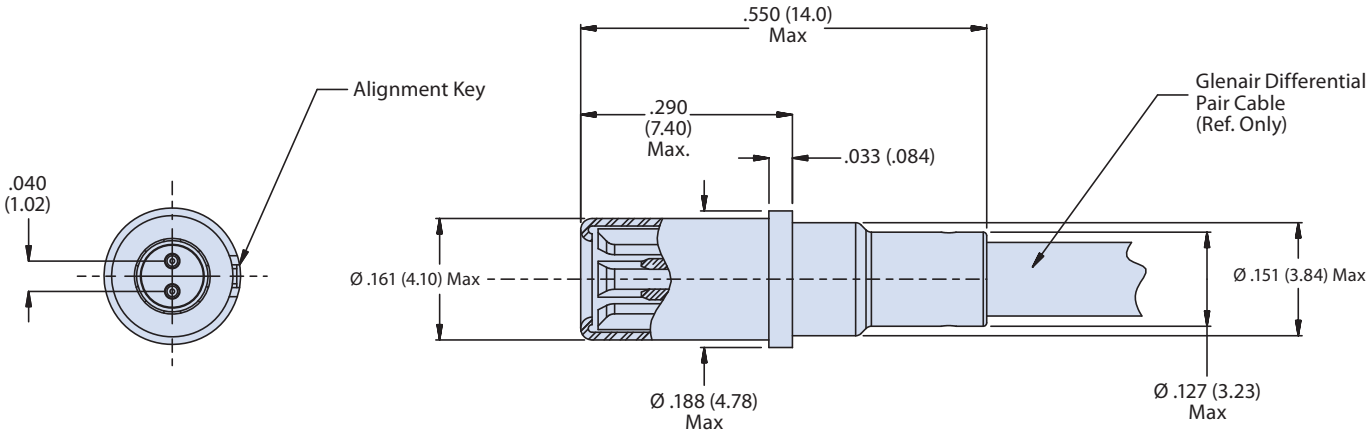



NOTES

Material and Finish

- Contact Body: Copper Alloy/Gold Plated
- Center Contact: Copper Alloy/Gold Plated

Electrical Parameters

- Differential Impedance: 100-ohms nominal
- Frequency Range: DC to 10 Ghz
- VSWR: 1.1+(.03* F GHz)
- Insertion Loss: 1/3* F GHz
- Dielectric Withstanding Voltage: 500 VRMS
- Insulation Resistance: 5000 Megohms minimum

Additional Information

- Contact is designed to accommodate Glenair P/N 963-102-30 cable.
- For assembly instructions, see AI85014
- Socket mates with cable pin contact 853-016-01. Consult factory for PC tail pin
- For use in Glenair Series 80 Mighty Mouse and Series 79 Micro-Crimp connectors only.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Size #12 differential twinax pin contact for multi-gigabit applications



These solder terminated #12 twinax pin contacts accept 100 ohm differential parallel pair data cable. Current rating is 1 Amp. DWV rating is 500 VAC sea level, 125 VAC at 70,000 feet. Contacts are packaged individually and shipped unassembled with instruction sheet. One contact consists of outer contact and insulator assembly. All contacts are gold-plated copper alloy. 5000 megohm insulation resistance at 200VDC. Mates with: 853-015-01 (cable socket). Consult factory for PC tail socket. Ideally suited for multi-gigabit data rate applications.

Type	Glenair Part No.	Military Part No.	AWG Wire Size	Cable Accommodation	Impedance	Frequency Range	VSWR	Insertion Loss
Pin	853-016-01	N/A	30	963-102-30	100-Ohms Nominal	DC to 10 GHz	1.1 + (.03 * F GHz)	1.3 *F GHz

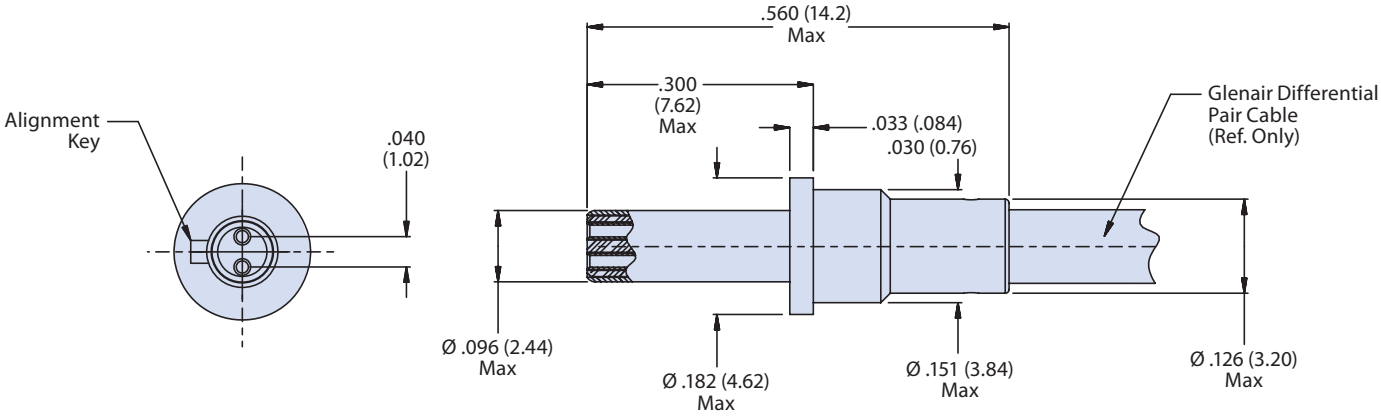



NOTES

Material and Finish

- Contact Body: Copper Alloy/Gold Plated
- Center Contact: Copper Alloy/Gold Plated

Electrical Parameters

- Differential Impedance: 100-ohms nominal
- Frequency Range: DC to 10 Ghz
- VSWR: 1.1+(.03* F Ghz)
- Insertion Loss: 1/3* F Ghz
- Dielectric Withstanding Voltage: 500 VRMS
- Insulation Resistance: 5000 Megohms minimum

Additional Information

- Contact is designed to accommodate Glenair P/N 963-102-30 cable.
- For assembly instructions, see AI85014
- Pin mates with cable socket contact 853-015-01. Consult factory for PC tail socket.
- For use in Glenair Series 80 Mighty Mouse and Series 79 Micro-Crimp connectors only.

S

Dimensions in Inches (millimeters) are subject to change without notice.

Size #12 Differential Twinax PC Tail Socket Contact For Use with Mighty Mouse and Series 79 Micro-Crimp


853-020 Ordering Information

Size #12 differential twinax socket contact for multi-gigabit applications




Current rating is 1 Amp. DWV rating is 500 VAC sea level, 125 VAC at 70,000 feet. One contact consists of outer contact, insulator assembly and straight PC tails. All contacts are gold-plated copper alloy. 5000 megohm insulation resistance at 200 VDC. Mates with: 853-016-01 (cable pin). Ideally suited for multi-gigabit data rate applications.

Type	Military Part No.	Impedance	Frequency Range	VSWR	Insertion Loss
Socket	N/A	100-Ohms Nominal	DC to 10 GHz	1.1 + (.03 * F GHz)	1.3 *F GHz

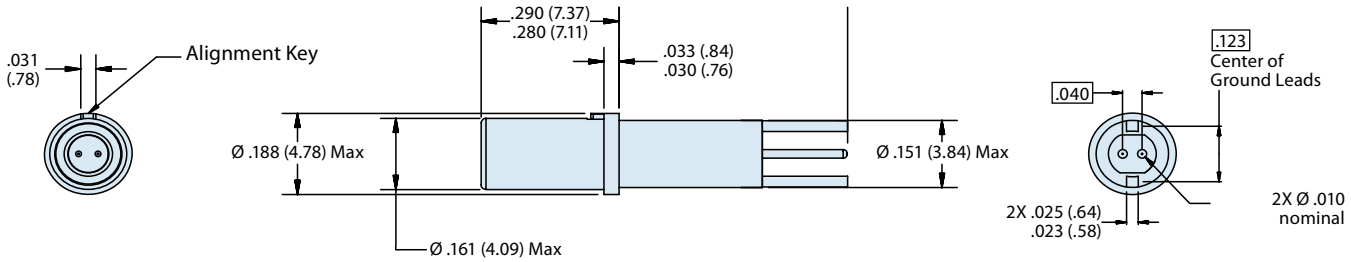

Recommended PC Board Layout



NOTES

Material and Finish

- Contact Body: Copper Alloy/Gold Plated
- Center Contact: Copper Alloy/Gold Plated
- Crimp Sleeve: Brass or equivalent/Gold Plated

Electrical Parameters

- Differential Impedance: 100-ohms nominal
- Frequency Range: DC to 10 Ghz
- VSWR: 1.1+(.03* F GHz)
- Insertion Loss: 1/3* F GHz
- Dielectric Withstanding Voltage: 500 VRMS
- Insulation Resistance: 5000 Megohms minimum

Additional Information

- Contact is designed to accommodate Glenair P/N 963-100-28 cable.
- For assembly instructions, see AI85014
- Socket mates with cable pin contact 853-016-01
- For use in Glenair Series 80 Mighty Mouse and Series 79 Micro-Crimp connectors only.

NOTE:

Contacts are pre-installed into connector by Glenair. Consult factory for available options.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Size #12 differential twinax pin contact for multi-gigabit applications




Current rating is 1 Amp. DWV rating is 500 VAC sea level, 125 VAC at 70,000 feet. One contact consists of outer contact, insulator assembly and straight PC tails. All contacts are gold-plated copper alloy. 5000 megohm insulation resistance at 200 VDC. Mates with: 853-015-01 (cable socket). Ideally suited for multi-gigabit data rate applications.

Type	Military Part No.	Impedance	Frequency Range	VSWR	Insertion Loss
Pin	N/A	100-Ohms Nominal	DC to 10 GHz	1.1 + (.03 * F GHz)	1.3 *F GHz

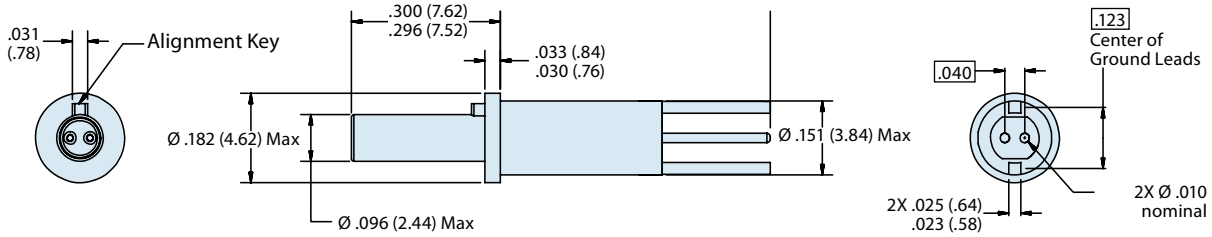

Recommended PC Board Layout



NOTES

Material and Finish

- Contact Body: Copper Alloy/Gold Plated
- Center Contact: Copper Alloy/Gold Plated
- Crimp Sleeve: Brass or equivalent/Gold Plated

Electrical Parameters

- Differential Impedance: 100-ohms nominal
- Frequency Range: DC to 10 Ghz
- VSWR: 1.1+(.03* F Ghz)
- Insertion Loss: 1/3* F Ghz
- Dielectric Withstanding Voltage: 500 VRMS
- Insulation Resistance: 5000 Megohms minimum

Additional Information

- Contact is designed to accommodate Glenair P/N 963-100-28 cable.
- For assembly instructions, see AI85014
- Pin mates with cable socket contact 853-015-01
- For use in Glenair Series 80 Mighty Mouse and Series 79 Micro-Crimp connectors only.

NOTE:

Contacts are pre-installed into connector by Glenair. Consult factory for available options.


S

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Twinax Socket Contact Assembly Instructions

AI85014

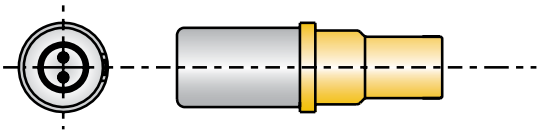


Socket Contact



100 Ohm Parallel Cable


STEP 1

1. Strip cable to dimensions shown. ***Be careful not to flare braid open***.
2. Pre-tin conductor and braid shield.
3. Clean the solder joint with alcohol.

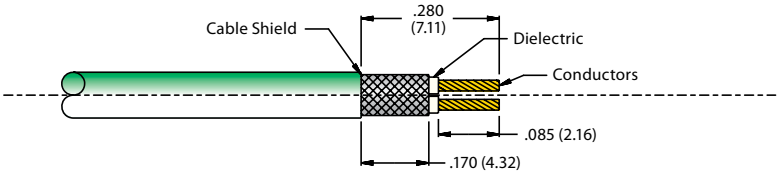


STEP 2

1. Insert cable into socket contact. ***Make sure center conductor lines up to the center socket.***




STEP 3

1. Install center conductors until they bottom-out in the contact cavity. ***Inspect to ensure cable shield is visible through the inspection hole***.
2. Apply flux and solder through the inspection hole; remove residues and contamination with alcohol after soldering.




STEP 4

1. Install M23053/5-204 or M23053/6-204 shrink tubing; cover solder area and extend insulation by minimum of one wire diameter.

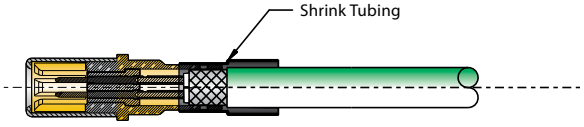

STEP 5


1. Illustrates final assembly.



S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.




Pin Contact

100 Ohm Parallel Cable

STEP 1

1. Strip cable to dimensions shown. ***Be careful not to flare braid open***.
2. Pre-tin conductor and braid shield.
3. Clean the solder joint with alcohol.

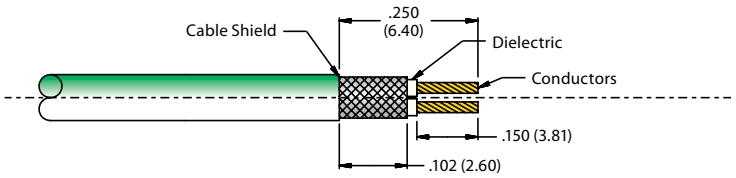


STEP 2

1. Insert cable into pin contact. ***Make sure center conductor lines up to the center pin.***




STEP 3

1. Install center conductors until they bottom-out in the contact cavity. ***Inspect to ensure cable shield is visible through the inspection hole***.
2. Apply flux and solder through the inspection hole; remove residues and contamination with alcohol after soldering.




STEP 4

1. Install M23053/5-204 or M23053/6-204 shrink tubing; cover solder area and extend insulation by minimum of one wire diameter.

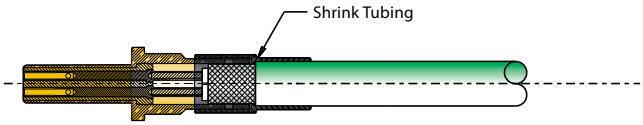

STEP 5

1. Illustrates final assembly.



S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Miniature Plug Connectors with Size #12 Ultra-Twinax Contacts

801-007 and 801-008 Ordering Information





New Mighty Mouse contact arrangements accept size #12 Ultra-Twinax contacts for multi-gigabit data rate applications. Series 801 Mighty Mouse plugs feature damage-resistant double-start ACME mating threads. Available with anti-decoupling feature or vibration-resistant ratchet mechanism. Purchase twinax contacts separately. Connector shells are aluminum or stainless steel, with thermoplastic insulators and fluorosilicone rubber seals.

How To Order

Sample Part Number	801-008	-16	M	7-1	P	A
Series (See Table I)	**801-007** = Plug Connector with Banding Termination Porch **801-008** = Plug Connector with Rear Accessory Thread					
Shell Style	**-16** = Plug with Anti-Decoupling Spring **-26** = Self-Locking Plug with Ratchet Mechanism					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	Size #12 Contacts (See Page S-2 for Contact Layout) **7-1**, **10-2**, **13-2**, **13-3**, **16-5**, **17-7**, **21-12**, Size #12 Combo Contacts (See Page S-2 for Contact Layout) **10-200**, **10-201**, **13-200**, **13-201**, **13-204**, **13-205**, **16-206**, **16-207**, **17-204**					
Contact Type	**Connector supplied without contacts (Order twinax contacts separately.)** **A** = Pin connector, less contacts **B** = Socket connector, less contacts					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series


	
801-007 Plug Connector with Banding Porch	**801-008** Plug Connector with Rear Accessory Thread

S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 801 Plug Connectors with Size #12 Contacts - shell style 16/26

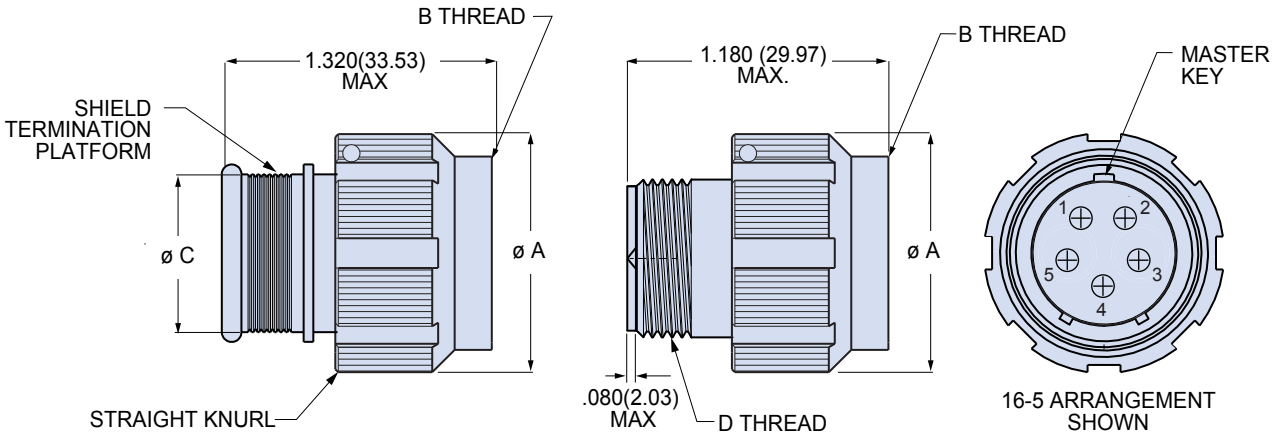

Banding Porch
801-007-16 and 801-007-26

Accessory Thread
801-008-16 and 801-008-26

Table II: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions

Shell Size	Style 16 ØA		Style 26 ØA		B Thread	Ø C		D Thread UNEF-2A
	In.	mm.	In	mm.		In	mm.	
7	.690	17.53	.790	20.07	.4375-.05P-.1L-DS-2B	.390	9.91	.4375-28
10	.880	22.35	.980	24.89	.6250 -.05P-.1L-DS-2B	.560	14.22	.6250-24
16	1.240	31.50	1.340	34.04	1.000-.1P-.2L-DS-2B	.805	20.45	.9375-20
17	1.300	33.02	1.450	36.83	1.0625-.1P-.2L-DS-2B	.850	21.59	.9375-20
21	1.550	39.07	1.650	41.91	1.3125-.1P-.2L-DS-2B	1.110	28.19	1.1875-18

S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Miniature Receptacle Connectors with Size #12 Ultra-Twinax Contacts


801-009 and 801-010 Ordering Information




New Mighty Mouse contact arrangements accept size #12 Ultra-Twinax contacts for multi-gigabit data rate applications. Series 801 Mighty Mouse receptacles feature damage-resistant double-start ACME mating threads. Available for rear panel jam nut mounting, in-line or square flange mount styles. Purchase twinax contacts separately. Connector shells are aluminum or stainless steel, with thermoplastic insulators and fluorosilicone rubber seals.

How To Order						
Sample Part Number	**801-010**	**-02**	**Z1**	**17-7**	**S**	**A**
Series (See Table I)	**801-009** = Plug Connector with Banding Termination Porch **801-010** = Plug Connector with Accessory Thread					
Shell Style (See Table II)	**-01** = In-Line For Free-Hanging Cables **-02** = Square Flange For Front or Rear Mounting **-07** = Jam Nut For Rear Panel Mounting					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	Size #12 Contacts (See Page S-2 for Contact Layout) **7-1**, **10-2**, **13-2**, **13-3**, **16-5**, **17-7**, **21-12**, Size #12 Combo Contacts (See Page S-2 for Contact Layout) **10-200**, **10-201**, **13-200**, **13-201**, **13-204**, **13-205**, **16-206**, **16-207**, **17-204**					
Contact Type	**Connector supplied without contacts (order twinax contacts separately.)** **A** = Pin connector, less contacts **B** = Socket connector, less contacts					
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




801-009
Plug with Banding Porch




801-10
Plug with Rear Accessory Thread


Table II: Shell Style



-01
In-Line
For Free-Hanging Cables



-02
Square Flange For Front or Rear Mounting




-07
Jam Nut
For Rear Panel Mounting

S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Rear panel mount jam nut receptacles - style 07

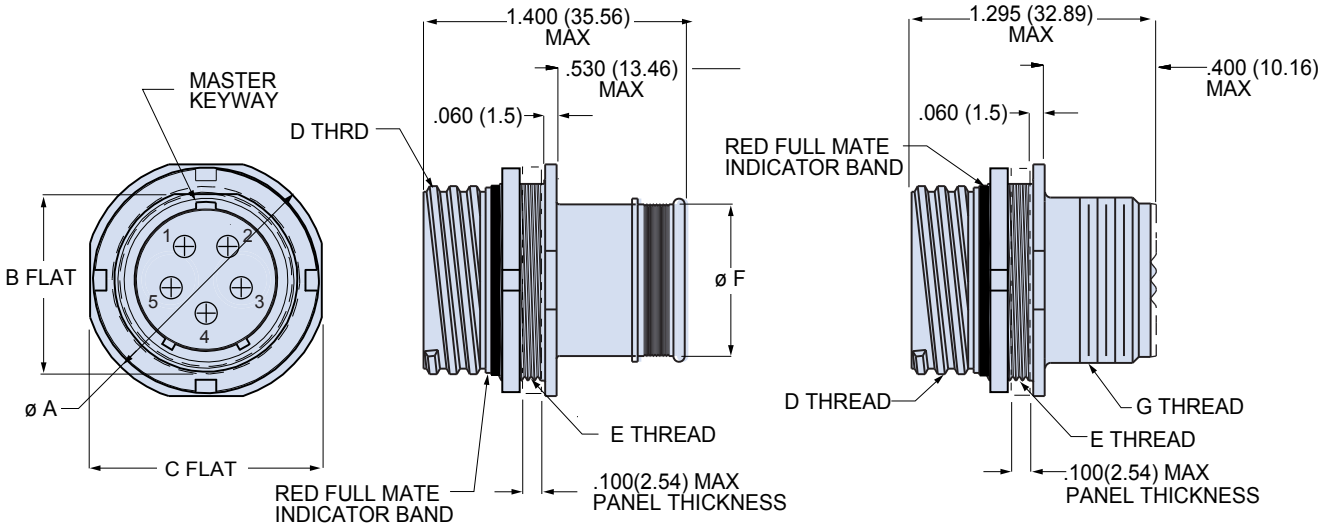


Banding Porch
801-009-07

Accessory Thread
801-010-07


Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread UN-2A	Ø F		G Thread UNEF-2A
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
7	.480	12.19	.445	11.30	.723	18.36	.4375-.05P-.1L-DS-2A	.5625-32	.390	9.91	.4375-28
10	.665	16.89	1.010	25.65	.855	21.72	.6250-.05P-.1L-DS-2A	.6875-28	.560	14.22	.6250-24
16	1.264	32.11	1.022	25.96	1.230	31.24	1.000-.1P-.2L-DS-2A	1.0625-20	.805	20.45	.9375-20
17	1.325	33.66	1.096	27.84	1.290	32.77	1.0625-.1P-.2L-DS-2A	1.1250-28	.850	21.59	.9375-20
21	1.625	41.28	1.345	34.16	1.577	40.06	1.3125-.1p-.2L-DS-2A	1.3750-28	1.110	28.19	1.1875-18

Table II: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Jam Nut Panel Cutout



Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
7	.542	13.77	.572	14.53
10	.666	16.92	.697	17.70
16	1.028	26.11	1.075	27.31
17	1.102	27.99	1.135	28.83
21	1.354	34.39	1.385	35.18


S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

s 801 Miniature Connectors
ze #12 Ultra-Twinax Contacts
-009 and 801-010 Dimensions

Front or rear panel mount square flange receptacles - style 02

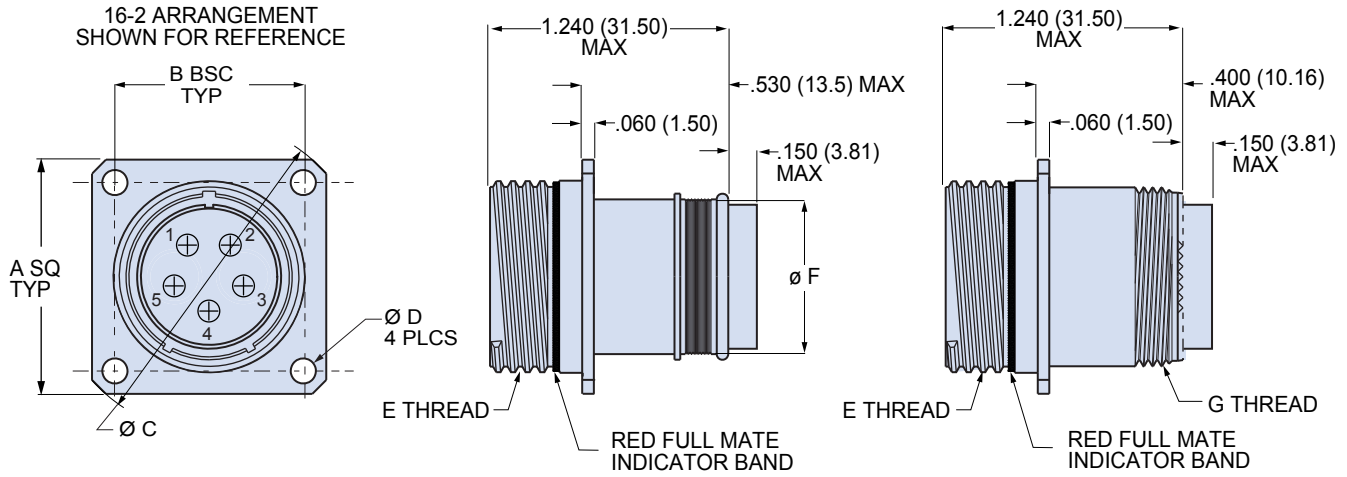


Banding Porch
801-009-02

Accessory Thread
801-010-02

Dimensions												
Shell Size	A Sq		B BSC		Ø C		Ø D		E Thread	Ø F		G Thread UNEF-2A
							In.	mm.				
	In.	mm.	In.	mm.	In.	mm.	+.003	+.08		In.	mm.	
7	.650	16.51	.483	12.27	.850	21.59	.093	2.36	.4375-.05P-.1L-DS-2A	.390	9.91	.5000-28
10	.890	22.61	.670	17.02	1.188	30.18	.128	3.25	.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24
16	1.219	30.96	.981	24.92	1.625	41.28	.128	3.25	1.000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.280	32.51	1.060	26.92	1.700	43.18	.128	3.25	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
21	1.430	36.32	1.322	33.58	1.938	49.23	.128	3.25	1.3125-.1p-.2l-DS-2a	1.110	28.19	1.1875-18

Square Flange Panel Cutout							
Shell Size	Ø A		B		Ø C		
	In	mm.	In	mm.	In	mm.	
7	.453	11.51	.483	12.27	.093	2.36	
10	.640	16.26	.670	17.02	.128	3.25	
16	1.015	25.78	.981	24.92	.128	3.25	
17	1.078	27.38	1.060	26.92	.128	3.25	
21	1.328	33.73	1.322	33.58	.128	3.25	




S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In-line cable receptacles - style 01

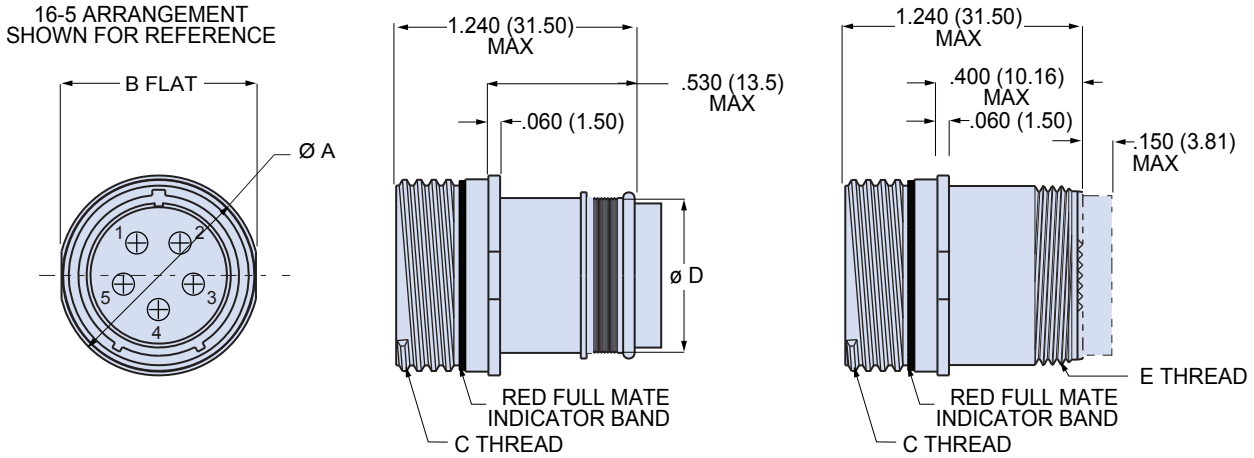


Banding Porch
801-009-01

Accessory Thread
801-010-01

Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread
	In.	mm.	In.	mm.		In.	mm.	
7	.480	12.19	.445	11.30	.4375-.05P-.1L-DS-2A	.390	9.91	.4375-28 UNEF-2A
10	.665	16.89	.635	16.13	.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24 UNEF-2A
16	1.040	26.42	1.010	25.65	1.000-.1P-.2L-DS-2A	.805	20.45	.9375-20 UNEF-2A
17	1.110	28.19	1.070	27.18	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20 UNEF-2A
21	1.405	35.69	1.312	33.32	1.3125-.1p-.2l-DS-2a	1.110	28.19	1.1875-18 UNEF-2A

Table II: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Miniature Connectors with Size #12 Ultra-Twinax Contacts

801-009 and 801-010 Dimensions

Front or rear panel mount square flange receptacles - style 02

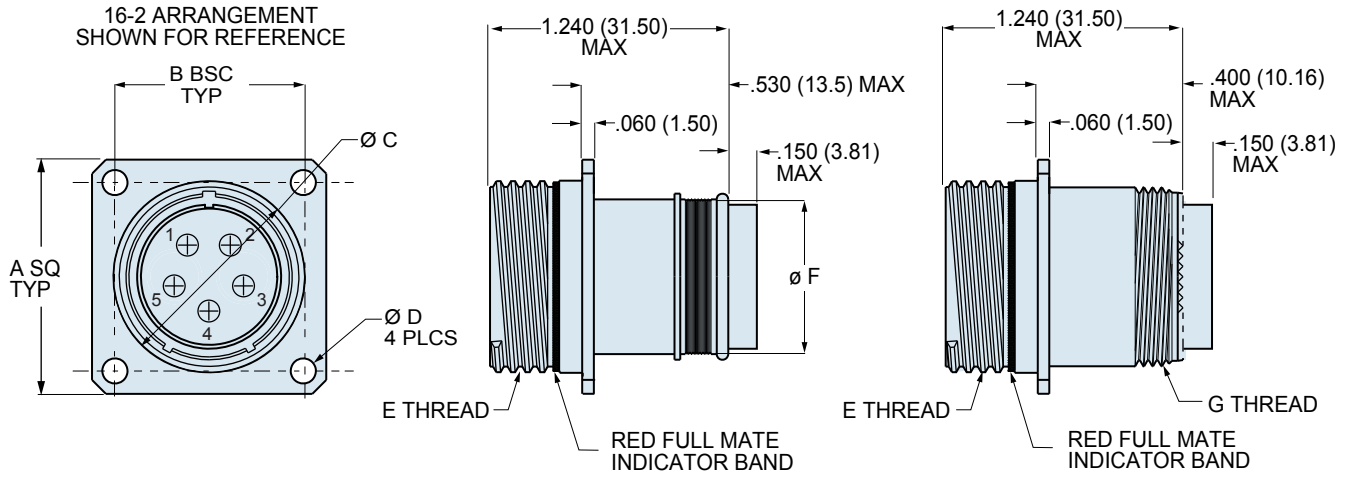


Banding Porch
801-009-02

Accessory Thread
801-010-02

Dimensions												
Shell Size	A Sq		B BSC		Ø C		Ø D		E Thread	Ø F		G Thread UNEF-2A
							In.	mm.				
	In.	mm.	In.	mm.	In.	mm.	+.003	+.08		In.	mm.	
7	.650	16.51	.483	12.27	.850	21.59	.093	2.36	.4375-.05P-.1L-DS-2A	.390	9.91	.5000-28
10	.890	22.61	.670	17.02	1.188	30.18	.128	3.25	.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24
16	1.219	30.96	.981	24.92	1.625	41.28	.128	3.25	1.000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.280	32.51	1.060	26.92	1.700	43.18	.128	3.25	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
21	1.430	36.32	1.205	30.61	1.938	49.23	.128	3.25	1.3125-.1p-.2l-DS-2a	1.110	28.19	1.1875-18

Square Flange Panel Cutout						
Shell Size	Ø A		B		Ø C	
	In	mm.	In	mm.	In	mm.
7	.453	11.51	.483	12.27	.093	2.36
10	.640	16.26	.670	17.02	.128	3.25
16	1.015	25.78	.981	24.92	.128	3.25
17	1.078	27.38	1.060	26.92	.128	3.25
21	1.328	33.73	1.322	33.58	.128	3.25




S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com
E-Mail: sales@glenair.com

In-line cable receptacles - style 01

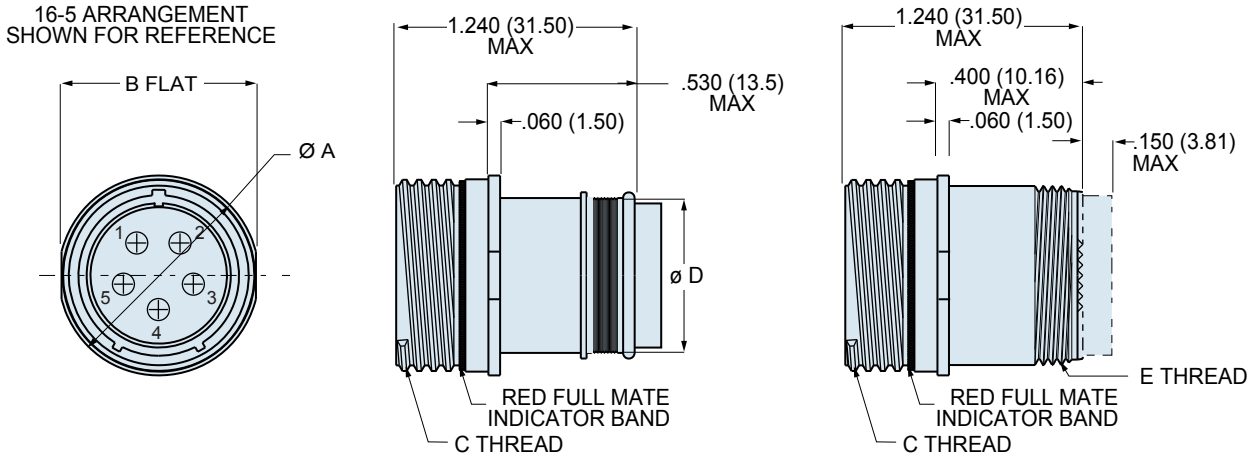


Banding Porch
801-009-01

Accessory Thread
801-010-01

Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread
	In.	mm.	In.	mm.		In.	mm.	
7	.480	12.19	.445	11.30	.4375-.05P-.1L-DS-2A	.390	9.91	.4375-28 UNEF-2A
10	.665	16.89	.635	16.13	.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24 UNEF-2A
16	1.040	26.42	1.010	25.65	1.000-.1P-.2L-DS-2A	.805	20.45	.9375-20 UNEF-2A
17	1.110	28.19	1.070	27.18	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20 UNEF-2A
21	1.405	35.69	1.312	33.32	1.3125-.1p-.2l-DS-2a	1.110	28.19	1.1875-18 UNEF-2A

Table II: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 PCB Miniature Receptacle Connectors with Size #12 Ultra-Twinax Contacts

801-011 and 801-033 Ordering Information




New Mighty Mouse contact arrangements accept size #12 Ultra-Twinax contacts for multi-gigabit datarate applications. Series 801 Mighty Mouse PCB receptacles are aluminum or stainless steel, with thermoplastic insulators, fluorosilicone rubber seals, and double-start ACME mating threads. Available for rear panel jam nut mounting or square flange styles, these receptacles are supplied with #12 Twinax PC Tail contacts (contact types PP or PS).


How To Order							
Sample Part Number	**801-011**	**-02**	**M**	**17-7**	**PS**	**A**	**-688**
Series (See Table I)	**801-011** = PCB Receptacle with Accessory Thread **801-033** = Receptacle for Solder Cup or PCB Termination, with Special "MOD-518" Sealing For Open Face (unmated) Water Immersion Requirements. 100% Leak Tested.						
Shell Style (See Table II)	**-02** = Square Flange For Front or Rear Mounting **-07** = Jam Nut For Rear Panel Mounting **-12** = Square Flange Receptacle for Rear Panel Mounting with 'Non-Locking" Clinch Nuts **-22** = Square Flange Receptacle for Rear Panel Mounting with "Locking" Clinch Nuts						
Shell Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZR** = Aluminum / Zinc-Nickel with Non-Reflective Black Chromate RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement	Size #12 Contacts (See Page S-2 for Contact Layout) **7-1**, **10-2**, **17-7**, **21-12**, Size #12 Combo Contacts (See Page S-2 for Contact Layout) **10-200**, **10-201**, **13-200**, **13-201**						
Contact Type	**Connector supplied with size #12 Ultra-Twinax PC Tail contacts.** **PP** = #12 Ultra-Twinax PC Tail Pin Contacts **PS** = #12 Ultra-Twinax PC Tail Socket Contacts						
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F						
Mod Code	Connector insulators supplied with keyways for use with keyed contacts						

S

Table I: Series




801-007
Plug with Banding Porch




801-008
Plug with Rear Accessory Thread

Table II: Shell Style




-02
Square Flange For Front or Rear Panel Mounting




-07
Jam Nut For Rear Panel Mounting

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Table III: Plug Key Positions			
Position	A°	B°	
A	150°	210°	
B	75°	210°	
C	95°	230°	
D	140°	275°	
E	75°	275°	
F	95°	210°	


**PC Tail Footprints for Size #12 Ultra-Twinax Contact Arrangements
Shell Size 7, 10, 16, 17 and 21**




7-1




10-2



16-5




17-7

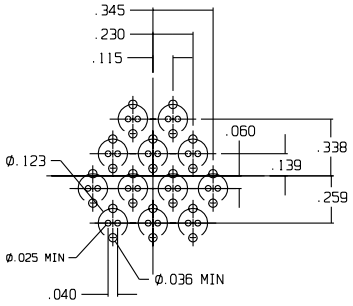


21-12


**PC Tail Footprints for Size #12 Ultra-Twinax Contact Arrangements
Combo Arrangements for Shell Sizes 10 and 13**




10-200



10-201



13-200



13-201


S

Dimensions in Inches (millimeters) are subject to change without notice.


Series 801 PCB Miniature Receptacle Connectors with Size #12 Ultra-Twinax Contacts

801-011 and 801-033 Dimensions


Rear panel mount jam nut receptacle - style 07

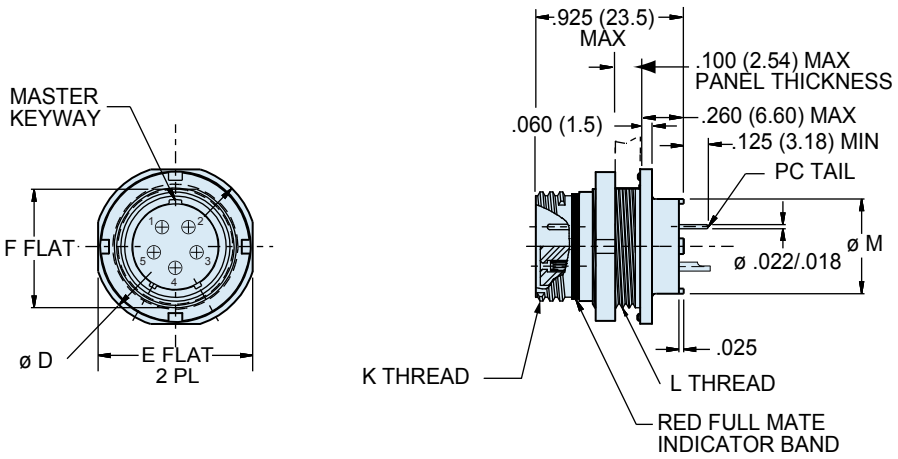

Front or rear panel mount square flange receptacle - style 02

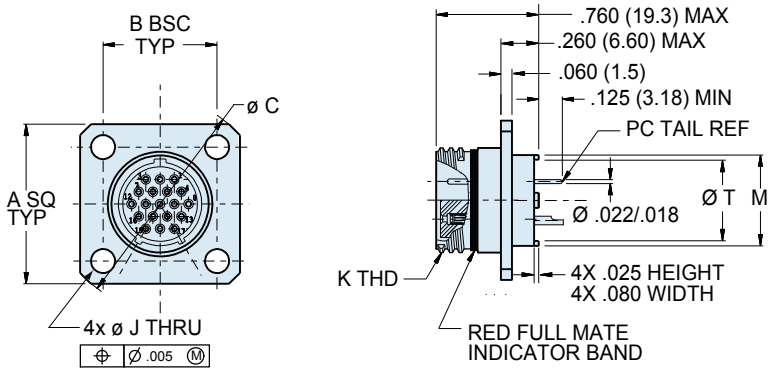

Rear panel mount square flange receptacle - styles 12 and 22

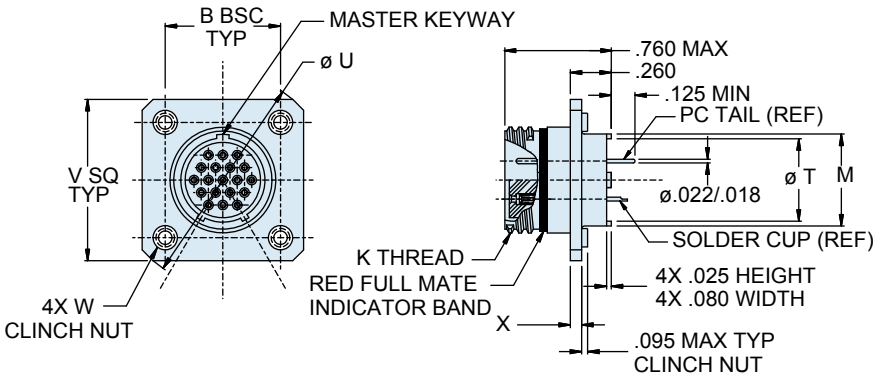


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Dimensions																
Shell Size	A Sq.		B Bsc		Ø D		Ø C		E Flat		F Flat		Ø J		K Thread	L Thread
	In.	mm.	In.	mm.	In	mm	In	mm	In	mm	In	mm	In.	mm.		
7	0.650	16.51	0.483	12.27	0.755	19.18	.850	21.59	0.723	18.36	0.536	13.61	0.096 0.091	2.44 2.31	.4375-.05P-.1L-2A	.5625-32 UN-2A
10	0.890	22.61	0.670	17.02	0.890	22.61	.890	22.61	0.855	21.72	0.658	16.71			.6250-.05P-.1L-2A	.6875-28 UN-2A
13	1.030	26.16	0.812	20.62	1.078	27.38	1.078	27.38	1.044	26.52	0.845	21.46			.8125-.1P-.2L-2A	.8750-28 UN-2A
16	1.219	30.96	0.981	24.92	1.265	32.13	1.625	41.28	1.230	31.24	1.022	25.96	.130 .126	3.30 3.20	1.0000-.1P-.2L-2A	1.0625-20 UN-2A
17	1.280	32.51	1.060	26.92	1.325	33.66	1.700	43.18	1.290	32.77	1.096	27.84			1.0625-.1P-.2L-2A	1.1250-28 UN-2A
21	1.565	39.75	1.322	33.58	1.625	41.28	2.100	53.34	1.577	40.06	1.345	34.16			1.3125-.1P-.2L-2A	1.3750-28 UN-2A

Dimensions (continued)										
Shell Size	Ø M		Ø T		Ø U		V Sq		W Clinch Nuts	X
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		
7	.432	10.97	0.327	8.31	0.944	23.98	0.743	18.87	2-56	.030
10	.620	15.75	0.516	13.11	1.268	32.21	0.990	25.15	4--40	.060
13	.703	17.86	0.599	15.21	1.470	37.34	1.132	28.75		
16	.863	21.92	0.759	19.28	1.708	43.38	1.301	33.05		
17	.912	23.16	0.808	20.52	1.822	46.28	1.382	35.10		
21	1.170	29.72	1.061	26.95	2.190	55.63	1.642	41.71		

Square Flange Panel Cutout for Style 02, 12 and 22						
Shell Size	Ø A		Ø B		Ø C	
	In.	mm.	In.	mm.	In.	mm.
7	.450	11.43	.483	12.27	.093	2.36
10	.640	16.26	.670	17.02	.128	3.25
13	.825	20.96	.812	20.62	.128	3.25
16	1.015	25.78	.981	24.92	.128	3.25
17	1.075	27.31	1.060	26.92	.128	3.25
21	1.330	33.78	1.322	33.58	.128	3.25



Jam Nut Panel Cutout				
Shell Size	N Flat		Ø P	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
7	.542	13.77	.572	14.53
10	.666	16.92	.697	17.70
13	.851	21.62	.885	22.48
16	1.028	26.11	1.075	27.31
17	1.102	27.99	1.135	28.83
21	1.354	34.39	1.385	35.18



S

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SERIES 80 MIGHTY MOUSE FIELD-READY MICRO USB

SERIES 80 MIGHTY MOUSE MICRO USB

SUPERSEAL™

Series 801 Mighty Mouse connectors with superior sealing, shielding and crimp contact termination



Features

- **Superior sealing—IP68 when mated—for complete system protection against water, sand and dust**
- **Shielded/grounded coupler designs in both receptacle and plug connectors**
- **Crimp contact termination**
- **Integrated banding porch or connector accessory interface**
- **Micro USB "B" plugs and universal "AB" receptacles**
- **Double-start stub ACME threaded coupling standard. Consult factory for available QDC push-pull and triple-start threaded versions**
- **Less than half the size and weight compared to MIL-DTL-38999 type solutions**

SUPERSEAL™

PRODUCT SELECTION GUIDE



Size #23 Contacts and Tools
Size #23 Pin Contacts for use with the Micro-B USB connectors in this catalog, plus appropriate tools and termination instructions.

Page T-5



801-082 and 801-083
SuperSeal™ Mighty Mouse Series 801 Plugs with Micro "B" USB Plug and Rear Crimp Contact Wire Termination

Page T-7



801-084 and 801-085
SuperSeal™ Mighty Mouse Series 801 Receptacles with Micro "AB" USB Receptacle with Rear Crimp Contact Wire Termination

Page T-8




801-087 and 801-088
SuperSeal™ Mighty Mouse Series 801 Plugs with Front and Rear Micro "B" USB Plugs

Page T-9



801-089 and 801-090
SuperSeal™ Mighty Mouse Series 801 Receptacles with Front and Rear Micro "AB" USB Receptacles

Page T-10



801-091
SuperSeal™ Mighty Mouse Series 801 Sav-Con® Connector Saver with Micro "B" USB Plug and Micro "AB" USB Receptacle

Page T-11

T

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 80 Mighty Mouse
SuperSeal™ Ethernet and USB
General Information



Crimp contact Micro-usb connectors with outstanding environmental performance and EMI/RFI grounding

- **Significant size and weight reduction compared to MIL-DTL-38999 type USB/ RJ45 solutions**
- **Rear-release crimp contact termination as well as USB/RJ45 jumper accommodation**
- **Superior sealing, IP67, in unmated condition compared to other available environmental circulars**
- **Superior grounding for electrostatic discharge and EMC**
- **Superior cable shield termination with integrated banding platform**

SuperSeal™ Mighty Mouse Micro-B USB Connector Selector



Series 801 Plug Connector with Micro-B USB



Series 801 In-Line Receptacle



Series 801 Square Flange Mount Receptacle



Series 801 Rear Panel Jam Nut Mount Receptacle



Series 804 Plug Connector with Micro-B USB



Series 804 In-Line Receptacle



Series 804 Rear Panel Jam Nut Mount Receptacle



Series 804 Front Panel Jam Nut Mount Receptacle



Plug-and-Play Micro-USB Plug and Receptacle

Plug-and-Play Micro-USB Booted Cordset



Spring-Loaded cover for Series 804 Jam Nut Receptacles

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

NOTES

Material and Finishes

- Shell/coupling: High strength aluminum alloy
- Plating: Cadmium olive drab over electroless nickel; Nickel PTFE; Electroless nickel
- Contacts: Copper alloy, gold plated
- USB insulator: High grade rigid dielectric
- Seals: Silicon-based elastomer
- Stainless steel and other materials and finishes available. Please consult factory.

Shell Type and Sizes

- Mating: Double-start stub ACME threaded, QDC push-pull, and triple-start threaded
- Size: Shell size 8

Micro USB Electrical Specifications


- Voltage Rating: 30 VAC (rms)
- Current Rating: Signal pins 1.0A, Power pins 1.8A
- D.W.V.: 600 VAC
- Shield Continuity: Continous through coupler or continous coupler to shell

Environmental / Mechanical Performance


- Sealing: IP68 mated condition
- Operating Temperature Range: -40°C to +125°C
- Vibration: 37 g's
- Mechanical Shock: 300 g's
- Mating Cycles: 10,000

Options

- Complete range of protective covers, both metal and rubber are available

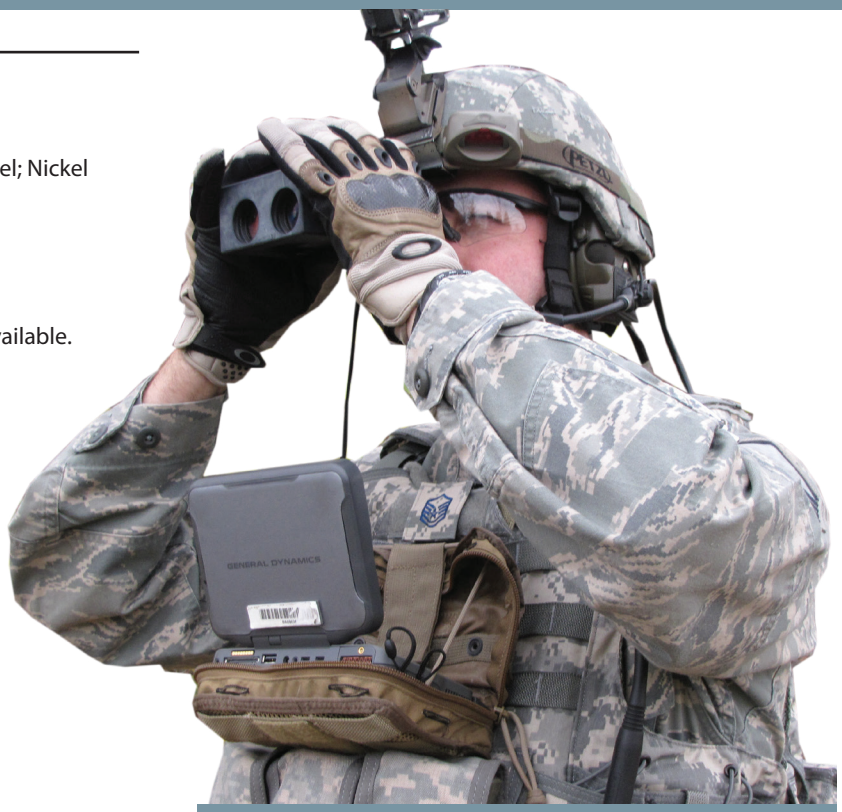


Crimp Contact Pin Layout



Pin Number	USB Designation	Typical Wiring Assignment
1	VBUS	Red
2	D-	White
3	D+	Green
4	ID	RA_PLUG_ID
5	GND	Black
Shell	SHIELD	DRAIN WIRE

UP TO 71% WEIGHT SAVINGS!
UP TO 52% SIZE SAVINGS!

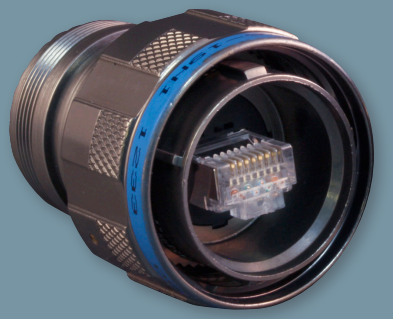

Series 801
Mighty Mouse
Micro USB



MIL-DTL-38999
Type RJ45

The series 801 connector offers up to 71% weight savings and 52% size reduction when compared to a D38999 Series III connector.

T

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com
E-Mail: sales@glenair.com

SuperSeal™ Mighty Mouse Series 801 Micro USB Connectors

Performance Specifications

Performance Specifications		
Test Description	Performance Requirements/Specifications	Procedure Per MIL-DTL-38999 Or Other Standard
Dielectric withstanding voltage	Maximum leakage current = 2 milliamperes No evidence of electric breakdown or flashover	4.5.11.1 or 4.5.11.2 IAW EIA-364-20, Method A
Insulation resistance	At ambient temperature: >5000 megohms between any pair of contacts and between any contact and the shell. after altitude immersion = 1000 megohms min. after humidity = 100 megohms min. At elevated temperature: >1000 megohms	4.5.10.1 and 4.5.10.2 IAW EIA-364-21
Contact resistance	Terminal-to-terminal resistance of mated connector contacts shall not exceed 0.050 ohms.	4.5.14
Mating durability	500-1000 cycles depending on plating, with no mechanical damage. Dielectric, contact resistance and air pressure requirements as described above shall be met after 500-1000 mating cycles.	4.5.8
Contact retention	Individual contacts capable of withstanding at least 10 pounds axial load applied uniformly at one pound per second.	IAW EIA-364-29
Vibration and Shock	37 g's random vibration, 300 g's shock. No electrical discontinuity, no disengagement of mated connectors, backing off of the coupling mechanism, or evidence of cracking, breaking, or loosening.	4.5.23
Temperature cycling	-65°C to 175°C or 200°, depending on finish. No blistering, peeling or separation of plating or other damage detrimental to the operation of the connector.	4.5.4 EIA364-32, Test condition A
Salt spray	5% solution, 34°–36°C. 48–1000 hours, depending on finish. Unmated connectors show no lifting of plated coating or exposure of basis material under 3X magnification which adversely affects performance.	4.5.13 EIA-364-26
Humidity	Cycle wired, mated connectors between 25° C at 80 % and 65° C at 50 %. Ramp time = 0.5 hour, dwell = 1.0 hour. 24 cycles.	4.5.26 EIA364-31, Method IV
Water immersion	1 Meter for 1 Hour, mated.	MIL-STD-810 Method 512
EMI Shielding	Series 801: Good	4.5.28 EIA-364-66

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


SuperSeal™ Mighty Mouse Series 801 Plugs
with Micro "B" USB Plug and Rear Crimp Contact Wire Termination
801-082 and 801-083 Ordering Information




Plug, Micro B USB Front and Crimp Rear View


How To Order				
Sample Part Number	**801-082**	**-16 MUSB**	**-M**	**A**
Series (See Table I)	**801-082** = Shield Termination Porch **801-083** = Accessory Threads			
Shell Style	**16** = Plug with Anti-Decoupling Spring **26** = Self-Locking Plug with Rachet Mechanism			
Shell Material and Finish	**NF** = Cadmium Olive Drab **M** = Electroless Nickel **MT** = Nickel PTFE **ZNU** = Black Zinc Nickel			
Shell Key Positions	**A, B, C, D, E, F**			

These Plug Connectors Mate with Glenair Receptacles 801-084, 801-085, and 801-090




Rear Grommet View

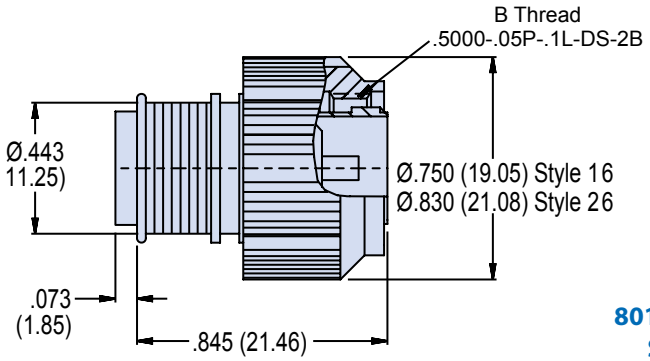





801-082 Micro USB Plug B with Shield Termination Porch




Rear Grommet View

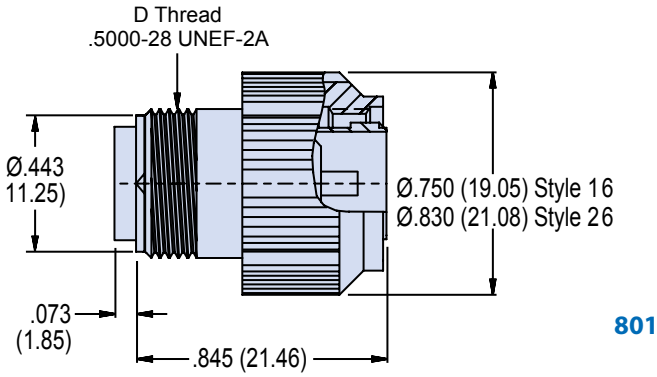





801-083 Micro USB Plug B with with Accessory Threads

Schematic

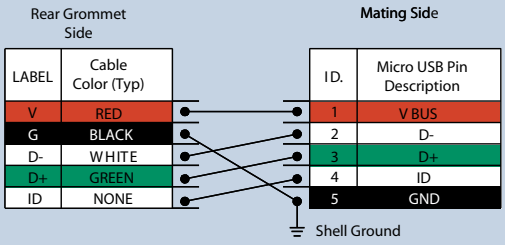

Plug and Receptacle Key Positions		
	A°	**B°**
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°





T

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SuperSeal™ Mighty Mouse Series 801 Receptacles

with Micro "AB" USB Receptacle and Rear Crimp Contact Wire Termination 801-084 and 801-085 Ordering Information




Square Flange Mount, MIcro AB USB Receptacle




Rear Panel Jam Nut Mount, MIcro AB USB Receptacle


How To Order				
Sample Part Number	**801-084**	**-02 MUSB**	**-M**	**A**
Series (See Table I)	**801-084** = Shield Termination Porch **801-085** = Accessory Threads			
Shell Style	**02** = Square Flange Mount Receptacle **07** = Jam Nut Mount Receptacle			
Shell Material and Finish	**NF** = Cadmium Olive Drab **M** = Electroless Nickel **MT** = Nickel PTFE **ZNU** = Black Zinc Nickel			
Shell Key Positions	**A, B, C, D, E, F**			

These Micro AB Receptacles Mate with Glenair Plugs 801-082, 801-083, 801-087 and 801-088




Micro-AB USB accepts both Micro-A and Micro-B plugs.

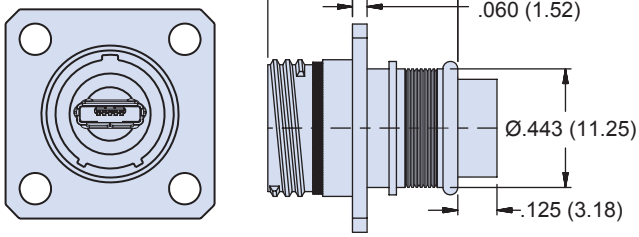




Rear Grommet View


801-084-02
Square Flange Mount Receptacle with Shield Termination Porch

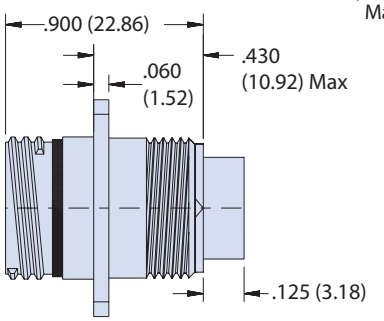


801-085-02
Square Flange Mount Receptacle with Accessory Threads

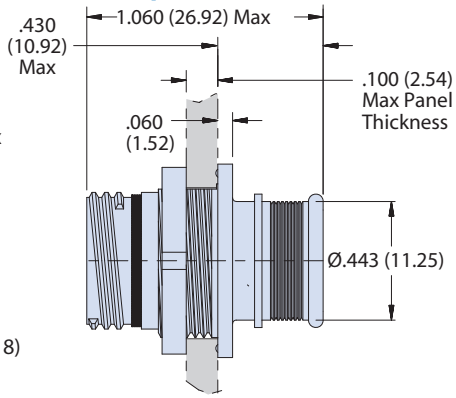


801-084-07
Jam Nut Mount Receptacle with Accessory Threads

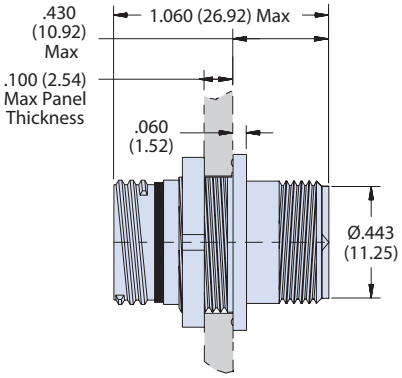


801-085-07
Jam Nut Mount Receptacle with Accessory Threads



Recommended Panel Cutout

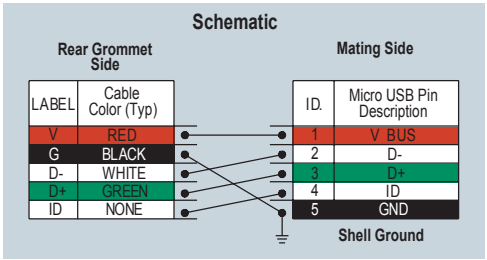

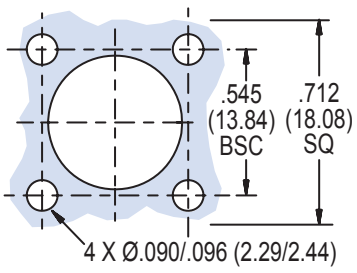

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


SuperSeal™ Mighty Mouse Series 801 Plugs
with Front and Rear Micro "B" USB Plugs
801-087 and 801-088 Ordering Information



Plug, Micro B USB Front and Rear View


How To Order				
Sample Part Number	**801-087**	**-02 MUSB**	**-M**	**A**
Series (See Table I)	**801-087** = Shield Termination Porch **801-088** = Accessory Threads			
Shell Style	**16** = Plug with Anti-Decoupling Spring **26** = Self-Locking Plug with Rachet Mechanism			
Shell Material and Finish	**NF** = Cadmium Olive Drab **M** = Electroless Nickel **MT** = Nickel PTFE **ZNU** = Black Zinc Nickel			
Shell Key Positions	**A, B, C, D, E, F**			

These Plugs Mate with Glenair Receptacles 801-084 and 801-085

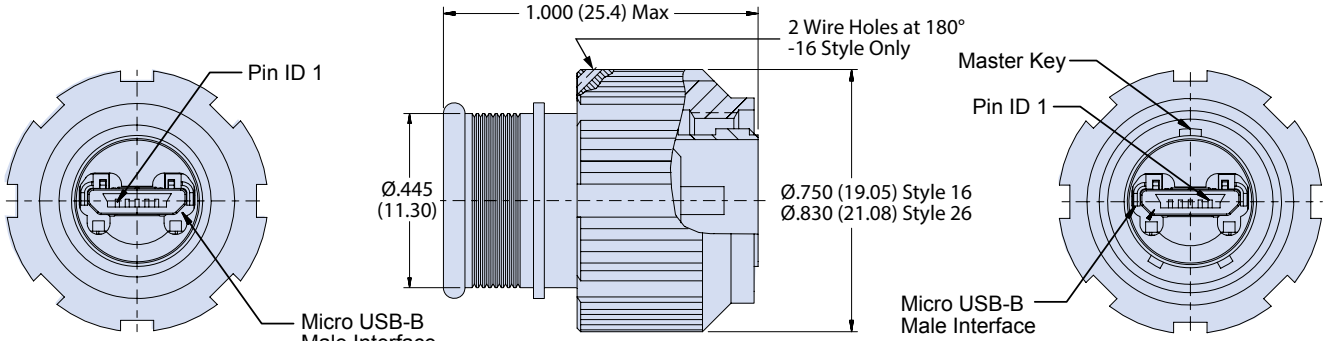

Face view of Plug Adapter as viewed from engaging end


801-087 Micro USB Plug B with Termination Porch

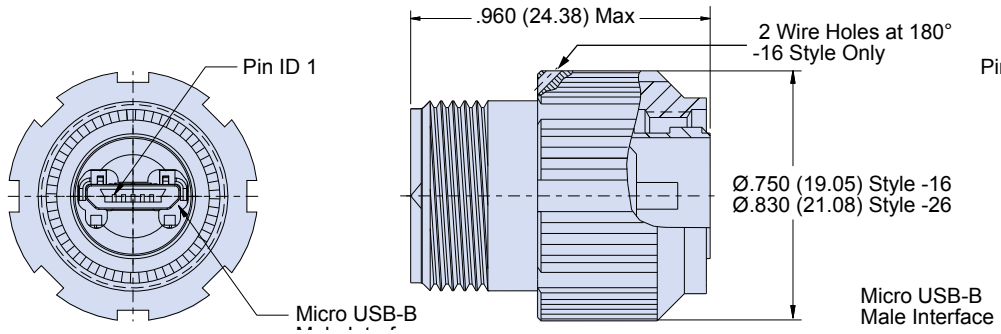


Face view of Plug Adapter as viewed from engaging end

801-088 Micro USB Plug B with Accessory Threads


Plug Key Positions (Receptacle Positions Mirrored)		
	A°	**B°**
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Jam Nut Cut-out



Square Flange Cut-out

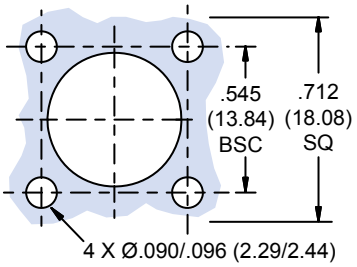

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SuperSeal™ Mighty Mouse Series 801 Receptacles

with Front and Rear Micro "AB" USB Receptacles
801-089 and 801-090 Ordering Information




Inline Receptacle



Jam Nut Receptacle




Square Flange Receptacle




Equipped with Micro AB USB Receptacles, Front and Rear

How To Order				
Sample Part Number	**801-089**	**-02 MUSB**	**-M**	**A**
Series (See Table I)	**801-089** = Shield Termination Porch **801-090** = Accessory Threads			
Shell Style	**01** = In Line Receptacle **02** = Square Flange Front or Rear Mount Receptacle **07** = Jam Nut Rear Mount Receptacle			
Shell Material and Finish	**NF** = Cadmium Olive Drab **M** = Electroless Nickel **MT** = Nickel PTFE **ZNU** = Black Zinc Nickel			
Shell Key Positions	**A**, **B**, **C**, **D**, **E**, **F**			


These Receptacle Connectors Mate with Glenair Plugs 801-082 and 801-083

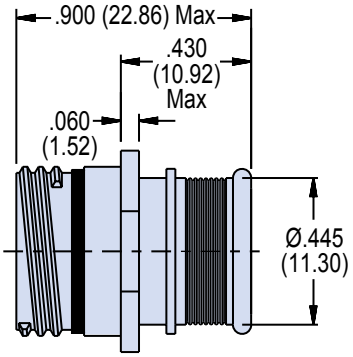


801-089-01 Inline

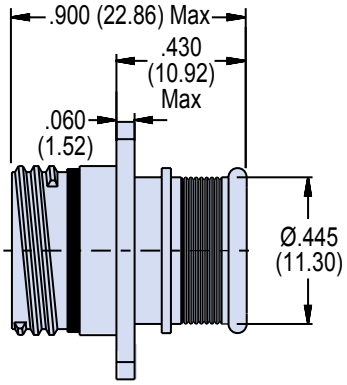


801-089-02 Square Flange Front or Rear Mount

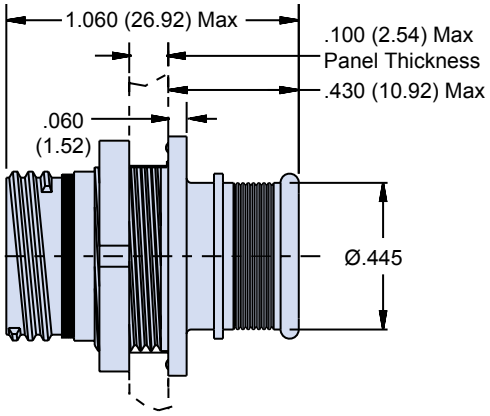


801-089-07 Jam Nut Rear Mount

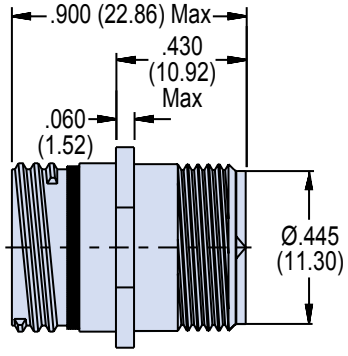

801-090-01 Inline

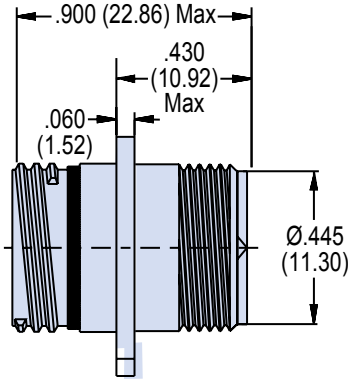

801-090-02 Square Flange Front or Rear Mount

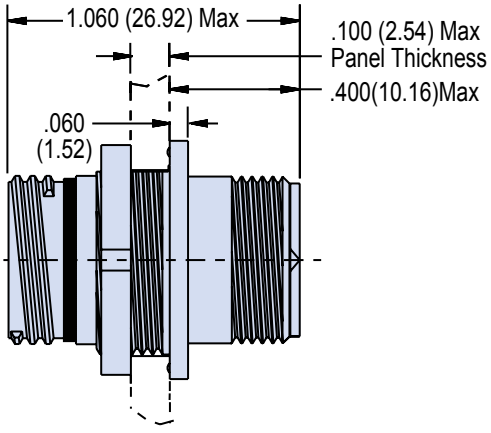

801-090-07 Jam Nut Rear Mount


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

SuperSeal™ Mighty Mouse Series 801

Sav-Con® Connector Saver with Micro "B" USB Plug and Micro "AB" USB Receptacle 801-091 Ordering Information

How To Order			
Sample Part Number	**801-091 -MUSB**	**-M**	**A**
Series (See Table I)	**801-091** = Plug/Receptacle Sav-Con® Connector Saver		
Shell Material and Finish	**NF** = Cadmium Olive Drab **M** = Electroless Nickel **MT** = Nickel PTFE **ZNU** = Black Zinc Nickel		
Shell Key Positions	**A**, **B**, **C**, **D**, **E**, **F**		

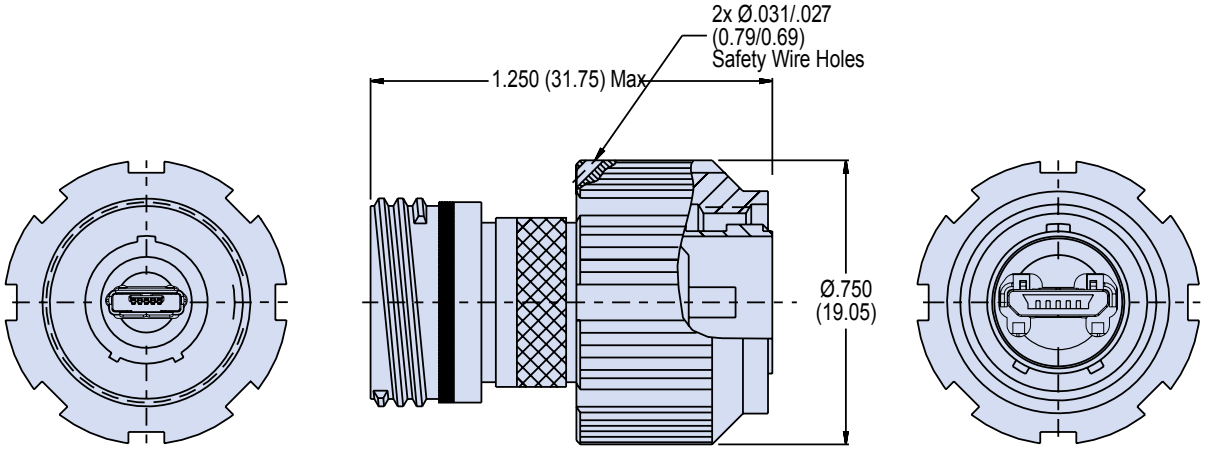


Face View Of Receptacle As Viewed From Engaging End.


Receptacle Side

Self-locking Plug Side

Face View Of Plug As Viewed From Engaging End.




Receptacle Side Equipped with Micro AB USB Receptacle




Plug Side Equipped with Micro B USB Receptacle

Schematic

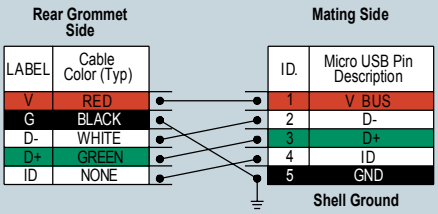

Alternate Key Positions

	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



T

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

SERIES 807

MOUSEBUD™

MIGHTY MOUSE

Ultra small form factor spring contact quick disconnect connector





The Glenair Mousebud™ is a low profile quick disconnect connector with ideal environmental, electrical and mechanical performance — optimized for rugged applications where reduced size and weight are a requirement. Available in plug and receptacle configurations, the spring contact equipped Mousebud™ is a seven channel 3 amp per line solution for such applications as heads–up display helmet applications, ruggedized soldier computers and field communications equipment. Equipped with a spring loaded latching mechanism, the series 807 Mousebud™ connects with a simple push and releases with a low– profile, thumb–activated lever on the plug coupling nut. Split-shell design of the plug provides easy access to wire terminations and an integrated banding porch eliminates the need for additional backshell accessories. Enviromentally rated to IP67, the Mousebud™ is ready for application in a wide range of harsh application environments.

Glenair®

Glenair, Inc.
1211 Air Way
Glendale, CA
91201-2497
818-247-6000
sales@glenair.com
www.glenair.com

PRODUCT SELECTION GUIDE



Series 80 ASAP Cordsets for High-Speed Ethernet **Page U-4**



USB 2.0 Cordsets **Page U-11**
Standard USB Type A Plug to Ruggedized Mighty Mouse Plug



Cat 5e Ethernet RJ45 Cordsets **Page U-12**
Standard Shielded RJ45 Plug to Ruggedized Mighty Mouse plug

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 80 Mighty Mouse
ASAP Cordsets for High-Speed Serial Data
General Information



Mighty Mouse for 100BASE-T
compared to RJ45 Plug in MIL-DTL-38999 Connector

- **Compact Weight-Saving Design with size #23 Contacts**
- **USB 2.0, 100BASE-T, 1000BASE-T, IEEE 1394**
- **Environmentally Protected, Robust Construction**
- **Aerospace-Grade Cable Meets FAA FAR 25 Flammability**
- **Tactical-Grade Cable Meets Low-Toxicity Requirements**
- **Silver-Coated Copper Braid Shield With 95% Coverage over Aluminized Mylar Shield**
- **Threaded Coupling, Quick-Disconnect or Bayonet Mating**

Glenair's Series 80 ASAP Cordsets for High-Speed Ethernet, USB and Firewire Applications

High-reliability aerospace and defense systems have adopted commercial data protocols such as Ethernet and USB; however, commercial-grade connectors such as RJ45 modular plugs are not suitable for airframe or tactical deployments where shielding, environmental protection, and mechanical robustness are prime considerations. The Mighty Mouse connector, because of it's compact size, ruggedness and in-stock availability, is widely deployed for 100BASE-T, 1000BASE-T and USB 2.0 applications on commercial air transport, military airframe, unmanned vehicles, and dismounted soldiers. This section of the Series 80 catalog provides ordering information and technical information on Mighty Mouse cordsets for Ethernet and other high-speed data applications. These ASAP cordsets in this section feature military-grade construction with the quickest delivery in the industry.





Full-Duplex Ethernet Switch
with Glenair Series 801 4 Pin Receptacles and Glenair 38999 Fiber Optic Connectors

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.



100BASE-T Cordset
with 4 Pin Series 800 Connector

Upgrade commercial high-speed serial interconnects to mil-spec performance. Glenair's ASAP "Mighty Mouse" cordsets are available for 100BASE-T, Gigabit Ethernet, IEE 1394 and USB 2.0 applications. These cordsets combine aerospace-grade data cables with Series 80 "Mighty Mouse" harsh environment connectors for maximum performance and minimum size.

FEP jackets meet FAA flammability requirements. Or, choose **low smoke / zero halogen polyurethane jackets** for mass transit or shipboard applications.

Three strain relief options – Standard overmolded cables offer excellent strain-relief and cable sealing. Or, choose heatshrink boots for smallest form factor. If repairability and ruggedness are important, choose machined aluminum EMI backshells.

Three reasons to specify Glenair Series 80 cordsets

1 **Simplified Ordering**: No need to buy cable, connectors, termination tools and strain reliefs.

2 **Guaranteed Performance**: All cordsets are 100% electrically tested.

3 **Faster Delivery**: Cable and connector components are in stock.

How To Order Cordsets

Step 1: Select the Connector Series

Table1 lists the five types of Series 80 connectors. For more information on selecting a connector, please refer to the connector selection chart on the following page. This section does not contain ordering information for series 802 AquaMouse™ cordsets. Please contact Glenair for information on hazardous environment high pressure cables for the 802 Series.

Step 2: Select the Cable

Table 2 contains specifications for standard data cables. The cable type also determines the connector layout. ***4 pin connectors are used for 4 wire cables, and 10 pin connectors are used for 8 wire cables.***

Step 3: Select a Cable Jacket

Table 3 shows available jacket options. Choose FEP flourocarbon jackets for airframe and avionics applications, or choose low smoke/zero halogen polyurethane jackets for soldier systems, vehicles, and transit systems.

Step 4: Select a Cable-To-Connector Interface

Table 3 provides three ways to attach the cable to the connector:
1. Polyamide boot, overmolded with flexible strain relief
2. Aluminum backshell, shielded, watertight and removable
3. Heat-shrink boot, low smoke/ zero halogen

Step 5: Select a Connector Configuration

Table 1 shows connector codes for specifying plug versus receptacle and pin versus socket contacts. Add a plating code, keying option and length.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
ASAP Cordsets for High-Speed Serial Data
How To Order

How To Order											
Sample Part Number		**801-024**	**B**	**F**	**P**	**A**	**C**	**M**	**P**	**Z**	**-72**
Series (See Table I)	**800-035** = Series 800 Cordset, UNF Threaded Coupling, Hex Nut **801-024** = Series 801 Cordset, Double-Start Threaded Coupling **803-007** = Series 803 Cordset, Push-Pull With Bayonet Lock Coupling **804-013** = Series 804 Cordset, Quick-Disconnect Push-Pull **805-007** = Series 805 Cordset, Tri-Start Threaded Coupling with Ratchet and Ground Spring										
Cable	**A** = 100BASE-T Ethernet 4 Cond. UTP, OAL Shield 4 Pin Connector **B** = 100BASE-T Ethernet Quad, OAL Shield, 4 Pin Connector **C** = 1000BASE-T Gigabit Ethernet 8 Cond. UTP, OAL Shield, 10 Pin Connector **D** = IEEE 1394 Hi-Speed Quad 110 Ohm, 4 Pin Connector **E** = USB 2.0, Two #22 Power, One STP #26 **F** = Two STP, 100 Ohm, OAL Shield, 4 Pin Connector **G** = Four STP, 100 Ohm, OAL Shield, 10 Pin Connector										
Cable Jacket	**F** = FEP Flourocarbon Jacket, Translucent Blue **P** = Low Smoke/ Zero Halogen Polyurethane Jacket, Black										
Strain Relief	**P** = Polyamide Overmold **B** = Metal Backshell **H** = Heat-Shrink Boot, Low Smoke/ Zero Halogen										
Connector End A P1	**A** = Plug, with Male Pin Contacts **B** = Plug, with Female Socket Contacts **C** = Receptacle, with Male Pin Contacts **D** = Receptacle, with Female Socket Contacts										
Connector End B P2	**A** = Plug, with Male Pin Contacts **B** = Plug, with Female Socket Contacts **C** = Receptacle, with Male Pin Contacts **D** = Receptacle, with Female Socket Contacts **N** = No Connector (Single-Ended)										
Shell Material / Finish	**M** = Aluminum/Electroless Nickel **NF** =Aluminum/Cadmium with Olive Drab Chromate **ZN** = Aluminum/Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **Z1** = Stainless Steel/Passivated										
Protective Cover	**P** = Metal Protective Covers Included **N** = No Covers Supplied										
Shell Pol. Pos.	Polarizing position depends on the connector series For Series 800 and 803: **N** = Normal **X**, **Y**, **Z** For Series 801 and 805: **A** = Normal **B**, **C**, **D** For Series 804: Omit for Single Master Key **A** = Normal **B**, **C**, **D**										
Overall Length	Overall Length In Inches 12 Inch Min.										

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Table 2: Cable Specifications							
Cable Code	**A**	**B**	**C**	**D**	**E**	**F**	**G**
Cable Type	100BASE-T	100BASE-T	1000BASE-T	IEEE 1394	USB 2.0	100 Ω STP	100 Ω STP
Construction	UTP	Quad	UTP	Quad	STP	STP	STP
Number of Pairs	2	-	4	-	1	2	4
Number of Conductors	4	4	8	4	4	4	8
Conductor AWG	24	24	24	24	26 & 22	26	26
Conductor Material	SCCA	SCCA	SCCA	SCCA	SCCA	SCCA	SCCA
Conductor Insulation	FEP	FEP	FEP	FEP	FEP	FEP	FEP
Inner Shield	AM	AM	AM	AM	SCCB	AM	AM
Outer Shield	SCCB	SCCB	SCCB	SCCB	SCCB	SCCB	SCCB
Shield Coverage	95% Min.	95% Min.	95% Min.	95%	95%	95%	95%
Impedance	100 ± 10 Ω	100 ± 10 Ω	100 ± 10 Ω	110 ± 7 Ω	90 ± 13 Ω	100 ± 10 Ω	100 ± 10 Ω
Capacitance (pF/ft.)	13.0	13.0	14.5	12.5	13.0	13.0	13.0
Propagation Velocity	80%	80%	70%	80%	70%	80%	80%
Attenuation (dB/100 ft.) 10MHz	3.1	3.1	3.1	2.9			
Attenuation dB/100 ft.) 100 MHz	8.0	8.0	8.0	7.5			
Attenuation (dB/100 ft.) 500 MHz	-	-	-	15.5			
Attenuation (dB/100 ft.) 1GHz	-	-	-	22.5			
Near-End Crosstalk dB @10MHz	47	47	47.0	47.0			
Near-End Crosstalk dB @100MHz	32	32	32.0	32.0			
Dielectric Withstanding Voltage	1500 VAC	1500 VAC	1500 VAC	1500 VAC	1500 VAC	1500 VAC	1500 VAC

AM – Aluminum Mylar SCCA – Silver-Coated Copper Alloy SCCB – Silver-Coated Copper Braid.
Attenuation values are nominal. Crosstalk values are minimum.

Table 3: Cable Jacket Options				
Jacket Code	**F**		**P**	
Jacket Material	Extruded FEP		Low Smoke/ Zero Halogen Polyurethane	
Typical Use	Airframe, Avionics, Missile		Dismounted Soldier,Shipboard, Armored Vehicle, Railcar	
UL Rating	94 V-0		94 V-0	
FAA Flammability	FAR 25.853(a) FAR 25.869(a)(4)		FAR 25.853(a)	
Temperature Range	-65° to +200° C.		-30 to +105° C.	
Resistance to Solvents	Excellent		Excellent	
Flexibility	Good		Excellent	
Abrasion Resistance	Excellent		Excellent	
Color	Translucent Blue		Black	
Smoke Index NES 711			24	
Toxicity Index NES 713			3.9	
Oxygen Index ASTM D-2863	95%		28%	
Overall Cable Diameter	Cable Code	Diameter	Cable Code	Diameter
	A	.210 (5.33)	A	.238 (6.05)
	B	.175 (4.45	B	.218 (5.54)
	C	.265 (6.73)	C	.311 (7.90)
	D	.190 (4.83)	D	.236 (5.99)
	E	.200 (5.08)	E	.250 (6.35)
	F	.250 (6.35)	F	.300 (7.62)
	G	.298 (7.57)	G	.344 (2.18)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
ASAP Cordsets for High-Speed Serial Data
Strain Relief Specifications

Table 4: Cable-To-Connector Interface (Strain Relief)			
Strain Relief Code	**P**	**B**	**H**
			
	Polyamide Overmold	Aluminum Backshell	Heat-Shrink Boot
Material	Polyamide	6061-T6 Aluminum	Polyolefin
Max. Operating Temperature	105° C.	150°C.	105° C.
Hardness	75 Shore A	N/A	
Low temperature Brittle Point	< -45°C.	N/A	<-65°C.
Volume Resistivity	$>10^{12}$ Ohms cm	N/A	
Dielectric Strength	>12 kV/mm	N/A	>12 kV/mm
Flammability (UL 94)	V0 Vertical Burn	N/A	V0 Vertical Burn
Smoke Index (NES 711)	<10	N/A	9.0
Toxicity Index (NES 713)	<7	N/A	1.9
Resistance to Ozone	Excellent	N/A	Excellent
Oil Resistance	Good	N/A	Good
Polar Solvents (alcohol)	Poor	N/A	Good
Non-polar Solvents	Good	N/A	Good
Fuel Resistance	Good	N/A	Fair
Immersion	1 meter MIL-STD-810 Method 512	IP67	1 meter MIL-STD-810 Method 512
Part Number	(Not Sold Separately)	390MS076	770-003


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

ASAP Cordset Dimensions


Strain relief Code P

Polyamide Overmold

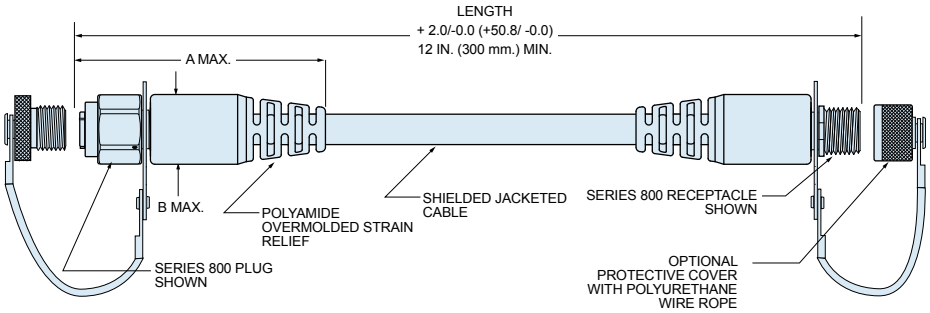


Strain relief Code B

Metal Backshell

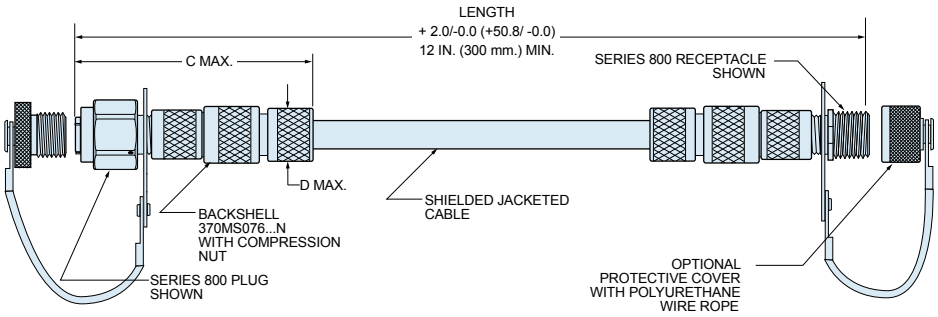

Strain relief Code H

Heatshrink Boot

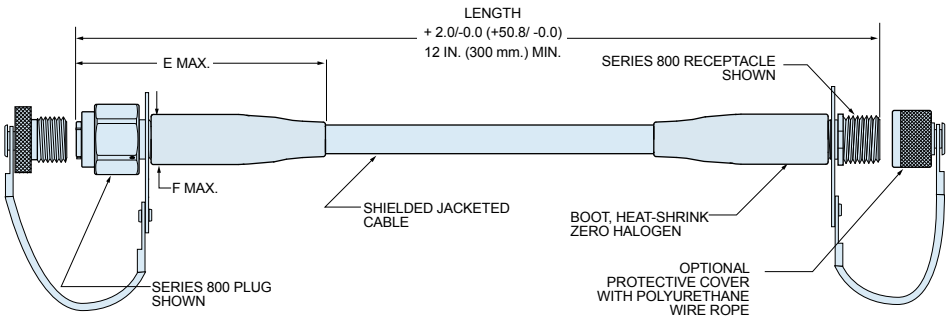

Dimensions


Cable Code	Type	Number of Connector Pins	A Max.		B Max.		C Max.		D Max.		E Max.		F Max.	
			In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
A	2 Pair UTP 100 Ω	4	2.500	63.50	.560	14.22	2.100	53.34	.530	13.46	1.600	40.64	.470	11.94
B	Quad 100 Ω	4	2.500	63.50	.560	14.22	2.100	53.34	.530	13.46	1.600	40.64	.470	11.94
C	4 Pair UTP 100 Ω	10	2.500	63.50	.680	17.27	2.100	53.34	.600	15.24	1.600	40.64	.580	14.73
D	Quad 110 Ω	4	2.500	63.50	.560	14.22	2.100	53.34	.530	13.46	1.600	40.64	.470	11.94
E	USB 90 Ω	4	2.500	63.50	.560	14.22	2.100	53.34	.600	15.24	1.600	40.64	.470	11.94
F	2 Pair STP 100 Ω	4	2.500	63.50	.560	14.22	2.100	53.34	.600	15.24	1.600	40.64	.470	11.94
G	4 Pair STP 100 Ω	10	2.500	63.50	.680	17.27	2.100	53.34	.600	15.24	1.600	40.64	.580	14.73

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.


Series 80 Mighty Mouse
ASAP Cordset Wiring Schematics
Type A, B and C Cables

Wiring Schematics For Type A and Type B Cable




WIRING DIAGRAM
CABLE TYPE A
100BASE-T UTP

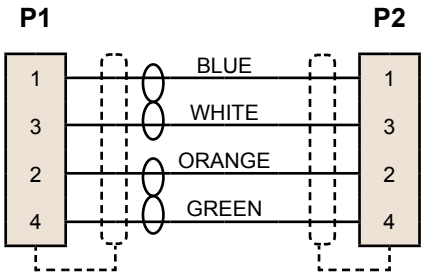




Pin Connector
Mating Face



Socket Connector
Mating Face


WIRING DIAGRAM
CABLE TYPE B
100BASE-T QUAD

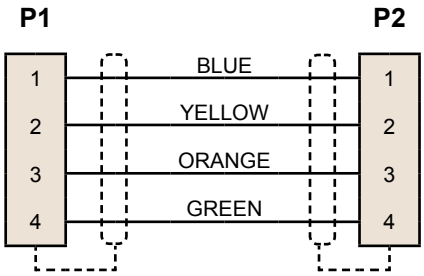


Wiring Schematic for Type C Cable for Gigabit Ethernet Applications



10 Pin Connector for Gigabit Ethernet




Pin Connector
Mating Face



Socket Connector
Mating Face


WIRING DIAGRAM
CABLE TYPE C
1000BASE-T UTP

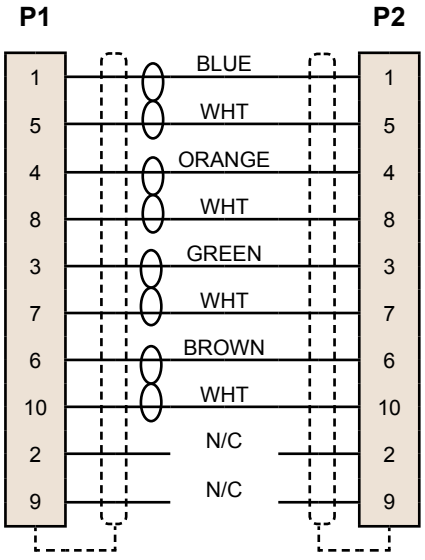

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Wiring Schematic for Type D Quad Cable For IEEE 1394 Applications






4 Pin Connector for IEEE 1394




Pin Connector
Mating Face





Socket Connector
Mating Face


WIRING DIAGRAM
CABLE TYPE D
1394 QUAD

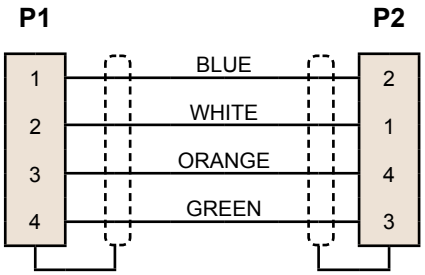


Wiring Schematic for Type E Cable For USB 2.0 Applications



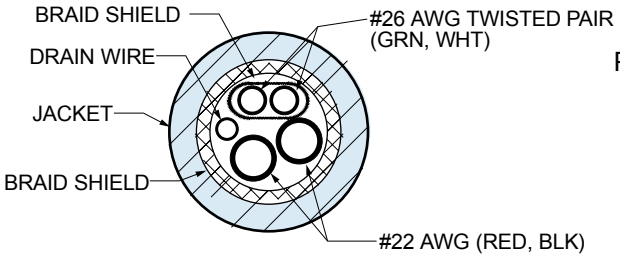




Pin Connector
Mating Face



Socket Connector
Mating Face

WIRING DIAGRAM
CABLE TYPE E
USB 2.0

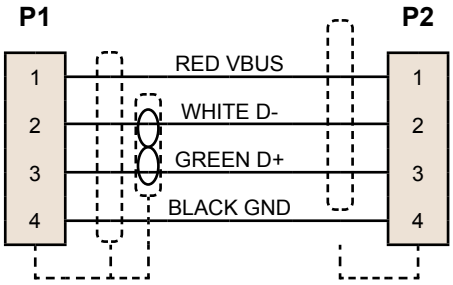



Dimensions in Inches (millimeters) are subject to change without notice.

Series 80 Mighty Mouse
ASAP Cordset Wiring Schematics
Type F and G Cables


Wiring Schematic for Type F Cable for 100 Ohm STP Applications

WIRING DIAGRAM
CABLE TYPE F
TW0 100 OHM SHIELDED TWISTED
PAIRS WITH OVERALL SHIELD

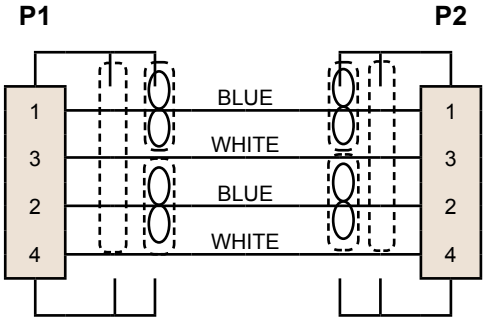




Pin Connector
Mating Face




Socket Connector
Mating Face

Wiring Schematic For Type G Cable For 100 Ohm STP Applications




Pin Connector
Mating Face



Socket Connector
Mating Face

WIRING DIAGRAM
CABLE TYPE G
FOUR STP

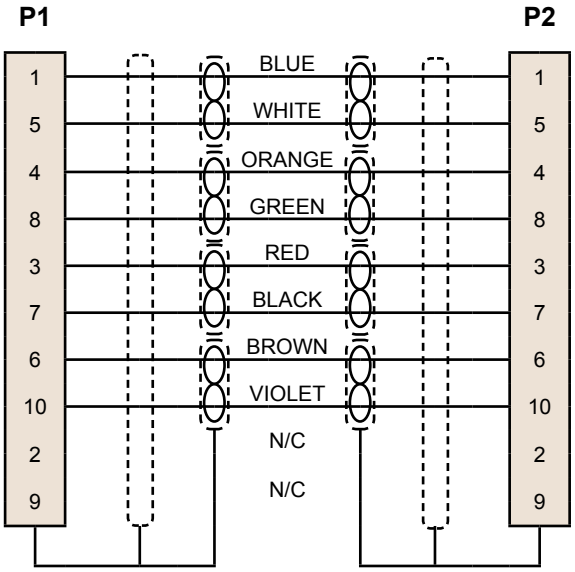


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Cordset, USB Type A plug to Mighty Mouse connector

These USB 2.0 cordsets have a standard USB type A plug on one end and a ruggedized Mighty Mouse plug on the other end. Low smoke zero halogen cable is UL VW-1 rated. #22 AWG power leads provide maximum current and low resistance. #28 AWG twisted pair data leads help reduce crosstalk. Rugged flexible molded cable ends provide strain relief and ingress protection. 100% tested for continuity and insulation resistance.



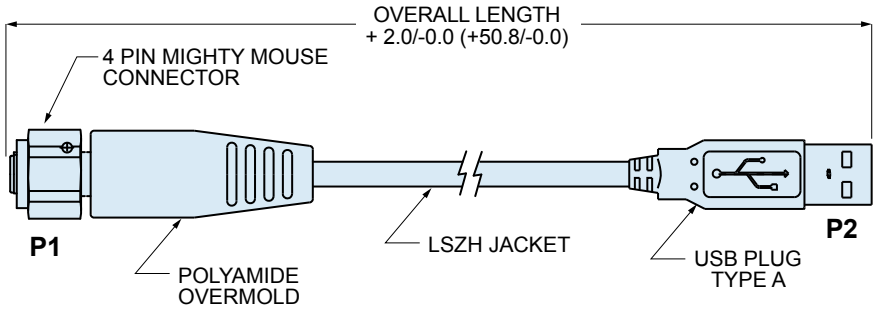

P1 Pinouts




PIN CONNECTOR




SOCKET CONNECTOR


Optional Cover

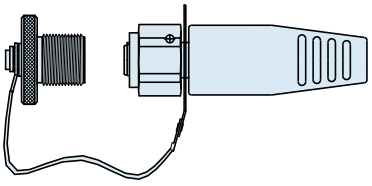

Wiring Diagram

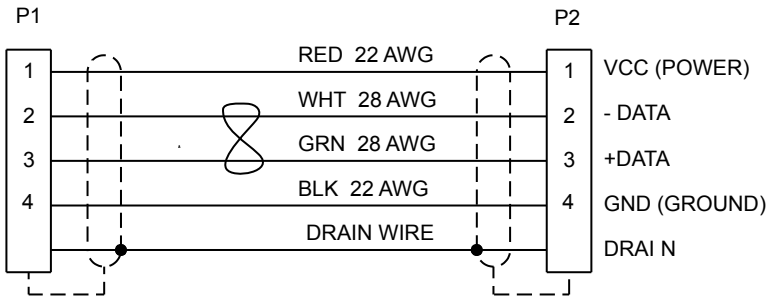

USB Cable Construction

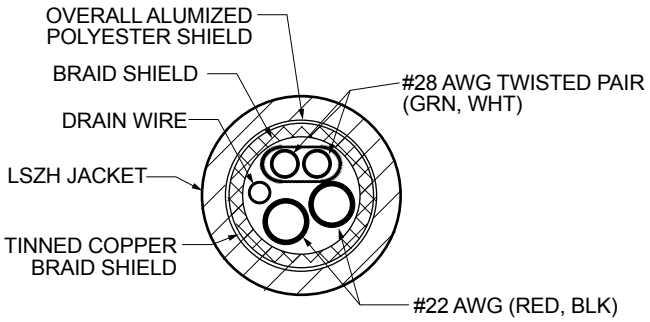

Dimensions in Inches (millimeters) are subject to change without notice.

Series 80 Mighty Mouse
USB 2.0 Cordsets

How To Order						
Sample Part Number	**801-028**	**A**	**ZNU**	**N**	**A**	**-72**
Series (See Table I)	**800-036**= Series 800 Cordset, UNF Threaded Coupling, Hex Nut **801-028** = Series 801 Cordset, Double-Start Threaded Coupling **803-011** = Series 803 Cordset, Push-Pull With Bayonet Lock Coupling **804-016** = Series 804 Cordset, Quick-Disconnect Push-Pull **805-012** = Series 805 Cordset, Tri-Start Threaded Coupling with Ratchet and Ground Spring					
Shell Style	**A** = Plug, with Male Pin Contacts **B** = Plug, with Female Socket Contacts **C** = Receptacle, with Male Pin Contacts **D** = Receptacle, with Female Socket Contacts					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated					
Protective Cover	**P** = Metal Protective Cover, with Lanyard (for Mighty Mouse Connector) **N** = No Covers Supplied					
Shell Polarizing Position	Polarizing position depends on the connector series. For Series 800 and 803: **N** (Normal), **X**, **Y** or **Z** For Series 801 and 805: **A** (Normal), **B**, **C**, **D** For Series 804: Omit (Leave Blank) for Single Master Key **A** (Normal), **B**, **C**, **D**					
Overall Length	Overall Length In Inches **18**, **36**, **72**, **120**					

Table I: Series

				
800-036 Series 801 Cordset, UNF Threaded Coupling, Hex Nut	**801-028** Series 801 Cordset, Double-Start Threaded Coupling	**803-011** Series 803 Cordset, Push-Pull With Bayonet Lock Coupling	**804-016** Series 804 Cordset, Quick-Disconnect Push-Pull	**805-012** Series 805 Cordset, Tri-Start Threaded Coupling with Ratchet and Ground Spring


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Cordset, Cat 5e RJ45 to Mighty Mouse connector




These Cat 5e cordsets have a standard shielded RJ45 modular plug on one end and a ruggedized Mighty Mouse 10 pin plug on the other end. Low smoke zero halogen cable is UL VW-1 rated and RoHS compliant. Certified to TAI/EIA-568-B.2 . Cable has four #26 twisted pairs plus tinned copper braid shield. Mighty Mouse connector is overmolded with polyamide for strain relief and ingress protection. RJ45 plug has molded snagless boot and 50 microinches gold plating on contacts. 100% tested for continuity and insulation resistance. Operating temperature -20° C to +60° C.

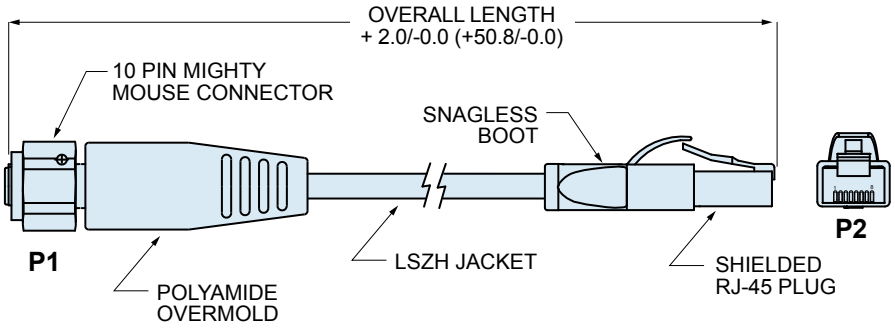

P! Pinouts




Pin Connector




Socket Connector

Optional Cover

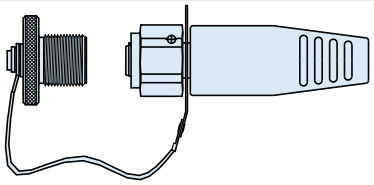


Wiring Diagram Per 568B

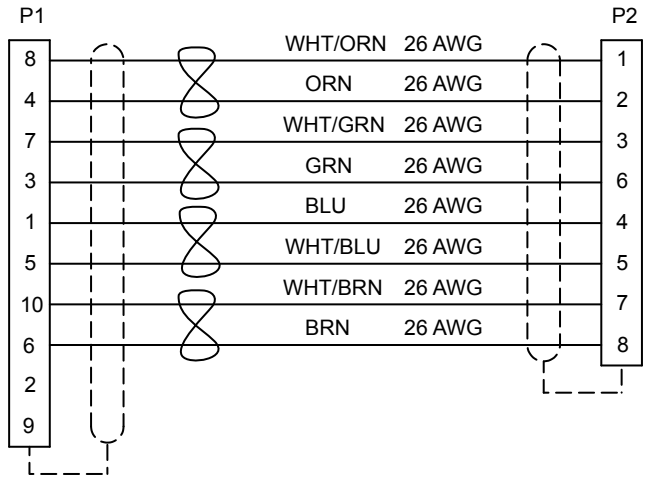

RJ45 Materials and Finishes

RJ45 Housing	Polycarbonate, clear, UL94V-0
RJ45 Contacts	Phosphor bronze, 50 µInches gold over 100 µInches Ni plating
Cable Jacket	LSZH, black
RJ45 Shield	Brass, nickel plated
RJ45 Boot	LSZH thermoplastic

RJ45 Cable Construction

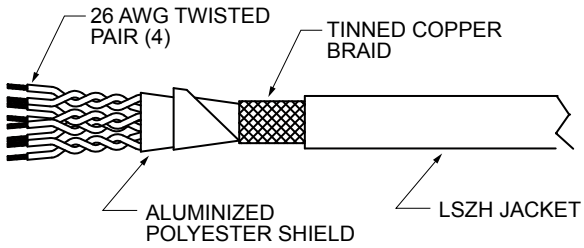

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Cat 5e Ethernet RJ45 Cordsets
Ordering Information

How To Order						
Sample Part Number	**801-029**	**B**	**MT**	**N**	**A**	**-36**

Series (See Table I)	**800-037**= Series 800 Cordset, UNF Threaded Coupling, Hex Nut **801-029** = Series 801 Cordset, Double-Start Threaded Coupling **803-012** = Series 803 Cordset, Push-Pull With Bayonet Lock Coupling **804-017** = Series 804 Cordset, Quick-Disconnect Push-Pull **805-013** = Series 805 Cordset, Tri-Start Threaded Coupling with Ratchet and Ground Spring
Shell Style	**A** = Plug, with Male Pin Contacts **B** = Plug, with Female Socket Contacts **C** = Receptacle, with Male Pin Contacts **D** = Receptacle, with Female Socket Contacts
Shell Material and Finish	**M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated
Protective Cover	**P** = Metal Protective Cover, with Lanyard (for Mighty Mouse Connector) **N** = No Covers Supplied
Shell Polarizing Position	Polarizing position depends on the connector series. **For Series 800 and 803:** **N** (Normal), **X**, **Y** or **Z** **For Series 801 and 805:** **A** (Normal), **B**, **C**, **D** **For Series 804:** Omit (Leave Blank) for Single Master Key, **A** (Normal), **B**, **C**, **D**
Overall Length	Overall Length In Inches **18**, **36**, **72**, **120**


Table I: Series

				
800-037 Series 801 Cordset, UNF Threaded Coupling, Hex Nut	**801-029** Series 801 Cordset, Double-Start Threaded Coupling	**803-012** Series 803 Cordset, Push-Pull With Bayonet Lock Coupling	**804-017** Series 804 Cordset, Quick-Disconnect Push-Pull	**805-013** Series 805 Cordset, Tri-Start Threaded Coupling with Ratchet and Ground Spring


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


PRODUCT SELECTION GUIDE




963-001
100 Ohm Differential Parallel Pair Data Cable
Page V-3




963-002
Tactical Cat 5e Ethernet Cable with Polyurethane Jacket
Page V-4




963-003
Avionic Cat 6a Ethernet Cable with FEP Jacket
Page V-5




963-004
Cat 7 Ethernet Cable with PVC Jacket
Page V-6



963-005
USB 2.0 Cable with FEP, Polyurethane or No Jacket
Page V-7



963-012
USB 3.0 Cable with Polyurethane Jacket
Page V-8



963-006
IEEE 1394 110 Ohm Quad Cable with FEP, Polyurethane or No Jacket
Page V-9




963-013
100 Ohm SATA/eSATA Cable with Polyurethane Jacket
Page V-10

V

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

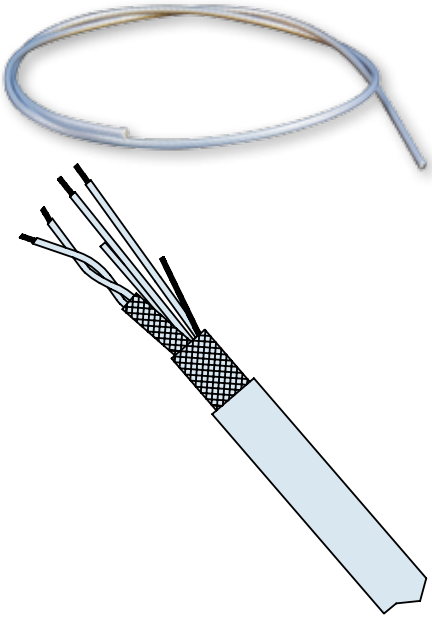

High Performance, Protocol-Compliant Cable for Series 80 Mighty Mouse *High-Speed* Applications

In addition to the turnkey cordsets offered in each respective section of this catalog, Glenair is pleased to offer our *High-Speed* Mighty Mouse customers discrete bulk cable for on-site termination. All of the cables in this section have been selected for protocol compliance IAW industry-standard Ethernet, USB, and SATA/eSATA specifications and the harsh mission-critical application environments where the Series 80 Mighty Mouse excels. Without exception, cables have been designed and fabricated to optimize flexibililty, weight reduction, ruggedness, and insulator quality. Each cable is offered with specific guidance as to shielding properties, impedance performance, attenuation, temperature rating, bend radius, weight, and maximum practical distance. All of the cable part numbers detailed here are in stock and ready for immediate, same-day shipment with no length or dollar minimums.


963-001	100 Ohm Differential Parallel Pair Data Cable
963-002	Tactical Cat 5e Ethernet Cable with Polyurethane Jacket
963-003	Avionic Cat 6a Ethernet Cable with FEP Jacket
963-004	Cat 7 Ethernet Cable with PVC Jacket
963-005	USB 2.0 Cable with FEP or Polyurethane Jacket
963-012	USB 3.0 Cable with Polyurethane Jacket
963-006	IEEE 1394 110 Ohm Quad Cable with FEP or Polyurethane Jacket
963-013	100 Ohm SATA/eSATA Cable with Polyurethane Jacket

Glenair's vertically integrated connector, hardware and cable facilities are perfectly positioned to supply catalog and custom short cable runs for the broad range of high-speed interconnect applications.



Dimensions in Inches (millimeters) are subject to change without notice.

963-001: 100 Ohm differential parallel pair data cable

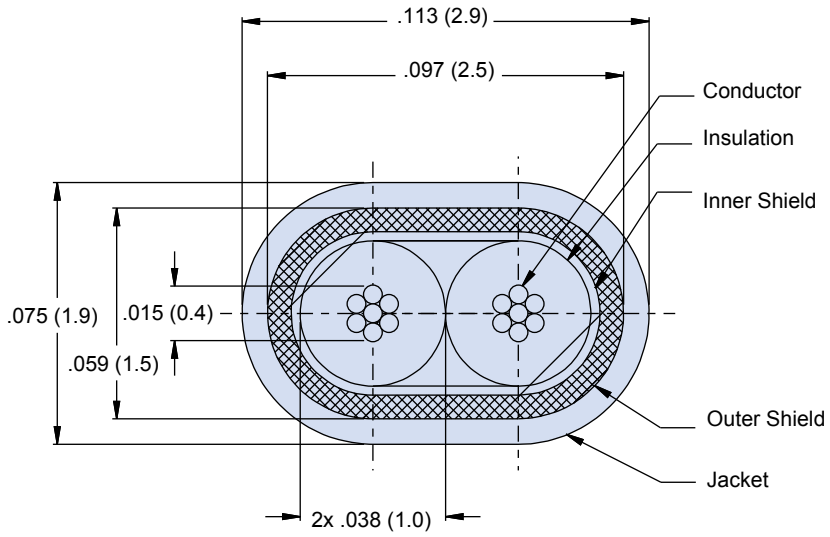

Properties	
Impedance	100 Ohms ± 10
Attenuation	0.25 dB/m @ 100 MHz .075 dB/m @ 500 MHz 1.25 dB/m @ 1000 MHz
Impedance	100 ± 10 Ohms
Capacitance	12.0 pF/ft (nom)
Velocity of Propogation	80%
Temperature Rating	150°C

Construction Details		
Data Pair	Conductor	2x 28 AWG (7/36) silver plated high strength copper alloy (.015" OD)
	Insulation	Extruded Foamed Fluoropolymer (.038")
	Colors	Blue and white
	Shield Coverage	Silver plated copper, 38 AWG, 95% minimum
Inner Shield		Aluminum/ Polyester tape, 100% coverage
Outer Shield		Round silver plated copper braid, 90% coverage
Jacket		Extruded FEP
Color		Transparent blue

NOTES


- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Tactical Cat 5e Ethernet Cable
963-002 Ordering Information

963-002: 1000 BASE-T Ethernet cable with polyurethane jacket

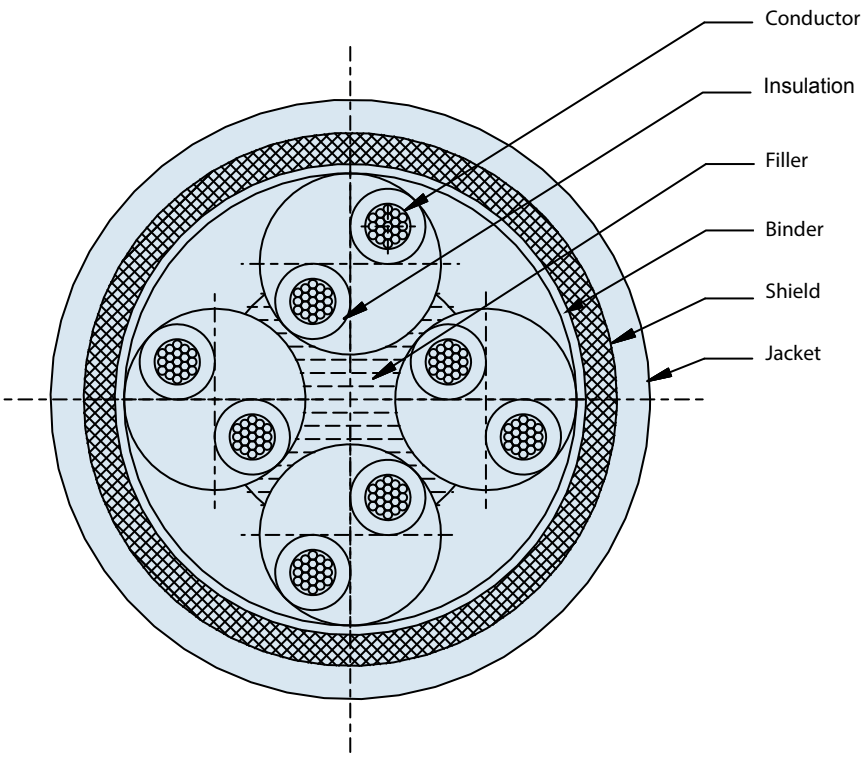

Construction Details		
	Details	Diameter (Inches)
Conductor	24 AWG 19x36 silver plated copper alloy	.0235
Insulation	Fluoropolymer	.045
Colors	**Pair #1** white/blue and blue **Pair #2** white/orange and orange **Pair #3** white/green and green **Pair #4** white/brown and brown	.235 .300
Two insulated conductors twisted together (varied lays)		

Properties	
Impedance	100 Ohms ± 15% (1 to 100 MHz)
Attenuation	8.0 dB/100 ft @ 100 MHz
NEXT	35.3 dB @ 100MHz
PSNEXT	32.3 dB @ 100 MHz
ELFEXT	23.8 dB @ 100 MHz
PSELFEXT	20.8 dB @ 100 MHz
Temperature Rating	200° C
Minimum Bend Radius	1.25" (dynamic) 1.00" (static)
Weight	4.8 lbs/100 ft
Max Cabling Distance	80 meters (100BASE-T)

Final Assembly	
Cable	Four twisted pairs caled around a center filler
Binder	Skive PTFE tape
Shield 1	Aluminum polyester
Shield 2	38 AWG silver plated copper braid 80% coverage
Jacket	Polyeurethane (Estane 58244) Color: Black .030" minimum jacket wall

NOTES


- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

963-003: 10G BASE-T ETHERNET CABLE WITH FEP JACKET

How to Order	
963-003-24	24 AWG
963-003-26	26 AWG

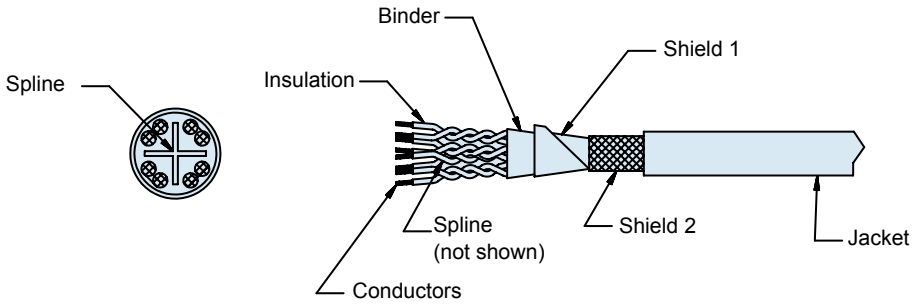

Construction Details		
	963-003-24	963-003-26
Conductor	24 AWG silver plated copper	26 AWG stranded silver plated copper
Insulation	FEP	PFA
Colors	Pair #1 white/blue and blue stripe Pair #2 white/orange and orange stripe Pair #3 white/green and green stripe Pair #4 white/brown and brown stripe	Pair #1 white/blue and blue stripe Pair #2 white/orange and orange stripe Pair #3 white/green and green stripe Pair #4 white/brown and brown stripe

Final Assembly		
	963-003-24	963-003-26
Conductors	Silver plated copper	Silver plated copper
Insulation	FEP	PFA
Cable	Four twisted pairs cabled around a center filler	Four twisted pairs cabled around a center filler
Spline	FEP	Fluoropolymer
Binder	Skive PTFE tape	Fluoropolymer tape
Shield 1	Aluminum mylar	n/a
Shield 2	38 AWG silver plated copper braid 90% coverage	silver plated copper braid 80% coverage
Jacket	FEP Color: Translucent blue .275" Nominal OD	PTFE laser printable jacket Color: White .220" nominal OD

Properties		
	963-003-24	963-003-26
Impedance	100 Ohms ± 10%	100 Ohms ± 10%
Attenuation (dB/100 Ft)	10 MHz - 2.4 100 MHz - 7.5 500 MHz - 17.7	10 MHz - 3.7 100 MHz - 11.2 500 MHz - 24.0
NEXT	10 MHz - 59.3 100 MHz - 44.3 250 MHz - 38.3 500 MHz - 33.8	10 MHz - 59.3 100 MHz - 44.3 250 MHz - 38.3 500 MHz - 33.8
SRL	10 MHz - 25.0 100 MHz - 20.1 250/500 MHz - 15.2	10 MHz - 25.0 100 MHz - 20.1 250/500 MHz - 15.2
Capacitance (pF/ft)	14.5 (nominal)	14.5 (nominal)
Velocity of Propogation	70% (nominal)	70% (nominal)
DWV	1.5 KV RMS	1.5 KV RMS
Temperature Rating	-55° to +200° C	-55° to +200° C
Minimum Bend Radius	1.40 Inches	.660 Inches
Weight	5.5 lbs/100 ft	3.05 lbs/100 ft
Max Cabling Distance	240 Feet (10GBASE-T)	188 Feet

NOTES


- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.
- Meets TIA-568B CAT-6A requirements when terminated to appropriate high speed connectors.
- Skydrol resistant, RoHS compliant and passes flamability requirements of FAR part 23 and 25, appendix F.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Cat 7 Ethernet Cable
963-004 Ordering Information

963-004: 10G BASE-T Ethernet cable with PVC jacket

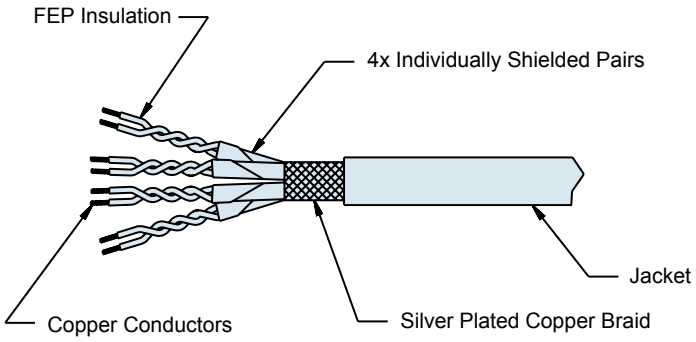

Construction Details	
Conductor	23 AWG solid copper alloy (.024" OD)
Insulation	Foam FEP (.057" OD)
Colors	**Pair #1** white with blue stripe **Pair #2** orange/white with orange stripe **Pair #3** green/white and green stripe **Pair #4** brown/white and brown stripe
Pair Shield	Aluminum mylar, 100% aluminum side facing out (.115" OD)
Overall Shield	Braid, silver plated copper 38 AWG, 85% minimum (.274" nominal OD)
Jacket	0.298" nominal OD

Properties	
Impedance	100 Ohms ± 10%
Attenuation (dB/100 M)	10 MHz - 5.7 100 MHz - 18.5 300 MHz - 33.3 600 MHz - 48.9 1000 MHz - 64
NEXT	10 MHz - 80 100 MHz - 72.4 300 MHz - 65.3 600 MHz - 60.8 1000 MHz - 67
SRL	10 MHz - 25 100 MHz - 20.1 300 MHz - 17.3 600 MHz - 17.3 1000 MHz - 18
Capacitance (pF/ft)	14.5 (nominal)
Velocity of Propogation	80% (nominal)
DWV	1000V RMS
Temperature Rating	-20° to +70° C
Weight	4.1 lbs/100 ft


NOTES
- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

963-005: USB 2.0 cable with FEP, polyurethane or no jacket

How To Order			
Sample Part Number		963-005	-2
Series	963-005 = USB 2.0 cable with FEP, polyurethane or no jacket		
Cable Jacket Material	1 - Less Jacket 2 - FEP (translucent blue) 3 - Polyurethane, zero halogen, Estane 58244 TPU or equivalent (black)		

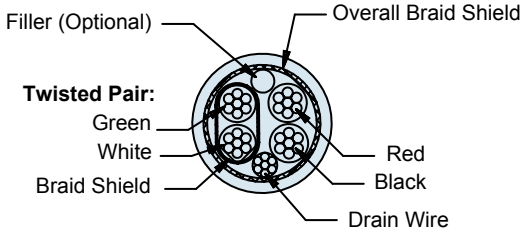

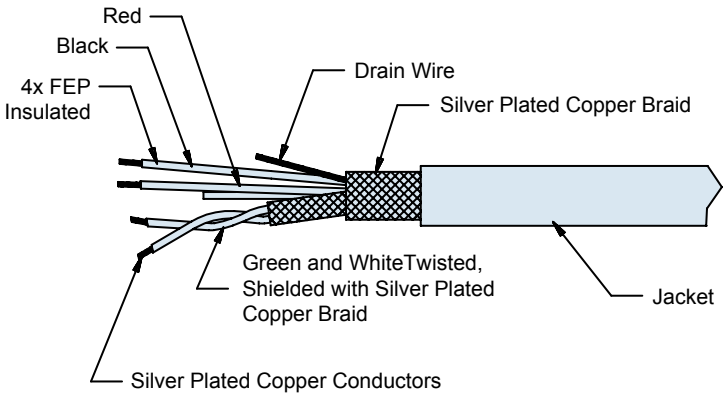

Properties	
Impedance	90 Ohms ± 10
Attenuation (dB/100 ft)	1 MHz - 1.2 4 MHz - 2.4 8 MHz - 3.5 12 MHz - 4.1 24 MHz - 5.8 48 MHz - 8.2 96 MHz - 11.6 200 MHz - 19.5 400 MHz - 35.0
Skew	100 ps max / 16.4 feet (5 meters)
Velocity of Propogation	70% (nominal)
DWV	1000V RMS
Temperature Rating	FEP: -65° to +200° C Polyurethane: -30° to +105° C
Weight	2.9 lbs/100 ft

Construction Details		
Data Pair	Conductor	2x 26 AWG (19/38) silver plated copper alloy (.019" OD)
	Insulation	FEP (.035")
	Colors	Green and white
	Shield Coverage	Silver plated copper, 38 AWG, 95% minimum
Power Pair	Conductor	2x 22 AWG (19/34) silver plated copper alloy (.030" OD)
	Insulation	FEP (.050")
	Colors	Red and black
Drain Wire	Conductor	26 AWG (19/38) silver plated copper alloy (.019" OD)
Filler		PTFE rod, optional
Overall Shield Coverage		Silver plated copper, 38 AWG, 95% minimum (.176" nominal OD)
Jacket Diameter		.200" nominal

NOTES

- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

V

963-012: USB 3.0 cable with polyurethane jacket

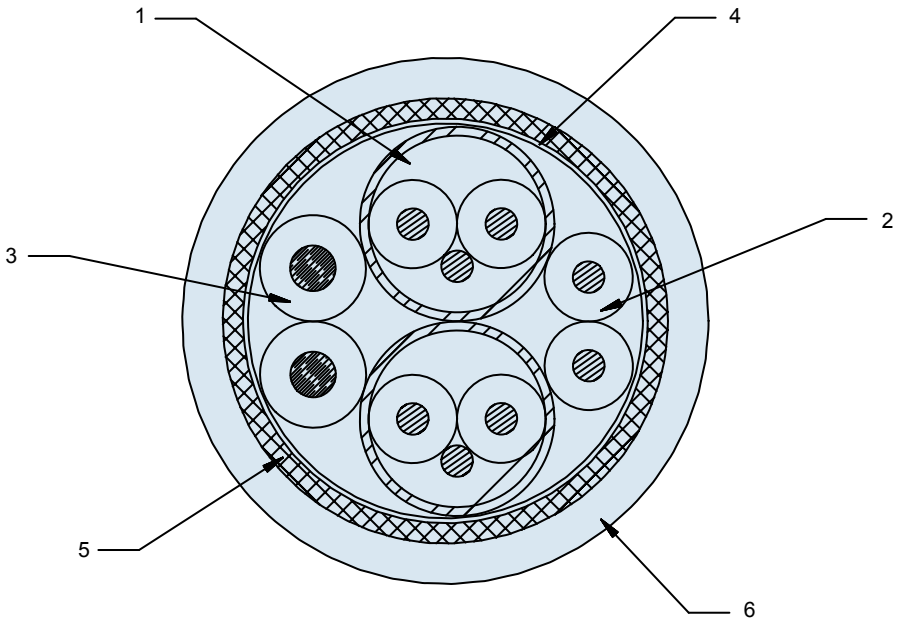

Construction Details			
1	2x Data Pair 90 Ohms (Twisted, Shielded)	Conductors	2x 26 AWG (19/38) silver plated copper
		Insulation	FEP
		Colors	**Pair 1**: Violet and orange **Pair 2**: Blue and yellow
		Drain	26 AWG (19/38) silver plated copper
		Shield	Al/Polyester, 50% lap (foil side in)
2	Data Pair 90 Ohms (Twisted)	Conductors	2x 26 AWG (19/38) silver plated copper
		Insulation	FEP
		Colors	Green and white
3	Power Pair	Conductors	2x 24 AWG (19/36) silver plated copper
		Insulation	FEP
		Colors	Black and red
4	Mylar Tape		50% Min Overlap
5	Overall Shield		36 AWG silver plated copper braid. 90% coverage minimum
6	Overall Jacket		Polyurethane, Ø .272 In nominal, black

Properties		
Impedance	90 Ohms ± 10	
Attenuation (nominal)	f (GHz)	IL (dB/m)
	1.25	-1.5
	2.5	-2.6
	5	-3.8
	7.5	-4.6
Velocity of Propogation	69%	
DWV	300VAC	
Temperature Rating	-30C to +105C	
Weight	47.8 lb/1000 ft	

NOTES

- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

963-006: 110 ohm quad cable with FEP, polyurethane or no jacket

How To Order			
Sample Part Number		**963-006**	**-2**
Series	**963-006** = USB 2.0 cable with FEP, polyurethane or no jacket		
Cable Jacket Material	**1** - Less Jacket **2** - FEP (translucent blue) **3** - Polyurethane, zero halogen, Estane 58244 TPU or equivalent (black)		

Construction Details	
Conductors	24 AWG (19/36) silver plated copper alloy (.0235" OD)
Insulation	Foam FEP, .054" OD
Filler	FEP .022" nominal OD
Overal Binder	PTFE tape wrap
Overall Shield #1	40 AWG silver plated copper braid
Overall Shield #2	38 AWG silver plated copper braid
Jacket Diameter	.190" nominal, .200" max

Properties	
Impedance	110 Ohms ± 6 (measured differentially)
Attenuation (dB/100 ft)	10 MHz - 2.9 100 MHz - 7.5 500 MHz - 15.0 1 GHz - 22.5
Skew	2.0 PS/ft typical, 3.5 PS/ft Max (within pair)
Velocity of Propogation	80% (nominal)
Capacitance	12.5 PF/ft nominal (between pairs, ground floating)
DWV	1500V RMS conductor/conductor 1000V RMS conductor/shield
Temperature Rating	FEP: -65° to +200° C Polyurethane: -30° to +105° C
Weight	3.5 lbs/100 ft

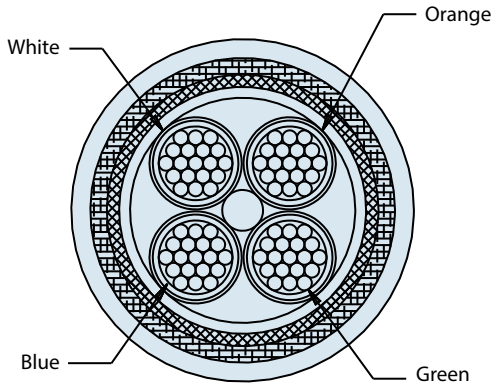

NOTES


- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

V

963-013: 100 ohm SATA/eSATA cable with polyurethane jacket

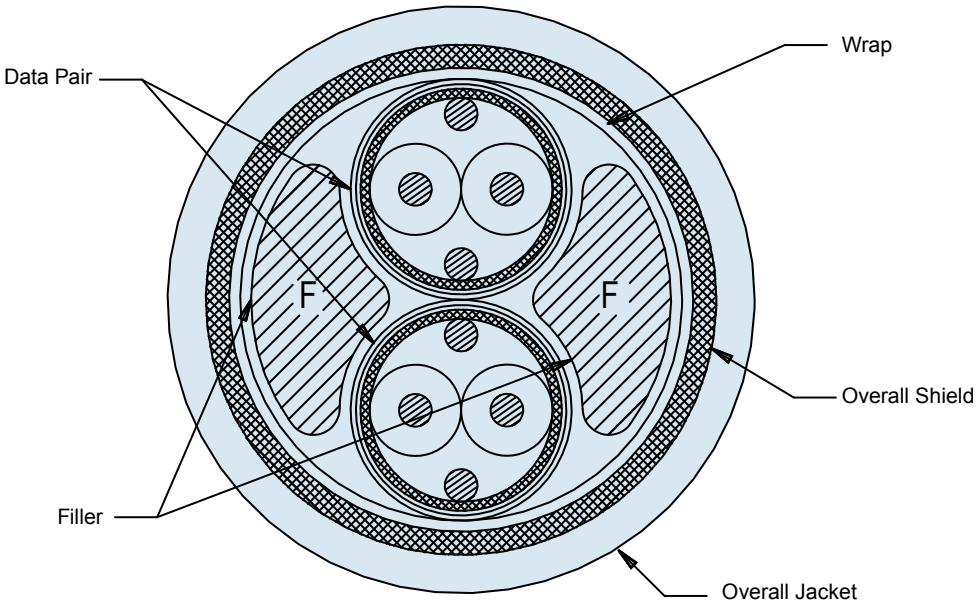

Construction Details	
Conductors	2x 28 AWG (7/36) silver plated copper
Insulation	.0115" NEWcel to .038" ± .002"
Drain Wire	2x 28 AWG (7/36) silver plated copper
Braid	44 AWG silver plated copper, 90% coverage minimum
Tape	.0015 Al/polyester, 50% lap (foil side in)
Jacket	.005" PFA to .099" ± .005
Wire Colors	white and blue (pair 1) white and orange (pair 2)
Filler	LSNW polyester
Wrap	.002" PTFE tape, 50% lap
Overall Shield	35 AWG tin copper braid, 90% coverage minimum
Overall Jacket	.035" polyurethane, .299" OD nominal, (black)
Marking	print on outer jacket in white ink


NOTES

- Cable identified with manufacturer's name and part number.
- Cable is sold in 1 foot increments. Specify desired length on purchase order.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

PRODUCT SELECTION GUIDE



Series 80 Mighty Mouse
Size 23, 20 and 16 Fiber Optic Contact Arrangements — Page W-2



Series 80 Mighty Mouse Size 23, 20 and 16 Fiber Optic Termini — Page W-4



Series 801 Mighty Mouse Plug Connectors — Page W-11



Series 801 Mighty Mouse Receptacle Connectors — Page W-13



Series 802 Mighty Mouse Plug Connectors — Page W-18



Series 802 Mighty Mouse Receptacle Connectors — Page W-20



Series 805 Mighty Mouse Plug Connectors — Page W-24



Series 805 Mighty Mouse Receptacle Connectors — Page W-26

W

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

















Series 80 Mighty Mouse
Fiber Optic Termini
Contact Arrangements

Series 80 Mighty Mouse Contact Arrangements							
Contact Size		Contact Quantity			Shell Size - Arrangement		
		#23	#20HD	#16	Series 801	Series 802	Series 805
Size #23 Fiber Optic Termini		3			5-3	5-3	N/A
		4			6-4	6-4	8-4
		6			6-6	6-6	8-6
		7			6-7	6-7	8-7
		10			7-10	7-10	9-10
		13			8-13	8-13	10-13
		19			9-19	9-19	11-19
		26			10-26	10-26	12-26
		31			11-31	11-31	13-31
		37			13-37	12-37	15-37
		55			16-55	14-55	18-55
		85			17-85	15-85	19-85
		100			19-100	19-100	21-100
		130			21-130	21-130	23-130
Size #20HD Fiber Optic Termini			3		6-23	6-23	8-23
			5		7-25	7-25	9-25
			8		8-28	8-28	10-28
			10		9-210	9-210	11-210
			20		13-220	12-220	15-220
			35		16-235	14-235	18-235
			41		17-241	15-241	19-241
			55		19-255	19-255	21-255
			69		21-269	21-269	23-269
Size #16 Fiber Optic Termini				1	6-1	6-1	8-1
				2	8-2	8-2	10-2
				4	9-4	9-4	11-4
				5	10-5	10-5	12-5
				7	13-7	12-7	15-7
				12	16-12	14-12	18-12
				14	17-14	15-14	19-14
				19	19-19	19-19	21-19
				22	21-22	21-22	23-22
Combo Arrangements							
Size #23 and #16 Fiber Optic Termini		4		2	9-200	9-200	11-200
		8		2	10-202	10-202	12-202
		20		2	13-202	12-202	15-202
		12		4	13-203	12-203	15-203
		40		2	16-204	14-204	18-204
		32		4	16-205	14-205	18-205
		40		4	17-203	15-203	19-203

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Size #23 Fiber Optic Termini
Contact Arrangements

	Series 80 Insert Arrangements for use with 23 Fiber Optic termini				
					
Series 801	5-3	6-4	6-6	6-7	7-10
Series 802	5-3	6-4	6-6	6-7	7-10
Series 805	N/A	8-4	8-6	8-7	9-10
					
Series 801	8-13	9-19	9-200	10-26	10-202
Series 802	8-13	9-19	9-200	10-26	10-202
Series 805	10-13	11-19	11-200	12-26	12-202
					
Series 801	11-31	13-37	13-202	13-203	16-55
Series 802	11-31	12-37	12-202	12-203	14-55
Series 805	13-31	15-37	15-202	15-203	18-55
					
Series 801	16-204	16-205	17-85	19-100	21-130
Series 802	14-204	14-204	15-85	19-100	21-130
Series 805	18-204	18-205	19-85	21-100	23-130

See Series 80 Mighty Mouse catalog for connector ordering information. Order connectors less contacts and order fiber optic termini separately. Cavity numbers are mating face view of pin connectors.

W

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **E-Mail: sales@glenair.com**

Series 80 Mighty Mouse
Size #23 Fiber Optic Termini
General Information



Series 801 Plug with
181-063 pin termini



Series 801 Receptacle with
181-064 socket termini

- **Single and Multi Mode**
- **Snap-in, Rear Release**
- **0.5 dB Typical Attenuation**
- **3 to 130 Channels**

Reduce size and weight with Series 80 Mighty Mouse fiber optic connectors

New size 23 fiber optic termini can be used in any standard Mighty Mouse connector but perform best in our Series 801, 804 and 805 systems. Available for single mode or multi mode fiber, these termini have low insertion loss and are intended for high-reliability aerospace applications. Series 80 connectors offer substantial reductions in size and weight compared to our D38999 type fiber optic connectors. Complete how to order instructions are included on the following pages. When ordering termini (sold seperately), please refer to the insert arrangement tables for count and size.

The Series 801 plug is less than half the size of our D38999 Series III type connector.



Series 801
Shell size 6, 4 channel
5 Grams
(less contacts)

D38999 Series III
Shell size 13, 4 channel
21 Grams
(less contacts)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Mighty Mouse

Size 23 fiber optic termini




181-063 Pin Terminus




181-064 Socket Terminus

Size 23 fiber optic termini are compatible with all Series 80 Mighty Mouse threaded connectors with size 23 cavities. Typical insertion loss 0.5 dB. Fits 50/125 and 62.5/125 multi mode and 9/125 single mode fiber.

Termini Type	Optical Fiber Type	Part Number	ØA Ferrule Hole*	Fiber Size Core/Cladding
Pin	Single Mode	181-063-1255	125.5 microns	9/125
	Multi Mode	181-063-126	126.0 microns	50/125, 62.5/125
Socket	Single Mode	181-064-1255	125.5 microns	9/125
	Multi Mode	181-064-126	126.0 microns	50/125, 62.5/125
*Consult factory for additional sizes				

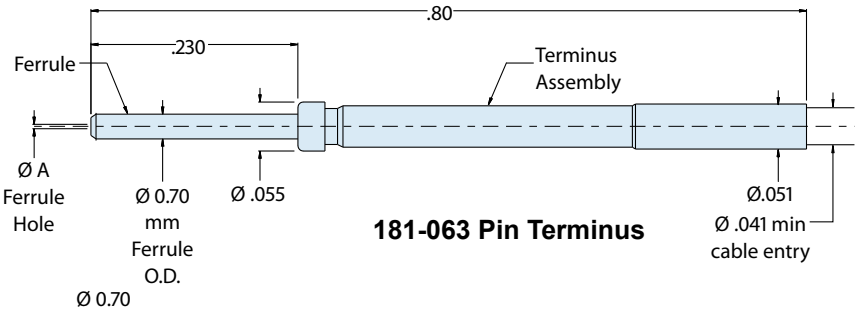

181-063 Pin Terminus

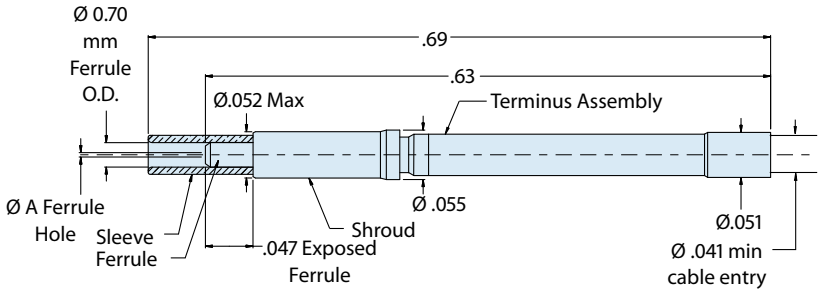

181-064 Socket Terminus

Materials and Finishes

181-063:

- Ferrule: zirconia ceramic
- Terminus assembly: copper-nickel-zinc

181-064:

- Ferrule, terminus assembly: copper-nickel-zinc
- Spring (not shown): stainless steel/passivate
- Sleeve: phosphor bronze
- Insertion/extraction Tool
- Standard size 23 plastic tool
- Glenair Part Number 809-088

Application Notes

1. Alignment sleeve is supplied with terminus assembly and may be ordered separately (see Table II).
2. For grommet sealing plug, see Glenair part number 809-155
3. Consult factory for termination and assembly procedures/tools.

Table II: Accessories	
181-064-K	Alignment Sleeve

Table I: Performance Specifications	
Optical Insertion Loss	0.5 dB typical
Operating Temperature	-65°C to +150°C/ Connector -65°C to +200°C/ Termini
Temperature (Thermal) Shock	-57°C to +85°C, 10 cycles, per TIA/EIA-455-71, Test Schedule C (ref MIL-DTL-83526/20A). CIT of 0.5 dB max during and after test.
Mating Durability	500 cycles, per TIA/EIA-455-21 (ref MIL-PRF-29504B). CIT of 0.5 dB max during and after test.
Mechanical Shock - Half-sine Pulse	50 G Peak, 5 shocks per axis (30 total shocks), per TIA-455-14, Test Condition A (ref MIL-DTL-83526/20A). Discontinuity of 0.5 dB max for 50 microseconds. CIT of 0.5 dB max after test.
Vibration - Sinusoidal	10 G Peak, 10-2000 Hz, 4 hours per axis (3 axes total), at ambient temperature, per TIA/EIA-455-11, Test Condition III (ref MIL-DTL-83526C). Discontinuity of 0.5 dB max for 50 microseconds max monitored during test. CIT of 0.5 dB max after test.
Vibration - Random	9 G RMS, 0.06 PSD, 1.5 hours per axis (3 axes total), at ambient temperature, per TIA/EIA-455-11, Test Condition VI, Test Letter C (ref MIL-DTL-83526C). Discontinuity of 0.5 dB max for 50 microseconds max monitored during test. CIT of 0.5 dB Max after test.
*Depending on cable and epoxy used.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Size #20HD Fiber Optic Termini
General Information



Series 801 Receptacle with 181-084 pin termini










Series 801 Plug with 181-085 socket termini

- **Single Mode and Multi Mode**
- **Snap-in, Rear Release**
- **Precision Ceramic Ferrules**
- **0.5 dB Typical Attenuation**
- **3 to 69 Channels**

Reduce size and weight with Series 80 Mighty Mouse fiber optic connectors

New size 20HD fiber optic termini can be used in any standard Mighty Mouse connector but perform best in our Series 801, 804 and 805 systems. Available for single mode or multi mode fiber, these termini have low insertion loss and are intended for high-reliability aerospace applications. Series 80 connectors offer substantial reductions in size and weight compared to our D38999 type fiber optic connectors. Complete how to order instructions are included on the following pages. When ordering termini (sold seperately), please refer to the insert arrangement tables for count and size.

	Series 80 Insert Arrangements for use with #20HD Fiber Optic termini				
					
Series 801	6-23	7-25	8-28	9-210	13-220
Series 802	6-23	7-25	8-28	9-210	12-220
Series 805	8-23	9-25	10-28	11-210	15-220
					
Series 801	16-235	17-241	19-255		
Series 802	14-235	15-241	19-255		
Series 805	18-235	19-241	21-255		

See Series 80 Mighty Mouse catalog for connector ordering information. Order connectors less contacts and order fiber optic termini separately. Cavity numbers are mating face view of pin connectors.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Mighty Mouse

Size 20HD fiber optic termini



181-084 Pin Terminus




181-085 Socket Terminus


Size 20HD fiber optic termini are compatible with all Series 80 Mighty Mouse threaded coupling connectors with size 20HD cavities. These snap-in, rear-release termini feature precision ceramic ferrules and sleeves for accurate fiber alignment. Typical insertion loss 0.5 dB. Fits 50/125 and 62.5/125 multi mode and 9/125 single mode fiber.

Termini Type	Optical Fiber Type	Part Number	ØA Ferrule Hole*	Fiber Size Core/Cladding
Pin	Single Mode	181-084-1255	125.5 microns	9/125
	Multi Mode	181-084-126	126.0 microns	50/125, 62.5/125
Socket	Single Mode	181-085-1255	125.5 microns	9/125
	Multi Mode	181-085-126	126.0 microns	50/125, 62.5/125

*Consult factory for additional sizes

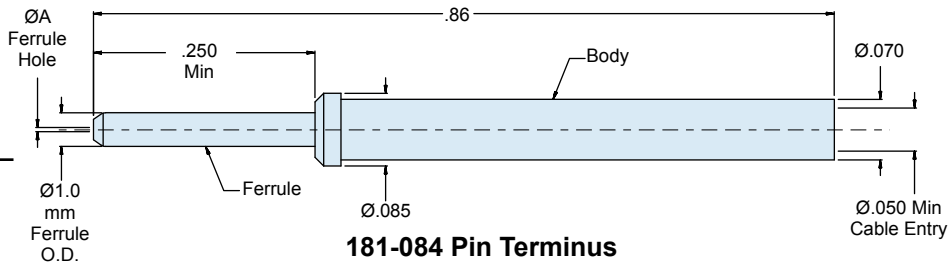

181-084 Pin Terminus

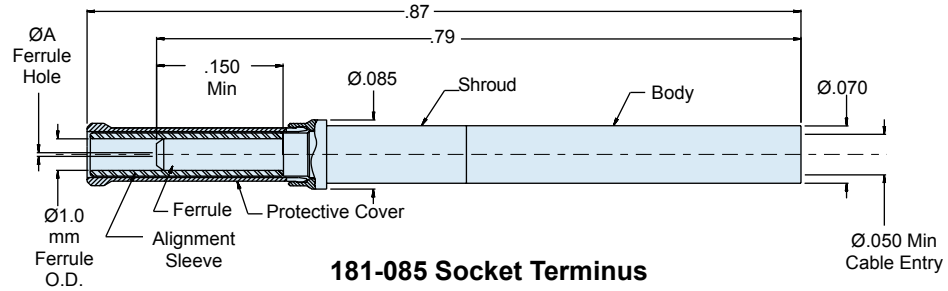

181-085 Socket Terminus

NOTES

Materials and Finishes

181-084 :

- Ferrule: zirconia ceramic
- Body: copper-nickel-zinc alloy

181-085:

- Ferrule, alignment sleeve: zirconia ceramic
- Body, shroud: copper-nickel-zinc alloy
  Spring (not shown): stainless steel/ passivate
  Protective cover: spring alloy/nickel
- Insertion/extraction Tool
- Standard size 20HD plastic tool
- Glenair Part Number **859-017**
- Military Part Number M81969/39-01

Application Notes

- Alignment sleeve and protective cover are supplied with socket terminus assembly, and may be ordered separately (see accessories table).
- For grommet sealing plug, see Glenair part number 859-012
- Consult factory for termination and assembly procedures/tools.















Table II: Accessories	
181-085-S	Ceramic Alignment Sleeve
181-085-C	Protective Cover

Table I: Performance Specifications	
Optical Insertion Loss	0.5 dB typical
Operating Temperature	-65°C to +150°C/Connector -65°C to +200°C/Termini*
Temperature (Thermal) Shock	-55°C to +85°C, 10 cycles, per TIA/EIA-455-71, Test Schedule C. 0.5 dB max IL before test. 0.5 dB max CIT during and after test.
Temperature Cycling	-55°C to +85°C, 5 cycles, per TIA/EIA-455-3, Test Condition A. 0.5 dB max IL before test. 0.5 dB max CIT during and after test.
Mating Durability	500 cycles, per TIA/EIA-455-21. 0.5 dB max IL before test. 0.5 dB max CIT during and after test.
Vibration - Random	49.5 G RMS, 24-2000 Hz, 8 hours per Axis (longitudinal and perpendicular) at Ambient Temperature, per EIA-364-28, Test Condition V. 0.5 dB max IL before test. 0.5 dB max CIT after test. Discontinuity of 0.5 dB max for 50 microseconds.
Mechanical Shock (Half-sine Pulse)	300 G Peak, 6 Shocks per Axis, per TIA-455-14, Test Condition D. 0.5 dB max IL before test. 0.5 dB max CIT after test. Discontinuity of 0.5 dB max for 50 microseconds.
*Depending on cable and epoxy used.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Size #16 Fiber Optic Termini
Contact Arrangements

	Series 80 Insert Arrangements for use with #16 Fiber Optic termini				
					
Series 801	6-1	8-2	9-4	9-200	10-5
Series 802	6-1	8-2	9-4	9-200	10-5
Series 805	8-1	10-2	11-4	11-200	12-5
					
Series 801	10-202	12-7	13-202	13-203	16-12
Series 802	10-202	13-7	12-202	12-203	14-12
Series 805	12-202	15-7	15-202	15-203	18-12
					
Series 801	16-204	16-205	17-14	17-203	19-19
Series 802	14-204	14-204	15-14	15-203	19-19
Series 805	18-204	18-205	19-14	19-203	21-13
					
Series 801	21-22				
Series 802	21-22				
Series 805	23-22				

See Series 80 Mighty Mouse catalog for connector ordering information. Order connectors less contacts and order fiber optic termini separately. Cavity numbers are mating face view of pin connectors.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **E-Mail: sales@glenair.com**



Series 801 Plug with
181-057 pin terminus



Series 801 receptacle with
181-075 socket terminus

- **Single Mode and Multi Mode**
- **Snap-in, Rear Release**
- **Precision Ceramic Ferrules**
- **0.5 dB Typical Attenuation**
- **1 to 22 Channels**

Reduce size and weight with Series 80 Mighty Mouse fiber optic connectors

New size 16 fiber optic termini can be used in any standard Mighty Mouse connector but perform best in our Series 801, 804 and 805 systems. Available for single mode or multi mode fiber, these termini have low insertion loss and are intended for high-reliability aerospace applications. Series 80 connectors offer substantial reductions in size and weight compared to our D38999 type fiber optic connectors. Complete how to order instructions are included on the following pages. When ordering termini (sold seperately), please refer to the insert arrangement tables for count and size.

The Series 801 9-4 receptacle is less than half the size of our D38999 type connector.



Series 801
6 Grams
(less contacts)



D38999 Series III
27 Grams
(less contacts)

Dimensions in Inches (millimeters) are subject to change without notice.

Series 80 Mighty Mouse
Contacts and Tools
Size #16 Fiber Optic Termini 181-057 and 181-075

Size 16 fiber optic termini

Size 16 fiber optic termini are compatible with all Series 80 Mighty Mouse threaded coupling connectors with size 16 cavities. These snap-in, rear-release termini feature precision ceramic ferrules and sleeves for accurate fiber alignment. Typical insertion loss 0.5 dB. Fits 50/125 and 62.5/125 multi mode and 9/125 single mode fiber.




181-057 Pin Terminus



181-075 Socket Terminus

Termini Type	Optical Fiber Type	Part Number	A Ferrule I.D.
Pin	Single Mode	181-057-125	125.5 microns
	Multi Mode	181-057-126	126.0 microns
Socket	Single Mode	181-075-125	125.5 microns
	Multi Mode	181-075-126	126.0 microns
*Consult factory for additional sizes			

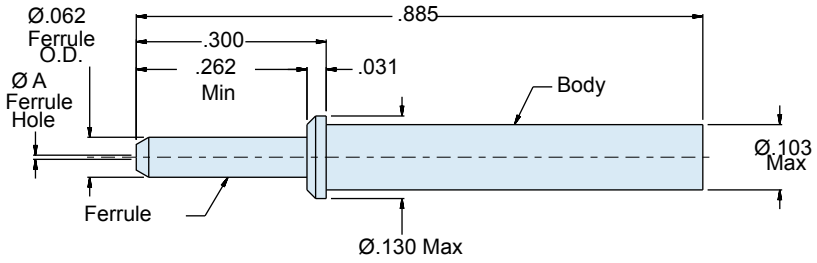

181-057 Pin Terminus


MATERIALS AND FINISHES

181-057 :

- Ferrule: zirconia ceramic
- Body: stainless steel, passivated

181-075:

- Ferrule, alignment sleeve: zirconia ceramic
- Terminus assembly: stainless steel/ passivate
  Spring: stainless steel/passivate
  Protective cover: spring alloy/nickel
- Insertion/extraction Tool
- Standard size 16 plastic tool
- Glenair Part Number **809-131**
- Military Part Number M81969/14-03
- Consult factory for termination and assembly procedures/tools.

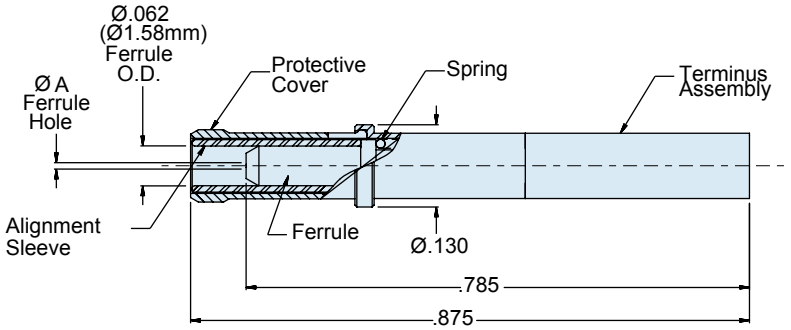

181-075 Socket Terminus

Table II: Accessories	
181-001-S	Ceramic Alignment Sleeve
181-075-C	Protective Cover

Table I: Performance Specifications	
Optical Insertion Loss	0.5 dB typical
Operating Temperature	-65°C to +150°C/Connector -65°C to +200°C/Termini*
Mating Durability	TIA/EIA-455-21, 500 cycles (Per MIL-PRF-29504B)
*Depending on cable and epoxy used.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Series 801 Mighty Mouse
Double-Start ACME Threads Plug
801-007 and 801-008 Ordering Information



Series 801 Plug Connector

Glenair's Series 801 Mighty Mouse connector features a double-start modified stub ACME mating thread for improved protection against cross-mating and thread damage. Connector shells are machined aluminum or stainless steel, and are designed to accommodate (depending on insert arrangement) Glenair size 16, 20HD, or 23 fiber optic termini (termini sold separately.) Metal clips inside the connector body lock the termini into place. Termini are removable. Fluorosilicone seals and rear grommet protect the connector from water ingress. Choose hex or knurled coupling nut. Terminate cable shield directly to connector body with Band-Master™ strap, or choose rear accessory thread to attach optional backshell. Available in shell sizes 5 through 21 in 30 insert arrangements.

How To Order							
Sample Part Number		801-007	-16	M	7-10	A	A
Series (See Table I)	**801-007** = With Banding Platform **801-008** = With Rear Accessory Thread						
Shell Style	**-16** = Plug with Anti-Decoupling Spring **-26** = Self-Locking Plug with Ratchet Mechanism (the "Clicker")						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement	See Insert Arrangements page W-3, W-6, W-8						
Contact Type	**Connector supplied without termini. Please indicate pin or socket.** **A** = Pin Connector, Less Termini **B** = Socket Connector, Less Termini						
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F						

Table I: Series




	
801-007 Banding Platform	**801-008** Rear Accessory Thread

Table II: Key Positions


	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°




Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 801 Mighty Mouse
Double-Start ACME Threads Plug
801-007 and 801-008 Dimensions

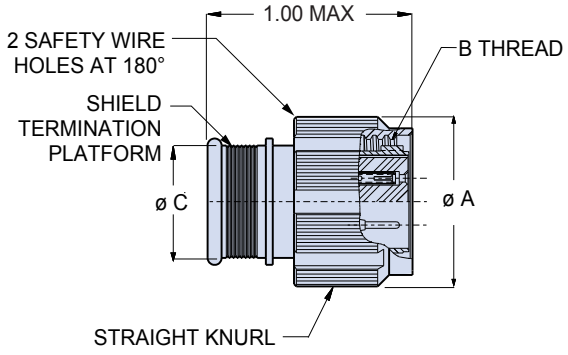

Integral Band Platform
801-007

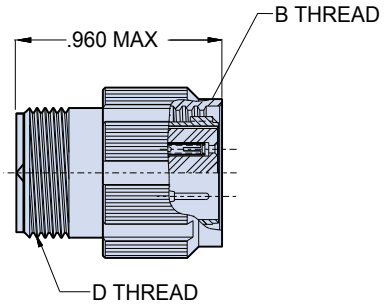

Accessory Thread
801-008



* For all size #8 arrangements, add .320" to overall length. For -26 add .127 (3.23)

Dimensions								
Shell Size	Ø A Style 16		Ø A Style 26		B Thread	Ø C		D Thread
	In.	mm.	In.	mm.		In.	mm.	
5	0.54	13.72	0.65	16.51	.3125-.05P-.1L-DS-2B	.245	6.22	.2500-32 UNEF-2A
6	0.60	15.24	0.69	17.53	.3750-.05P-.1L-DS-2B	.290	7.37	.3125-32 UNEF-2A
7	0.69	17.53	0.79	20.07	.4375-.05P-.1L-DS-2B	.390	9.91	.4375-28 UNEF-2A
8	0.75	19.05	0.83	21.08	.5000-.05P-.1L-DS-2B	.445	11.30	.5000-28 UNEF-2A
9	0.81	20.57	0.92	23.37	.5625-.05P-.1L-DS-2B	.500	12.70	.5625-24 UNEF-2A
10	0.88	22.35	0.98	24.89	.6250-.05P-.1L-DS-2B	.560	14.22	.6250-24 UNEF-2A
11	0.92	23.37	1.02	25.91	.6875-.05P-.1L-DS-2B	.605	15.37	.6875-24 UNEF-2A
13	1.05	26.67	1.10	27.94	.8125-.1P-.2L-DS-2B	.650	16.51	.6875-24 UNEF-2A
16	1.24	31.50	1.34	34.04	1.0000-.1P-.2L-DS-2B	.805	20.45	.9375-24 UNEF-2A
17	1.30	33.02	1.45	36.83	1.0625-.1P-.2L-DS-2B	.850	21.59	.9375-24 UNEF-2A
19	1.40	35.56	1.50	38.10	1.1875-.1P-.2L-DS-2B	1.003	25.48	1.0625-24 UNEF-2A
21	1.55	39.37	1.65	41.91	1.3125-.1P-.2L-DS-2B	1.110	28.19	1.1875-24 UNEF-2A

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse
Double-Start ACME Threads Crimp Receptacle
801-009 and 801-010 - Ordering Information



In-Line
Shell Style 01




Rear Panel Jam Nut Mount
Shell Style 07




Square Flange Mount
Shell Style 02

How To Order						
Sample Part Number	**801-010**	**-02**	**Z1**	**16-55**	**B**	**A**
Series (See Table I)	**801-009** Receptacle with Banding Platform **801-010** Receptacle with Accessory Thread					
Shell Style (See Table III)	**-01** = In-Line Receptacle for Free-Hanging Cables **-02** = Thru Hole Square Flange Receptacle for Front or Rear Panel Mounting **-07** = Jam Nut Receptacle for Rear Panel Mounting **-12** = Square Flange Receptacle for Rear Panel Mounting with "Non-Locking" Clinch Nuts **-22** = Square Flange Receptacle for Rear Panel Mounting with "Locking" Clinch Nuts					
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arr	See Insert Arrangements page W-3, W-6, W-8					
Contact Type	**Connector supplied without termini. Please indicate pin or socket.** **A** = Pin Connector, Less Termini **B** = Socket Connector, Less Termini					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series




800-009
Banding Platform






801-010
Rear Accessory Thread

Table II: Keyway Positions



	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Table III: Shell Style


		
Style -01 In-line	**Style -02, -12, -22** Square Flange	**Style -07** Jam Nut

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Threads
In-Line Receptacle
801-009-01 and 801-010-01 - Dimensions

In-line receptacle- shell style 01

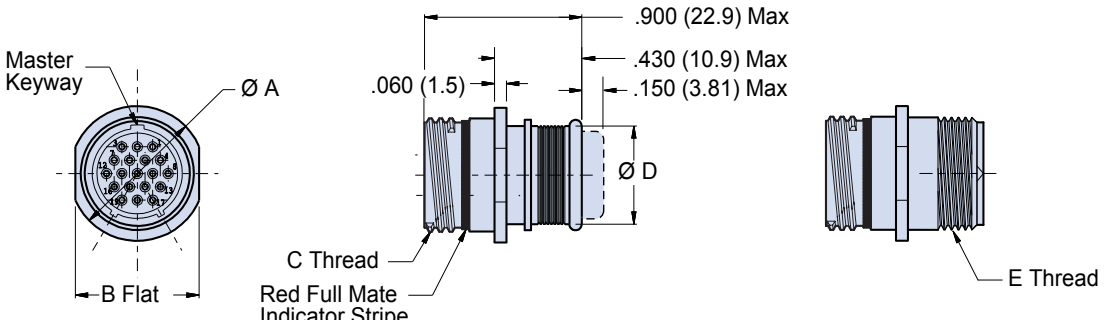

Integral Band Platform
801-009-01

Accessory Thread
801-010-01


Dimensions								
Shell Size	Ø A		B Flat		C Thread	Ø D		E Thread UNEF-2A
	In.	mm.	In.	mm.		In.	mm.	
5	.355	9.02	.325	8.13	.3125-.05P-.1L-DS-2A	.245	6.22	.2500-32
6	.415	10.54	.385	9.78	.3750-.05P-.1L-DS-2A	.290	7.37	.3125-32
7	.480	12.19	.445	11.30	.4375-.05P-.1L-DS-2A	.390	9.91	.4375-28
8	.540	13.72	.510	12.95	.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28
9	.605	15.37	.575	14.61	.5625-.05P-.1L-DS-2A	.500	12.70	.5625-24
10	.665	16.89	.635	16.13	.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24
11	.730	18.54	.700	17.78	.6875-.05P-.1L-DS-2A	.605	15.37	.6875-24
13	.855	21.72	.825	20.96	.8125-.1P-.2L-DS-2A	.650	16.51	.6875-24
16	1.040	26.42	1.010	25.65	1.0000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.110	28.19	1.070	27.18	1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
19	1.243	31.57	1.191	30.25	1.1875-.1P-.2L-DS-2A	1.003	25.48	1.0625-18
21	1.375	34.93	1.312	33.32	1.3125-.1P-.2L-DS-2A	1.110	28.19	1.1875-18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com **E-Mail: sales@glenair.com**

Square flange receptacle- shell style 02

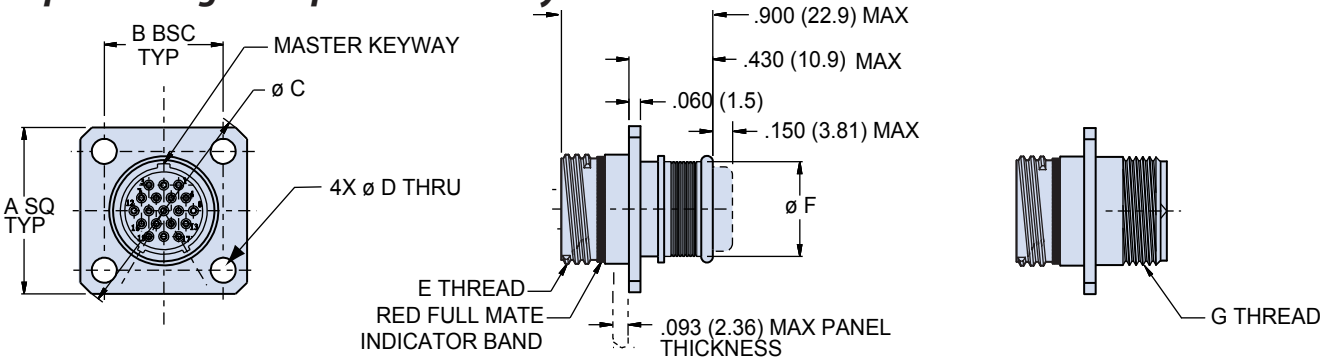


Integral Band Platform
801-009-02

Accessory Thread
801-010-02

Dimensions												
Shell Size	A SQ		B BSC		Ø C		Ø D		E Thread	Ø F		G Thread UNEF-2A
	In.	mm.	In.	mm.	In.	mm.	In.	mm.		In.	mm.	
5	.530	13.46	.363	9.22	.680	17.27	.096 .091	2.44 2.31	.3125-.05P-.1L-DS-2A	.245	6.22	.2500-32
6	.590	14.99	.423	10.74	.750	19.05			.3750-.05P-.1L-DS-2A	.290	7.37	.3125-32
7	.650	16.51	.483	12.27	.850	21.59			.4375-.05P-.1L-DS-2A	.390	9.91	.4375-28
8	.712	18.08	.545	13.84	.938	23.83			.5000-.05P-.1L-DS-2A	.445	11.30	.5000-28
9	.850	21.59	.607	15.42	1.125	28.58	.130 .126	3.30 3.20	.5625-.05P-.1L-DS-2A	.500	12.70	.5625-24
10	.890	22.61	.670	17.02	1.188	30.18			.6250-.05P-.1L-DS-2A	.560	14.22	.6250-24
11	.935	23.75	.715	18.16	1.250	31.75			.6875-.05P-.1L-DS-2A	.605	15.37	.6875-24
13	1.030	26.16	.812	20.62	1.375	34.93			.8125-.1P-.2L-DS-2A	.650	16.51	.6875-24
16	1.219	30.96	.981	24.92	1.625	41.28			1.0000-.1P-.2L-DS-2A	.805	20.45	.9375-20
17	1.280	32.51	1.060	26.92	1.700	43.18			1.0625-.1P-.2L-DS-2A	.850	21.59	.9375-20
19	1.432	36.37	1.191	30.25	1.900	48.26			1.1875-.1P-.2L-DS-2A	1.003	25.48	1.0625-18
21	1.565	39.75	1.322	33.58	2.100	53.34			1.3125-.1P-.2L-DS-2A	1.110	28.19	1.1875-18

Series 801 Panel Cutout




Shell Size	Ø A		B BSC		Ø C	
	In	mm.	In	mm.	In	mm.
5	.328	8.33	.363	9.22	.096 .091	2.44 2.31
6	.390	9.91	.423	10.74		
7	.453	11.51	.483	12.27		
8	.515	13.08	.545	13.84		
9	.578	14.68	.607	15.42	.130 .126	3.30 3.20
10	.640	16.26	.670	17.02		
11	.703	17.86	.715	18.16		
13	.828	21.03	.812	20.62		
16	1.015	25.78	.981	24.92		
17	1.078	27.38	1.060	26.92		
19	1.203	30.56	1.191	30.25		
21	1.328	33.73	1.322	33.58		

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse Double-Start ACME Threads
Jam Nut Receptacle
801-009-07 and 801-010-07 - Dimensions

Jam nut, rear panel mount receptacle - shell style 07

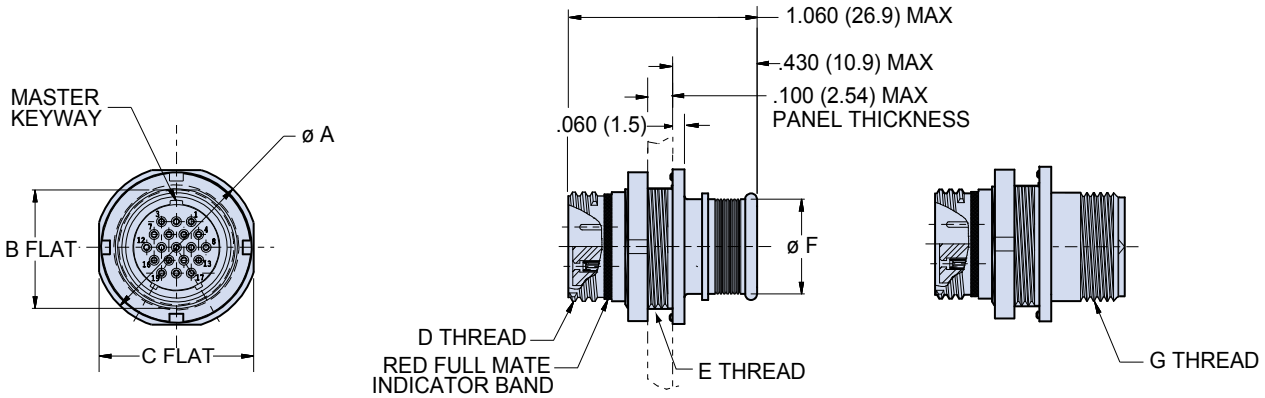


Integral Band Platform
801-009-07

Accessory Thread
801-010-07

Dimensions											
Shell Size	Ø A		B Flat		C Flat		D Thread	E Thread UN-2A	Ø F		G Thread UN-2A
	In.	mm.	In.	mm.	In.	mm.			In.	mm.	
5	.575	14.61	.350	8.89	.545	13.84	.3125-.05P-.1L-2A	.375-28	.245	6.22	.250-32
6	.635	16.13	.410	10.41	.595	15.11	.375-.05P-.1L-2A	.4375-28	.290	7.37	.3125-32
7	.755	19.18	.536	13.61	.723	18.36	.4375-.05P-1L2A	.5625-32	.390	9.91	.4375-28
8	.755	19.18	.536	13.61	.723	18.36	.5000-.05P-.1L-2A	.5625-32	.445	11.30	.5000-28
9	.830	21.08	.596	15.14	.790	20.07	.5625-.05P-.1L-2A	.625-28	.500	12.70	.5625-24
10	.890	22.61	.658	16.71	.855	21.72	.6250-.05P-.1L-2A	.6875-28	.560	14.22	.6250-24
11	.960	24.38	.718	18.24	.925	23.50	.6875-.05P-.1L-2A	.7500-28	.605	15.37	.6875-24
13	1.078	27.38	.845	21.46	1.044	26.52	.8125-.1P-.2L-2A	.875-28	.650	16.51	.6875-24
16	1.264	32.11	1.022	25.96	1.230	31.24	1.000-.1P-.2L-2A	1.0625-20	.805	20.45	.9375-20
17	1.325	33.66	1.096	27.84	1.290	32.77	1.062-.1P-.2L-2A	1.125-28	.850	21.59	.9375-20
19	1.450	36.83	1.227	31.17	1.415	35.94	1.1875-.1P-.2L-2A	1.2500-28	1.003	25.48	1.0625-18
21	1.625	41.28	1.347	34.21	1.577	40.06	1.3125-.1P-.2L-2A	1.375-28	1.110	28.19	1.1875-18

Series 801 Jam Nut Panel Cutout




Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .002	mm. ± 0.05
5	.356	9.04	.385	9.78
6	.416	10.57	.447	11.35
7	.542	13.77	.572	14.53
8	.542	13.77	.572	14.53
9	.602	15.29	.635	16.13
10	.666	16.92	.697	17.70
11	.730	18.54	.760	18.44
13	.851	21.62	.885	22.48
16	1.028	26.11	1.075	27.31
17	1.102	27.99	1.135	28.83
19	1.243	31.57	1.260	32.00
21	1.354	34.39	1.385	35.18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Rear panel mount receptacle - shell style 12 and 22

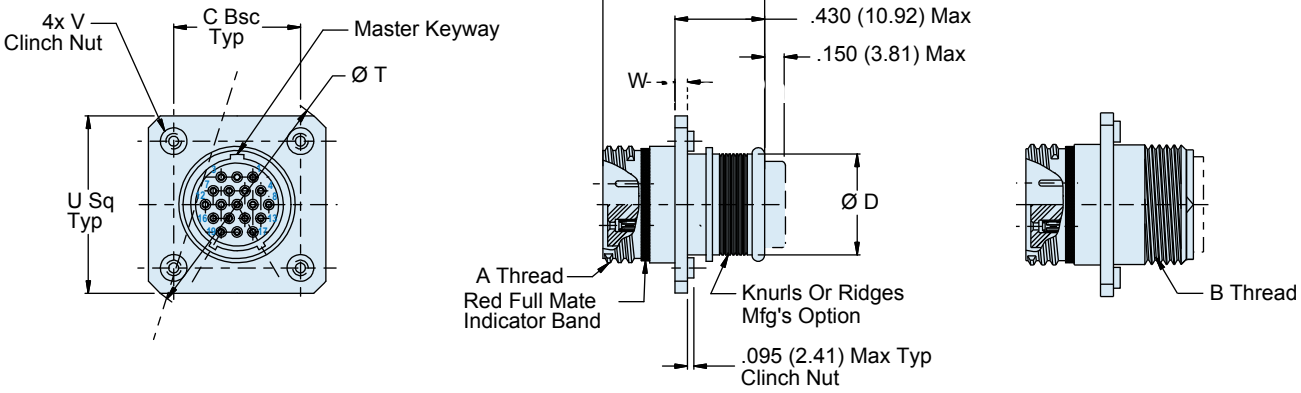


Integral Band Platform
801-009-12 and 801-009-22

Accessory Thread
801-010-12 and 801-010-22

	Dimensions						
Shell Size	A Thread	B Thread	C BSC	Ø T	U SQ	V Clinch Nut	W
5	.3125-.05P-.1L-DS-2A	.2500-32 UNEF-2A	0.363	0.774	0.623	2-56	0.030
6	.3750-.05P-.1L-DS-2A	.3125-32 UNEF-2A	0.423	0.860	0.683		
7	.4375-.05P-.1L-DS-2A	.4375-28 UNEF-2A	0.483	0.944	0.743		
8	.5000-.05P-.1L-DS-2A	.5000-28 UNEF-2A	0.545	1.032	0.805		
9	.5625-.05P-.1L-DS-2A	.5625-24 UNEF-2A	0.607	1.180	0.927	4-40	0.060
10	.6250-.05P-.1L-DS-2A	.6250-24 UNEF-2A	0.670	1.268	0.990		
11	.6875-.05P-.1L-DS-2A	.6875-24 UNEF-2A	0.715	1.331	1.035		
13	.8125-.1P-.2L-DS-2A	.6875-24 UNEF-2A	0.812	1.470	1.132		
16	1.0000-.1P-.2L-DS-2A	.9375-20 UNEF-2A	0.981	1.708	1.301		
17	1.0625-.1P-.2L-DS-2A	.9375-20 UNEF-2A	1.060	1.822	1.382		
19	1.1875-.1P-.2L-DS-2A	1.0625-18 UNEF-2A	1.191	2.006	1.511		
21	1.3125-.1P-.2L-DS-2A	1.1875-18 UNEF-2A	1.322	2.190	1.642		

Series 801 Front and Rear Mount Panel Cutout



G Bsc	H Holes	Ø R
0.363	0.096 0.091	0.328
0.423		0.390
0.483		0.453
0.545		0.515
0.607	0.130 0.126	0.578
0.670		0.640
0.715		0.703
0.812		0.828
0.981		1.015
1.060		1.078
1.191		1.203
1.322		1.328

NOTES

1. Grommet protrudes for power/ combo/#8 arrangements.
2. For all #8 arrangements, add .100" to length of banding platform.
3. For all #8 arrangements, add .340" to overall length.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 "Aqua Mouse" Submersible Plug

802-008 and 802-009 - Ordering Information




Glenair's Series 802 Mighty Mouse connectors feature stainless steel or marine bronze shells with marine bronze coupling nuts to withstand corrosion in the most hostile environments, and are designed to accommodate (depending on insert arrangement) Glenair size 16, 20HD, or 23 fiber optic termini (termini sold separately.) Metal clips inside the connector body lock the termini into place. Termini are removable. Rated for 3500 PSI when mated, these connectors are suitable for the most demanding geophysical and underwater applications. Terminate cable shield directly to integral shield attachment platform with Band-Master™ strap, or choose rear accessory thread to attach optional backshell. Available in shell sizes 1 through 21 in 30 insert arrangements.


W

How To Order							
Sample Part Number		**802-009**	**-06**	**Z1**	**9-19**	**A**	**A**
Series (See Table I)	**802-008** = Plug with Banding/ Molding Platform **802-009** = Plug with Accessory Thread						
Shell Style	**-06** = Plug						
Shell Material and Finish	**Z1** = Stainless Steel/Passivated RoHS Compliant **ZM** = Stainless Steel/ Electroless Nickel Plated **AB** = Marine Bronze						
Shell Size - Insert Arrangement	See Contact Arrangements page W-3, W-6, W-8						
Contact Type	**Connector Supplied without Termini.** **A** = Pin Connector, Less Termini P = Pin, Crimp **B** = Socket Connector, Less Termini S = Socket, Crimp						
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F						

Table I: Series




802-008
Hex Plug with Banding/Molding Platform



802-009
Hex Plug with Accessory Thread


Table II: Key Positions



Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

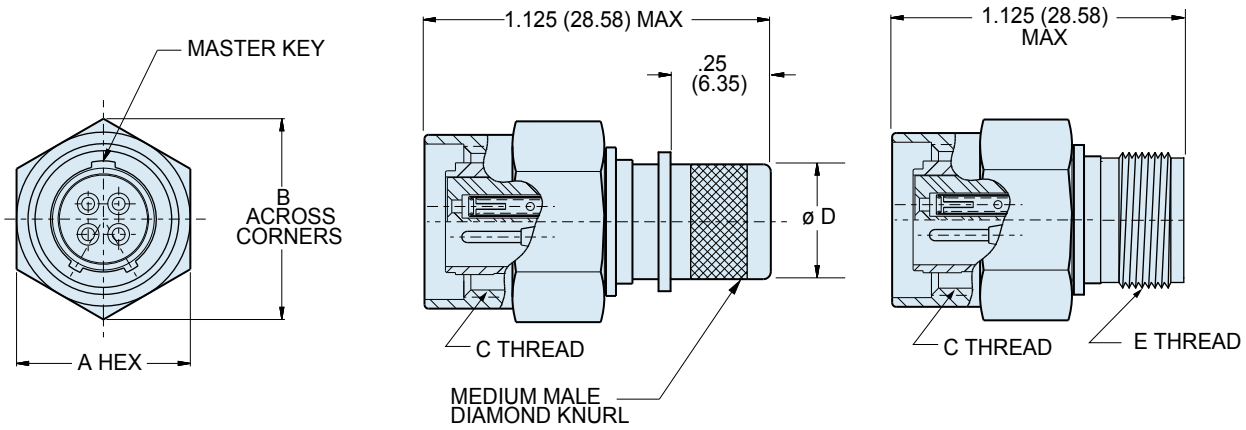

Integral Band Platform
802-006

Accessory Thread
802-009


Dimensions								
Shell Size	A Hex		B Max.		C	Ø D		E Threads Accessory
	In.	mm.	In.	mm.	Mating Threads	In.	mm.	
5	.500	12.70	.560	14.22	.438-28 UNEF	.232	5.90	.2500-32 UNEF-2A
6	.625	15.88	.720	18.29	.562-20 UN	.312	7.92	.3125-32 UNEF-2A
7	.688	17.48	.780	19.81	.625-20 UN	.375	9.53	.4375-28 UNEF-2A
8	.750	19.05	.860	21.84	.687-20 UN	.438	11.13	.5000-28 UNEF-2A
9	.812	20.62	.930	23.62	.750-20 UNEF	.500	12.70	.5625-24 UNEF-2A
10	.875	22.23	1.000	25.40	.812-20 UNEF	.562	14.27	.6250-24 UNEF-2A
12	.938	23.83	1.060	26.92	.875-20 UNEF	.656	16.66	.6875-24 UNEF-2A
14	1.125	28.58	1.250	31.75	1.062-20 UN	.812	20.62	.8750-20 UNEF-2A
15	1.188	30.18	1.320	33.53	1.125-20 UN	.885	22.40	.9375-20 UNEF-2A
21	1.562	39.67	1.700	43.18	1.437-20 UN	1.188	30.18	1.2500-18 UNEF-2A

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 802 "Aqua Mouse" Submersible Receptacle

802-010 and 802-011 Ordering Information



Jam Nut, Rear Mount




Square Flange

Three Shell Mounting Options: Jam nut with o-ring for rear panel mounting, square flange for front panel mounting, or in-line receptacles for free-hanging cables.


Two Shell Styles: Choose the integral band platform for direct attachment of a cable shield. Install a boot, or overmold a boot over the band platform. An accessory thread is available for attaching strain reliefs and backshells.

How To Order						
Sample Part Number	**802-011**	**-02**	**Z1**	**10-26**	**P**	**B**
Series (See Table I)	**802-010** Receptacle with Banding Platform **802-011** Receptacle with Accessory Thread					
Shell Style (See Table II)	**-01** = In-Line **-02** = Square Flange for Front Panel Mounting **-07** = Jam Nut for Rear Panel Mounting					
Shell Material and Finish	**Z1** = Stainless Steel/Passivated RoHS Compliant **ZM** = Stainless Steel/Electroless Nickel Plated **AB** = Marine Bronze/Unplated					
Shell Size - Insert Arrangement	See Contact Arrangements Page W-3, W-6, W-8					
Contact Type	**Connector supplied without termini. Please indicate pin or socket.** **A** = Pin Connector, less termini **B** = Socket Connector, less termini					
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




802-010
Receptacle with Banding Platform




802-011
Receptacle with Accessory Thread


Table II: Shell Style



-01
In-Line




-02
Square Flange



-07
Jam Nut for Rear Panel Mounting

Table II: Keyway Positions




	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In-line cable receptacle - shell style 01

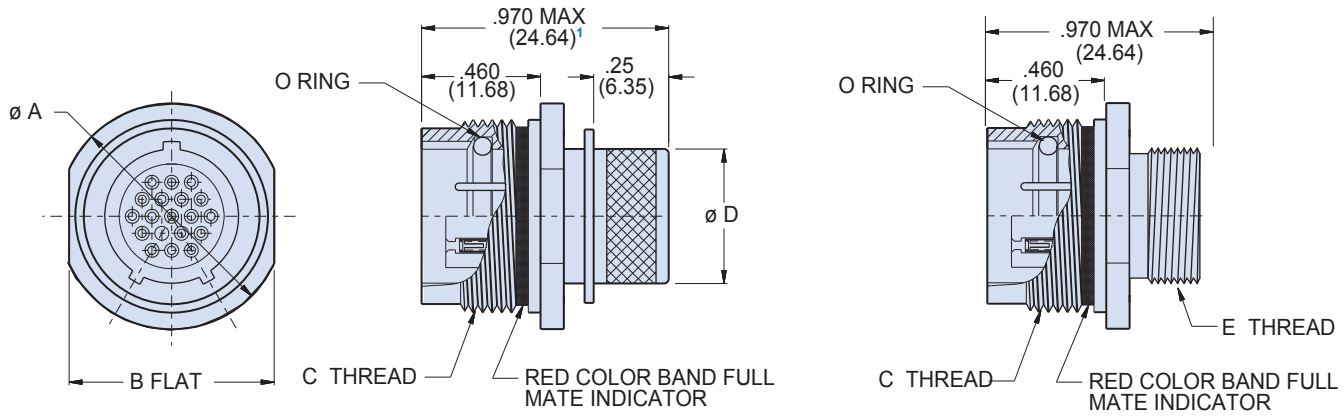

IN-LINE RECEPTABLE WITH
INTEGRAL BAND PLATFORM
802-010

Integral Band Platform

802-010

IN-LINE RECEPTACLE WITH
ACCESSORY THREAD
802-011

Accessory Thread

802-011

Dimensions								
Shell Size	Ø A		B Flats		C Mating Threads	Ø D		E Accessory Threads
	In.	mm.	In.	mm.		In.	mm.	
5	.560	14.22	.500	12.70	.438-28 UNEF	.232	5.90	.2500-32 UNEF-2A
6	.720	18.29	.625	15.88	.562-20 UN	.312	7.92	.3125-32 UNEF-2A
7	.780	19.81	.688	17.48	.625-20 UN	.375	9.53	.4375-28 UNEF-2A
8	.860	21.84	.750	19.05	.687-20 UN	.438	11.13	.5000-28 UNEF-2A
9	.930	23.62	.812	20.62	.750-20 UNEF	.500	12.70	.5625-24 UNEF-2A
10	1.000	25.40	.875	22.23	.812-20 UNEF	.562	14.27	.6250-24 UNEF-2A
12	1.060	26.92	.938	23.83	.875-20 UNEF	.656	16.66	.6875-24 UNEF-2A
14	1.250	31.75	1.125	28.58	1.062-20 UN	.812	20.62	.8750-20 UNEF-2A
15	1.320	33.53	1.188	30.18	1.125-20 UN	.885	22.40	.9375-20 UNEF-2A
21	1.690	42.93	1.562	39.67	1.4375-20 UN	1.188	30.18	1.2500-20 UNEF-2A


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 "Aqua Mouse" Submersible Square Flange Receptacle

802-010-02 and 802-011-02 Dimensions

Square flange, front panel mount receptacle - shell style 02

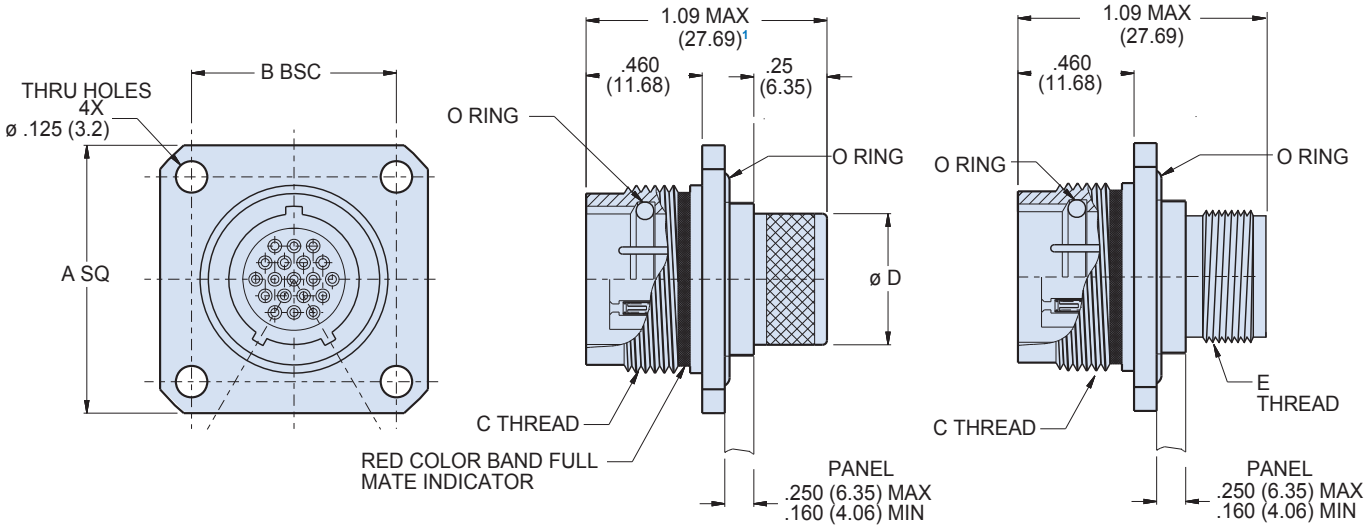

Integral Band Platform


802-010

Accessory Thread

802-011

Dimensions										
Shell Size	A Square		B Bsc.		C Mating Threads	Ø D		E Accessory Threads	Ø F	
	In.	mm.	In.	mm.		In.	mm.		In.	mm.
5	.885	22.48	.500	12.70	.438-28 UNEF	.232	5.90	.2500-32 UNEF-2A	.327	8.31
6	1.010	25.65	.625	15.88	.562-20 UN	.312	7.92	.3125-32 UNEF-2A	.390	9.91
7	1.072	27.23	.688	17.48	.625-20 UN	.375	9.53	.4375-28 UNEF-2A	.515	13.08
8	1.135	28.83	.750	19.05	.687-20 UN	.438	11.13	.5000-28 UNEF-2A	.577	14.66
9	1.195	30.35	.812	20.62	.750-20 UNEF	.500	12.70	.5625-24 UNEF-2A	.640	16.26
10	1.260	32.00	.875	22.23	.812-20 UNEF	.562	14.27	.6250-24 UNEF-2A	.702	17.83
12	1.322	33.58	.938	23.83	.875-20 UNEF	.656	16.66	.6875-24 UNEF-2A	.765	19.43
14	1.510	38.25	1.125	28.58	1.062-20 UN	.812	20.62	.8750-20 UNEF-2A	.953	24.21
15	1.573	39.95	1.188	30.18	1.125-20 UN	.885	22.40	.9375-20 UNEF-2A	1.015	25.78
21	1.750	44.45	1.375	34.93	1.4375-20 UN	1.188	30.18	1.2500-20 UNEF-2A	1.312	33.32


Series 802 Square Flange Panel Cutout

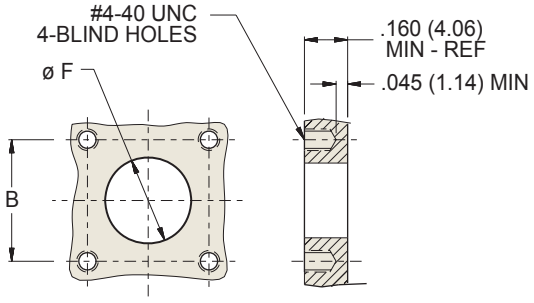

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Jam nut, rear panel mount receptacle - shell style 07

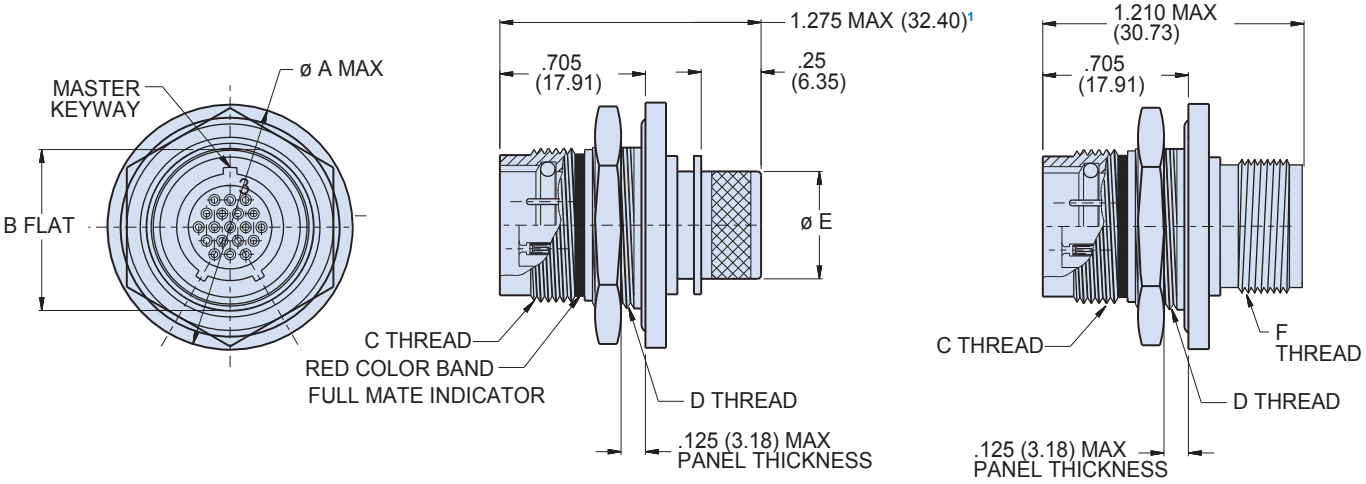


Integral Band Platform
802-010

Accessory Thread
802-011

W

Dimensions													
Shell Size	A Max.		B Flat		C Mating Threads	D Jam Nut Threads	Ø E		F Accessory Threads	G Flat		Ø H	
	In.	mm.	In. ± .003	mm. ±0.08			In.	mm.		In. ± .003	mm. ±0.08	In.	mm.
5	.885	22.48	.466	11.84	.438-28 UNEF	.500-32 UN-2A	.232	5.90	.2500-32 UNEF-2A	.477	12.12	.510	12.95
6	1.010	25.65	.591	15.01	.562-20 UN	.625-28 UN-2A	.312	7.92	.3125-32 UNEF-2A	.602	15.29	.635	16.13
7	1.072	27.23	.653	16.59	.625-20 UN	.687-28 UN-2A	.375	9.53	.4375-28 UNEF-2A	.664	16.87	.697	17.70
8	1.135	28.83	.716	18.19	.687-20 UN	.750-28 UN-2A	.438	11.13	.5000-28 UNEF-2A	.727	18.47	.760	19.30
9	1.195	30.35	.778	19.76	.750-20 UNEF	.812-28 UN-2A	.500	12.70	.5625-24 UNEF-2A	.789	20.04	.822	20.88
10	1.260	32.00	.827	21.01	.812-20 UNEF	.875-28 UN-2A	.562	14.27	.6250-24 UNEF-2A	.838	21.29	.885	22.48
12	1.322	33.58	.890	22.61	.875-20 UNEF	.938-28 UN-2A	.656	16.66	.6875-24 UNEF-2A	.901	22.89	.948	24.08
14	1.510	38.25	1.077	27.36	1.062-20 UN	1.125-28 UN-2A	.812	20.62	.8750-20 UNEF-2A	1.088	27.64	1.135	28.83
15	1.572	39.93	1.140	28.96	1.125-20 UN	1.188-28 UN-2A	.885	22.40	.9375-20 UNEF-2A	1.151	29.24	1.198	30.43
21	1.940	49.28	1.464	37.19	1.4375-20 UN	1.500-28 UN-2A	1.188	30.18	1.2500-20 UNEF-2A	1.473	37.41	1.510	39.12

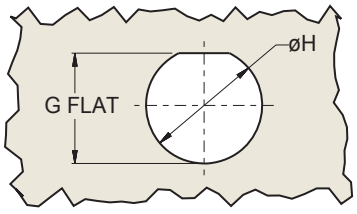

RECOMMENDED PANEL CUTOUT

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start Plug
805-001 and 805-002 Ordering Information



Glenair's Series 805 Mighty Mouse connectors feature a spring mechanism in the coupling nut that locks into radial teeth on the plug barrel. This features allows the Series 805 to stay mated even when under high vibration, without the need for safety wire or torque tools. Connector shells are machined aluminum or stainless steel, and are designed to accommodate (depending on insert arrangement) Glenair size 16, 20HD, or 23 fiber optic termini (termini sold separately.) Metal clips inside the connector body lock the termini into place. Termini are removable. Fluorosilicone seals and rear grommet protect the connector from water ingress. Choose hex or knurled coupling nut. Terminate cable shield directly to connector body with Band-Master™ strap, or choose rear accessory thread to attach optional backshell. Available in shell sizes 1 through 21 in 30 insert arrangements.

How To Order

Sample Part Number	805-001	-16	M	8-4	P	A
Series (See Table I)	**805-001** = Plug with Banding Platform **805-002** = Plug with Accessory Thread					
Shell Style	**-16** = Plug Connector with Ratcheting Anti-Decoupling Mechanism					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements Page W-3, W-6, W-8					
Contact Type	**Connector supplied without termini. Please indicate pin or socket.** **A** = Pin Connector, less termini **B** = Socket Connector, less termini					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




	
805-001 Plug with Banding Platform	**805-002** Plug with Accessory Thread


Table II: Key Positions

Key Position	Key Rotation A	Key Rotation B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°



Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

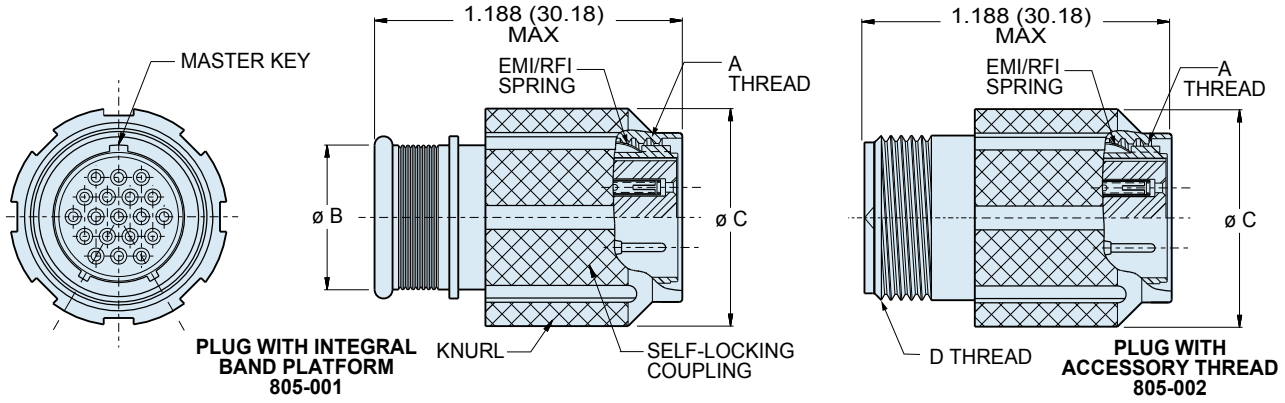

W

Dimensions						
Shell Size	A Threads	Ø B		Ø C		D Threads Accessory
		In.	mm.	In.	mm.	
8	.5000-.1P-.3L-TS-2B	.317	8.05	.691	17.55	.3750-32 UNEF-2A
9	.5625-.1P-.3L-TS-2B	.397	10.08	.787	19.99	.4375-28 UNEF-2A
10	.6250-.1P-.3L-TS-2B	.473	12.01	.826	20.98	.5000-28 UNEF-2A
11	.6875-.1P-.3L-TS-2B	.519	13.18	.916	23.27	.5625-24 UNEF-2A
12	.7500-.1P-.3L-TS-2B	.585	14.86	.982	24.94	.6250-24 UNEF-2A
15	.9375-.1P-.3L-TS-2B	.687	17.45	1.097	27.86	.7500-20 UNEF-2A
18	1.1250-.1P-.3L-TS-2B	.884	22.45	1.290	32.77	.9375-20 UNEF-2A
19	1.1875-.1P-.3L-TS-2B	.884	22.45	1.310	33.27	.9375-20 UNEF-2A
23	1.4375-.1P-.3L-TS-2B	1.135	28.83	1.562	39.67	1.1875-18 UNEF-2A

Performance Specifications	
DWV	23 500 VAC Sea level, 20HD 750 VAC, 12 AND 16 1800 VAC
Insulation Resistance	5000 Megohms Minimum
Operating Temperature	-55° C. to +150° C.
Immersion, Mated	MIL-STD-810 Method 512. One Meter for One Hour.
EMI	65 dB Minimum from 1 GHz. to 10 GHz.

Materials and Finishes	
Connector Shell	Aluminum or Stainless Steel
Insulator	Liquid Crystal Polymer (LCP)
Seals	Fluorosilicone Rubber, Blue
Pin Contact	Copper Alloy, Gold over Nickel Plating
Socket Contact	Copper Alloy, Gold over Nickel Plating, with SST Hood
Contact Retainer Clip	Copper alloy, Unplated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start Crimp Receptacle

805-003 and 805-004 Ordering Information



Three Shell Mounting Options
Jam nut with O-ring for rear panel mounting, square flange for front or rear panel mounting, or in-line receptacles for free-hanging cables.


Gold-Plated Crimp Contacts
are held in place with beryllium copper retention clips. Contacts are removable.

Two Shell Styles: Choose integral band platform for direct attachment of a cable shield. Install a boot, or overmold a boot over the band platform. An accessory thread is available for attaching strain reliefs and backshells.


W

How To Order						
Sample Part Number	**805-004**	**-02**	**NF**	**9-10**	**P**	**A**
Series (See Table I)	**805-003** = Receptacle with Banding Platform **805-004** = Receptacle with Accessory Thread					
Shell Style (See Table II)	**-01** = In-line **-02** = Square Flange Front or Rear Mount **-12** = Square Flange Rear Mount Non-Locking Clinch Nuts **-22** = Square Flange Rear Mount Locking Clinch Nuts **-07** = Jam Nut for Rear Panel Mounting					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant **M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated; RoHS Compliant **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy/Black Chromate					
Shell Size - Insert Arr	See Contact Arrangements Page W-3, W-6, W-8					
Contact Type	**Connector supplied without termini. Please indicate pin or socket.** **A** = Pin Connector, less termini **B** = Socket Connector, less termini					
Shell Key Positions (See Table III)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. E **F** = Pos. F					

Table I: Series




805-003
Receptacle with Banding Platform



805-004
Receptacle with Accessory Thread


Table II: Shell Style



-01
In-line Receptacle




-02, -12, -22
Square Flange



-07
Jam Nut

Table III Keyway Positions




Position	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

In-line cable receptacle - shell style 01

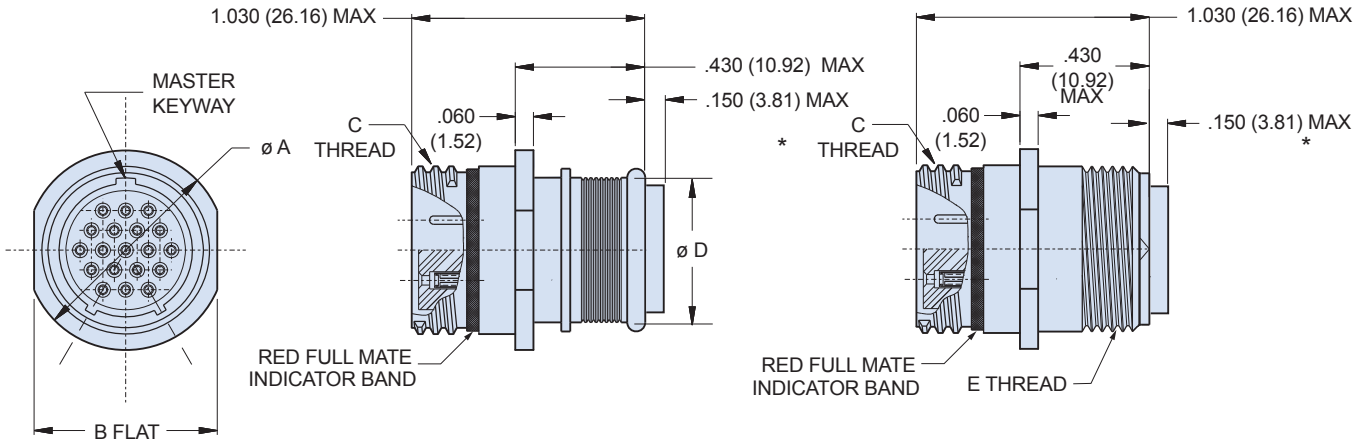

*Grommet protrudes for
power/combo arrangements

Dimensions								
Shell Size	Ø A		B		C Threads	Ø D		E Threads Accessory
	In.	mm.	In.	mm.		In.	mm.	
8	.540	13.72	.510	12.95	.5000-.1P-.3L-TS-2A	.316	8.05	.3750-32 UNEF-2A
9	.605	15.37	.575	14.61	.5625-.1P-.3L-TS-2A	.397	10.08	.4375-28 UNEF-2A
10	.668	16.96	.638	16.21	.6250-.1P-.3L-TS-2A	.472	12.01	.5000-28 UNEF-2A
11	.730	18.54	.700	17.78	.6875-.1P-.3L-TS-2A	.519	13.18	.5625-24 UNEF-2A
12	.793	20.14	.763	19.38	.7500-.1P-.3L-TS-2A	.585	14.86	.6250-24 UNEF-2A
15	.980	24.89	.950	24.13	.9375-.1P-.3L-TS-2A	.687	17.45	.7500-20 UNEF-2A
18	1.165	29.59	1.135	28.83	1.1250-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
19	1.235	31.37	1.205	30.61	1.1875-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
23	1.485	37.72	1.455	36.96	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.1875-18 UNEF-2A

Performance Specifications	
DWV	23 500 VAC Sea level, 20HD 750 VAC, 12 AND 16 1800 VAC
Insulation Resistance	5000 Megohms Minimum
Operating Temperature	-55° C. to +150° C.
Immersion, Mated	MIL-STD-810 Method 512. One Meter for One Hour.
EMI	65 dB Minimum from 1 GHz. to 10 GHz.

Materials and Finishes	
Connector Shell	Aluminum or Stainless Steel
Insulator	High grade rigid dielectric
Seals	Fluorosilicone Rubber, Blue
Pin Contact	Copper Alloy, Gold over Nickel Plating
Socket Contact	Copper Alloy, Gold over Nickel Plating, with SST Hood
Contact Retainer Clip	Copper alloy, Unplated


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start Square Flange Receptacle

805-003-02 and 805-004-02 Dimensions

Square flange, front or rear panel mount receptacle - shell style 02

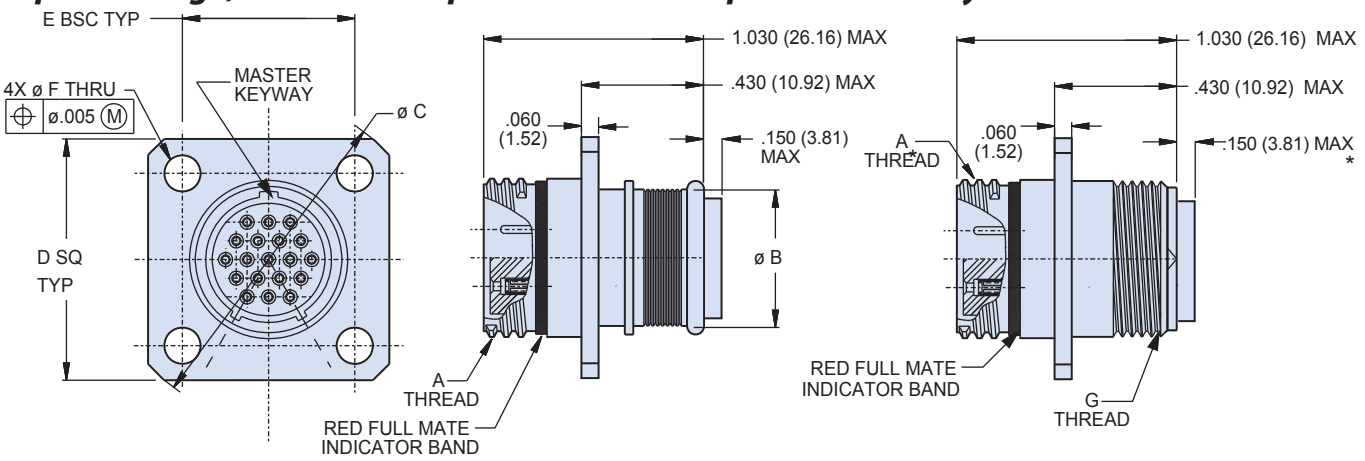

*Grommet protrudes for power/combo arrangements

Dimensions												
Shell Size	A		B		ØC		ØD		E Threads	Ø F		G Threads Accessory
							In.	mm.				
	In.	mm.	In.	mm.	In.	mm.	± .003	± .08		In.	mm.	
8	.850	21.59	.660	16.76	1.150	29.21	.094	2.39	.5000-.1P-.3L-TS-2A	.316	8.05	.3750-32 UNEF-2A
9	.913	23.19	.723	18.36	1.230	31.24	.094	2.39	.5625-.1P-.3L-TS-2A	.397	10.08	.4375-28 UNEF-2A
10	.975	24.77	.785	19.94	1.330	33.78	.094	2.39	.6250-.1P-.3L-TS-2A	.472	12.01	.5000-28 UNEF-2A
11	1.039	26.39	.848	21.54	1.410	35.81	.094	2.39	.6875-.1P-.3L-TS-2A	.519	13.18	.5625-24 UNEF-2A
12	1.099	27.91	.909	23.09	1.500	38.10	.094	2.39	.7500-.1P-.3L-TS-2A	.585	14.86	.6250-24 UNEF-2A
15	1.288	32.74	1.058	26.87	1.750	44.45	.128	3.25	.9375-.1P-.3L-TS-2A	.687	17.45	.7500-20 UNEF-2A
18	1.475	37.47	1.255	31.88	2.000	50.80	.128	3.25	1.1250-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
19	1.537	71.06	1.327	33.71	2.094	53.19	.128	3.25	1.1875-.1P-.3L-TS-2A	.884	22.45	.9375-20 UNEF-2A
23	1.787	45.39	1.570	39.88	2.440	61.98	.128	3.25	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.1875-18 UNEF-2A


Performance Specifications	
DWV	23 500 VAC Sea level, 20HD 750 VAC, 12 AND 16 1800 VAC
Insulation Resistance	5000 Megohms Minimum
Operating Temperature	-55° C. to +150° C.
Immersion, Mated	MIL-STD-810 Method 512. One Meter for One Hour.
EMI	65 dB Minimum from 1 GHz. to 10 GHz.

Materials and Finishes	
Connector Shell	Aluminum or Stainless Steel
Insulator	High grade rigid dielectric
Seals	Fluorosilicone Rubber, Blue
Contact	Copper Alloy, Gold over Nickel Plating
Contact Retainer Clip	Copper alloy, Unplated

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Jam nut, rear panel mount receptacle - shell style 07

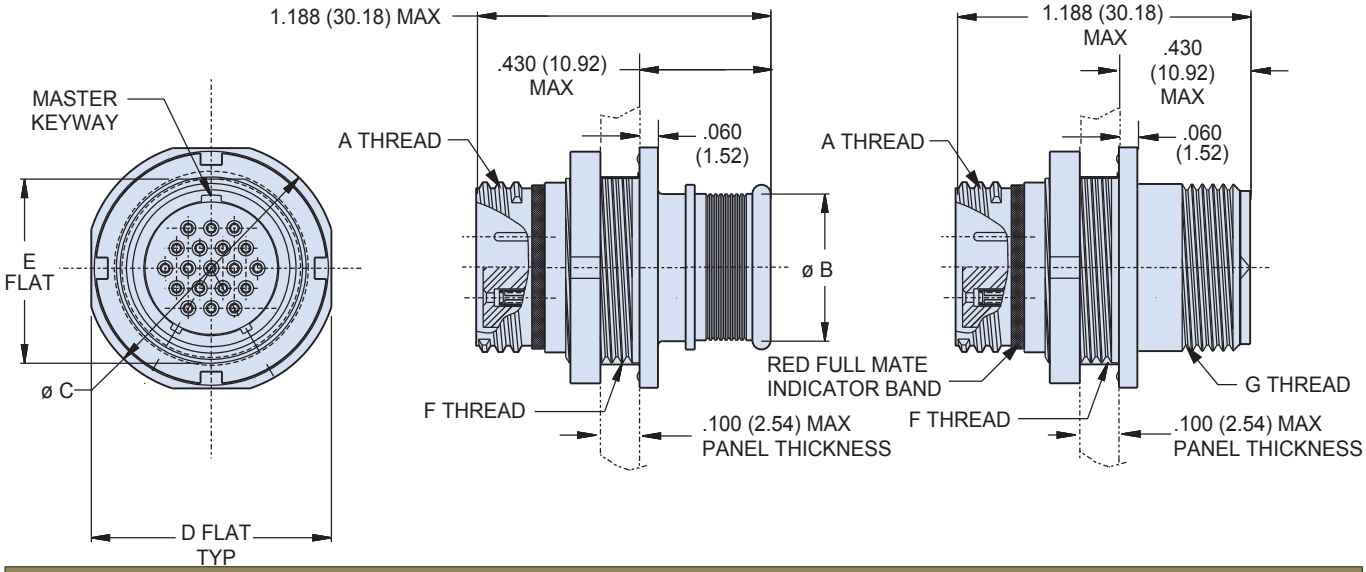

Dimensions											
Shell Size	Ø A		B		C		D Threads	Ø E		F Threads	G Threads Accessory
	In.	mm.	In.	mm.	In.	mm.		In.	mm.		
8	.760	19.30	.535	13.59	.730	18.54	.5000-.1P-.3L-TS-2A	.317	8.05	.5625-28 UNEF-2A	.3750-32 UNEF-2A
9	.880	22.35	.661	16.79	.850	21.59	.5625-.1P-.3L-TS-2A	.397	10.08	.6875-28 UN-2A	.4375-28 UNEF-2A
10	.880	22.35	.661	16.79	.850	21.59	.6250-.1P-.3L-TS-2A	.473	12.01	.6875-28 UN-2A	.5000-28 UNEF-2A
11	.955	24.26	.721	18.31	.925	23.50	.6875-.1P-.3L-TS-2A	.519	13.18	.7500-28 UN-2A	.5625-24 UNEF-2A
12	1.060	26.92	.784	19.91	1.035	26.29	.7500-.1P-.3L-TS-2A	.585	14.86	.8125-28 UN-2A	.6250-24 UNEF-2A
15	1.203	30.56	.970	24.64	1.173	29.79	.9375-.1P-.3L-TS-2A	.687	17.45	1.0000-28 UN-2A	.7500-20 UNEF-2A
18	1.389	35.28	1.147	29.13	1.359	34.52	1.1250-.1P-.3L-TS-2A	.884	22.45	1.1875-28 UN-2A	.9375-20 UNEF-2A
19	1.450	36.83	1.221	31.01	1.420	36.07	1.1875-.1P-.3L-TS-2A	.884	22.45	1.2500-28 UN-2A	.9375-20 UNEF-2A
23	1.705	43.31	1.470	37.34	1.675	42.55	1.4375-.1P-.3L-TS-2A	1.134	28.80	1.500-25 UN-2A	1.1875-18 UNEF-2A

Panel Cutout For Jam Nut Receptacle

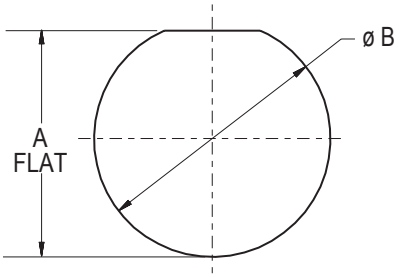


Shell Size	A Flat		Ø B	
	In. ± .002	mm. ± 0.05	In. ± .005	mm. ± 0.13
8	.545/.541	13.84/13.74	.572/.567	14.53/14.40
9	.671/.667	17.04/16.94	.698/.693	17.73/17.60
10	.671/.667	17.04/16.94	.698/.693	17.73/17.60
11	.731/.727	18.57/18.47	.760/.755	19.30/19.18
12	.794/.790	20.17/20.07	.822/.817	20.88/20.75
15	.982/.976	24.94/24.79	1.010/1.006	25.65/25.55
18	1.157/1.153	29.39/29.29	1.198/1.193	30.43/30.30
19	1.231/1.227	13.27/31.17	1.260/1.255	32.00/31.88
23	1.480/1.476	37.60/37.49	1.510/1.505	38.54/38.23

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start
Square Flange, Clinch Nut Receptacle
805-003-12/22 and 805-004-12/22 Dimensions


Square flange, rear panel mount receptacle with clinch nut - shell style 12/22

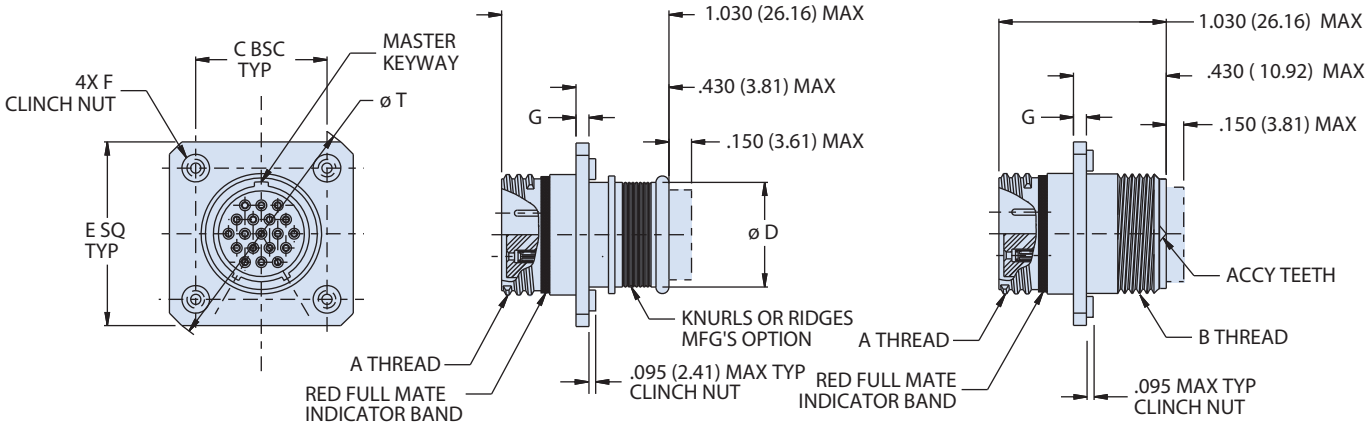

Band Platform
805-003

Accessory Thread
805-004

Dimensions										
Shell Size	A Thread	B Thread	C BSC		Ø D		E SQ		F Clinch Nuts	G
			in.	mm.	in.	mm.	in.	mm.		
8	.5000-.1P-.3L-TS-2A	.3750-32 UNEF-2A	0.660	16.76	1.194	30.33	0.920	23.37	2-56	.030
9	.5625-.1P-.3L-TS-2A	.4375-28 UNEF-2A	0.723	18.36	1.283	32.59	0.983	24.97		
10	.6250-.1P-.3L-TS-2A	.5000-28 UNEF-2A	0.785	19.94	1.371	34.82	1.045	26.54		
11	.6875-.1P-.3L-TS-2A	.5625-24 UNEF-2A	0.848	21.54	1.460	37.08	1.104	28.04		
12	.7500-.1P-.3L-TS-2A	.6250-24 UNEF-2A	0.909	23.09	1.546	39.27	1.169	29.69		
13	.8125-.1P-.3L-TS-2A	.6875-24 UNEF-2A	0.973	24.71	1.637	41.58	1.233	31.32		
15	.9375-.1P-.3L-TS-2A	.7500-20 UNEF-2A	1.058	26.87	1.817	46.15	1.378	35.00	4-40	.060
18	1.1250-.1P-.3L-TS-2A	.9375-20 UNEF-2A	1.255	31.88	2.096	53.24	1.575	40.01		
19	1.1875-.1P-.3L-TS-2A	.9375-20 UNEF-2A	1.327	33.71	2.197	55.80	1.647	41.83		
21	1.3125-.1P-.3L-TS-2A	1.0625-18 UNEF-2A	1.452	36.88	2.380	60.45	1.772	45.01		
23	1.4375-.1P-.3L-TS-2A	1.1875-18 UNEF-2A	1.570	39.88	2.541	64.54	1.890	48.01		



Square Flange Panel Cut Out Dimensions												
Shell Size	P Bsc		Ø R		Ø S		Shell Size	P Bsc		Ø R		Ø S	
	In.	mm.	In.	mm.	In.	mm.				In.	mm.	In.	mm.
8	0.660	16.76	.515	13.08	.096 .091	2.43 2.31	15	1.058	26.87	.953	24.21	.130 .126	3.30 3.20
9	0.723	18.36	.578	14.68			18	1.255	31.88	1.140	28.96		
10	0.785	19.94	.640	16.26			19	1.327	33.71	1.203	30.56		
11	0.848	21.54	.703	17.86			21	1.452	36.88	1.328	33.73		
12	0.909	23.09	.765	19.43			23	1.570	39.88	1.453	36.91		
13	0.973	24.71	.828	21.03									

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


PRODUCT SELECTION GUIDE




Heat-Shrink Boots
These boots provide strain relief, environmental protection and fit all Series 80 connectors. Straight, 90°, 45°, Long Tail and USB versions.
Page X-3



Hex Nuts and Jam Nuts
Mighty Mouse jam nut receptacles are supplied with low-profile spanner nuts. Optional hex nuts are available with safety wire holes.
Page X-10



Flange Gaskets
Die-cut flange gaskets provide panel sealing for flange mount receptacles. Available in fluorosilicone, Viton® and conductive fluorosilicone.
Page X-12



Replacement O-rings
Replace lost or damaged O-rings. Available in fluorosilicone, EPDM and conductive fluorosilicone, these O-rings fit Mighty Mouse jam nut receptacles.
Page X-15



Mounting Flange
Replace worn or lost mounting flanges. Offered with standard or metric threads.
Page X-18



Backshells
Thread on rotatable or direct coupling backshells provide strain relief for wire bundles. Upgrade to environmental and EMI protection or select an adapter for banding or shrink boot options. Available in Straight, 45°, or 90°.
Page X-19



Series 800 thru 805 Protective Covers
Thread-on or frictions fit covers provide a watertight seal and prevent damage. Select nylon cord or wire rope lanyards with a range of ring terminal diameters to fit just about any need.
Page X-41



Series 800 Dummy Storage Receptacles
Provide a safe and secure location for cable plugs that are disconnected due to maintanance or repair.
Page X-74

X

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Backshells and Accessories

Accessory Thread Information

About accessory thread sizes for Series 80 connectors

Series 80 Connectors accept a variety of thread-on backshells and adapters. This section contains ordering information for these fittings, arranged by thread size.

The Accessory Thread Table below identifies the accessory thread sizes for each Series 80 product type. Find the correct accessory thread code from this table, and use this information to identify the correct accessory part number from the following pages.

Some Mighty Mouse sizes are compatible with MIL-DTL- 38999 Series I/II accessories. The table below lists the D38999 shell sizes which share the same threads with Series 80 connectors.

For example, any accessory which fits a 38999 Series II shell size 8 connector will also fit a Series 800 shell size 7 connector.

How to order a 38999 accessory compatible with Series 80 connectors:

1. *Find the Series 80 shell size and thread size in the Accessory Thread Table below.*
2. *Find the corresponding 38999 shell size in the right hand column of the table.*
3. *Find a suitable accessory in Glenair's catalog. Use connector designator "F" and the correct shell size from the table.*

X

Accessory thread table

Find the correct accessory thread code from this table, and use this information to identify the correct accessory part number from the following pages.

Series 802 AquaMouse™ connectors are intended for high pressure submersible applications. The accessories in this section are not recommended for use on Series 802 connectors. Contact Glenair for information on special heavy-duty stainless steel accessories for the Series 802.

Accessory Thread	Size Code	Shell Size					
		Series 800	Series 801	Series 803	Series 804	Series 805	38999 Series II
.2500-32 UNEF	05	5	5	5	5		
.3125-32 UNEF	06	6	6	6	6		
.3750-32 UNEF	11					8	
.4375-28 UNEF	07	7	7	7	7	9	8
.5000-28 UNEF	08	8	8	8	8	10	
.5625-24 UNEF	09	9	9	9	9	11	10
.6250-24 UNEF	10	10	10	10	10	12	
.6875-24 UNEF	12	12	11, 13	12	11, 12	13	12
.7500-20 UNEF	13					15	
.9375-20 UNEF	14		16, 17	14, 15	14, 15	18, 19	16
1.0625-18 UNEF	16		19			21	18
1.1875-18 UNEF	17		21			23	20

Using 38999 Series II accessories with Series 80 connectors- some examples

1 Using a Swing Arm backshell on a Mighty Mouse connector.

Connector Part Number
801-008-16M9-19PA

Shell Size 9

Shell size 9 Series 801 corresponds to shell size 10 38999 Series II. Use Connector Designator "F" and shell size 10 in the part number:

Backshell Part Number
319F064XO10

Connector Designator F

Shell Size 10

2 Using a TAG® Ring backshell on a Mighty Mouse connector.

Connector Part Number
804-002-06NF14-55P

Shell Size 14

Shell size 14 Series 804 corresponds to shell size 16 38999 Series II. Use Connector Designator "F" and shell size "16" in the part number:

Backshell Part Number
400FS001NF1606L6

Connector Designator F


Shell Size 16

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Shrink Boots – Straight, Long Tail, 90°, 45° and USB for Series 80 Connectors



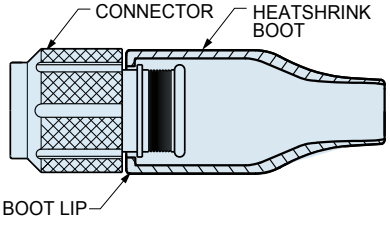

LIPPED BOOT

Protect Your Cable Harness with heat-shrinkable boots. These easy-to-use boots provide excellent electrical, mechanical and environmental protection. Heating the boot causes the boot to shrink onto the connector and cable . An adhesive lining bonds the boot to the connector and cable and fills small gaps for a complete seal. Choose straight cable exit or right angle exit. These lipped boots attach directly to Series 80 Mighty Mouse HD connectors with integral band platform. After shrinking, the boot lip locks into groove. Choose Type 1 high performance elastomer for extreme temperatures and excellent resistance to fuels and oils or Type 2 non-halogenated flame-retardant polyolefin for use where limited fire hazard is required.

Material Selection Guide

Attribute	Type 1 High Performance Semi-Rigid Elastomer	Type 2 Zero Halogen Polyolefin	Type 9 Low-Temp Flexible Polyolefin – USB ONLY –
Continuous Operating Temp.	-75° to +165°C	-40° to +130°C	-40° to +100°C
Resistance to Fuels, Oils	Excellent	Very Good	Very Good
Low Toxicity, Zero Halogen	No	Yes	No

Type 1 High performance Elastomer

Semi-rigid high performance boots combine excellent resistance to fuels, oils and solvents with superior performance at extreme temperatures. Rated for 3000 hours continuous operation at +165° C, these boots fit most standard boot adapters for circular connectors. Material meets the requirements of VG95343 Type 6, BSG 198-5-DE, EN62329-102 and SAE AS5258 Type H. These boots are recommended for demanding applications such as military vehicles and petrochemical exploration. Standard Black color.

Type 2 Zero halogen

Halogen-free polyolefin boots meet low smoke and toxicity requirements of shipboard, transit and aircraft systems. These Low Smoke/Zero Halogen (LSZH) boots fit most standard shrink boot adapters, including M85049 types along with Glenair Series 31 and Series 44 adapters. Oxygen index greater than 30%, smoke index less than 20, and toxicity index under 3 per 100 grams. Material meets requirements of NAVSEA 5617649, VG95343 Part 29, BSG 198-5-DF, EN62329-101 and SAE AS5258 Type G. Resistance to oils, fuels and solvents. The boots provide strain relief and environmental protection to connector/cable transitions. Temperature rating -40° C to +130° C. Standard Black color.

Type 9 Low Temp Flexibile Polyolefin (Standard for USB)

Lipped Straight USB Shrink Boots are available only in Type 9 Flexibile Polyolefin which is designed for a low installation temperature of less than 80°C. Operating temperature range of -40° C to 100° C. Standard Black color.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Glenair®

Series 80 Mighty Mouse Shrink Boots

Boot Material Properties

Adhesive lined boot material properties

Heat-shrink boots are not watertight unless equipped with factory-installed or user-installed adhesives. When heat is applied to the boot, the adhesive melts and fixes the boot to the adapter and cable jacket to provide the necessary sealing as well as mechanical strain-relief. Hot melt thermoplastic polyamide adhesive is compatible with most cable jackets, economical and easy to install.

Shrink Boot Typical Material Properties

Property	Type 1 High Performance Elastomer	Type 2 Zero Halogen Polyolefin	Type 9* Low Temperature Flexible Polyolefin
Flexibility	Semi-rigid	Semi-flexible	Flexible
Operating Temperature Range	-75°C to +165°C	-40°C to +130°C	-40°C to +100°C
Shrink Temperature (min.)	135°C	135°C	<80°C
Tensile Strength (psi)	1700	1100	1740
Elongation (% min.)	400	250	500
Long Term Heat Aging	3000 hrs, 150°C	3000 hrs, 135°C	168 hrs, 150°C
Heat Shock	4 hrs, 215°C	4 hrs, 215°C	4 hrs, 160°C
Heat Aging	168 hrs, 160°C	168 hrs, 160°C	168 hrs, 160°C
Dielectric Strength (V/mil)	300	380	10 M
Volume Resistivity (ohms-cm)	10^{13}	10^{12}	10^{12}
Water Absorption (%)	0.5	0.5	0.5
Flammability	Burn Time <15 sec Burn Length <25mm	Burn Time <15 sec Burn Length <25mm	Burn Time <120 sec Burn Length <25mm
RoHS Compliant	Yes	Yes	Yes
Oxygen Index (% min.)	N/A	30	N/A
Temperature Index (°C)	N/A	250	N/A
Smoke Index (max.)	N/A	20	N/A
Toxicity Index (max.)	N/A	3	N/A

* Note: Type 9 Low-Temp Flexible Polyolefin is the standard material for the USB Shrink Boot.

Shrink Boot Fluid Resistance

Fluid	Type 1 High Performance Elastomer	Type 2 Zero Halogen Polyolefin
Lubricating Oil	Very good	Good
Hydraulic Fluid	Very Good	Good
Aviation Fuel	Very Good	Good
Gasoline	Very Good	Fair
De-Icing Fluid	Excellent	Very Good
Automotive Diesel	Good	Fair

W1 and W2 Adhesive Properties

Attribute	W1 Standard High Temperature Hot Melt Adhesive (All Boots Except USB)	W2 Standard Hot Melt Adhesive For USB Type 9 Boots Only
Boot Material Compatibility	Type 1 and 2	Type 9 Only
Continuous Operating Temp.	-65° to +125°C	-40° to +80°C
Resistance to Fuels, Oils & Fluids	Good	Good
Low Toxicity, Zero Halogen	Yes	Yes

Material Color Options for Type 1 High Performance Elastomer Only
Add Optional Color Mod Code to End of Any Type 1 Material Part Number

Mod Code	Color	Similar to (Reference)	Mod Code	Color	Similar to (Reference)
632 B	Blue	PANTONE 3005U	632 R	Red	PANTONE 1797U
632 E	Grey	FED-STD-595; #36270	632 T	Tan	FED-STD-595; #33446
632 G	Green	PANTONE 355U	632 W	White	FED-STD-595; #37875
632 P	Purple	FED-STD-595; #37100	632 Y	Yellow	PANTONE YELLOW U
632 O	Orange	FED-STD-595; #32300	Standard	Black	FED-STD-595; #37038

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Lipped straight shrink boots-Type 1 high performance elastomer

- -75° C to +165° C
- Excellent resistance to fuels, oils, solvents and heat.



Fully recovered boot shown. As supplied part will vary.

Boot Size	Shell Size			Part Number
	Series 800, 801, 802, 803, 804	Series 805	Series 811	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	5	809S060-1
2	7	9	6,7	809S060-2
3	8, 9	10, 11	8,9	809S060-3
4	10, 11, 12, 13	12, 15	N/A	809S060-4
5	14, 15, 16, 17	18, 19	N/A	809S060-5
6	19, 21	23	N/A	809S060-6

Lipped straight shrink boots- Type 2 zero halogen

- Low Smoke, Zero Halogen
- Meets U.S. and E.U. toxicity requirements.



Fully recovered boot shown. As supplied part will vary.

Boot Size	Shell Size			Part Number
	Series 800, 801, 802, 803, 804	Series 805	Series 811	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	5	809S060-1H
2	7	9	6,7	809S060-2H
3	8, 9	10, 11	8,9	809S060-3H
4	10, 11, 12, 13	12, 15	N/A	809S060-4H
5	14, 15, 16, 17	18, 19	N/A	809S060-5H
6	19, 21	23	N/A	809S060-6H

Lipped 90° right angle shrink boots- Type 1 high performance elastomer

- -75° C to +165° C
- Excellent resistance to fuels, oils, solvents and heat.



Fully recovered boot shown. As supplied part will vary.

Boot Size	Shell Size			Part Number
	Series 800, 801, 802, 803, 804	Series 805	Series 811	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	5	809A060-1
2	7	9	6,7	809A060-2
3	8, 9	10, 11	8,9	809A060-3
4	10, 11, 12, 13	12, 15	N/A	809A060-4
5	14, 15, 16, 17	18, 19	N/A	809A060-5
6	19, 21	23	N/A	809A060-6

Lipped 90° right angle shrink boots- Type 2 zero halogen

- Low Smoke, Zero Halogen
- Meets U.S. and E.U. toxicity requirements.



Fully recovered boot shown. As supplied part will vary.

Boot Size	Shell Size			Part Number
	Series 800, 801, 802, 803, 804	Series 805	Series 811	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	5	809A060-1H
2	7	9	6,7	809A060-2H
3	8, 9	10, 11	8,9	809A060-3H
4	10, 11, 12, 13	12, 15	N/A	809A060-4H
5	14, 15, 16, 17	18, 19	N/A	809A060-5H
6	19, 21	23	N/A	809A060-6H

Lipped 45° angle shrink boots- Type 1 high performance elastomer

- -75° C to +165° C
- Excellent resistance to fuels, oils, solvents and heat.



Fully recovered boot shown. As supplied part will vary.

Boot Size	Shell Size		Part Number
	Series 800, 801, 802, 803, 804	Series 805	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	809B060-1
2	7	9	809B060-2
3	8, 9	10, 11	809B060-3
4	10, 11,12, 13	12, 15	809B060-4
5	14, 15, 16, 17	18, 19	809B060-5
6	19, 21	23	809B060-6

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Backshells and Accessories
809B060, 809SL060 and 809SU060 Shrink Boots

Lipped 45° angle shrink boots- Type 2 Zero halogen

- Low Smoke, Zero Halogen
- Meets U.S. and E.U. toxicity requirements.



Boot Size	Shell Size		Part Number
	Series 800, 801, 802, 803, 804	Series 805	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	809B060-1H
2	7	9	809B060-2H
3	8, 9	10, 11	809B060-3H
4	10, 11, 12, 13	12, 15	809B060-4H
5	14, 15, 16, 17	18, 19	809B060-5H
6	19, 21	23	809B060-6H

Lipped straight long tail shrink boots- Type I high performance elastomer

- -75° C to +165° C
- Excellent resistance to fuels, oils, solvents and heat.



Boot Size	Shell Size		Part Number
	Series 800, 801, 802, 803, 804	Series 805	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	809SL060-1
2	7	9	809SL060-2
3	8/9	10/11	809SL060-3
4	10/11/12/13	12/15	809SL060-4

Lipped straight long tail shrink boots- Type 2 zero halogen

- Low Smoke, Zero Halogen
- Meets U.S. and E.U. toxicity requirements.



Boot Size	Shell Size		Part Number
	Series 800, 801, 802, 803, 804	Series 805	Pre-Coated with W1 Hi-Temp Hot-Melt Adhesive
1	5/6	8	809SL060-1H
2	7	9	809SL060-2H
3	8/9	10/11	809SL060-3H
4	10/11/12/13	12/15	809SL060-4H

Lipped straight USB shrink boots- Type 9 low-temp flexible polyolefin

- -40° C to +100° C
- Same excellent physical properties within a limited temperature range.




Boot Size	Shell Size	Part Number
	Series 801, 804, 805	Pre-Coated with W2 Hot-Melt Adhesive
1	7, 8	809SU060-1

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com


Lipped straight shrink boots- dimensions

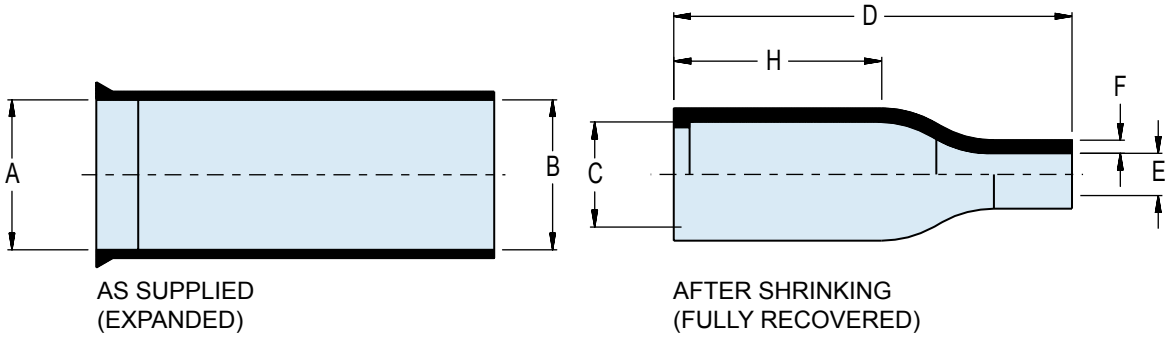

Boot Size	A Min.		B Min.		C Max.		D Ref.		E Max.		F Ref.		H Ref.		Cable Range			
															Maximum		Minimum	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
1	.390	9.91	.390	9.91	.260	6.60	1.370	34.80	.080	2.03	.030	0.76	.750	19.05	.230	5.84	.100	2.54
2	.669	16.99	.669	16.99	.300	7.62	1.500	38.10	.140	3.56	.032	0.81	.750	19.05	.500	12.70	.170	4.32
3	.945	24.00	.945	24.00	.390	9.91	1.500	38.1	.200	5.08	.035	0.89	.750	19.05	.800	20.32	.240	6.10
4	1.181	30.00	1.181	30.00	.550	13.97	2.170	55.12	.240	6.10	.039	0.99	1.180	29.97	1.020	25.91	.280	7.11
5	1.260	32.00	1.260	32.00	.710	18.03	2.640	67.06	.280	7.11	.039	0.99	1.300	33.02	1.120	28.45	.300	7.62
6	1.417	35.99	1.417	35.99	.900	9.91	3.150	80.01	.330	8.38	.047	1.19	1.570	39.88	1.200	30.48	.350	8.89

X

Lipped 90° right angle shrink boots- dimensions

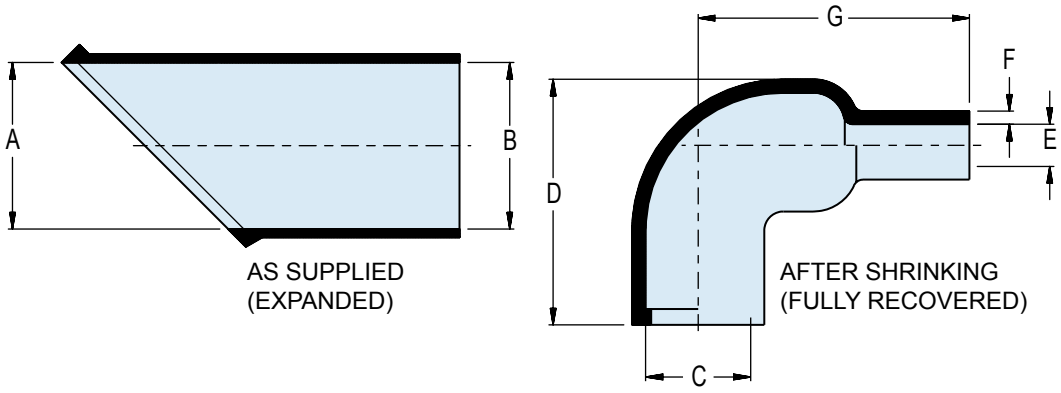


Boot Size	A Min.		B Min.		C Max.		D Ref.		E Max.		F Ref.		G Ref.		Cable Range			
															Maximum		Minimum	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
1	.390	9.91	.390	9.91	.260	6.60	.790	20.07	.095	2.41	.032	0.81	.750	19.05	.230	5.84	.100	2.54
2	.669	16.99	.669	16.99	.310	7.87	.790	20.07	.140	3.56	.032	0.81	.790	20.07	.500	12.70	.170	4.32
3	.945	24.00	.945	24.00	.390	9.91	.980	24.89	.200	5.08	.040	1.02	.980	24.89	.800	20.32	.240	6.10
4	1.181	30.00	1.181	30.00	.530	13.46	1.060	26.92	.220	5.59	.046	1.17	1.260	32.00	1.020	25.91	.270	6.86
5	1.260	32.00	1.260	32.00	.710	18.03	1.260	32.00	.280	7.11	.052	1.32	1.540	39.12	1.120	28.45	.300	7.62
6	1.417	35.99	1.417	35.99	.900	9.91	1.500	38.10	.330	8.38	.052	1.32	1.930	49.02	1.200	30.48	.350	8.89

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Lipped 45° angle shrink boots- dimensions

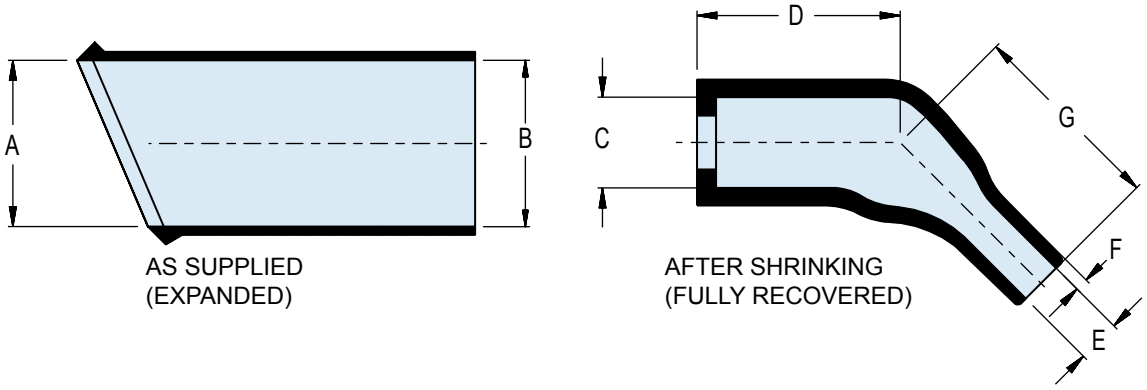

Boot Size	A Min.		B Min.		C Max.		D Ref		E Max.		F Ref.		G Ref.		Cable Range			
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Max. In.	Max. mm.	Min. In.	Min. mm.
1	.390	9.9	.390	9.9	.260	6.60	.600	15.24	.080	2.03	.030	0.76	.560	14.22	.230	5.84	.100	2.54
2	.669	17.0	.669	17.0	.300	7.62	.640	16.26	.140	3.56	.035	0.89	.620	15.75	.500	12.70	.170	4.32
3	.945	24.0	.945	24.0	.390	9.91	.500	12.7	.160	4.06	.040	1.02	.750	19.05	.800	20.32	.240	6.10
4	1.181	30.0	1.181	30.0	.550	13.97	.748	19.00	.230	5.84	.043	1.09	1.180	29.97	1.020	25.91	.280	7.11
5	1.260	32.0	1.260	32.0	.710	18.03	.984	24.99	.280	7.11	.065	1.65	1.380	35.05	1.120	28.45	.300	7.62
6	1.417	35.99	1.417	35.99	.900	22.86	1.260	32.00	.330	8.38	.065	1.65	1.570	39.88	1.200	30.48	.350	8.89

Lipped straight long tail shrink boots- dimensions

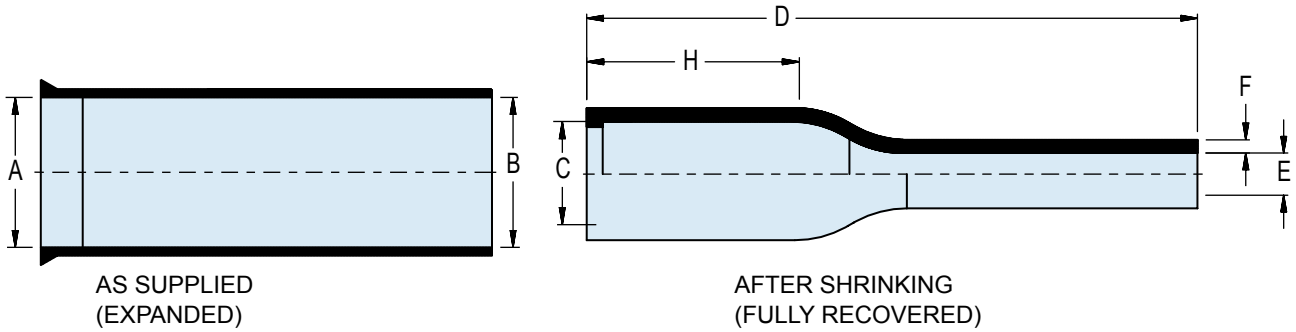


Boot Size	A Min.		B Min.		C Max.		D Ref		E Max.		F Ref.		H Ref.		Cable Range			
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Max. In.	Max. mm.	Min. In.	Min. mm.
1	.390	9.9	.390	9.9	.280	7.11	2.500	63.50	.080	2.03	.045	1.14	.750	19.05	.230	5.84	.100	2.54
2	.669	17.0	.669	17.0	.310	7.87	2.500	63.50	.140	3.56	.045	1.14	.750	19.05	.500	12.70	.170	4.32
3	.945	24.0	.945	24.0	.390	9.91	2.500	63.50	.200	5.08	.045	1.14	.750	19.05	.800	20.32	.240	6.10
4	1.181	30.0	1.181	30.0	.550	13.97	3.000	76.20	.240	6.10	.045	1.14	1.180	29.97	1.020	25.91	.280	7.11

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

Lipped straight USB shrink boots- dimensions

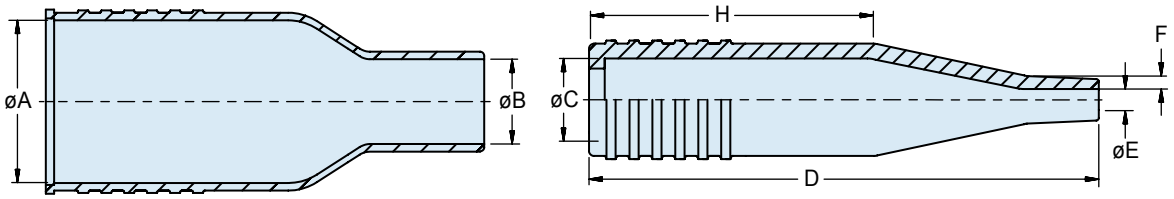

AS SUPPLIED
(EXPANDED)

AFTER SHRINKING
(FULLY RECOVERED)

Boot Size	A Min.		B Min.		C Max.		D Ref		E Max.		F Ref.		H Ref.		Cable Range			
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Max. In.	Max. mm.	Min. In.	Min. mm.
1	.550	13.97	.360	9.14	.330	8.38	2.000	50.80	.090	2.29	.055	1.40	1.130	28.70	.250	6.35	.090	2.29

X


Dimensions in Inches (millimeters) are subject to change without notice.


Series 80 Mighty Mouse
Backshells and Accessories
Jam Nuts 809-094

Jam nut for Mighty Mouse connectors

Replace lost or damaged jam nuts with these standard replacement parts. Jam nut fits all Series 80 jam nut receptacles. Use with Glenair tool 600-146







X

How To Order			
Sample Part Number	809-094	-M	7
Series (See Table I)	809-094		
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **Z1** = Stainless Steel / Passivated		
Dash No.	See Table I		


Dash No.	800	801	804 -00 style	804 -07 style	805	A Thread Class 2B	B Dia
1	5					.3125-28 UN-2B	0.43
2	6	5				.3750-28 UN-2B	0.50
3	7	6				.4375-28 UNEF-2B	0.56
3-3				5		.4375-32 UN-2B	0.56
4	8		5	6		.5000-32 UN-2B	0.62
5					8	.5625-28 UN-2B	0.68
5-5	9	7,8	6			.5625-32 UN-2B	0.68
6		9		7,8		.6250-28 UN-2B	0.75
6-6	10					.6250-32 UN-2B	0.75
7		10	7,8	9	9,10	.6875-28 UN-2B	0.81
8	12	11	9	10	11	.7500-28 UN-2B	0.87
9			10	11	12	.8125-28 UN-2B	0.93
10	14	13	11	12	13	.8750-28 UN-2B	1.00
11	15					.9375-28 UN-2B	1.06
12			12	14	15	1.0000-28 UN-2B	1.12
13		16	14	15		1.0625-20 UN-2B	1.18
14		17	15			1.1250-28 UN-2B	1.25
15					18	1.1875-28 UN-2B	1.31
16		19			19	1.2500-28 UN-2B	1.37
18		21			21	1.3750-28 UN-2B	1.50
20					23	1.5000-28 UN-2B	1.62

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Hex jam nuts for Mighty Mouse receptacles



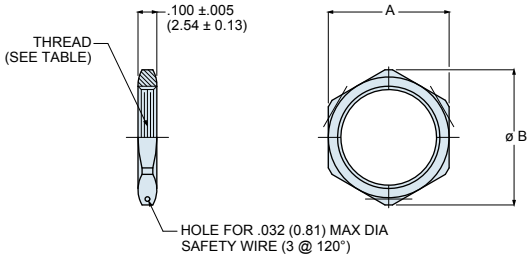

Replace low-profile spanner-style jam nuts with hex nuts for applications where jam nuts must be safety-wired to prevent loosening. These hex nuts fit all standard Series 80 jam nut receptacles except for Series 803 bayonet-coupling versions. Use Glenair Modification Code 501 to specify hex nuts to be supplied with connector.

How To Order				
Sample Part Number	**809-035**	**-M**	**03**	**W**
Series (See Table I)	**809-035**			
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **Z1** = Stainless Steel / Passivated			
Dash No.	See Table			
Wire Holes	**W** = Wire Holes **Omit** for none			

X


Dash No	Thread Size Class 2B	Part Number						Dimensions			
		Aluminum				Stainless Steel		A Hex		B Dia.	
		Electroless Nickel	Olive Drab Cadmium	Black Zinc Nickel	Nickel-PTFE	Passivated	Black Zinc-Cobalt	In.	mm.	In.	mm.
01	.2500-32 UNEF	809-035M01W	809-035NF01W	809-035ZNU01W	809-035MT01W	809-035Z101W	809-035ZC01W	.375	9.53	.403	10.24
02	.3125-28 UN	809-035M02W	809-035NF02W	809-035ZNU02W	809-035MT02W	809-035Z102W	809-035ZC02W	.4375	11.11	.475	12.07
03	.3125-32 UNEF	809-035M03W	809-035NF03W	809-035ZNU03W	809-035MT03W	809-035Z103W	809-035ZC03W	.4375	11.11	.475	12.07
04	.3750-28 UN	809-035M04W	809-035NF04W	809-035ZNU04W	809-035MT04W	809-035Z104W	809-035ZC04W	.500	12.70	.547	13.89
05	.4375-28 UNEF	809-035M05W	809-035NF05W	809-035ZNU05W	809-035MT05W	809-035Z105W	809-035ZC05W	.5625	14.29	.620	15.75
23	.5000-32 UN	809-035M23W	809-035NF23W	809-035ZNU23W	809-035MT23W	809-035Z123W	809-035ZC23W	.625	15.88	.690	17.53
06	.5625-24 UNEF	809-035M06W	809-035NF06W	809-035ZNU06W	809-035MT06W	809-035Z106W	809-035ZC06W	.6875	17.46	.755	19.18
16	.5625-28 UN	809-035M16W	809-035NF16W	809-035ZNU16W	809-035MT16W	809-035Z116W	809-035ZC16W	.6875	17.46	.755	19.18
07	.5625-32 UN	809-035M07W	809-035NF07W	809-035ZNU07W	809-035MT07W	809-035Z107W	809-035ZC07W	.6875	17.46	.755	19.18
08	.6250-28 UN	809-035M08W	809-035NF08W	809-035ZNU08W	809-035MT08W	809-035Z108W	809-035ZC08W	.750	19.05	.830	21.08
09	.6875-28 UN	809-035M09W	809-035NF09W	809-035ZNU09W	809-035MT09W	809-035Z109W	809-035ZC09W	.8125	20.64	.898	22.81
10	.7500-28 UN	809-035M10W	809-035NF10W	809-035ZNU10W	809-035MT10W	809-035Z110W	809-035ZC10W	.875	22.23	.970	24.64
17	.8125-28 UN	809-035M17W	809-035NF17W	809-035ZNU17W	809-035MT17W	809-035Z117W	809-035ZC17W	.9375	23.81	1.030	26.16
11	.8750-28 UN	809-035M11W	809-035NF11W	809-035ZNU11W	809-035MT11W	809-035Z111W	809-035ZC11W	1.000	25.40	1.078	27.38
12	.9375-20 UNEF	809-035M12W	809-035NF12W	809-035ZNU12W	809-035MT12W	809-035Z112W	809-035ZC12W	1.0625	26.99	1.187	30.15
13	.9375-28 UN	809-035M13W	809-035NF13W	809-035ZNU13W	809-035MT13W	809-035Z113W	809-035ZC13W	1.063	27.00	1.187	30.15
18	1.0000-28 UN	809-035M18W	809-035NF18W	809-035ZNU18W	809-035MT18W	809-035Z118W	809-035ZC18W	1.125	28.58	1.200	30.48
14	1.0625-20 UN	809-035M14W	809-035NF14W	809-035ZNU14W	809-035MT14W	809-035Z114W	809-035ZC14W	1.188	30.18	1.264	32.11
15	1.1250-28 UN	809-035M15W	809-035NF15W	809-035ZNU15W	809-035MT15W	809-035Z115W	809-035ZC15W	1.250	31.75	1.325	33.66
19	1.1875-28 UN	809-035M19W	809-035NF19W	809-035ZNU19W	809-035MT19W	809-035Z119W	809-035ZC19W	1.313	33.35	1.415	35.94
20	1.2500-28 UN	809-035M20W	809-035NF20W	809-035ZNU20W	809-035MT20W	809-035Z120W	809-035ZC20W	1.375	34.93	1.490	37.85
22	1.3750-28 UN	809-035M22W	809-035NF22W	809-035ZNU22W	809-035MT22W	809-035Z122W	809-035ZC22W	1.500	38.1	1.625	41.28
21	1.5000-28 UN	809-035M21W	809-035NF21W	809-035ZNU21W	809-035MT21W	809-035Z121W	809-035ZC21W	1.625	41.28	1.750	44.45


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Flange gaskets for series 800 mighty mouse receptacles

These flange gaskets provide sealing between square flange receptacles and the mounting panel. Choose fluorosilicone, Viton®, or conductive fluorosilicone material (Chomerics 1298 silver-filled). Gaskets are .032" (0.8) thick.




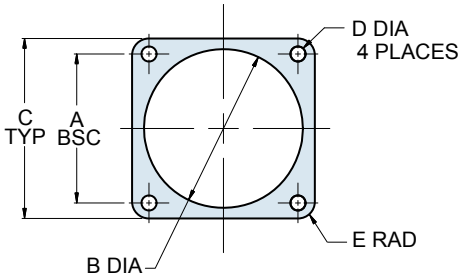


Shell Size	Part Number			Dimensions									
	Fluorosilicone	Viton®	Conductive Fluorosilicone	A Bsc.		B Dia.		C Typ.		D Dia.		E Rad.	
				In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	809-108F01	809-108V01	809-108X01	.363	9.22	.342	8.69	.527	13.39	.093	2.36	.078	1.98
6	809-108F02	809-108V02	809-108X02	.423	10.74	.405	10.29	.588	14.94	.093	2.36	.078	1.98
7	809-108F03	809-108V03	809-108X03	.483	12.27	.467	11.86	.650	16.51	.125	3.18	.078	1.98
8	809-108F04	809-108V04	809-108X04	.542	13.77	.530	13.46	.709	18.01	.125	3.18	.078	1.98
9	809-108F05	809-108V05	809-108X05	.719	18.26	.593	15.06	.938	23.83	.125	3.18	.105	2.67
10	809-108F06	809-108V06	809-108X06	.719	18.26	.655	16.64	.938	23.83	.125	3.18	.105	2.67
12	809-108F07	809-108V07	809-108X07	.812	20.62	.780	19.81	1.031	26.19	.125	3.18	.105	2.67

Flange gaskets for series 801 mighty mouse receptacles

These flange gaskets provide sealing between square flange receptacles and the mounting panel. Choose fluorosilicone, Viton®, or conductive fluorosilicone material (Chomerics 1298 silver-filled). Gaskets are .032" (0.8) thick.



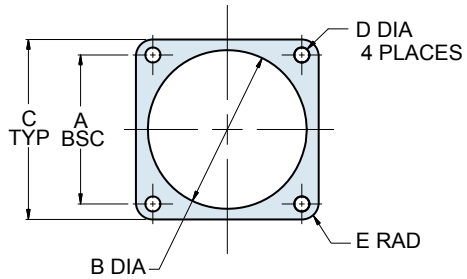


Shell Size	Part Number			Dimensions									
	Fluorosilicone	Viton®	Conductive Fluorosilicone	A Bsc.		B Dia.		C Typ.		D Dia.		E Rad.	
				In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	809-108F11	809-108V11	809-108X11	.363	9.22	.342	8.69	.530	13.46	.093	2.36	.078	1.98
6	809-108F12	809-108V12	809-108X12	.423	10.74	.405	10.29	.590	14.99	.093	2.36	.078	1.98
7	809-108F13	809-108V13	809-108X13	.483	12.27	.467	11.86	.650	16.51	.093	2.36	.078	1.98
8	809-108F14	809-108V14	809-108X14	.545	13.84	.530	13.46	.712	18.08	.093	2.36	.078	1.98
9	809-108F16	809-108V16	809-108X16	.607	15.42	.560	14.22	.850	21.59	.125	3.18	.105	2.67
10	809-108F15	809-108V15	809-108X15	.670	17.02	.655	16.64	.890	22.61	.125	3.18	.105	2.67
11	809-108F45	809-108V45	809-108X45	.715	18.16	.717	18.21	.935	23.75	.125	3.18	.105	2.67
13	809-108F17	809-108V17	809-108X17	.812	20.62	.842	21.39	1.030	26.16	.125	3.18	.105	2.67
16	809-108F18	809-108V18	809-108X18	.981	24.92	1.030	26.16	1.219	30.96	.125	3.18	.105	2.67
17	809-108F19	809-108V19	809-108X19	1.060	26.92	1.092	27.74	1.280	32.51	.125	3.18	.105	2.67
19	809-108F44	809-108V44	809-108X44	1.191	30.25	1.218	30.94	1.432	36.37	.125	3.18	.105	2.67
21	809-108F43	809-108V43	809-108X43	1.322	33.58	1.332	33.83	1.570	39.88	.125	3.18	.105	2.67


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Flange gaskets for Series 802 Mighty Mouse receptacles

These flange gaskets provide sealing between square flange receptacles and the mounting panel. Choose fluorosilicone, Viton, or neoprene material. Gaskets are .032" (0.8) thick.




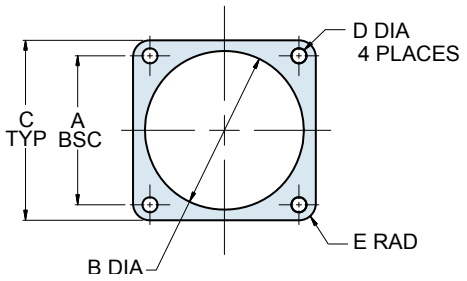


Shell Size	Part Number			Dimensions									
	Fluorosilicone	Viton®	Neoprene	A Bsc.		B Dia.		C Typ.		D Dia.		E Rad.	
				In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	809-108F51	809-108V51	809-108N51	.500	12.70	.448	11.38	.885	22.48	.125	3.18	.105	2.67
6	809-108F52	809-108V52	809-108N52	.625	15.88	.572	14.53	1.010	25.65	.125	3.18	.105	2.67
7	809-108F53	809-108V53	809-108N53	.688	17.48	.635	16.13	1.072	27.23	.125	3.18	.105	2.67
8	809-108F54	809-108V54	809-108N54	.750	19.05	.698	17.73	1.135	28.83	.125	3.18	.105	2.67
9	809-108F55	809-108V55	809-108N55	.812	20.62	.760	19.30	1.195	30.35	.125	3.18	.105	2.67
10	809-108F56	809-108V56	809-108N56	.875	22.23	.822	20.88	1.260	32.00	.125	3.18	.105	2.67
12	809-108F57	809-108V57	809-108N57	.938	23.83	.885	22.48	1.323	33.60	.125	3.18	.105	2.67
14	809-108F58	809-108V58	809-108N58	1.125	28.58	1.072	27.23	1.510	38.35	.125	3.18	.105	2.67
15	809-108F59	809-108V59	809-108N59	1.188	30.18	1.135	28.83	1.573	39.95	.125	3.18	.105	2.67
21	809-108F60	809-108V60	809-108N60	1.375	34.93	1.448	36.78	1.760	44.70	.125	3.18	.105	2.67

Flange gaskets for Series 803 Mighty Mouse receptacles

These flange gaskets provide sealing between elliptical flange receptacles and the mounting panel. Choose fluorosilicone, Viton®, or conductive fluorosilicone material (Chomerics 1298 silver-filled). Gaskets are .032" (0.8) thick.



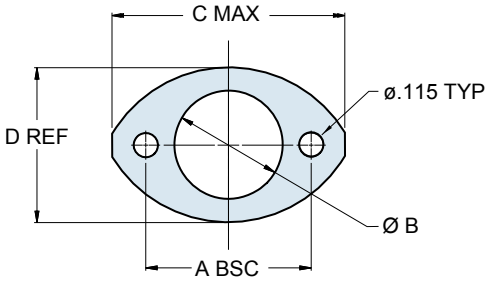


Shell Size	Part Number			Dimensions							
	Fluorosilicone	Viton®	Conductive Fluorosilicone	A Bsc.		B Dia.		C Max.		D Ref.	
				In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	809-108F31	809-108V31	809-108X31	.513	13.03	.345	8.00	.710	18.03	.460	11.68
6	809-108F32	809-108V32	809-108X32	.598	15.19	.405	10.29	.795	20.19	.522	13.26
7	809-108F33	809-108V33	809-108X33	.708	17.98	.475	12.07	.900	22.86	.590	14.99
8	809-108F34	809-108V34	809-108X34	.964	24.51	.545	13.84	1.160	29.46	.670	17.02
9	809-108F35	809-108V35	809-108X35	1.017	25.83	.605	15.37	1.215	30.86	.721	18.31
10	809-108F36	809-108V36	809-108X36	1.101	37.97	.682	17.32	1.295	32.89	.795	20.19
12	809-108F37	809-108V37	809-108X37	1.204	30.58	.757	19.23	1.400	35.56	.874	22.20
14	809-108F38	809-108V38	809-108X38	1.280	32.51	.910	23.11	1.555	39.50	1.050	26.67
15	809-108F39	809-108V39	809-108X39	1.370	34.80	.970	24.64	1.640	41.66	1.150	29.21


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Flange gaskets for Series 805 Mighty Mouse receptacles

These flange gaskets provide sealing between square flange receptacles and the mounting panel. Choose fluorosilicone, Viton®, or conductive fluorosilicone material (Chomerics 1298 silver-filled). Gaskets are .032" (0.8) thick.



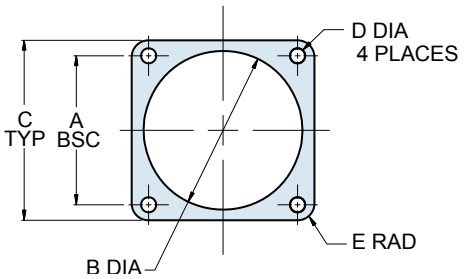

Shell Size	Part Number			Dimensions									
	Fluorosilicone	Viton®	Conductive Fluorosilicone	A Bsc.		B Dia.		C Typ.		D Dia.		E Rad.	
				In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
8	809-108F20	809-108V20	809-108X20	.660	16.76	.530	13.46	.850	21.59	.093	2.36	.078	1.98
9	809-108F21	809-108V21	809-108X21	.723	18.36	.590	14.99	.913	23.19	.093	2.36	.078	1.98
10	809-108F22	809-108V22	809-108X22	.785	19.94	.660	16.76	.975	24.77	.093	2.36	.078	1.98
11	809-108F23	809-108V23	809-108X23	.848	21.54	.720	18.29	1.039	26.39	.093	2.36	.078	1.98
12	809-108F24	809-108V24	809-108X24	.909	23.09	.780	19.81	1.099	27.91	.093	2.36	.078	1.98
13	809-108F29	809-108V29	809-108X29	.973	24.71	.842	21.39	1.163	29.54	.093	2.36	.078	1.98
15	809-108F25	809-108V25	809-108X25	1.058	26.87	.970	24.64	1.288	32.72	.125	3.18	.105	2.67
18	809-108F26	809-108V26	809-108X26	1.255	31.88	1.160	29.46	1.475	37.47	.125	3.18	.105	2.67
19	809-108F27	809-108V27	809-108X27	1.327	33.71	1.220	30.99	1.537	39.04	.125	3.18	.105	2.67
21	809-108F30	809-108V30	809-108X30	1.452	36	1.342	34.09	1.663	42.24	.125	3.18	.105	2.67
23	809-108F28	809-108V28	809-108X28	1.570	39.88	1.458	37.03	1.797	45.64	.125	3.18	.105	2.67


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-Mail: sales@glenair.com

800 and 801 Replacement O-rings for Mighty Mouse jam nut receptacles

Replace lost or damaged O-rings with standard fluorosilicone O-rings. Or, choose EPDM O-rings for improved resistance to hydraulic fluids. Upgrade to silver-filled conductive O-rings for improved EMI protection.



O-rings for Series 800 Jam Nut Receptacles

Shell Size	Part Number				Dimensions	
	Fluoro-silicone	EPDM	Conductive Silicone Cho-Seal 1285	Conductive Fluorosilicone Cho-Seal 1298	ØA	ØB
-05	809-067-05F	809-067-05E	249-003-800-05-B	249-003-800-05-C	.364 (9.25)	.045 (1.14)
-06	809-067-06F	809-067-06E	249-003-800-06-B	249-003-800-06-C	.426 (10.82)	.050 (1.27)
-07	809-067-07F	809-067-07E	249-003-800-07-B	249-003-800-07-C	.489 (12.42)	.055 (1.40)
-08	809-067-08F	809-067-08E	249-003-800-08-B	249-003-800-08-C	.558 (14.94)	.051 (1.30)
-09	809-067-09F	809-067-09E	249-003-800-09-B	249-003-800-09-C	.614 (15.60)	.070 (1.78)
-10	809-067-10F	809-067-10E	249-003-800-10-B	249-003-800-10-C	.709 (18.01)	.079 (2.01)
-12	809-067-12F	809-067-12E	249-003-800-12-B	249-003-800-12-C	.801 (20.35)	.070 (1.78)
-14	809-067-14F	809-067-14E	249-003-800-14-B	249-003-800-14-C	.926 (23.52)	.070 (1.78)
-15	809-067-15F	809-067-15E	249-003-800-15-B	249-003-800-15-C	.989 (25.12)	.070 (1.78)

O-rings for Series 801 Jam Nut Receptacles

Shell Size	Part Number				Dimensions	
	Fluoro-silicone	EPDM	Conductive Silicone Cho-Seal 1285	Conductive Fluorosilicone Cho-Seal 1298	ØA	ΦB
-05	809-054-05F	809-054-05E	249-003-801-05-B	249-003-801-05-C	.394 (10.01)	.047 (1.19)
-06	809-054-06F	809-054-06E	249-003-801-06-B	249-003-801-06-C	.459 (11.66)	.049 (1.24)
-07	809-054-07F	809-054-07E	249-003-801-07-B	249-003-801-07-C	.578 (14.68)	.040 (1.02)
-08	809-054-08F	809-054-08E	249-003-801-08-B	249-003-801-08-C	.578 (14.68)	.040 (1.02)
-09	809-054-09F	809-054-09E	249-003-801-09-B	249-003-801-09-C	.650 (16.51)	.045 (1.14)
-10	809-054-10F	809-054-10E	249-003-801-10-B	249-003-801-10-C	.709 (18.01)	See Note 1
-11	809-054-11F	809-054-11E	N/A	N/A	.780 (19.81)	.047 (1.19)
-13	809-054-13F	809-054-13E	249-003-801-13-B	249-003-801-13-C	.894 (22.71)	.047 (1.19)
-14	809-054-14F	809-054-14E	N/A	N/A	.945 (24.00)	.047 (1.19)
-15	809-054-15F	809-054-15E	N/A	N/A	1.024 (26.01)	.047 (1.19)
-16	809-054-16F	809-054-16E	249-003-801-16-B	249-003-801-16-C	1.086 (27.58)	.040 (1.02)
-17	809-054-17F	809-054-17E	249-003-801-17-B	249-003-801-17-C	1.142 (29.01)	.043 (1.09)
-18	809-054-18F	809-054-18E	N/A	N/A	1.201 (30.51)	.047 (1.19)
-19	809-054-19F	809-054-19E	N/A	N/A	1.257 (31.93)	.047 (1.19)
-21	809-054-21F	809-054-21E	249-003-801-21-B	249-003-801-21-C	1.417 (35.99)	.047 (1.19)
-23	809-054-23F	809-054-23E	249-003-801-23-B	249-003-801-23-C	1.530 (38.86)	.047 (1.19)

1. Non-conductive O-rings are .049 (1.24). Conductive O-rings are .043 (1.09)

Dimensions in Inches (millimeters) are subject to change without notice.


Rev. 12/22/17

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Replacement O-Rings
For Jam Nut Receptacles

802 Replacement O-rings for Mighty Mouse receptacles


These Viton® O-rings fit Series 802 "AquaMouse" rear panel mount jam nut connector flanges.



Flange O-rings for Series 802 Jam Nut and Square Flange Receptacles

Shell Size	Jam Nut Flange Style			Square Flange Style		
	Part Number Viton®	O-Ring Size	Ø A	Part Number Viton®	O-Ring Size	Ø A
-05	809-165-05	2-015	.551 (14.00)	809-165-35	2-012	.364 (9.25)
-06	809-165-06	2-017	.676 (17.17)	809-165-36	2-014	.489 (12.42)
-07	809-165-07	2-018	.739 (18.77)	809-165-37	2-015	.551 (14.00)
-08	809-165-08	2-019	.801 (20.35)	809-165-38	2-016	.614 (15.60)
-09	809-165-09	2-020	.864 (21.95)	809-165-39	2-017	.676 (17.17)
-10	809-165-10	2-021	.926 (23.52)	809-165-40	2-018	.739 (18.77)
-12	809-165-12	2-022	.989 (25.12)	809-165-42	2-019	.801 (20.35)
-14	809-165-14	2-025	1.176 (29.87)	809-165-44	2-022	.989 (25.12)
-15	809-165-15	2-026	1.239 (31.47)	809-165-45	2-023	1.051 (26.70)
-21	809-165-21	2-030	1.614 (41.00)	809-165-51	2-028	1.364 (34.65)

These Viton® Piston O-rings fit Series 802 "AquaMouse".




Piston O-rings for Series 802

Shell Size	Part Number Viton®	ØA In.	Shell Size	Part Number Viton®	ØA In.
-05	809-209-05	.208 (5.28)	10	809-209-10	.551 (14.00)
-06	809-209-06	.270 (6.86)	12	809-209-12	.614 (15.60)
-07	809-209-07	.364 (9.25)	14	809-209-14	.801 (20.35)
-08	809-209-08	.384 (9.75)	15	809-209-15	.864 (21.95)
-09	809-209-09	.489 (12.42)	21	809-209-21	1.051 (26.70)

803 Replacement O-rings for Mighty Mouse jam nut receptacles

Replace lost or damaged O-rings with standard fluorosilicone O-rings. Or, choose EPDM O-rings for improved resistance to hydraulic fluids.



O-rings for Series 803 Jam Nut Receptacles


Shell Size	Part Number		Dimensions	
	Fluoro- silicone	EPDM	ØA	ØB
-05	809-189-05F	809-189-05E	.394 (10.01)	.047 (1.19)
-06	809-189-06F	809-189-06E	.459 (11.66)	.049 (1.24)
-07	809-189-07F	809-189-07E	.578 (14.68)	.040 (1.02)
-08	809-189-08F	809-189-08E	.650 (16.51)	.045 (1.14)
-09	809-189-09F	809-189-09E	.650 (16.51)	.045 (1.14)
-10	809-189-10F	809-189-10E	.780 (19.81)	.047 (1.19)
-12	809-189-12F	809-189-12E	.894 (22.71)	.047 (1.19)
-14	809-189-14F	809-189-14E	1.086 (27.58)	.040 (1.02)
-15	809-189-15F	809-189-15E	1.142 (29.01)	.043 (1.09)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

804 and 805 O-Rings for Mighty Mouse jam nut receptacles

Replace lost or damaged O-rings with standard fluorosilicone O-rings. Or, choose EPDM o-rings for improved resistance to hydraulic fluids. Upgrade to silver-filled conductive O-rings for improved EMI protection.



O-rings for Series 804 Jam Nut Receptacles (Style 07)

Shell Size	Part Number				Dimensions	
	Fluoro-silicone	EPDM	Conductive Silicone Cho-Seal 1285	Conductive Fluorosilicone Cho-Seal 1298	ØA	ØB
05	809-055-05F	809-055-05E	249-003-804-05-B	249-003-804-05-C	.505 (12.83)	.070 (1.78)
06	809-055-06F	809-055-06E	249-003-804-06-B	249-003-804-06-C	.525 (13.34)	.071 (1.80)
07	809-055-07F	809-055-07E	249-003-804-07-B	249-003-804-07-C	.638 (16.21)	.073 (1.85)
08	809-055-08F	809-055-08E	249-003-804-08-B	249-003-804-08-C	.688 (17.48)	.070 (1.78)
09	809-055-09F	809-055-09E	249-003-804-09-B	249-003-804-09-C	.750 (19.05)	.070 (1.78)
10	809-055-10F	809-055-10E	249-003-804-10-B	249-003-804-10-C	.813 (20.65)	.063 (1.60)
11	809-055-11F	809-055-11E	249-003-804-11-B	249-003-804-11-C	.864 (21.95)	.070 (1.78)
12	809-055-12F	809-055-12E	249-003-804-12-B	249-003-804-12-C	.943 (23.95)	.070 (1.78)
14	809-055-14F	809-055-14E	249-003-804-14-B	249-003-804-14-C	1.061 (26.95)	.073 (1.85)
15	809-055-15F	809-055-15E	249-003-804-15-B	249-003-804-15-C	1.114 (28.30)	.070 (1.78)

O-rings for Series 805 Jam Nut Receptacles

Shell Size	Part Number				Dimensions	
	Fluoro-silicone	EPDM	Conductive Silicone Cho-Seal 1285	Conductive Fluorosilicone Cho-Seal 1298	ØA	ØB
08	809-150-08F	809-150-08E	249-003-805-08-B	249-003-805-08-C	.578 (14.68)	.040 (1.02)
09	809-150-09F	809-150-09E	249-003-805-09-B	249-003-805-09-C	.709 (18.01)	.045 (1.14)
10	809-150-10F	809-150-10E	249-003-805-10-B	249-003-805-10-C	.709 (18.01)	See note 1
11	809-150-11F	809-150-11E	249-003-805-11-B	249-003-805-11-C	.780 (19.81)	.047 (1.19)
12	809-150-12F	809-150-12E	249-003-805-12-B	249-003-805-12-C	.894 (22.71)	.047 (1.19)
13	809-150-13F	809-150-13E	249-003-805-13-B	249-003-805-13-C	.945 (24.00)	.047 (1.19)
15	809-150-15F	809-150-15E	249-003-805-15-B	249-003-805-15-C	1.024 (26.01)	.047 (1.19)
18	809-150-18F	809-150-18E	249-003-805-18-B	249-003-805-18-C	1.201 (30.51)	.047 (1.19)
19	809-150-19F	809-150-19E	249-003-805-19-B	249-003-805-19-C	1.257 (31.93)	.047 (1.19)
21	809-150-21F	809-150-19E	249-003-805-21-B	249-003-805-21-C	1.417 (35.99)	.047 (1.19)
23	809-150-23F	809-150-23E	249-003-805-23-B	249-003-805-23-C	1.530 (38.86)	.047 (1.19)

1. Non-conductive O-rings are .049 (1.24). Conductive O-rings are .045 (1.14)


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 800 Mighty Mouse
Mounting Flange with Standard or Metric Threads
809-199 and 809-303 Ordering Information



How To Order			
Sample Part Number	**809-199**	**-10**	**EAP**
Series	**809-199** = Mounting Flange with standard threads **809-303** = Mounting Flange with metric threads		
Dash No.	**1** thru **22**		
Shell Material/Finish	Mounting Flange: Aluminum Alloy Clinch Nuts: Cres/Passivate Omit for Chem Film per MIL-C-5541 EAP - Polyamide Primer per MIL-PRF-23377		

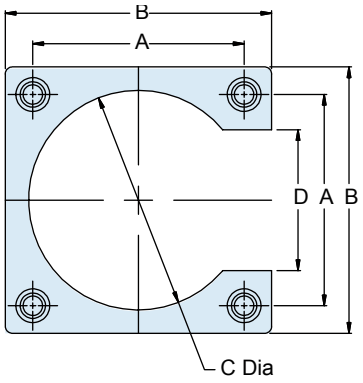



Dimensions

Dash No	800 shell Size	801 Shell Size	802 Shell Size	805 Shell Size	A ± .005		B ±.010		C ±.010		D ±.010		809-199 Thread Size	809-303 Thread Size
					in	mm	in	mm	in	mm	in	mm		
1			5		.500	12.70	.780	19.81	.400	10.16	.220	5.59	4-40	M3 X .5
2			6		.625	15.88	.905	22.99	.600	15.24	.345	8.76	4-40	M3 X .5
3				8	.660	16.76	.880	22.35	.700	17.78	.440	11.18	2-56	M2 X .4
4			7		.688	17.48	.968	24.59	.680	17.27	.408	10.36	4-40	M3 X .5
5	9,10				.720	18.29	1.000	25.40	.728	18.49	.440	11.18	4-40	M3 X .5
6				9	.720	18.29	.940	23.88	.728	18.49	.440	11.18	2-56	M2 X .4
7			8		.750	19.05	1.030	26.16	.770	19.56	.470	11.94	4-40	M3 X .5
8				10	.785	19.94	1.005	25.53	.805	20.45	.565	14.35	2-56	M2 X .4
9	12	13	9		.812	20.62	1.092	27.74	.860	21.84	.532	13.51	4-40	M3 X .5
10				11	.848	21.54	1.068	27.13	.868	22.05	.628	15.95	2-56	M2 X .4
11			10		.875	22.23	1.155	29.34	.946	24.03	.595	15.11	4-40	M3 X .5
12	14				.909	23.09	1.189	30.20	.955	24.26	.629	15.98	4-40	M3 X .5
13				12	.909	23.09	1.129	28.68	.909	23.09	.629	15.98	2-56	M2 X .4
14			12		.938	23.83	1.218	30.94	1.018	25.86	.658	16.71	4-40	M3 X .5
15	15				.969	24.61	1.249	31.72	1.049	26.64	.689	17.50	4-40	M3 X .5
16		16			.981	24.92	1.261	32.03	1.061	26.95	.701	17.81	4-40	M3 X .5
17		17		15	1.060	26.92	1.340	34.04	1.140	28.96	.780	19.81	4-40	M3 X .5
18			14		1.125	28.58	1.405	35.69	1.205	30.61	.845	21.46	4-40	M3 X .5
19		19*	15		1.188	30.18	1.468	37.29	1.268	32.21	.908	23.06	4-40	M3 X .5
20				18	1.255	31.88	1.535	38.99	1.335	33.91	.975	24.77	4-40	M3 X .5
21		21*		19	1.327	33.71	1.607	40.82	1.407	35.74	1.047	26.59	4-40	M3 X .5
22				23	1.570	39.88	1.850	46.99	1.650	41.91	1.290	32.77	4-40	M3 X .5

* Available for 809-199 only

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Straight Shorting Cap with Attachment
340MS026 Ordering Information



Shorting Applications — These caps are used to cover up exposed wires on the back of a shorting connector. Shorting connectors are used to protect critical circuits from static discharge. Plugs can also re-route circuits in Switching applications. Or, resistors and active electronics can be installed. Whatever the application, a shorting cap is a simple way to cover up the back end of the connector.

Table I: Overall Length	
-4 – .50 (12.7)	**-10** – 2.00 (50.8)
-5 – .75 (19.1)	**-11** – 2.25 (57.2)
-6 – 1.00 (25.4)	**-12** – 2.50 (63.5)
-7 – 1.25 (31.8)	**-13** – 2.75 (69.9)
-8 – 1.50 (38.1)	**-14** – 3.00 (76.2)
-9 – 1.75 (44.5)	






Table II: Attachment Code	
Omit for attachment types **N** (No Attachment) and **SK** (Slip Knot)	
 Small Ring	**01** – .126 (3.20) I.D. **02** – .145 (3.68) I.D. **04** – .188 (4.78) I.D. **06** – .197 (5.00) I.D.
 Large Solid Ring	**14** – .385 (9.78) I.D. **15** – .445 (11.30) I.D. **16** – .570 (14.48) I.D. **17** – .635 (16.13) I.D. **18** – .695 (17.65) I.D. **19** – .885 (22.48) I.D. **20** – 1.070 (27.17) I.D. **21** – 1.135 (28.83) I.D. **22** – 1.210 (30.73) I.D.

NOTES

Materials


- Cap: Aluminum Alloy 6061-T6 or 300 Series Stainless Steel
- O-Ring: Silicone Rubber
- Hardware: 300 Series Stainless Steel

How To Order							
Sample Part Number	**340MS026**	**M**	**G**	**07**	**-4**	**02**	**-6**
Series	**340MS026** = Straight Shorting Cap Backshell						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated						
Attachment Type	**G** = Nylon Rope **H** = SST Wire Rope, Fluoropolymer® Jacket **N** = No Attachment **S** = SST Sash Chain **SK** = Nylon Rope With Slip Knot **U** = SST Wire Rope, Polyurethane Jacket						
Size Code	**05, 06, 11, 07, 08, 09, 10, 12, 13, 14, 16, 17**						
Overall Length (See Table I)	**-4, -5, -7, -8, -9, -10, -11, -12, -13, -14**						
Attachment Code (See Table II)	Omit for attachment Type N (No Attachment) **Small Ring**: **01, 02, 04, 06** **Large Solid Ring**: **14, 15, 16, 17, 18,19, 20, 21, 22**						
Attachment Length in Inches	**Omit** for attachment Type N (No Attachment) Example: "**-6**" equals six inch length						

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Shorting Cap Dimensions
340MS026

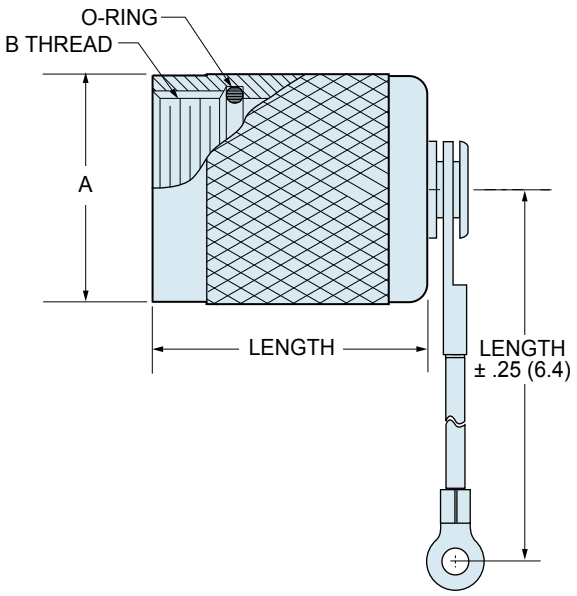

Attachment Options

	Dia. Code	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		±.005	±0.13	Max.	Max.
Small Ring for Attaching to a Panel with a Screw	01	.126	3.20	.31	7.9
	02	.145	3.68	.31	7.9
	04	.188	4.78	.31	7.9
	06	.197	5.00	.31	7.9

	Dia. Code	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		± .010	±0.25	± .015	± 0.38
Large Solid Ring for Attaching to a Jam Nut Receptacle	14	.385	9.78	.510	12.95
	15	.445	11.30	.565	14.35
	16	.570	14.48	.685	17.40
	17	.635	16.13	.760	19.30
	18	.695	17.65	.820	20.82
	19	.885	22.48	1.010	25.65
	20	1.070	27.17	1.195	30.35
	21	1.135	28.83	1.250	31.75
	22	1.210	30.73	1.312	33.32

Nylon Rope With Slip Knot (SK) for Attaching Covers to Cable	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

Dimensions

Size Code	Shell Size Reference		Ø A Max.		B Threads
	800/801 803/804	805	In.	mm.	
05	5	N/A	.350	8.89	.250-32 UNEF-2B
06	6	N/A	.415	10.54	.3125-32 UNEF-2B
11	N/A	8	.465	11.81	.3750-32 UNEF-2B
07	7	9	.530	13.46	.4375-28 UNEF-2B
08	8	10	.595	14.35	.5000-28 UNEF-2B
09	9	11	.650	16.51	.5625-24 UNEF-2B
10	10	12	.715	18.16	.6250-24 UNEF-2B
12	11/12/13	13	.785	19.94	.6875-24 UNEF-2B
13	N/A	15	.830	21.08	.7500-20 UNEF-2B
14	14/15/16/17	18/19	1.020	25.91	.9375-20 UNEF-2B
16	19	21	1.155	29.34	1.0625-18 UNEF-2B
17	21	23	1.270	32.26	1.1875-18 UNEF-2B

Lanyard Options

Nylon Rope (G)	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
Polyurethane Coated Wire Rope (U)	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
Fluoropolymer Jacketed Wire Rope (H)	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
Sash Chain (S)	Stainless steel, #8 chain, .240" (6mm)

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Shorting Cap with Rotatable Coupling and Attachment
340MS001 Ordering Information



Shorting Applications — These caps are used to cover up exposed wires on the back of a shorting connector. Shorting connectors are used to protect critical circuits from static discharge.

These extended plugs can also re-route circuits in **Switching** applications like our smaller plugs, but accommodate the need for additional resistors and active electronics when needed.

How To Order

Sample Part Number	340MS001	M	12	-5	E	A	
Series	**340MS001** Straight Backshell and Shorting Cap						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated						
Size Code (See Table II)	**05**, **06**, **07**, **08**, **09**, **10**, **12**, **13**, **14**, **16**, **17**						
Length	Length in .5 inch increments. Example: 6 = 3.0 inches Standard minimum length is 1.00 inch (dash code -2)						
Attachment Sym	See Table I						
Attachment Length	Length in .5 inch increments. Example: 6 = 3.0 inches						
Att. Ring Dia.	See Table III						

Table I: Attachment Sym


Sym	Description
C	No Attachment, Body Strap Only
D	Bead Chain, Cres/ Passivate, with Terminal
E	Link Chain, Cres/ Passivate, with Reverse Link
F	Wire Rope, Nylon Jacket with Terminal
G	Nylon Rope, with Terminal
H	SST Wire Rope, Fluoropolymer Jacket
N	Attachment Omitted
R	Wire Rope, Fluoropolymer Jacket, with Terminal
S	#8 Sash Chain, Cres/ Passivate
U	SST Wire Rope, Polyurethane Jacket

Table II

Size Code	Shell Size Reference 800/801 803/804	Shell Size Reference 805	A Thread Class -2B	Ø B Max In.	Ø B Max mm.
05	5	N/A	1/4-32 UNEF	0.470	11.94
06	6	N/A	5/16-32 UNEF	0.530	13.46
11	N/A	8	3/8-32 UNEF	0.570	14.48
07	7	9	7/16-28 UNEF	0.637	16.18
08	8	10	1/2-28 UNEF	0.700	17.78
09	9	11	9/16-24 UNEF	0.758	19.25
10	10	12	5/8-24 UNEF	0.819	20.80
12	11/12/13	13	11/16-24 UNEF	0.896	22.76
13	N/A	15	3/4-20 UNEF	0.930	23.62
14	14/15/16/17	18/19	15/16-20 UNEF	1.137	28.88
16	19	21	1 1/16-18 UNEF	1.230	31.24
17	21	23	1 3/16-18 UNEF	1.387	35.23

Table III: Attachment Ring Diameter

Symbol	E Dia.	Symbol	E Dia.
A	.140	D	.191
B	.167	E	.125
C	.182	F	.218

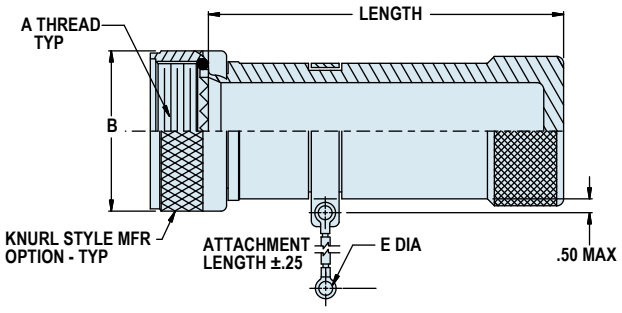

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Direct or Rotatable Coupling Strain Relief Clamp
620MS064 & 620M*065 Straight, 45° and 90° Ordering Information





These clamps provide strain relief to open wire bundles. Add tubing or tape to build up smaller diameter wires to fit the clamps.

Straight Entry clamps are available with rotatable coupling or save space with lower profile direct coupling versions.

How To Order			
Sample Part Number	**620MS064**	**M**	**07**
Series (See Table I)	**620MS064 =** Straight Direct Coupling **620MS065 =** Straight Rotatable Coupling **620MB065 =** 45° Rotatable Coupling **620MA065 =** 90° Rotatable Coupling		
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated		
Size Code (See Table II)	**05, 06, 11, 07, 08, 09, 10, 12, 13, 14, 15, 16, 17**		

Table I: Cover Style

	
620MS065 Rotatable Coupling	**620MS064** Direct Coupling

NOTES

Materials

- Coupling Nut, Clamp, and Saddles: Aluminum Alloy 6061-T6 or 300 Series SST
- Hardware: 300 Series Stainless Steel


Table II: Size Codes

Size Code	Shell Size Ref		A Thread Size Class-2B	Cable Entry Diameter (E Closed Dia)
	Series 800, 801 803, 804	Series 805		
05	5	N/A	.2500-32 UNEF	.11
06	6	N/A	.3125-32 UNEF	.17
11	N/A	8	.3750-32 UNEF	.17
07	7	9	.4375-28 UNEF	.23
08	8	10	.5000-28 UNEF	.30
09	9	11	.5625-24 UNEF	.30
10	10	12	.6250-24 UNEF	.36
12	11/12/13	13	.6875-24 UNEF	.42
13	N/A	15	.7500-20 UNEF	.42
14	14/15/16/17	18/19	.9375-20 UNEF	.48
15	14/15/16/17	18/19	.9375-20 UNEF	.61
16	19	21	1.0625-18 UNEF	.73
17	21	23	1.1875-18 UNEF	.86


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Direct or Rotatable Coupling Strain Relief Clamp
620MS064 & 620MS065 Straight Dimensions

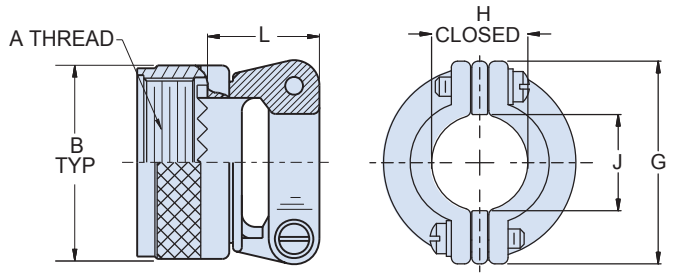

SYMBOL S: STRAIGHT
ROTATABLE COUPLING
620MS065

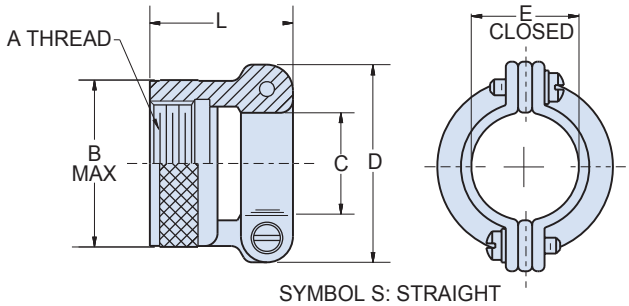

SYMBOL S: STRAIGHT
DIRECT COUPLING
620MS064

620MS065 Symbol S Dimensions

Size Code	Shell Size Ref		A Thread Class -2B	B Typ		G Dim		H Closed		J Dim		L Max.	
	Series 800, 801, 803, 804	Series 805		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
05	5	N/A	.2500-32 UNEF	.470	11.94	.496	12.60	.11	2.79	.119	3.02	.688	17.48
06	6	N/A	.3125-32 UNEF	.530	13.46	.582	14.78	.17	4.32	.182	4.62	.688	17.48
11	N/A	8	.375-32 UNEF	.570	14.48	.582	14.78	.17	4.32	.182	4.62	.688	17.48
07	7	9	.4375-28 UNEF	.637	16.18	.656	16.66	.23	5.08	.244	6.20	.688	17.48
08	8	10	.5000-28 UNEF	.700	17.78	.726	18.44	.30	7.62	.307	7.80	.688	17.48
09	9	11	.5625-24 UNEF	.758	19.25	.726	18.44	.30	7.62	.307	7.80	.750	19.05
10	10	12	.6250-24 UNEF	.819	20.80	.885	22.48	.36	9.14	.369	9.37	.750	19.05
12	11/12/13	13	.6875-24 UNEF	.896	22.76	.952	24.18	.42	10.67	.432	10.97	.750	19.05
13	N/A	15	.750-20 UNEF	.930	23.62	.952	24.18	.42	10.67	.432	10.97	.750	19.05
14	14/15/16/17	18/19	.9375-20 UNEF	1.137	28.88	1.018	25.86	.48	12.19	.494	12.55	.750	19.05
15	14/15/16/17	18/19	.9375-20 UNEF	1.137	28.88	1.148	29.16	.61	15.49	.619	15.72	.750	19.05
16	19	21	1.0625-18 UNEF	1.230	31.24	1.273	32.33	.73	18.54	.744	18.90	.750	19.05
17	21	23	1.1875-18 UNEF	1.387		1.400	35.56	.86	21.84	.869	22.07	.750	19.05

620MS064 Symbol S Dimensions


Size Code	Shell Size Ref		A Thread Class -2B	B Max.		C Dia.		D Dia.		E Dia. Closed		L Max	
	Series 800, 801, 803, 804	Series 805		In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
05	5	N/A	.2500-32 UNEF	.350	8.89	.119	3.02	.496	12.60	.11	2.79	.625	15.88
06	6	N/A	.3125-32 UNEF	.415	10.54	.182	4.62	.582	14.78	.17	4.32	.625	15.88
11	N/A	8	.375-32 UNEF	.465	11.81	.182	4.62	.582	14.78	.17	4.32	.625	15.88
07	7	9	.4375-28 UNEF	.530	13.46	.244	6.20	.656	16.66	.23	5.08	.688	17.48
08	8	10	.5000-28 UNEF	.595	15.11	.307	7.80	.726	18.44	.30	7.62	.688	17.48
09	9	11	.5625-24 UNEF	.650	16.51	.307	7.80	.726	18.44	.30	7.62	.750	19.05
10	10	12	.6250-24 UNEF	.715	18.16	.369	9.37	.885	22.48	.36	9.14	.875	22.23
12	11/12/13	13	.6875-24 UNEF	.785	19.94	.432	10.97	.952	24.18	.42	10.67	.875	22.23
13	N/A	15	.750-20 UNEF	.830	21.08	.432	10.97	.952	24.18	.42	10.67	.875	22.23
14	14/15/16/17	18/19	.9375-20 UNEF	1.020	25.91	.494	12.55	1.018	25.86	.48	12.19	1.000	25.40
15	14/15/16/17	18/19	.9375-20 UNEF	1.020	25.91	.619	15.72	1.148	29.16	.61	15.49	1.000	25.40
16	19	21	1.0625-18 UNEF	1.155	29.34	.744	18.90	1.273	32.33	.73	18.54	1.000	25.40
17	21	23	1.1875-18 UNEF	1.280	32.51	.869	22.07	1.400	35.56	.86	21.84	1.125	28.58

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse
Rotatable Coupling Strain Relief Clamp
620MA065 90° and 620MB065 45° Dimensions

90° Rotatable coupling clamp

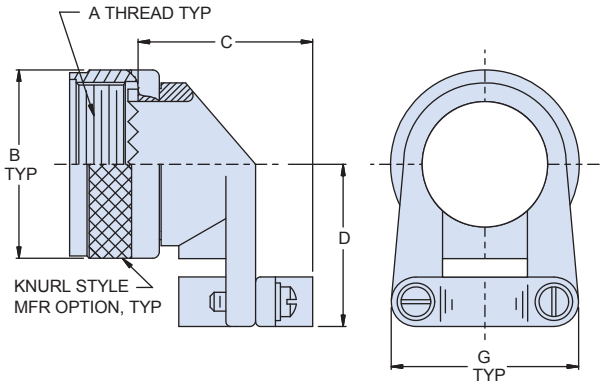

SYMBOL A: 90°
620MA065

45° Rotatable coupling clamp

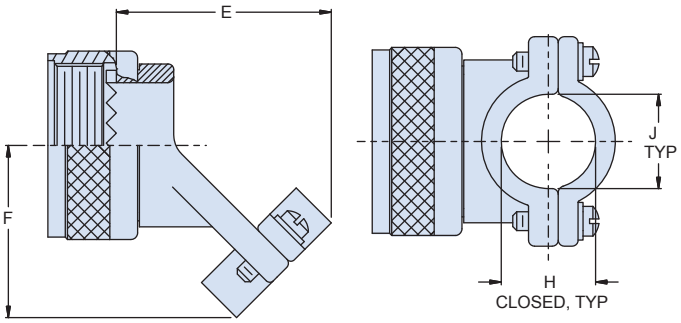

SYMBOL B: 45°
620MB065

X

620MA065 Symbol A Dimensions

Size Code	Shell Size Ref		A Thread Class -2B	B Max		C Max		D Max		G Typ	
	800/801/803/804	805		in	mm	in	mm	in	mm	in	mm
05	5	N/A	1/4-32 UNEF	.470		.613		.551			
06	6	N/A	5/16-32 UNEF	.530		.675		.582			
11	N/A	8	3/8-32 UNEF	.570		.675		.602			
07	7	9	7/16-28 UNEF	.637		.675		.632			
08	8	10	1/2-28 UNEF	.700		.743		.662			
09	9	11	9/16-24 UNEF	.758		.743		.691			
10	10	12	5/8-24 UNEF	.819		.805		.846			
12	11/12/13	13	11/16-24 UNEF	.896		.868		.881			
13	N/A	15	3/4-20 UNEF	.930		.868		.921			
14	14/15/16/17	18/19	15/16-20 UNEF	1.137		.993		.998			
15	14/15/16/17	18/19	15/16-20 UNEF	1.137		1.055		1.060			
16	19	21	1 1/16-18 UNEF	1.230		1.243		1.090			
17	21	23	1 3/16-18 UNEF	1.387		1.312		1.151			

620MB065 Symbol B Dimensions

Size Code	Shell Size Ref		E Max		F max		G Dim		H Closed		J Dim	
	800/801/803/804	805	in	mm	in	mm	in	mm	in	mm	in	mm
05	5	N/A	.806		.511		.496		0.11		0.119	
06	6	N/A	.850		.542		.582		0.17		0.182	
11	N/A	8	.850		.562		.582		0.17		0.182	
07	7	9	.850		.592		0.656		0.23		0.244	
08	8	10	.887		.622		0.726		0.30		0.307	
09	9	11	.887		.651		0.726		0.30		0.307	
10	10	12	1.018		.770		0.885		0.36		0.369	
12	11/12/13	13	1.061		.805		0.952		0.42		0.432	
13	N/A	15	1.091		.855		0.952		0.42		0.432	
14	14/15/16/17	18/19	1.146		.922		1.018		0.48		0.494	
15	14/15/16/17	18/19	1.208		.984		1.148		0.61		0.619	
16	19	21	1.325		.950		1.273		0.73		0.744	
17	21	23	1.495		1.042		1.400		0.86		0.869	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 80 Mighty Mouse
Rotatable Coupling Band-Master™ ATS Thread-On Adapter
440M*135 Straight, 90° and 45° Ordering Information



These thread-on adapters are used with ***Band-Master™ ATS Micro Band*** shield termination straps. Choose the smallest cable entry for your wire bundle. ***Straight Entry*** adapters are available in various lengths. ***Straight***, ***45°*** and ***90°*** adapters feature rotatable coupling nuts.

Band-Master™ ATS Band Microband 601-061



Band-Master™ ATS Micro Band Tool 601-101








Add a boot or overmold for environmental protection (Shown without boot)

X

How To Order							
Sample Part Number	**440MS135**	**M**	**07**	**05-**	**7**	**K**	
Series (See Table I)	**440MS135** = Straight Entry **440MK135** = 45° Entry **440ML135** = 90° Entry						
Shell Material and Finish	**UCR** = Aluminum / Zinc Cobalt Black **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated						
Size Code (See Table II)	**05, 06, 11, 07, 08, 09, 10, 12, 13, 14, 16, 17**						
Cable Entry Size (See Table III)	**02-, 03-, 04-, 05-, 06-, 07-, 08-, 09-, 10-, 11-, 12-, 13-, 14-**						
Length	Applies to symbol "S", straight only Length in 1/8 (3.18mm) inch increments (i.e. 7 = .875 inches)						
Band Option	**K** = Pre-coiled Band Supplied (600-057-1) = Band Supplied (600-057) **Omit** for no band supplied						
Lace-Tie Option	T = Lace-Tie **Omit** for no lace-tie option						

Table I: Cover Style		
		
440MS135 Straight Entry	**440MK135** 45° Entry	**440ML135** 90° Entry

NOTES

1. Standard Minimum Length is .75. applies to symbol "S" straight only.
2. Consult factory for larger cable entries dimensions C, D, E & F may be exceeded.


Materials

- Coupling nut, Adapter: aluminum alloy or 300 series SST
- Band: 300 series SST
- O-ring: silicone elastomer


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse
Rotatable Coupling Band-Master™ ATS Adapter
440MS135, 440MK135 and 440ML135 Dimensions

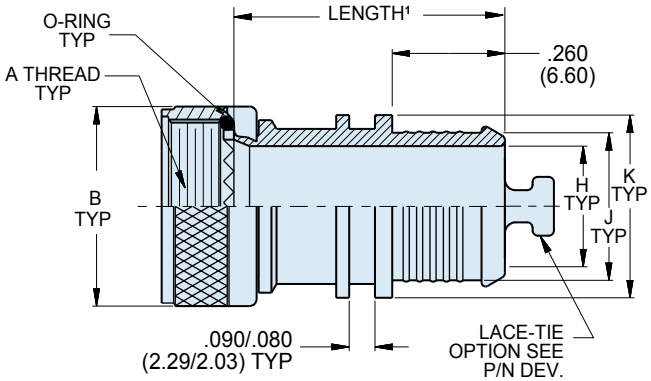

STRAIGHT ENTRY
ROTATABLE COUPLING
440MS135

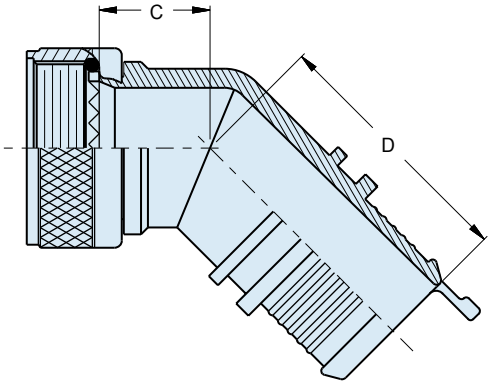

45° ENTRY
ROTATABLE COUPLING
440MK135

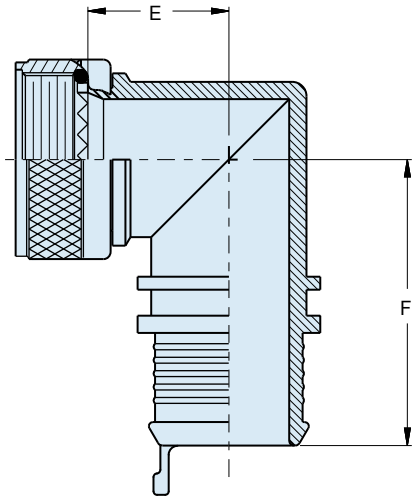

90° ENTRY
ROTATABLE COUPLING
440ML135

Table II: Dimensions

Size Code	A Threads	Shell Size		Max Cable Entry Code[2]
		Series 800, 801, 803, 804	Series 805	
05	.2500-32 UNEF-2B	5	N/A	03
06	.3125-32 UNEF-2B	6	N/A	04
11	.375-32 UNEF-2B	N/A	8	04
07	.4375-28 UNEF-2B	7	9	06
08	.5000-28 UNEF-2B	8	10	07
09	.5625-24 UNEF-2B	9	11	08
10	.6250-24 UNEF-2B	10	12	09
12	.6875-24 UNEF-2B	11, 12, 13	13	10
13	.750-20 UNEF-2B	N/A	15	10
14	.9375-20 UNEF-2B	14, 15, 16, 17	18, 19	14
16	1.0625-18 UNEF-2B	19	21	15
17	1.1875-18 UNEF-2B	21	23	16

Table II: Dimensions (continued)

Size Code	B Max.		C Max.		D Max.		E Max.		F Max.	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
05	.470	11.94	.530	13.46	.660	16.76	.630	16.00	.780	19.81
06	.530	13.46	.550	13.97	.670	17.02	.660	16.76	.790	20.27
11	.570	14.48	.560	14.22	.680	17.27	.680	17.27	.810	20.57
07	.637	16.18	.570	14.48	.690	17.53	.700	17.78	.830	21.08
08	.700	17.78	.580	14.73	.700	17.78	.740	18.80	.860	21.84
09	.758	19.25	.590	14.99	.710	18.03	.770	19.56	.890	22.61
10	.819	20.80	.610	15.49	.730	18.54	.800	20.32	.920	23.37
12	.896	22.76	.640	16.26	.750	19.05	.840	21.34	.970	24.64
13	.930	23.62	.660	16.76	.770	19.56	.890	22.60	1.020	25.91
14	1.137	28.88	.690	17.53	.800	20.32	.950	24.13	1.090	27.69
16	1.230	31.24	.710	18.03	.820	20.82	.980	24.89	1.130	28.70
17	1.387	35.23	.720	18.29	.830	21.08	1.010	25.65	1.160	29.46

Table III: Cable Entry Dimensions

Cable Entry Code	Ø H		Ø J		Ø K	
	In.	mm.	In.	mm.	In.	mm.
	± .015	± 0.38	± .015	± 0.38	± .015	± 0.38
02	.125	3.18	.164	4.17	.266	6.76
03	.188	4.78	.227	5.77	.329	8.36
04	.250	6.35	.289	7.34	.391	9.93
05	.312	7.92	.351	8.92	.453	11.51
06	.375	9.53	.414	10.52	.516	13.11
07	.438	11.13	.477	12.12	.579	14.71
08	.500	12.70	.539	13.69	.641	16.28
09	.562	14.27	.601	15.27	.703	17.86
10	.625	15.88	.664	16.87	.766	19.46
11	.688	17.48	.727	18.47	.829	21.06
12	.750	19.05	.789	20.04	.891	22.63
13	.812	20.62	.851	21.62	.953	24.21
14	.875	22.23	.914	23.22	1.016	25.81
15	.938	23.83	.977	24.82	1.079	27.41
16	1.00	25.4	1.039	26.39	1.141	28.98

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Environmental Direct Coupling Band-Master™ ATS Adapter
440MS134 Straight - Ordering Information



These adapters are used with Band-Master™ ATS micro band shield termination straps. Choose the smallest cable entry for your wire bundle.

Band-Master™ ATS Band Microband 601-061



Band-Master™ ATS Micro Band Tool 601-101






Add a boot or overmold for environmental protection (Shown without boot)

X

How To Order						
Sample Part Number		**440MS134**	**NF**	**07**	**04**	**B**
Series (See Table I)	**440MS134** = Straight Entry					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated					
Size Code (See Table II)	**05, 06, 11, 07, 08, 09, 10, 12, 13, 14, 17**					
Cable Entry Size (See Table III)	**01, 02, 03, 04, 05, 06, 07, 08, 09, 10, 11, 12, 13, 14**					
Band Option	**B** = 601-060 flat band supplied **K** = 601-061 pre-coiled band supplied **Omit** = no band supplied					

Table I: Cover Style



440MS134
Straight Entry

NOTES


Materials

- Adapter: Aluminum Alloy or 300 Series SST
- Band: 300 Series SST
- O-Ring: Silicone Elastomer

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Low-Profile Band-Master™ ATS Adapter
440MS134 Straight - Dimensions

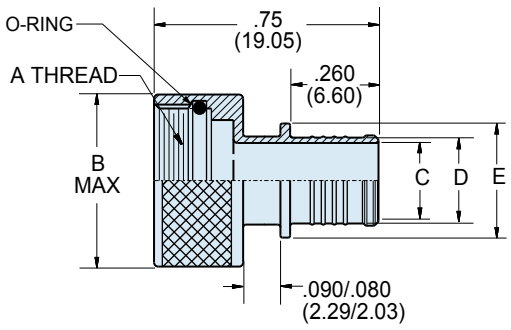

STRAIGHT ENTRY
DIRECT COUPLING
440MS134

Table III: Banding Platform and Cable Entry Dimensions

Cable Entry Code	Ø C		Ø D		Ø E	
	In.	mm.	In.	mm.	In.	mm.
	± .015	± 0.38	± .015	± 0.38	± .015	± 0.38
01	.094	2.39	.133	3.38	.235	5.97
02	.125	3.18	.164	4.17	.266	6.76
03	.172	4.37	.211	5.36	.313	7.95
04	.234	5.94	.273	6.93	.375	9.53
05	.272	6.91	.311	7.90	.413	10.49
06	.312	7.92	.351	8.92	.453	11.51
07	.375	9.53	.414	10.52	.516	13.11
08	.438	11.13	.477	12.12	.579	14.71
09	.500	12.70	.539	13.69	.641	16.28
10	.562	14.27	.601	15.27	.703	17.86
11	.625	15.88	.664	16.87	.766	19.46
12	.688	17.48	.727	18.47	.829	21.06
13	.750	19.05	.789	20.04	.891	22.63
14	.812	20.62	.851	21.62	.953	24.21
15	.875	22.15	.914	23.22	1.016	25.81
16	.938	23.83	.977	24.82	1.079	27.41
17	1.000	25.40	1.039	26.39	1.141	28.98

Table II: Size Code Dimensions and Reference

Adapter Size Code	Shell Size Reference		A Threads	B Max.		Use with Cable Entry Size Codes
	800, 801, 803, 804	Series 805		In.	mm.	
05	5	N/A	.2500-32 UNEF-2B	.350	8.89	01 thru 03
06	6	N/A	.3125-32 UNEF-2B	.415	10.54	01 thru 04
11	N/A	8	.375-32 UNEF-2B	.465	11.81	01 thru 04
07	7	9	.4375-28 UNEF-2B	.530	13.46	02 thru 06
08	8	10	.5000-28 UNEF-2B	.595	15.11	03 thru 07
09	9	11	.5625-24 UNEF-2B	.650	16.51	05 thru 08
10	10	12	.6250-24 UNEF-2B	.715	18.16	06 thru 09
12	11, 12, 13	13	.6875-24 UNEF-2B	.785	19.94	07 thru 10
13	N/A	15	.750-20 UNEF-2B	.830	21.08	07 thru 10
14	14, 15, 16, 17	18, 19	.9375-20 UNEF-2B	1.020	25.91	10 thru 15
16	19	21	1.0625-18 UNEF-2B	1.155	29.34	10 thru 16
17	21	23	1.1875-18 UNEF-2B	1.280	32.51	10 thru 17

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Direct or Rotatable Coupling Environmental Backshell
370MS037 and 370M*038 Straight, 45° and 90° Ordering Information





Environmental backshells feature silicone o-rings for a watertight seal.

Straight Entry backshells are available with direct coupling or rotatable coupling.

45° and 90° adapters feature rotatable coupling nuts.

Table II: Cover Style

	
Omit Screw Clamp with Saddle Bars	N Compression Nut





How To Order

Sample Part Number	370MS037	C	10	05-	6	N
Series (See Table III)	**370MS037** = Straight Entry **370MS038** = Straight Entry **370MB038** = 45° Entry **370MA038** = 90° Entry					
Shell Material and Finish	**M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated					
Size Code (See Table I)	**05, 06, 11, 07, 08, 09, 10, 12, 13, 14, 16, 17**					
Cable Entry Code (See Table II)	**01-, 02-, 03-, 04-, 05-, 06-, 07-, 08-, 09-, 10-, 11-, 12-,13-**					
Length (See Table III)	**Straight length only.** Specify length in 1/8 inch increments (e.g. 6 = .75 inches). See Table II for standard lengths.					
Clamp Style (Table II)	**Omit** = screw clamp with saddle bars **N** = Compression Nut, Low Profile					

Table I: Straight Coupling Dimensions

Size Code	Shell Size Ref		A Thread UNEF Class -2B	370MS038				370MS037			
				B Max.		Std Length		C Max.		Std Length	
	800/801 803/804	805		In.	mm.	In.	mm.	In.	mm.	In.	mm.
05	5	N/A	1/4 - 32	.470	11.94	.75	19.05	.350	8.89	.63	16.00
06	6	N/A	5/16 - 32	.530	13.46	.75	19.05	.415	10.54	.63	16.00
11	N/A	8	3/8 - 32	.570	14.48	.75	19.05	.465	11.68	.63	16.00
07	7	9	7/16 - 28	.637	16.18	.75	19.05	.530	13.46	.75	19.05
08	8	10	1/2 - 28	.700	17.78	.75	19.05	.595	15.11	.75	19.05
09	9	11	9/16 - 24	.758	19.25	.75	19.05	.650	16.51	.75	19.05
10	10	12	5/8 - 24	.819	20.80	.75	19.05	.715	18.16	.75	19.05
12	11 thru 13	13	11/16 - 24	.896	22.76	.88	22.35	.785	19.94	.88	22.35
13	N/A	15	3/4 - 20	.930	23.62	.88	22.35	.830	21.08	.88	22.35
14	14 thru 17	18/19	15/16 - 20	1.137	28.88	1.00	25.40	1.020	25.91	1.00	25.40
16	19	21	1 1/16 - 18	1.230	31.24	1.00	25.40	1.155	29.34	1.00	25.40
17	21	23	1 3/16 - 18	1.280	32.51	1.13	28.70	1.287	35.23	1.13	28.70


Table III: Backshell Profile

	
370MS037 Straight Entry, Direct Coupling	**370MS038** Straight Entry, Rotatable Coupling
	
370MB038 45° Entry Rotatable Coupling	**370MA038** 90° Entry Rotatable Coupling


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 80 Mighty Mouse
Direct or Rotatable Coupling Environmental Backshell
370MS037, 370MS038, 370MB038 and 370MA038 Dimensions

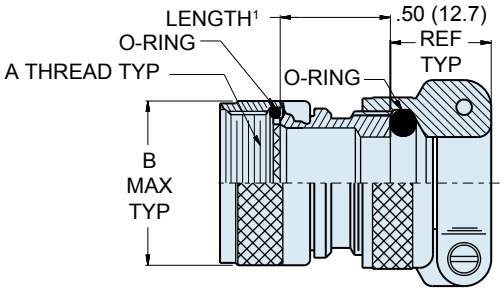


STRAIGHT ENTRY
ROTATABLE
COUPLING
370MS038

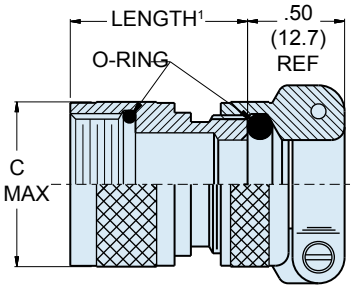


STRAIGHT ENTRY
DIRECT COUPLING
370MS037




SADDLE CLAMP

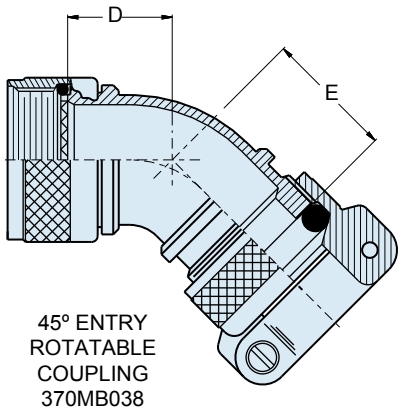

45° ENTRY
ROTATABLE
COUPLING
370MB038

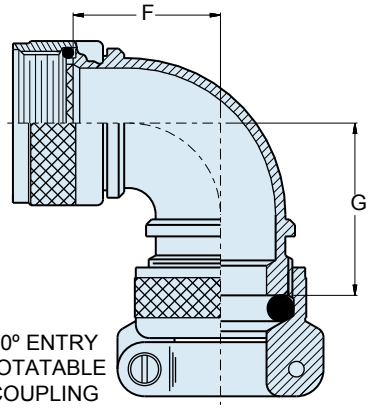

90° ENTRY
ROTATABLE
COUPLING
370MA038



CLAMP STYLE N
COMPRESSION
NUT

Table II: 370M*038 45° and 90° Dimensions

Cable Entry Code	Cable Entry Dia.		D Max.		E Max.		F Max.		G Max.		H		J Closed		Ø K	
	Max.	Min.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	in. ± .015	mm ± 0.38	In.	mm.	in ± .015	mm ± 0.38
01	.109	.031	.603	15.32	.581	14.76	.724	18.39	.702	17.83	.496	12.60	.11	2.79	.398	10.11
02	.172	.078	.603	15.32	.581	14.76	.724	18.39	.702	17.83	.582	14.78	.17	4.32	.460	11.68
03	.234	.140	.603	15.32	.581	14.76	.724	18.39	.702	17.83	.656	16.66	.23	5.84	.523	13.28
04	.297	.203	.629	15.98	.607	15.42	.786	19.96	.764	19.41	.726	18.44	.30	7.62	.585	14.86
05	.359	.265	.629	15.98	.607	15.42	.786	19.96	.764	19.41	.885	22.48	.36	9.14	.647	16.43
06	.422	.328	.655	16.64	.633	16.00	.848	21.54	.826	20.98	.952	24.18	.42	10.67	.710	18.03
07	.484	.390	.655	16.64	.633	16.00	.848	21.54	.826	20.98	1.018	25.86	.48	12.19	.773	19.63
08	.547	.453	.707	17.96	.685	17.40	.911	23.14	.889	22.58	1.084	27.53	.55	13.97	.835	21.21
09	.609	.515	.707	17.96	.685	17.40	.911	23.14	.889	22.58	1.148	29.16	.61	15.49	.897	22.78
10	.672	.578	.733	18.62	.711	18.06	.973	24.71	.951	.951	1.211	30.76	.67	17.02	.959	24.36
11	.734	.640	.733	18.62	.711	18.06	.973	24.71	.951	.951	1.273	32.33	.73	18.54	1.021	25.93
12	.859	.765	.785	19.94	.763	19.38	1.036	26.31	1.014	1.014	1.400	35.56	.86	21.84	1.083	27.51
13	1.00	.906	.811	20.60	.789	20.04	1.098	27.89	1.076	1.076	1.539	39.09	.99	25.15	1.145	29.08

NOTES

1. Minimum length is .63 Inches. Applies to "S" straight entry only.
2. Use shrink Sleeve or bushing to build cable to dia shown under saddle bars.

Materials

- Adapter, Clamp, Nut and Saddles: Aluminum Alloy 6061-T6 or 300 Series Stainless Steel
- O-Rings: Silicone Rubber
- Hardware: 300 Series Stainless Steel

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse EMI Backshell

380MS135 and 380M*137 Straight, 45° and 90° Ordering Information



380MS135

EMI backshells feature an EMI ring for easy shield termination.

Straight Entry backshells are available with direct coupling or rotatable coupling.

380-137 adapters feature rotatable coupling nuts.

How To Order

Sample Part Number	380MS135	M	07	04-	6	N
Series (See Table I)	**380MS135** = Straight Entry **380MS137** = Straight Entry, **380MB137** = 45° Entry **380MA137** = 90° Entry					
Shell Material and Finish	**UCR** = Aluminum / Zinc Cobalt with Black **ZNU** = Aluminum / Zinc Nickel with Black over Electroless Nickel **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated					
Size Code (See Table V)	**05**, **06**, **11**, **07**, **08**, **09**, **10**, **12**, **13**, **14**, **16**, **17**					
Cable Entry Code (See Table II)	**01-**, **02-**, **03-**, **04-**, **05-**, **06-**, **07-**, **08-**, **09-**, **10-**, **11-**, **12-**, **13-**					
Length (See Table III)	**For Straight Entry Only.** Use Standard lengths listed in Table III for Best Availability Specify length in .125 (3.18) inch increments (e.g. 6 = .75 in)					
Clamp Style (See Table IV)	**Omit** = Clamp with Saddle Bars **N** = Compression Nut, Low Profile					

Table I: Backshell Style





			
380MS135 Straight Entry, Direct Coupling	**380MS137** Straight Entry, Rotatable Coupling	**380MB137** 45° Entry, Rotatable Coupling	**380MA137** 90° Entry, Rotatable Coupling


Table II: Cable Entry Code

Cable Entry Code	Saddle Clamp Dia. Fully Closed	Cable Entry Code	Saddle Clamp Dia. Fully Closed
01-	.11 (2.79)	**08-**	.55 (13.97)
02-	.17 (4.32)	**09-**	.61 (15.49)
03-	.23 (5.84)	**10-**	.67 (17.02)
04-	.30 (7.62)	**11-**	.73 (18.54)
05-	.36 (9.14)	**12-**	.86 (21.84)
06-	.42 (10.67)	**13-**	.99 (25.15)
07-	.48 (12.19)		

Table III: Std. Length[1]

Size Code	380MS137 Std. Length		380MS135 Std. Length	
	In.	mm.	In.	mm.
05	.75	19.05	.63	16.00
06	.75	19.05	.63	16.00
11	.75	19.05	.63	16.00
07	.75	19.05	.75	19.05
08	.75	19.05	.75	19.05
09	.75	19.05	.75	19.05
10	.75	19.05	.75	19.05
12	.88	22.35	.88	22.35
13	.88	22.35	.88	22.35
14	1.00	25.40	1.00	25.40
16	1.00	25.40	1.00	25.40
17	1.13	28.70	1.13	28.70

Table IV: Clamp Style

	
Omit Clamp with Saddle Bars	**N** Compression Nut, Low Profile

NOTES

1. Minimum length is .63 Inches. Applies to straight entry only.
2. Use shrink sleeve or bushing to build cable to dia. shown under saddle bars.

Materials


- Adapter, Clamp, Nut and Saddles: Aluminum Alloy 6061-T6 or 300 Series Stainless Steel
- Hardware: 300 Series Stainless Steel

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 80 Mighty Mouse EMI Backshell


380MS135 Straight and 380M*137 Straight, 45° and 90° Dimensions

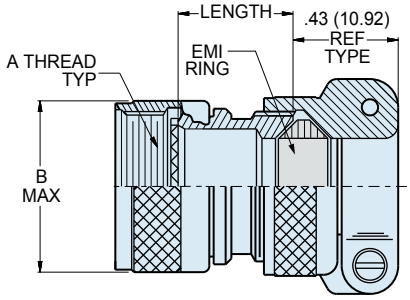


STRAIGHT ENTRY
ROTATABLE COUPLING
380MS137

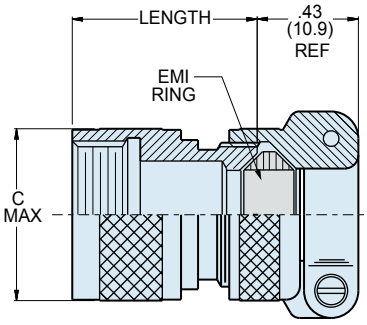


STRAIGHT ENTRY
DIRECT COUPLING
380MS135




SADDLE CLAMP



CLAMP STYLE N
COMPRESSION NUT

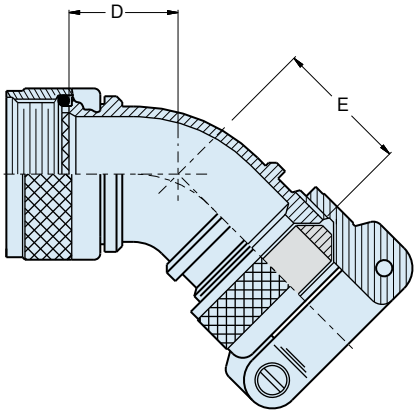

45° ENTRY
ROTATABLE COUPLING
380MB137

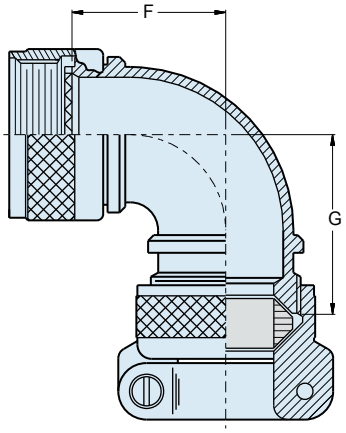

90° ENTRY
ROTATABLE COUPLING
380MA137

Straight Coupling Dimensions

Size Code	Shell Size Ref. 800/801 803/804	Shell Size Ref. 805	A Thd. UNEF Class-2B	B Max. In.	B Max. mm.	C Max. In.	C Max. mm.
05	5	N/A	.2500-32	.470	11.94	.350	8.89
06	6	N/A	.3125-32	.530	13.46	.415	10.54
11	N/A	8	.3750-32	.570	14.48	.465	11.68
07	7	9	.4375-28	.637	16.18	.530	13.46
08	8	10	.5000-28	.700	17.78	.595	15.11
09	9	11	.5625-24	.758	19.25	.650	16.51
10	10	12	.6250-24	.819	20.80	.715	18.16
12	11/12/13	13	.6875-24	.896	22.76	.785	19.94
13	N/A	15	.7500-20	.930	23.62	.830	21.08
14	14/15/16/17	18/19	.9375-20	1.137	28.88	1.020	25.91
16	19	21	1.0625-18	1.230	31.24	1.155	29.34
17	21	23	1.1875-18	1.387	35.23	1.280	32.51

45° and 90° Coupling Dimensions

Cable Entry Code	D Max. In.	D Max. mm.	E Max. In.	E Max. mm.	F Max. In.	F Max. mm.	G Max. In.	G Max. mm.	H In. ± .015	H mm. ± 0.38	J Closed In. ± .030	J Closed mm. ± 0.76	K In. ± .015	K mm. ± 0.38	Ø L In. ± .015	Ø L mm. ± 0.38
01	.603	15.32	.581	14.76	.724	18.39	.702	17.83	.496	12.60	.11	2.79	.119	3.02	.398	10.11
02	.603	15.32	.581	14.76	.724	18.39	.702	17.83	.582	14.78	.17	4.32	.182	4.62	.460	11.68
03	.603	15.32	.581	14.76	.724	18.39	.702	17.83	.656	16.66	.23	5.84	.244	6.20	.523	13.28
04	.629	15.98	.607	15.42	.786	19.96	.764	19.41	.726	18.44	.30	7.62	.307	7.80	.585	14.86
05	.629	15.98	.607	15.42	.786	19.96	.764	19.41	.885	22.48	.36	9.14	.369	9.37	.647	16.43
06	.655	16.64	.633	16.00	.848	21.54	.826	20.98	.952	24.18	.42	10.67	.432	10.97	.710	18.03
07	.655	16.64	.633	16.00	.848	21.54	.826	20.98	1.018	25.86	.48	12.19	.494	12.55	.773	19.63
08	.707	17.96	.685	17.40	.911	23.14	.889	22.58	1.084	27.53	.55	13.97	.557	14.15	.835	21.21
09	.707	17.96	.685	17.40	.911	23.14	.889	22.58	1.148	29.16	.61	15.49	.619	15.72	.897	22.78
10	.733	18.62	.711	18.06	.973	24.71	.951	24.16	1.211	30.76	.67	17.02	.682	17.32	.959	24.36
11	.733	18.62	.711	18.06	.973	24.71	.951	24.16	1.273	32.33	.73	18.54	.744	18.90	1.021	25.93
12	.785	19.94	.763	19.38	1.036	26.31	1.014	25.76	1.400	35.56	.86	21.84	.869	22.07	1.083	27.51
13	.811	20.60	.789	20.04	1.098	27.89	1.076	27.33	1.539	39.09	.99	25.15	1.010	25.65	1.145	29.08

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse EMI/RFI Backshell
Non-Environmental
380MS141 Ordering Information



The Series 80 Mighty Mouse, non-environmental backshell utilizes an EMI ring for easy shield termination. A protective backshell provides robust cable strain-relief.

How To Order						
Sample Part Number		**380MS141**	**M**	**08**	**06**	**-4**
Series	**380MS141** = Straight Entry					
Shell Material and Finish	**UCR** = Aluminum / Zinc-Cobalt Black **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated					
Size Code (See Table I)	**05, 06, 11, 07, 08, 09, 10, 12, 13, 14, 16, 17**					
Cable Entry Code (Table II)	**02, 25, 03, 35, 04, 05, 06, 07, 08, 09, 10, 11, 12, 13, 14, 15, 16**					
Length	Specify length in 1/8 inch increments (e.g. 6 = .75 inches). Minimum length .50 inches					

NOTES

Material/Finish

- Adapter, coupling nut, rear nut: aluminum alloy/per part number development
- Saddle: stainless steel/per part number development
- Hardware: stainless steel/passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse EMI/RFI Backshell
Non-Environmental
380MS141 Ordering Information

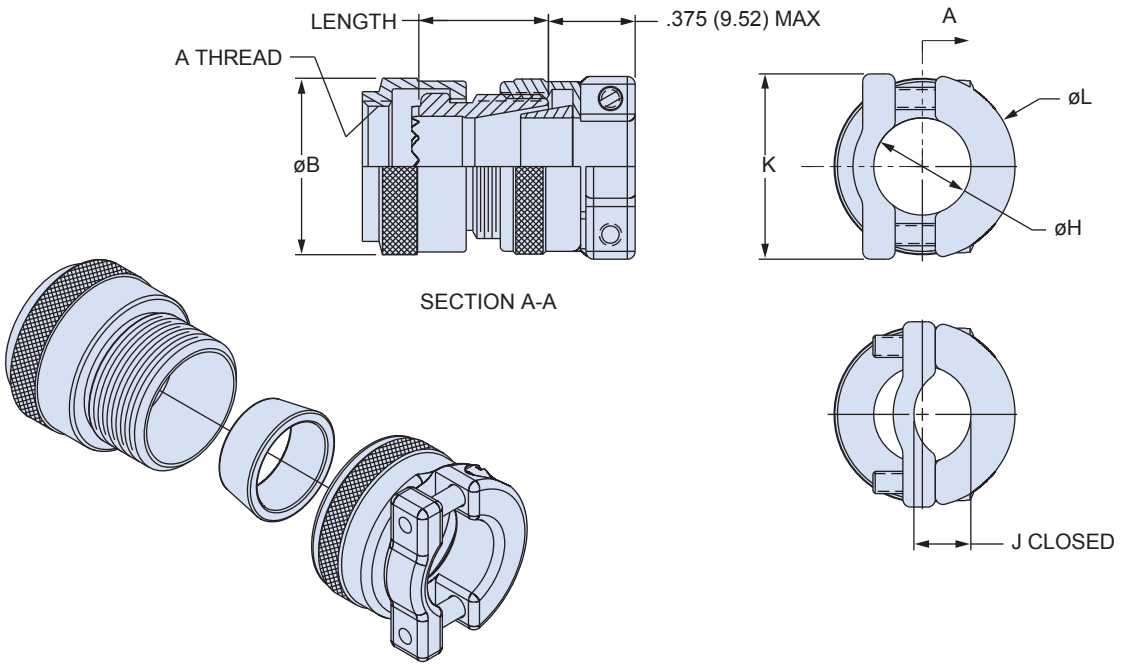


Table I: Size Code									
Size Code	Shell Size, Mighty Mouse Series					A Thread UNEF-2B	Ø B Max		Max Entry
	800	801	803	804	805		In.	mm.	
05	5	5	5	5	-	.2500-32	0.470	11.94	25
06	6	6	6	6	-	.3125-32	0.530	13.46	35
11	-	-	-	-	8	.3750-32	0.570	14.48	4
07	7	7	7	7	9	.4375-28	0.637	16.18	5
08	8	8	8	8	10	.5000-28	0.700	17.78	6
09	9	9	9	9	11	.5625-24	0.758	19.25	7
10	10	10	10	10	12	.6250-24	0.819	20.80	8
12	12	13	12	12	-	.6875-24	0.896	22.76	9
13	-	-	-	-	15	.7500-20	0.930	23.62	10
14	-	16,17	14,15	14,15	18,19	.9375-20	1.137	28.88	13
16	-	19	-	-	21	1.0625-18	1.250	31.75	14
17	-	21	-	-	23	1.1875-18	1.397	35.48	16

Table II: Cable Entry Code				
Entry Code	Ø H	J Closed	K	Ø L Max
02	0.125	0.075	0.470	0.470
25	0.156	0.094	0.470	0.470
03	0.188	0.113	0.530	0.530
35	0.219	0.131	0.530	0.530
04	0.250	0.150	0.590	0.590
05	0.313	0.188	0.655	0.655
06	0.375	0.225	0.715	0.715
07	0.438	0.263	0.780	0.780
08	0.500	0.300	0.840	0.840
09	0.563	TBD*	TBD*	TBD*
10	0.625	TBD*	TBD*	TBD*
11	0.688	TBD*	TBD*	TBD*
12	0.750	TBD*	TBD*	TBD*
13	0.813	TBD*	TBD*	TBD*
14	0.875	TBD*	TBD*	TBD*
15	0.938	TBD*	TBD*	TBD*
16	1.000	TBD*	TBD*	TBD*
* Contact Factory				

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse EMI/RFI Backshell
Band-In-A-Can Backshell
447MS981 Ordering Information



Series 80 Mighty Mouse, Band-In-A-Can backshell utilizes a secondary adapter that covers the banding area, along with providing options for strain relief. This backshell combines the efficiency and convenience of band style shield termination with a protective backshell which protects the shield termination area from damage due to rough handling and provides for robust cable strain-relief. Recommended for use in severe application environments where banding is the preferred shield termination technology.

How To Order							
Sample Part Number		**447MS981**	**M**	**08**	**06**	**-6**	**K**
Series	**447MS981** = Straight Entry						
Shell Material and Finish	**UCR** = Aluminum / Zinc-Cobalt Black **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated						
Size Code (See Table I)	**05**, **06**, **11**, **07**, **08**, **09**, **10**, **12**, **13**, **14**, **16**, **17**						
Cable Entry Code (See Table II)	**02**, **25**, **03**, **35**, **04**, **05**, **06**, **07**, **08**, **09**, **10**, **11**, **12**, **13**, **14**, **15**, **16**						
Length	Specify length in 1/8 inch increments (e.g. 12 = 1.50 inches). Minimum Length = .75						
Band Option	**B** = 1/8" Wide Straight Band **K** = 1/8" Wide Precoiled Band **Omit** = No Band Supplied						

NOTES

Material/Finish

- Adapter, coupling nut, rear nut: aluminum alloy/per part number development
- Saddle: stainless steel/per part number development
- Hardware: stainless steel/passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse EMI/RFI Backshell
Band-In-A-Can Backshell
447MS981 Ordering Information

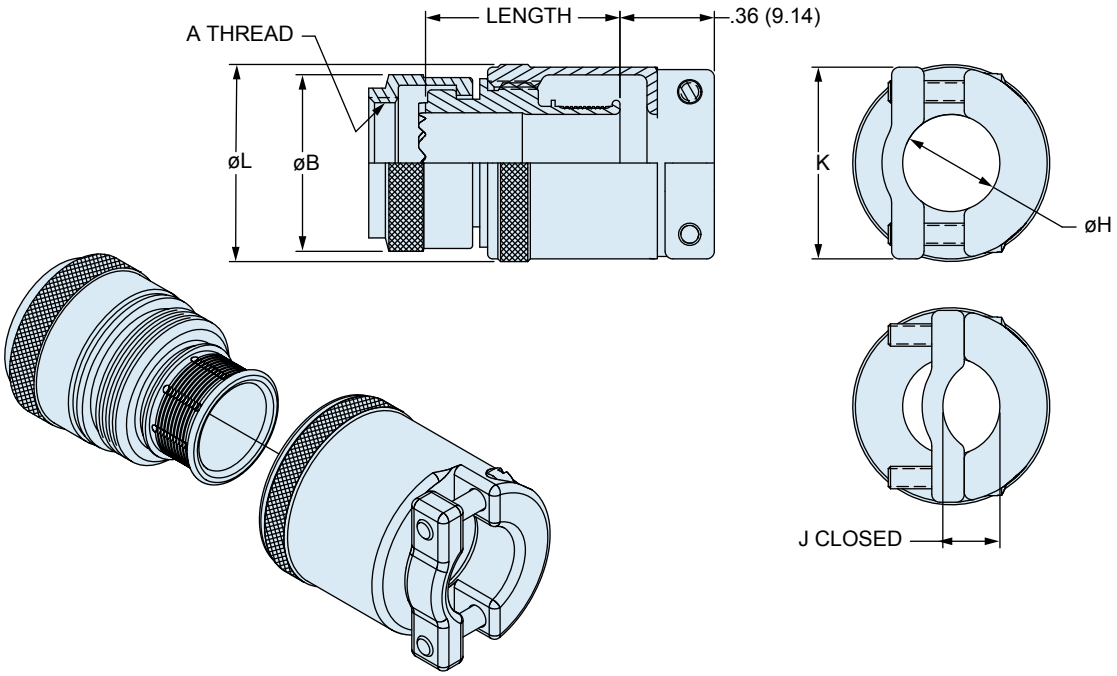


Table I: Size Code

Size Code	800	801	803	804	805	A Thread UNEF - 2B	Ø B Max		Max Entry
							In.	mm.	
05	5	5	5	5	-	.2500-32	0.470	11.94	25
06	6	6	6	6	-	.3125-32	0.530	13.46	35
11	-	-	-	-	8	.3750-32	0.570	14.48	04
07	7	7	7	7	9	.4375-28	0.637	16.18	05
08	8	8	8	8	10	.5000-28	0.700	17.78	06
09	9	9	9	9	11	.5625-24	0.758	19.25	07
10	10	10	10	10	12	.6250-24	0.819	20.80	08
12	12	13	12	12	-	.6875-24	0.896	22.76	09
13	-	-	-	-	15	.7500-20	0.930	23.62	10
14	-	16,17	14,15	14,15	18,19	.9375-20	1.137	28.88	13
16		19			21	1.0625-18	1.250	31.75	14
17	-	21	-	-	23	1.1875-18	1.387	35.48	16

Table II: Cable Entry Code

Entry Code	Ø H		J Closed		K		Ø L Max	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
02	0.125	3.18	0.075	1.91	0.490	12.45	0.520	13.21
25	0.156	3.96	0.094	2.39	0.520	13.21	0.550	13.97
03	0.188	4.78	0.113	2.87	0.550	13.97	0.580	14.73
35	0.219	5.56	0.131	3.33	0.580	14.73	0.610	15.49
04	0.250	6.35	0.150	3.81	0.615	15.62	0.645	16.38
05	0.313	7.95	0.188	4.78	0.680	17.27	0.710	18.03
06	0.375	9.53	0.225	5.72	0.740	18.80	0.770	19.56
07	0.438	11.13	0.263	6.68	0.800	20.32	0.830	21.08
08	0.500	12.70	0.300	7.62	0.865	21.97	0.895	22.73
09	0.563	14.30	TBD*		TBD*		TBD*	
10	0.625	15.88	TBD*		TBD*		TBD*	
11	0.688	17.48	TBD*		TBD*		TBD*	
12	0.750	19.05	TBD*		TBD*		TBD*	
13	0.813	20.65	TBD*		TBD*		TBD*	
14	0.875	22.23	TBD*		TBD*		TBD*	
15	0.938	23.83	TBD*		TBD*		TBD*	
16	1.000	25.40	TBD*		TBD*		TBD*	


* Consult Factory

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse Environmental EMI Backshell

390MS076 Straight, 390M*077 Straight, 45° and 90°
Ordering Information

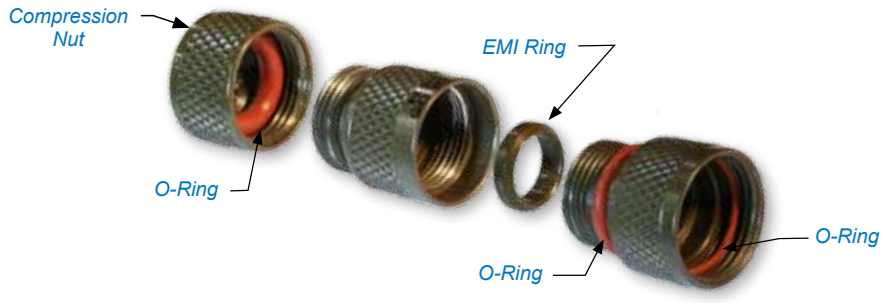

These backshells feature an EMI ring for easy shield termination. O-rings provide watertight seals on the cable jacket and on the backshell-to-connector interface.

How To Order						
Sample Part Number	**390MS077**	**M**	**07**	**04-**	**6**	**N**
Series (See Table I)	**390MS076** = Straight Entry, Direct Coupling **390MS077** = Straight Entry, Rotatable Coupling **390MB077** = 45° Entry **390MA077** = 90° Entry					
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE **Z1** = Stainless Steel / Passivated					
Size Code (See Table II)	**05**, **06**, **11**, **07**, **08**, **09**, **10**, **12**, **13**, **14**, **16**, **17**					
Cable Entry Code (See Table III)	**01**, **02**, **03**, **04**, **05**, **06**, **07**, **08**, **09**, **10**, **11**, **12**, **13**					
Length	Straight Entry 390MS Only Specify length in increments of .125; e.g. **6** =.75 in					
Clamp Style (See Table IV)	**Omit** = Screw Clamp with Saddle Bars **N** = Compression Nut, Low Profile					

Table I: Cover Style





			
390MS076 Straight Entry, Direct Coupling	**390MS077** Straight Entry, Rotatable Coupling	**390MB077** 45° Entry	**390MA077** 90° Entry


Table II: Size Code

Size Code	Thread Size Class -2B UNEF	Size Code	Thread Size Class -2B UNEF
05	.2500-32	**10**	.6250-24
06	.3125-32	**12**	.6875-24
11	.3750-32	**13**	.7500-20
07	.4375-28	**14**	.9375-20
08	.5000-28	**16**	1.0625-18
09	.5625-24	**17**	1.1875-18

Table III: Cable Entry Code

Cable Entry Code	Saddle Clamp J Diameter Fully Closed		Cable Entry Code	Saddle Clamp J Diameter Fully Closed	
	In. ± .030	mm. ± 0.76		In. ± .030	mm. ± 0.76
01-	.110	2.79	**08-**	.550	13.97
02-	.170	4.32	**09-**	.610	15.49
03-	.230	5.84	**10-**	.670	17.02
04-	.300	7.62	**11-**	.730	18.54
05-	.360	9.14	**12-**	.860	21.84
06-	.420	10.67	**13-**	.990	25.15
07-	.480	12.19			

Table IV: Cover Style

	
Omit Screw Clamp With Saddle Bars	**N** Compression Nut, Low Profile

NOTES

1. Minimum length is .63 Inches. Tee table i for standard lenth applies to sym s, straight only
2. Use shrink sleeve or bushing to build cable to dia. shown, under saddle bars

Materials


- Adapter, clamp, nut and saddles: aluminum alloy 6061-t6 or 300 series stainless steel
- O-rings: silicone rubber
- Hardware: 300 series stainless steel

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 80 Mighty Mouse Environmental EMI Backshell


390MS076 Straight and 390M077 Straight, 45° and 90° Dimensions

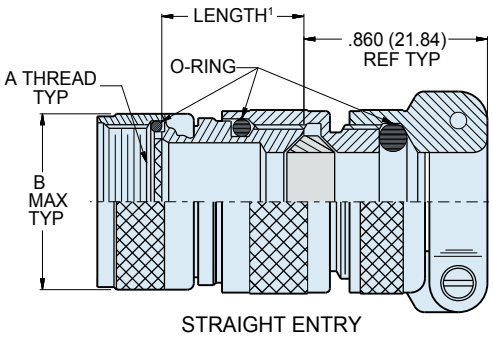


STRAIGHT ENTRY
ROTATABLE COUPLING
390MS077

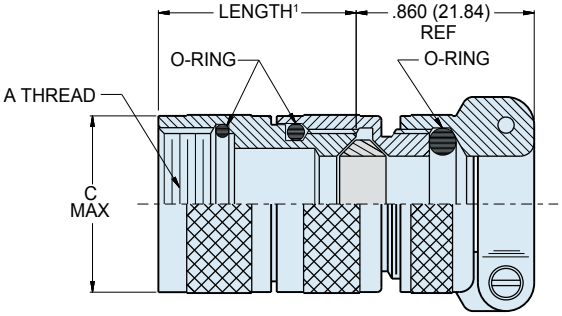


STRAIGHT ENTRY
DIRECT COUPLING
390MS076




CLAMP STYLE N
COMPRESSION NUT

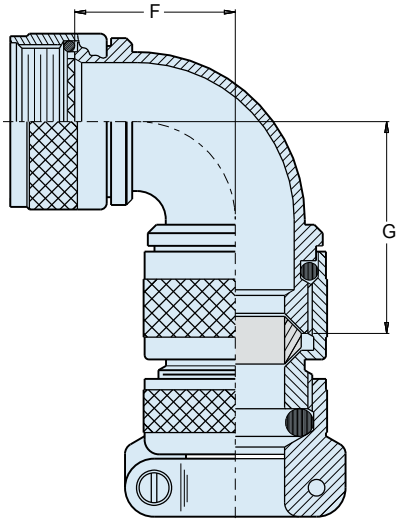

90° ENTRY
ROTATABLE COUPLING
390MA077

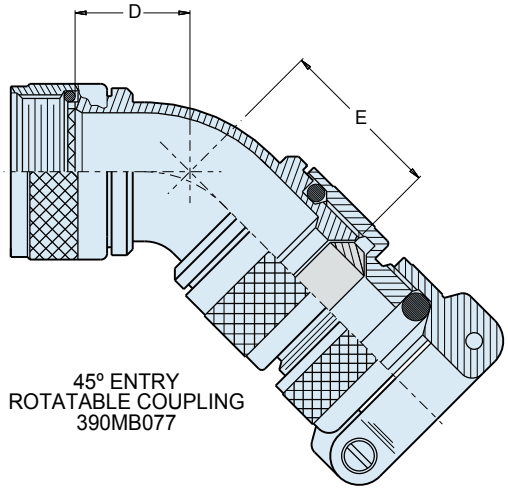

45° ENTRY
ROTATABLE COUPLING
390MB077



ENTRY SADDLE CLAMP

Cable Entry Dimensions

Dash No.	Cable Entry Max.		Cable Entry Min.		D Max.		E Max.		F Max.		G Max.		H		Ø K	
	In.	mm.	in.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In. ± .010	mm. ± 0.25	In. ± .010	mm. ± 0.25
01	.109	2.77	.031	0.79	.603	15.32	.681	17.30	.724	18.39	.802	20.37	.496	12.60	.398	10.11
02	.172	4.37	.078	1.98	.603	15.32	.681	17.30	.724	18.39	.802	20.37	.582	14.78	.460	11.68
03	.234	5.94	.140	3.56	.603	15.32	.681	17.30	.724	18.39	.802	20.37	.656	16.66	.523	13.28
04	.297	7.54	.203	5.16	.629	15.98	.707	17.96	.786	19.96	.864	21.95	.726	18.44	.585	14.86
05	.359	9.12	.265	6.73	.629	15.98	.707	17.96	.786	19.96	.864	21.95	.885	22.48	.647	16.43
06	.422	10.72	.328	8.33	.655	16.64	.733	18.62	.848	21.54	.926	23.52	.952	24.18	.710	18.03
07	.484	12.29	.390	9.91	.655	16.64	.733	18.62	.848	21.54	.926	23.52	1.018	25.86	.773	19.63
08	.547	13.89	.453	11.51	.707	17.96	.785	19.94	.911	23.14	.989	25.12	1.084	27.53	.835	21.21
09	.609	15.47	.515	13.08	.707	17.96	.785	19.94	.911	23.14	.989	25.12	1.148	29.16	.897	22.78
10	.672	20.80	.578	14.68	.733	18.62	.811	20.60	.977	24.82	1.055	26.80	1.211	30.76	.959	24.36
11	.734	18.64	.640	16.26	.733	18.62	.811	20.60	.977	24.82	1.055	26.80	1.273	32.33	1.021	25.93
12	.859	21.82	.765	19.43	.785	19.94	.863	21.92	1.036	26.31	1.114	28.30	1.400	35.56	1.083	27.51
13	1.000	25.40	.906	23.01	.811	20.60	.889	22.58	1.098	27.89	1.176	29.87	1.539	39.09	1.145	29.08

Size Code Dimensions


Size Code	Shell Size Ref. 800 801 803 804	Shell Size Ref. 805	A Thds. UNEF Class-2B	B Max. In.	B Max. mm.	C Max. In.	C Max. mm.	Std. Length[1] In.	Std. Length[1] mm.
05	5	N/A	.2500-32	.470	11.94	.350	8.89	.75	19.05
06	6	N/A	.3125-32	.530	13.46	.415	10.54	.75	19.05
11	N/A	8	.3750-32	.570	14.48	.465	11.81	.75	19.05
07	7	9	.4375-28	.637	16.18	.530	13.46	.75	19.05
08	8	10	.5000-28	.700	17.78	.595	15.11	.75	19.05
09	9	11	.5625-24	.758	19.25	.650	16.51	.75	19.05
10	10	12	.6250-24	.819	20.80	.715	18.16	.75	19.05
12	11/12 13	13	.6875-24	.896	22.76	.785	19.94	.88	22.35
13	N/A	15	.7500-20	.930	23.62	.830	21.08	.88	22.35
14	14 /15 16/17	18 19	.9375-20	1.137	28.88	1.020	25.91	1.00	25.40
16	19	21	1.0625-18	1.230	31.24	1.155	29.34	1.00	25.40
17	21	23	1.1875-18	1.387	35.23	1.280	108.71	1.13	28.70

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

These adapters are used with Band-Master™ ATS micro band shield termination straps. Choose the smallest cable entry for your wire bundle.

How To Order					
Sample Part Number	**809-141**	**NF**	**07**	**04**	**B**
Series (See Table I)	**809-141**				
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **Z1** = Stainless Steel / Passivated				
Shell Size (See Table I)	**05**, **06**, **07**, **08**, **09**, **10**, **12**, **14**, **15**				
Dash No. (See Table II)	**01**, **02**, **03**, **04**, **05**, **06**, **07**, **08**, **09**, **10**, **11**, **12**, **13**, **14**, **15**, **16**, **17**				
Band Option	**B** =601-060 Flat Band Supplied **K**= 601-061 Pre-Coiled Band Supplied **Omit** for No Band Supplied				

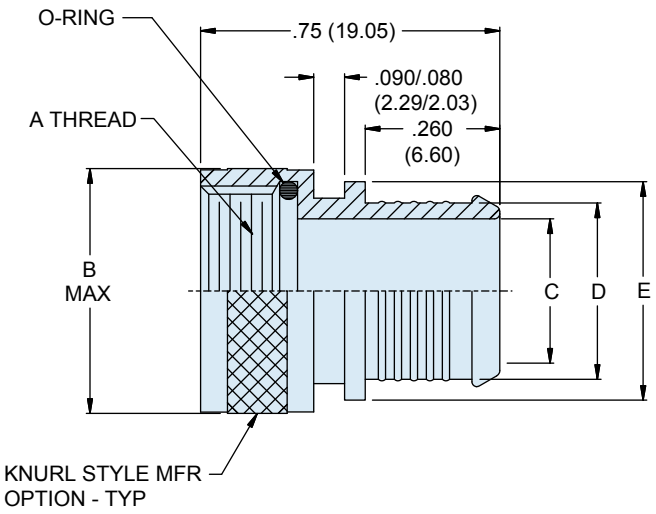

X

Table I: Dash Number Reference

Shell Size	A Thread Class -2B	B Max	Dash No. Available[2]
05	1/4-32 UNEF	0.375	**01-03**
06	5/16-32 UNEF	0.438	**01-04**
07	7/16-28 UNEF	0.562	**02-06**
08	1/2-28 UNEF	0.625	**03-07**
09	9/16-24 UNEF	0.682	**05-08**
10	5/8-24 UNEF	0.745	**06-09**
12	11/16-24 UNEF	0.807	**07-10**
14	7/8-20 UNEF	0.985	**08-12**
15	15/16-20 UNEF	1.047	**10-14**

Table II: Dimensions

Dash No.	C Dia		D Dia		E Dia	
	in	mm	in	mm	in	mm
01	0.094	2.39	0.133	3.38	0.235	5.97
02	0.125	3.18	0.164	4.17	0.266	6.76
03	0.172	4.37	0.211	5.36	0.313	7.95
04	0.234	5.94	0.273	6.93	0.375	9.53
05	0.272	6.91	0.311	7.90	0.413	10.49
06	0.312	7.92	0.351	8.92	0.453	11.51
07	0.375	9.53	0.414	10.52	0.516	13.11
08	0.438	11.13	0.477	12.12	0.579	14.71
09	0.500	12.70	0.539	13.69	0.641	16.28
10	0.562	14.27	0.601	15.27	0.703	17.86
11	0.625	15.88	0.664	16.87	0.766	19.46
12	0.688	17.48	0.727	18.47	0.829	21.06
13	0.750	19.05	0.789	20.04	0.891	22.63
14	0.812	20.62	0.851	21.62	0.953	24.21
15	0.875	22.23	0.914	23.22	1.016	25.81
16	0.938	23.83	0.977	24.82	1.079	27.41
17	01.00	25.40	1.036	26.31	1.141	28.98

NOTES

1. Glenair 600 Series backshell assembly tools are recommended for assembly and installation.
2. Consult factory for availability of additional entries.

Material/Finish:


3. Adapter - see Table III
4. O-Ring - Viton/90 shore
5. Band - stainless steel/passivate

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

189M052 Straight, 90° and 45° Convoluted Tubing Backshell for Series 80 "Mighty Mouse" Fiber Optic Connectors


How To Order					
Sample Part Number	**189MS052**	**NF**	**12**	**12**	**K**
Series (See Table I)	**189MS052** = Straight **189MN052** = 90° **189MM052** = 45°				
Shell Material and Finish	**M** = Aluminum / Electroless Nickel; RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate				
Size Code	**10**, **12**, **14**; See Table I				
Conduit Size Dash No.	**10**, **16**, **20**, **24**; See Table III				
Tubing	**K** = Peek Tubing; See P/N 120-108 (Omit for E, F, P or T) See P/N 120-100				

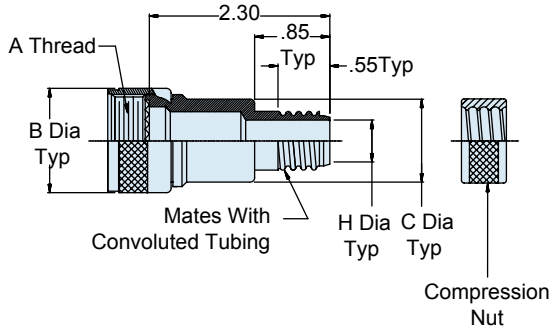

SYM S
Straight



SYM N
90°



SYM M
45°

Table I: Shell Size							
Shell Size	A Thread Class 2B	B Max	C	D Max	E Max	F Max	G Max
10	.6875-24 UNEF	.91 (23.1)	.620 (15.7)	.701(17.81)	1.200(30.48)	1.911(48.54)	2.410(61.21)
12	.6875-24 UNEF	.91 (23.1)	.620 (15.7)	.910 (23.1)	1.250 (31.8)	1.985 (50.4)	2.395 (60.8)
14	.9375-20 UNEF	1.25 (31.8)	.875 (22.2)	1.020 (25.9)	1.370 (34.8)	2.115 (53.7)	2.465 (62.6)

Table II: Material and Finish	
Code	Finish
M	Electroless Nickel
NF	Cadmium/Olive Drab over Electroless Nickel

Refer to Appendix for material/finish details

Table III: PEEK Conduit Size		
Frac. Size	Dash No.	H Max
3/8	12	.320 (8.1)
1/2	16	.425 (10.8)
5/8	20	.550 (14.0)
3/4	24	.680 (17.3)

MATERIAL AND FINISH

- Adapter, Coupling Nut and Compression Nut: AL Alloy/see Table II
- O-Ring: Fluorosilicone
- Detent Spring: Torlon

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse
Metal Protective Covers with UN Mating Thread
667-184 and 667-185 Ordering Information



Protective covers fit Series 800 plug and receptacle connectors. Aluminum or stainless steel. Fluorosilicone rubber gasket protects connector from contamination and water ingress. Attach to panel or cable with a variety of lanyards and fittings. Lanyard styles include braided nylon rope, stainless steel wire or sash chain. Stainless steel wire available with flexible, rugged polyurethane coating or Fluoropolymer sleeve for high temperature requirements.

How To Order

Sample Part Number	667-184	-M	- G	9	04	-6	X
Series (See Table I)	**667-184** = Plug Cover **667-185** = Receptacle Cover						
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant						
Attachment Type	**-D** = Bead Chain, CRES, Passivate **-F** = Wire Rope, Nylon Jacket **-G** = Nylon Rope **-H** = SST Wire Rope, Fluoropolymer Jacket **-N** = No Attachment **-R** = Wire Rope, PVC Jacket **-S** = SST Sash Chain **-SK** = Nylon Rope With Slip Knot **-T** = SST Wire Rope, No Jacket **-U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel						
Shell Size	**5**, **6**, **7**,**8**, **9**, **10**, **12**						
Attachment Code (See Table II)	Small Ring = **01**, **02**, **04**, **06** Large Ring = **14** thru **33** Split Ring = **50** thru **68**						
Attachment Length (Inches)	Omit for attachment Type N (No Attachment) Example: "-6" equals six inch length						
Alternate Polariztion	**X**, **Y**, **Z**; **Omit** for Normal						

Table I: Shell Style





	
667-184 Plug Cover	**667-185** Receptacle Cover

Table II: Attachment Code

Omit for attachment types **N** (No Attachment) and **SK** (Slip Knot)

	00 - No Eyelet
 Small Ring	**01** –.125 (3.2) I.D. **02** –.145 (3.6) I.D. **04** –.182 (4.6) I.D. **06** –.197 (5.0) I.D.
 Large Ring	**32** – .265 (6.73) I.D. **29** – .315 (8.00) I.D. **14** – .385 (9.78) I.D. **15** – .445 (11.30) I.D. **33** – .510 (12.95) I.D. **16** – .570 (14.48) I.D. **17** – .635 (16.13) I.D. **18** – .695 (17.65) I.D. **27** – .766 (19.46) I.D.
 Split Ring	**50** – .432 (11.0) I.D. **52** – .492 (12.5) I.D. **54** – .648 (16.5) I.D. **56** – .757 (19.2) I.D. **58** – .898 (22.8) I.D. **60** – 1.023 (26.01) I.D. **64** – 1.137 (28.9) I.D. **68** – 1.357 (34.5) I.D.


X


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse
Metal Protective Covers with UN Mating Thread
667-184 and 667-185 Dimensions

667-185 Cover Attachment for RPM Jam Nut Receptacle

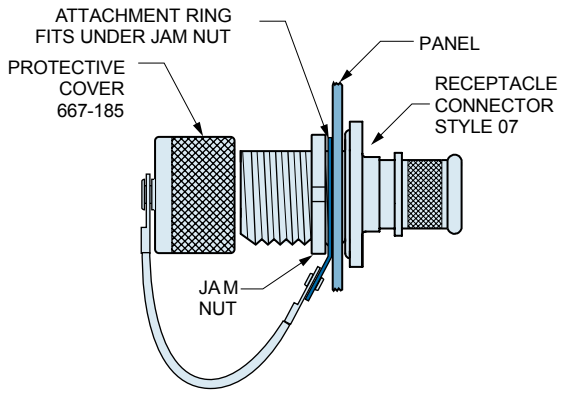





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
29	5	0.315	8.00	0.44	11.18
14	6	0.385	9.78	0.51	12.95
15	7	0.445	11.30	0.57	14.48
33	8	0.510	12.95	0.62	15.75
16	9	0.570	14.48	0.69	17.53
17	10	0.635	16.13	0.76	19.30
27	12	0.766	19.46	0.89	22.61

667-185 Cover Attachment to a Panel with a Screw

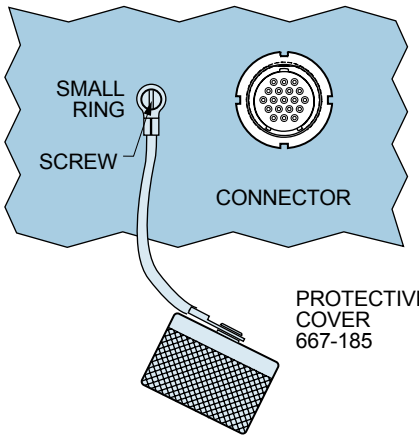





Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Screw Size	Ring I.D. In. ±.005	Ring I.D. mm. ±0.13	Ring O.D. In. Max.	Ring O.D. mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

667-184 Cover Attachment to Cable Assembly

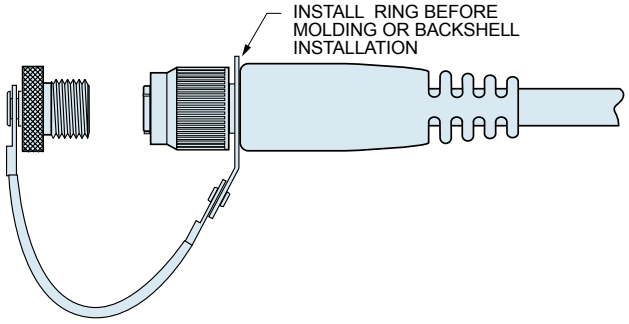





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
29	5	.315	6.73	0.44	11.18
14	6	0.385	9.78	0.51	12.95
33	7,8	0.510	12.95	0.62	15.75
16	9	0.570	14.48	0.69	17.53
17	10	0.635	16.13	0.76	19.30
18	12	0.695	17.65	0.82	20.83

667-184 Cover Attachment for Cable

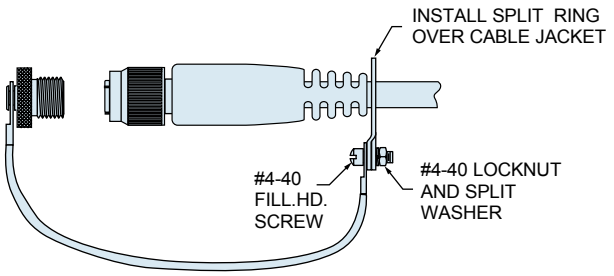




Large Split Ring for Attaching Covers to Cables

Attch. Code	Max. Cable Dia. (in.)	Ring Diameter Min. ID In.	Ring Diameter Min. ID mm.	Ring Diameter Max. OD In.	Ring Diameter Max. OD mm.
50	.410	.420	10.67	.580	14.73
52	.470	.480	12.19	.640	16.26
54	.625	.635	16.13	.796	20.22
56	.735	.745	18.92	.905	22.99
58	.875	.885	22.48	1.046	26.57
60	1.000	1.010	25.65	1.171	29.74
64	1.115	1.125	28.58	1.285	32.64
68	1.335	1.345	34.16	1.505	38.23


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 800 Mighty Mouse
Metal Protective Covers with UN Mating Thread
667-184 and 667-185 Dimensions

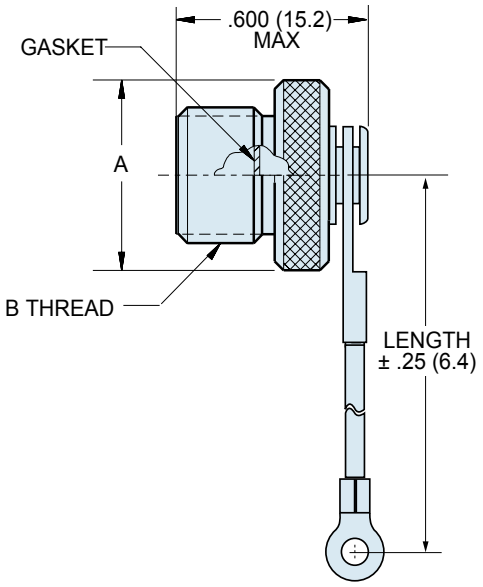

667-184 Plug Cover

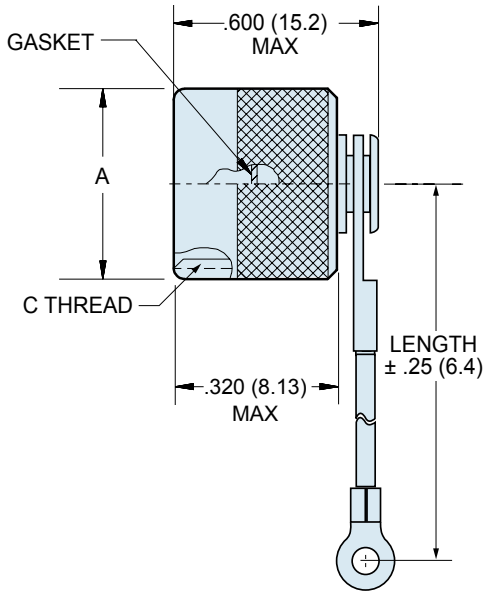

667-185 Receptacle Cover

X

Dimensions				
Shell Size	A Max.		B	C
	In.	mm.		
5	.462	11.73	.3125-28 UN-2A	.3125-28 UN-2B
6	.525	10.80	.3750-28 UN-2A	.3750-28 UN-2B
7	.588	14.94	.4375-28 UNEF-2A	.4375-28 UNEF-2B
8	.650	16.51	.5000-32 UN-2A	.5000-32 UN-2B
9	.713	18.11	.5625-32 UN-2A	.5625-32 UN-2B
10	.838	21.29	.6250-32 UN-2A	.6250-32 UN-2B
12	.900	22.86	.7500-28 UN-2A	.7500-28 UN-2B

Lanyard options	
 Nylon Rope	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Fluoropolymer Jacketed Wire Rope	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain	Stainless steel, #8 chain, .240" (6mm)
 **Slip Knot (SK)** for Attaching Covers to Cable	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

NOTES

Materials and Finishes

- Cover: Aluminum alloy per ASTM B211, or stainless steel per AMS-QQ-S-763
- Gasket: Fluorosilicone rubber
- Wire, Hardware: Stainless steel, passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Metal Protective Cover
667-217 and 667-218 Ordering Information



Protect Connectors From Damage Machined aluminum covers have rubber gaskets for a watertight fit.

Stainless Steel Fittings and Rings Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Fluoropolymer jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order

Sample Part Number	667-217	-M	-G	9	04	-6
Series (See Table I)	**667-217** = Plug Cover **667-218** = Receptacle Cover					
Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Attachment Type	**-D** = Bead Chain, CRES, Passivate **-F** = Wire Rope, Nylon Jacket **-G** = Nylon Rope **-H** = SST Wire Rope, Fluoropolymer Jacket **-N** = No Attachment **-R** = Wire Rope, PVC Jacket **-S** = SST Sash Chain **-SK** = Nylon Rope With Slip Knot **-T** = SST Wire Rope, No Jacket **-U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel					
Shell Size	**5, 6, 7,8, 9, 10, 11, 13, 16, 17, 19, 21**					
Attachment Code (See Table II)	Small Ring = **01** thru **06** Split Ring = **50** thru **68** Solid Ring = **14** thru **33**					
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example "-6" equals six inch length					

Table I: Cover Style




	
667-217 Plug Cover	**667-218** Receptacle Cover

Table II: Attachment Code


Omit for attachment types **N** (No Attachment) and **SK** (Slip Knot)


Small Ring  ± .010 I.D. tolerance	**01** – .126 (3.20) I.D. **02** – .145 (3.68) I.D. **04** – .188 (4.78) I.D. **06** – .197 (5.00) I.D.
 Large Ring ± .015 I.D. tolerance	**32** – .265 (.37) I.D. **29** – .315 (8.00) I.D. **14** – .385 (9.78) I.D. **15** – .445 (11.30) I.D. **33** – .510 (12.95) I.D. **16** – .570 (14.48) I.D. **17** – .635 (16.13) I.D. **18** – .695 (17.65) I.D. **27** – .766 (.89) I.D. **19** – .885 (22.48) I.D. **26** – .950 (24.13) I.D. **20** – 1.070 (27.17) I.D. **21** – 1.135 (28.83) I.D. **22** – 1.210 (30.73) I.D. **23** – 1.275 (32.39) I.D. **30** – 1.380 (35.05) I.D.
 Split Ring	**50** – .432 (11.00) I.D. **52** – .492 (12.50) I.D. **54** – .648 (16.50) I.D. **56** – .757 (19.20) I.D. **58** – .898 (22.80) I.D. **60** – 1.023 (26.00) I.D. **64** – 1.137 (28.90) I.D. **68** – 1.357 (34.50) I.D.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

667-218 Cover Attachment for RPM Jam Nut Receptacle

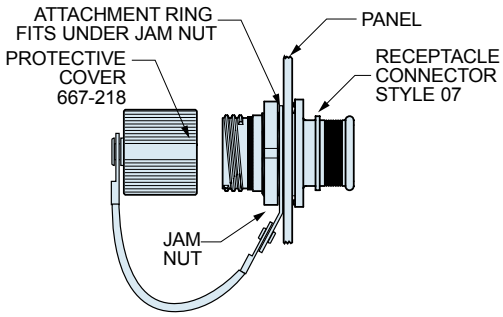





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .015	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
14	5	.385	9.78	.51	12.95
15	6	.445	11.30	.57	14.35
16	7, 8	.570	14.48	.69	17.40
17	9	.635	16.13	.76	19.30
18	10	.695	17.65	.82	20.82
27	11	.766	19.46	.89	22.61
19	13	.885	22.48	1.01	25.65
20	16	1.070	27.17	1.20	30.35
21	17	1.135	28.83	1.25	31.75
23	19	1.275	30.734	1.37	33.27
30	21	1.380	35.05	1.52	37.85

667-217 Cover Attachment to Cable

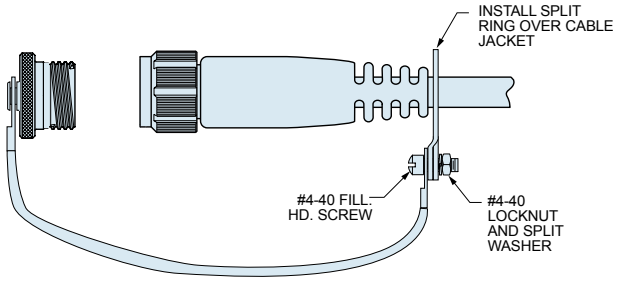





Large Split Ring for Attaching Covers to Cables

Attch. Code	Max. Cable Dia. (in.)	Ring Diameter Min. ID In.	Ring Diameter Min. ID mm.	Ring Diameter Max. OD In.	Ring Diameter Max. OD mm.
50	.410	.420	10.67	.580	14.73
52	.470	.480	12.19	.640	16.26
54	.625	.635	16.13	.796	20.22
56	.735	.745	18.92	.905	22.99
58	.875	.885	22.48	1.046	26.57
60	1.000	1.010	25.65	1.171	29.74
64	1.115	1.125	28.58	1.285	32.64
68	1.335	1.345	34.16	1.505	38.23

667-218 Cover Attachment to a Panel with a Screw

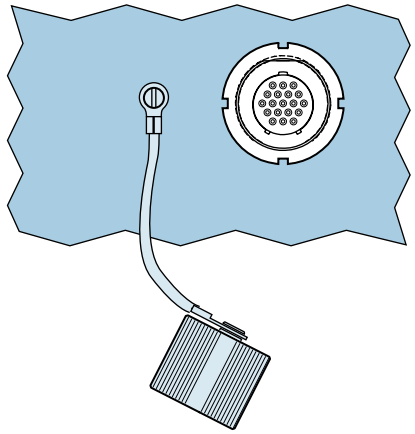





Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Screw Size	Ring I.D. In. ±.010	Ring I.D. mm. ±0.13	Ring O.D. In. Max.	Ring O.D. mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

667-217 Cover Attachment to Cable Assembly

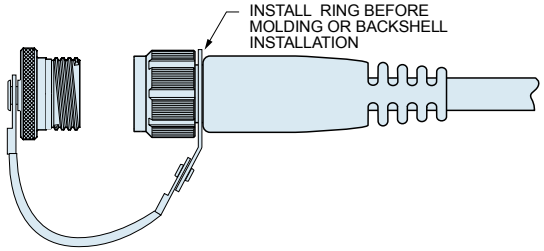



Solid Ring


Attch. Code	Shell Size	Ring I.D. In. ± .015	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
29	5	.315	8.00	.44	11.18
14	6	.385	9.78	.51	12.95
33	7,8	.510	12.95	.62	15.75
16	9	.570	14.48	.69	17.53
17	10	.635	16.13	.76	19.30
18	11,13	.695	17.65	.82	20.83
26	16,17	.950	24.13	1.14	28.96
20	19	1.070	27.18	1.20	30.48
22	21	1.210	30.73	1.31	33.27

X


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread Metal Protective Cover
667-217 and 667-218 Dimensions

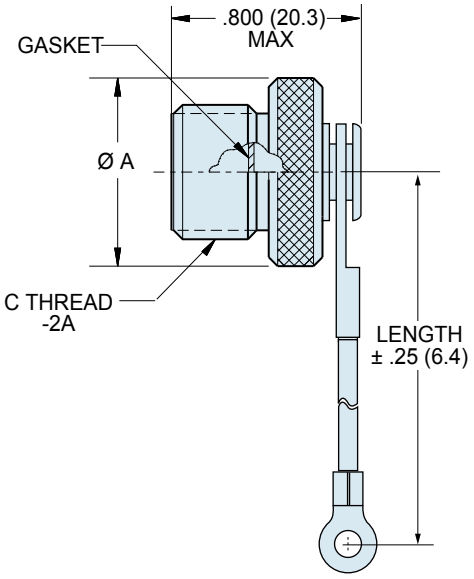

667-217 Plug Cover

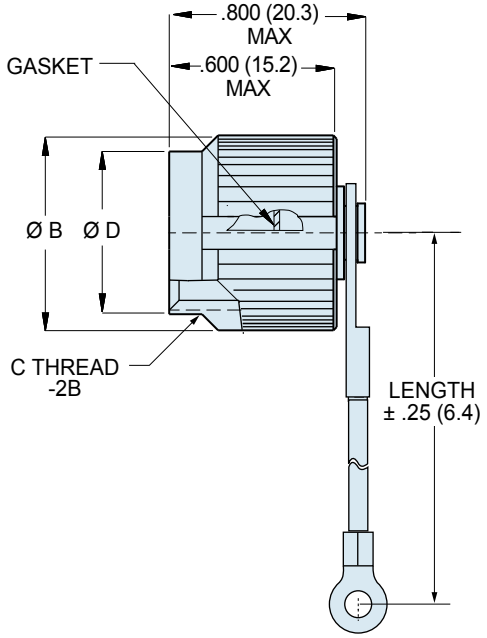

667-218 Receptacle Cover

Dimensions							
Shell Size	Ø A Max.		Ø B Max.		Ø D ±.015 (0.38)		C Thread
	In.	mm.	In.	mm.	In.	mm.	
5	.465	11.8	.488	12.40	.368	9.3	.3125-.05P-.1L
6	.525	13.3	.555	14.10	.453	11.5	.375-.05P-.1L
7	.590	14.9	.615	15.62	.538	13.7	.4375-.05P-.1L
8	.653	16.6	.675	17.15	.587	14.9	.5000-.05-.1L
9	.715	18.0	.840	21.34	.648	16.5	.5625-.05P-.1L
10	.778	19.7	.905	22.95	.712	18.1	.6250-.05P-.1L
11	.840	21.3	948	24.1	.778	19.8	.6875-.05P-.1L
13	.965	24.4	.995	25.27	.904	22.9	.8125-.1P-.2L
16	1.150	29.2	1.261	32.03	1.092	27.7	1.000-.1P-.2L
17	1.215	30.8	1.321	33.55	1.158	29.4	1.062-.1P-.2L
19	1.340	34.0	1.447	36.8	1.283	32.6	1.1875-.1P-.2L
21	1.477	37.5	1.570	39.88	1.412	35.8	1.3125-.1P-.2L

Lanyard Options	
 Nylon Rope	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Fluoropolymer Jacketed Wire Rope	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain	Stainless steel, #8 chain, .240" (6mm)
 Slip Knot (SK) for Attaching Covers to Cable	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

NOTES

Materials and Finishes

1. Cover: Aluminum alloy or stainless steel
2. Gasket: Fluorosilicone rubber
3. Wire,Hardware: Stainless steel, passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse and Series 811 High Density Rubber Protective Cover



809-190 and 809-191 Ordering Information



Splashproof Molded Rubber Covers fit all Series 801 and 811 plugs and receptacles. Braided black nylon lanyard is available with metal rings, cable tie or slipknot for attachment to panel or to cable. -40° to +120° C operating temperature, fungus resistant per MIL-STD-810G Method 508.6.

How To Order						
Sample Part Number	**809-191**	**-05**	**G**	**6**	**-SCS**	**6**
Series (See Table I)	**809-191** = Plug Cover **809-190** = Receptacle Cover					
Shell Size	**5**, **6**, **7**, **8**, **9**, **10**, **11**, **13**, **16**, **17**, **19**, **21**					
Lanyard Type	**G** = Nylon Rope Omit for no lanyard					
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example: "-6" equals six inch length					
Attachment Type (See Table II)	**-WS** = Nylon Cable **-SCS** = Adjustable Slip Knot **-00** = Lanyard with No Attachment Lug Terminals = **-01** thru **-07** Solid Ring = **-08** thru **-33**					
Material	Omit for Neoprene Rubber per ASTM-D-2000 BC610Z1 **C** = Conductive Neoprene Blend (Conductance = 100K Ohms/Sq. Minimum					

Table I: Cover Style

	
809-190 Receptacle Cover	**809-191** Plug Cover

NOTES


Materials and Finishies

- Cover: neoprene rubber blend, black
- Lanyard: .062" (1.57) diameter nylon cord, black
- Cable tie: 6/6 nylon, black, SST locking tab
- Ring: stainless steel, black zinc-cobalt finish
- Crimp sleeve: copper alloy, black zinc-cobalt finish

Table II: Attachment Code



-WS
Nylon Cable Tie, 1.77 Inch (45mm) Maximum Wire Bundle Diameter





-SCS
Adjustable Slip Knot with Crimp Sleeve. The sleeve can be crimped with pliers for a permanent attachment.



-00
Lanyard With No Attachment (Fused End)

Lug Terminals and Rings

 Lug Terminal	**-01** – .126 (3.20) I.D. **-02** – .140 (3.56) I.D. **-03** – .145 (3.68) I.D. **-04** – .156 (3.96) I.D. **-05** – .167 (4.24) I.D. **-06** – .188 (4.78) I.D. **-07** – .197 (5.00) I.D.
 Solid Ring	**-08** – .385 (9.78) I.D. **-09** – .445 (11.30) I.D. **-11** – .570 (14.48) I.D. **-13** – .635 (16.13) I.D. **-14** – .695 (17.65) I.D. **-16** – .885 (22.48) I.D. **-19** – 1.070 (27.18) I.D. **-20** – 1.135 (28.83) I.D. **-22** – 1.210 (30.73) I.D. **-23** – 1.275 (32.39) I.D. **-26** – .950 (24.10) I.D. **-27** – .766 (19.50) I.D. **-29** – .315 (8.00) I.D. **-30** – 1.380 (35.10) I.D. **-32** – .265 (6.70) I.D. **-33** – .510 (13.00) I.D.


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse and Series 811 High Density Rubber Protective Cover

809-190 and 801-191 Dimensions

809-190 Cover Attachment for RPM Jam Nut Receptacle

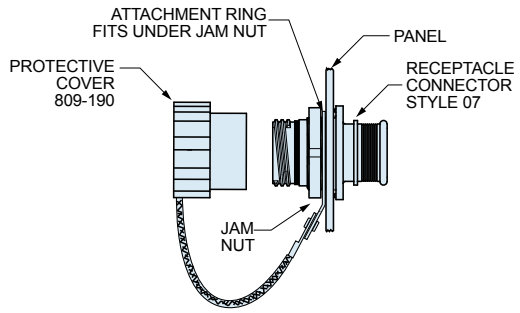





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
08	5	.385	9.78	.51	12.95
09	6	.445	11.30	.57	14.35
11	7, 8	.570	14.48	.69	17.40
13	9	.635	16.13	.76	19.30
14	10	.695	17.65	.82	20.82
27	11	.766	19.46	.89	22.61
16	13	.885	22.48	1.01	25.65
19	16	1.070	27.17	1.20	30.35
20	17	1.135	28.83	1.25	31.75
23	19	1.275	32.39	1.37	34.80
30	21	1.380	35.05	1.48	37.59

809-190 and 801-191 Cover Attachment to Cable Assembly

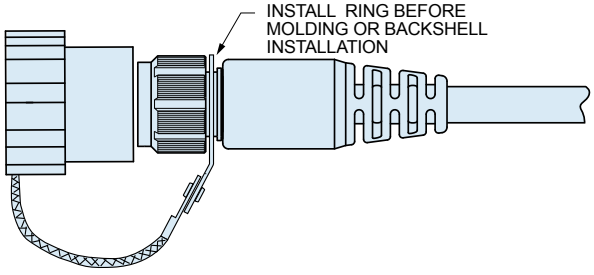





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
29	5	.315	8.00	.44	11.18
08	6	.385	9.80	.51	13.0
33	7,8	.510	12.95	.62	15.75
11	9	.570	14.48	.69	17.53
13	10	.635	16.13	.76	19.30
14	11,13	.695	17.65	.82	20.83
26	16,17	.950	24.13	1.14	28.96
19	19	1.070	27.18	1.20	30.48
22	21	1.210	30.73	1.31	33.27

809-190 Cover Attachment to Panel with a Screw

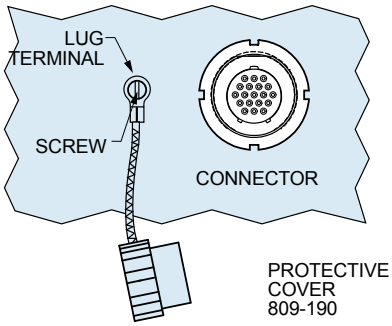





Lug Terminal for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Screw Size	Ring I.D. In. ±.005	Ring I.D. mm. ±0.13	Ring O.D. In. Max.	Ring O.D. mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
06	#8, M4	.188	4.78	.31	7.9
07	#10	.197	5.00	.31	7.9

809-190 and 191 Cover Attachment for Cable Assembly with Type WS Cable Tie

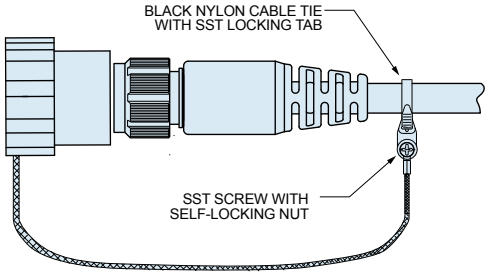

809-190 and 191 Cover Attachment for Cable Assembly with Type SCS Slip Knot

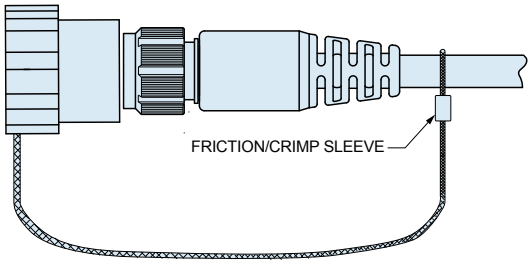


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 801 Mighty Mouse and Series 811 High Density Rubber Protective Cover

809-190 and 801-191 Dimensions

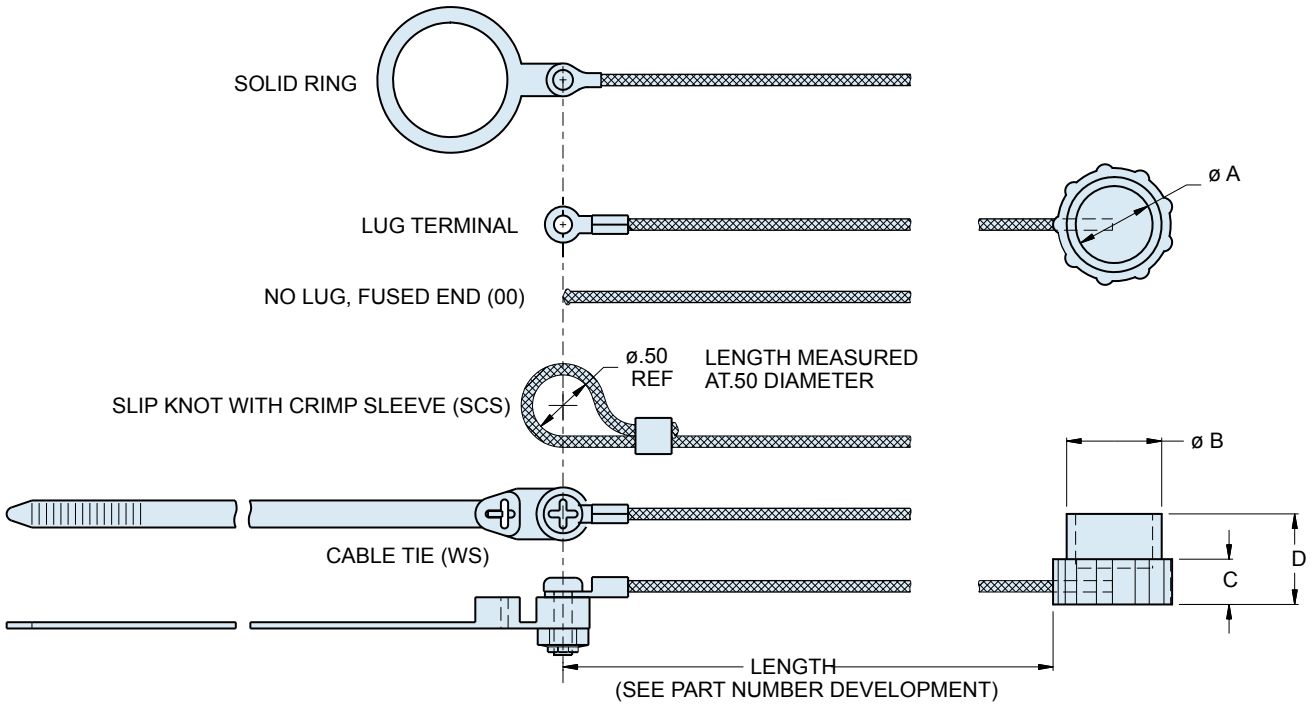

809-190 Receptacle Cover

Shell Size	Ø A		Ø B		C ± .010 (0.3)		D ± .010 (0.3)	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.
05	.28	7.1	.41	10.4	.31	7.9	.62	15.7
06	.35	8.9	.47	11.9	.31	7.9	.62	15.7
07	.41	10.4	.53	13.5	.31	7.9	.62	15.7
08	.47	11.9	.60	15.2	.31	7.9	.62	15.7
09	.53	13.5	.66	16.8	.31	7.9	.62	15.7
10	.60	15.2	.72	18.3	.31	7.9	.62	15.7
11	.66	16.8	.78	20.1	.31	7.9	.62	15.7
13	.78	19.8	.91	23.1	.31	7.9	.62	15.7
16	.97	24.6	1.10	27.9	.31	7.9	.62	15.7
17	1.03	26.2	1.16	29.5	.31	7.9	.62	15.7
19	1.16	26.46	1.28	35.51	.31	7.9	.62	15.7
21	1.28	35.51	1.41	35.81	.31	7.9	.62	15.7

809-191 Plug Cover

Shell Size	Ø A		Ø B		C		D	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.
05	.51	13.0	.70	17.8	.375	9.5	.875	22.2
06	.57	14.5	.76	19.3	.375	9.5	.875	22.2
07	.66	16.8	.85	21.6	.375	9.5	.875	22.2
08	.72	18.3	.91	23.1	.375	9.5	.875	22.2
09	.78	19.8	.97	24.6	.375	9.5	.875	22.2
10	.85	21.6	1.03	26.2	.375	9.5	.875	22.2
11	.89	22.6	1.08	27.4	.375	9.5	.875	22.2
13	1.02	25.4	1.21	30.7	.375	9.5	.875	22.2
16	1.21	30.7	1.40	35.6	.375	9.5	.875	22.2
17	1.27	32.3	1.46	37.1	.375	9.5	.875	22.2
19	1.38	35.05	1.56	39.62	.375	9.5	.875	22.2
21	1.52	38.60	1.71	43.43	.375	9.5	.875	22.2

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD) Metal Protective Covers

667-347 and 667-218



Protect Connectors From Damage
Machined aluminum covers have rubber gaskets for a watertight fit.




Stainless Steel Fittings and Rings
Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Fluoropolymer® jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

Table I: Attachment Code



Omit for attachment types N (No Attachment) and SK (Slip Knot)

Attachment Code	*Inside Diameter*
Small Ring	
01	.126 (3.20) I.D.
02	.145 (3.68) I.D.
04	.188 (4.78) I.D.
06	.197 (5.00) I.D.
Large Ring	
14	.385 (9.78) I.D.
15	.445 (11.30) I.D.
16	.570 (14.48) I.D.
17	.635 (16.13) I.D.
18	.695 (17.65) I.D.
19	.885 (22.48) I.D.
20	1.070 (27.17) I.D.
21	1.135 (28.83) I.D.
22	1.210 (30.73) I.D.
23	1.275 (32.39) I.D.
27	.766 (19.5) I.D.
29	.315 (8.0) I.D.
32	.265 (6.7) I.D.
33	.510 (13.0) I.D.
Split Ring	
50	.420 (10.67) I.D.
52	.480 (12.19) I.D.
54	.635 (16.13) I.D.
56	.745 (18.92) I.D.
58	.885 (22.48) I.D.
60	1.010 (25.65) I.D.
64	1.125 (28.58) I.D.
68	1.345 (34.16) I.D.

How To Order

Sample Part Number	667-347	-ME	-G	9	04	-6
Series	**667-347** = Protective cover for use with series 811 plugs **667-218** = Protective Cover for use with Series 811 Receptacles					
Shell Material / Finish	**ME** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **ZR** = Aluminum / Zinc-Nickel with Black Chromate					
Attachment Type	**-G** = Nylon Rope **-H** = SST Wire Rope, Fluoropolymer Jacket **-N** = No Attachment **-S** = SST Sash Chain **-SK** = Nylon Rope With Slip Knot **-T** = SST Wire Rope, No Jacket **-U** = SST Wire Rope, Polyurethane Jacket **"SST"** = Stainless Steel					
Shell Size	**5**, **6**, **7**, **8**, **9**					
Attachment Code See Table I	Small ring = **01**, **02**, **04**, **06** Large ring = **14**, **15**, **16**, **17**, **18**, **19**, **20**, **21**, **22**, **23**, **27**, **29**, **32**, **33** Split ring = **50**, **52**, **54**, **56**, **58**, **60**,**64**,**68**					
Attachment Length in Inches	Omit for attachment Type N (No Attachment) Example: "-6" equals six inch length					


Table I: Cover Style


	
667-347 Plug Cover	**667-218** Receptacle Cover

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

667-218 Cover Attachment to RPM Jam Nut Receptacle

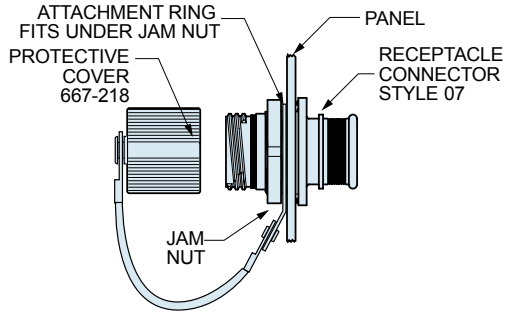





Solid Ring

Attch. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		± .010	±0.25	± .015	± 0.38
14	5	.385	9.78	.510	12.95
15	6	.445	11.30	.565	14.35
16	7, 8	.570	14.48	.685	17.40
17	9	.635	16.13	.760	19.30

667-347 Cover Attachment to Cable Assembly

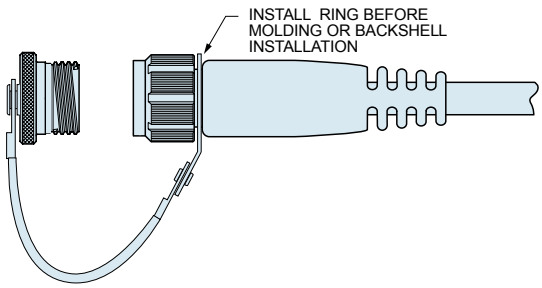


Plug cover shown




Solid Ring

Attch. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		± .010	±0.25	± .015	± 0.38
14	5,6	.385	9.78	.510	12.95
15	7	.445	11.30	.565	14.35
16	8, 9	.570	14.48	.685	17.40

667-218 Cover Attachment to Panel with Screw

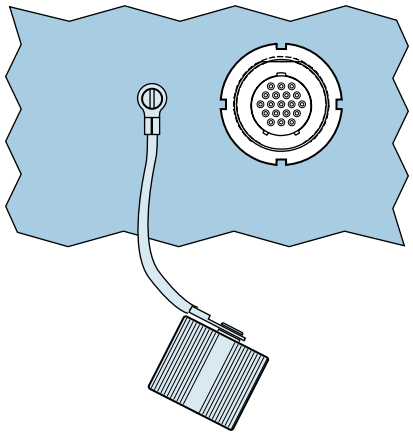





Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Screw Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		±.005	±0.13	Max.	Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

667-347 Cover Attachment to Cable

Plug cover shown

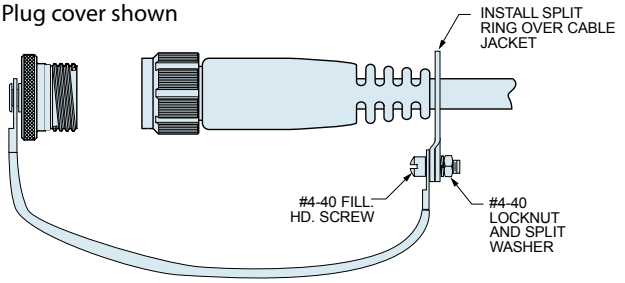



Large Split Ring for Attaching Covers to Cables

Attch. Code	Max. Cable Dia. (in.)	Ring Diameter			
		Min. ID		Max. OD	
		In.	mm.	In.	mm.
50	.410	.420	10.67	.580	14.73
52	.470	.480	12.19	.640	16.26
54	.625	.635	16.13	.796	20.22
56	.735	.745	18.92	.905	22.99
58	.875	.885	22.48	1.046	26.57
60	1.000	1.010	25.65	1.171	29.74
64	1.115	1.125	28.58	1.285	32.64
68	1.335	1.345	34.16	1.505	38.23


X


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD) Metal Protective Cover

667-347 and 667-218 Dimensions and Attachments

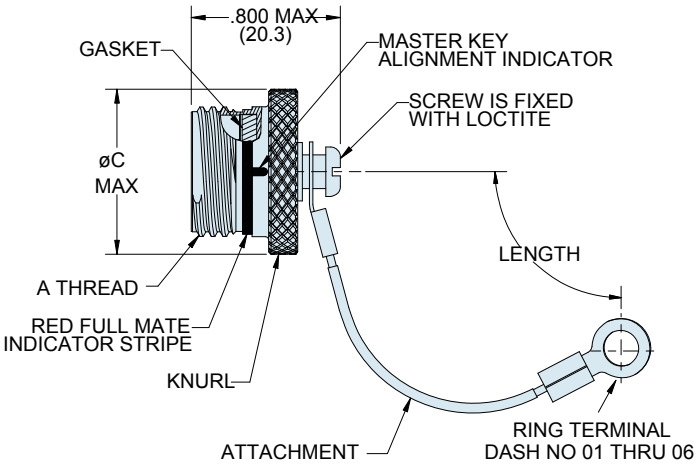

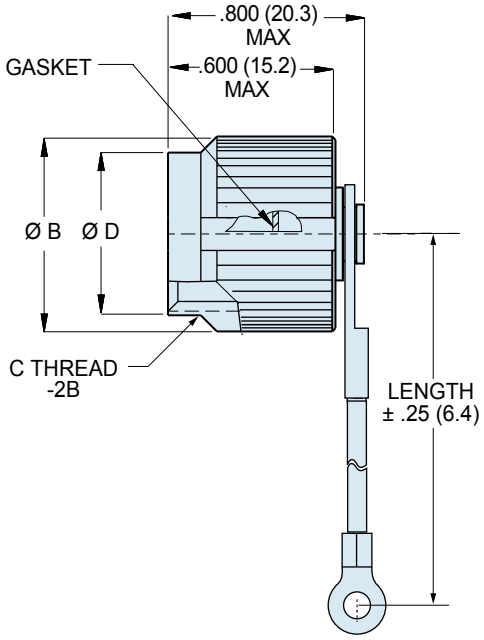

667-347 ***Plug Cover***

667-218 ***Receptacle Cover***

Dimensions					
Shell Size	A Max.		B Max.		C Thread
	In.	mm.	In.	mm.	
5	.465	11.81	.488	12.40	.3125-.05P-.1L
6	.525	13.34	.555	14.10	.3750-.05P-.1L
7	.590	14.99	.615	15.62	.4375-.05P-.1L
8	.653	16.59	.675	17.15	.5000-.05-.1L
9	.715	18.16	.840	21.34	.5625-.05P-.1L

NOTES

Materials and Finishes

- Cover: aluminum alloy or stainless steel
- Gasket: silicone rubber
- Wire,hardware: stainless steel, passivated


Lanyard Options	
 Nylon Rope	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Fluoropolymer Jacketed Wire Rope	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain	Stainless steel, #8 chain, .240" (6mm)
 Slip Knot (SK) for Attaching Covers to Cable	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 811 Mighty Mouse High Density (HD) Rubber Protective Cover

809-190 and 809-191 Dimensions and Attachments

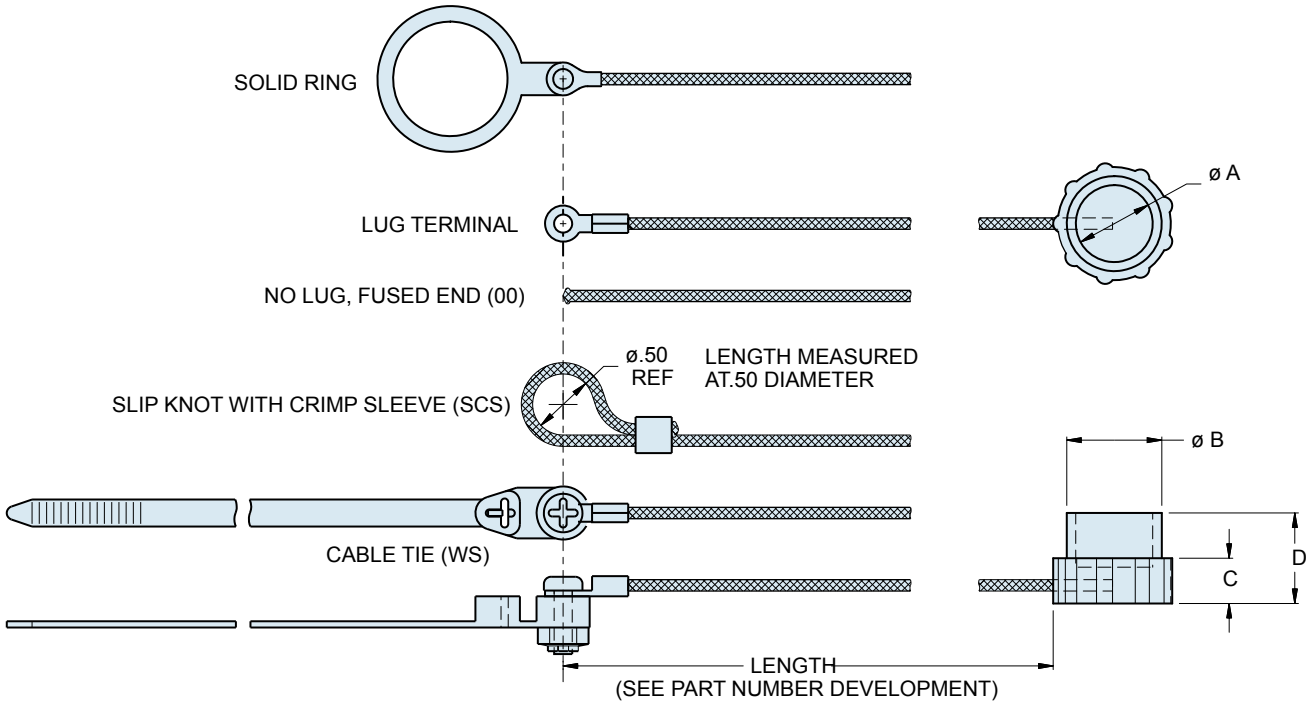

809-190 Receptacle Cover Dimensions				
Shell Size	Ø A		Ø B	
	In.	mm.	In.	mm.
-05	.28	7.1	.41	10.4
-06	.35	8.9	.47	11.9
-07	.41	10.4	.53	13.5
-08	.47	11.9	.60	15.2
-09	.53	13.5	.66	16.8

809-191 Plug Cover Dimensions				
Shell Size	Ø A		Ø B	
	In.	mm.	In.	mm.
-05	.51	13.0	.70	17.8
-06	.57	14.5	.76	19.3
-07	.66	16.8	.85	21.6
-08	.72	18.3	.91	23.1
-09	.78	19.8	.97	24.6

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible IP68 Protective Cover

660-088 and 660-087 Ordering Information



Protect Connectors From Damage – These covers prevent ingress of water and contamination. Stainless steel plug covers feature Viton® O-rings for IP68 sealing (one meter for one hour). Receptacle covers have a Viton® gasket and are made from marine bronze to minimize galling. Cover is designed for low PSI connector protection. For 3500 PSI protection, use part numbers 667-241 and 667-242

Three Types of Attachment Rings Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.



Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Fluoropolymer jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

X

How To Order							
Sample Part Number	**667-088**	**-9**	**G**	**04**	**-6**	**B**
Series (See Table I)	**660-088** = Receptacle Cover **660-087** = Plug Cover
Shell Size	**-5, -6, -7, -8, -9, -10, -12, -14, -15, -21**
Attachment Type	**G** = Nylon Rope **H** = SST Wire Rope, Fluoropolymer Jacket **N** = No Attachment **S** = SST Sash Chain **SK** = Nylon Rope With Slip Knot **T** = SST Wire Rope, No Jacket **U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel
Attachment Code (See Table II)	Small Ring = **01**, **02**, **04**, **06** Solid Ring = **16** thru **24** Split Ring = **50** thru **72**
Attachment Length (inches)	Example "-6" equals six inch length Omit for attachment Type N (No Attachment)
Alternate Key Position (660-087 Only)	**Omit** for plug connectors with standard "**A**" key position, for all other positions indicate **B**, **C** or **D** Omit if ordering 660-088 receptacle cover

Table I: Cover Style


	
660-088 Receptacle Cover	**660-087** Plug Cover

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible IP68 Protective Cover

660-088 and 660-087 Dimensions

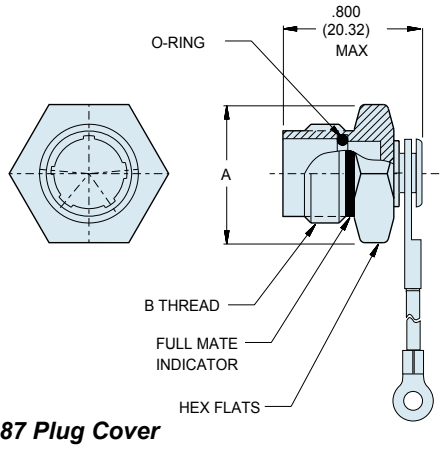

660-087 Plug Cover

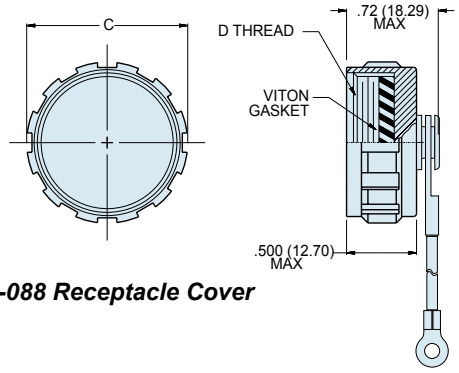

660-088 Receptacle Cover

660-087 & -088 Dimensions						
Shell Size	A Hex		B Thread Class 2A	Ø C Max.		D Thread Class 2B
	In.	mm.		In.	mm.	
5	.500	12.70	.438-28 UNEF	.59	15.0	.438-28 UNEF
6	.625	15.88	.562-20 UN	.72	18.3	.562-20 UN
7	.688	17.48	.625-20 UN	.78	19.8	.625-20 UN
8	.750	19.05	.687-20 UN	.84	21.3	.687-20 UN
9	.812	20.62	.750-20 UNEF	.90	22.9	.750-20 UNEF
10	.875	22.23	.812-20 UNEF	.97	24.6	.812-20 UNEF
12	.938	23.83	.875-20 UNEF	1.03	26.2	.875-20 UNEF
14	1.125	28.58	1.062-20 UN	1.22	31.0	1.062-20 UN
15	1.188	30.18	1.125-20 UN	1.28	32.5	1.125-20 UN
21	1.562	39.67	1.438-20 UN	1.61	40.9	1.438-20 UN

Table II: Attachment Options				
Small Ring For Attaching Receptacle Covers to a Panel with a Screw	Attch. Code	Screw Size	Ring I.D.	
			In.	mm.
	01	#4, M3	.126	3.20
	02	#6	.145	3.68
	04	#8, M4	.188	4.78
	06	#10	.197	5.00
Solid Ring for Attaching Receptacle Covers to Jam Nut Receptacles	Attch. Code	Receptacle Cover Shell Size	Ring I.D.	
			In.	mm.
	16	5	.570	14.5
	17	6	.635	16.1
	18	7	.695	17.7
	19	8, 9, 10	.885	22.5
	20	12	1.070	27.2
	21	14	1.135	28.8
	22	15	1.210	30.7
	24	21	1.530	38.9
Large Split Ring for Attaching Covers to Cables	Attch. Code	Max. Cable Dia.	Min. ID	
	50	.410	.420	10.67
	52	.470	.480	12.19
	54	.625	.635	16.13
	56	.735	.745	18.92
	58	.875	.885	22.48
	60	1.000	1.010	25.65
	64	1.115	1.125	28.58
	68	1.335	1.345	34.16
	72	1.416	1.438	36.53
Slip Knot (SK) for Attaching Covers to Cable				

Jam Nut Major Diameter Reference			
Shell Size	Jam Nut Thread Major Dia.	Shell Size	Jam Nut Thread Major Dia.
5	.5000	10	.8750
6	.6250	12	.9375
7	.6875	14	1.1250
8	.7500	15	1.1875
9	.8125	21	1.5000

NOTES

Materials and Finishes

- Plug Cover: 316 stainless steel, passivated
- Receptacle Cover: marine bronze, unplated
- O-Ring: Viton rubber
- Gasket: Viton rubber
- Wire,Hardware: Stainless steel, passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible 3500 PSI Protective Cover

667-241 and 667-242 Ordering Information



Protect Connectors From Damage – These covers prevent ingress of water and contamination. Stainless steel plug covers feature Viton® O-rings for 3500 PSI sealing. Receptacle covers have a Viton® gasket and are made from marine bronze to minimize galling. For low-pressure IP68 receptacle sealing only, use part number 660-088.

Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Teflon® jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order					
Sample Part Number	**667-241**	**-S**	**6**	**03**	**-6**
Series (See Table I)	**667-241** = Plug Cover **667-242** = Receptacle Cover				
Attachment Type	**-D =** Bead Chain, Cres., Passivate **-F** = Wire Rope, Nylon Jacket **-G** = Nylon Rope **-H** = SST Wire Rope, Teflon® Jacket **-N** = No Attachment **-R** = Wire Rope, PVC Jacket **-S** = SST Sash Chain **-T** = SST Wire Rope, No Jacket **-U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel				
Shell Size	**5**, **6**, **7**, **8**, **9**, **10**, **12**, **14**, **15**, **21**				
Attachment Code (See Table II)	Small Ring = **01** thru **06** Solid Ring = **14** thru **33**				
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example "-6" equals six inch length				

Table I: Cover Style





	
667-241 High Pressure Plug Cover	**667-242** High Pressure Receptacle Cover

Table II: Attachment Code

Omit for attachment Type **N** (No Attachment)


 Small Ring	**01** – .125 (3.2) I.D. **02** – .140 (3.6) I.D. **04** – .182 (4.6) I.D. **06** – .197 (5.0) I.D.
 Solid Ring	**14** – .385 (9.8) I.D. **15** – .445 (11.3) I.D. **16** – .570 (14.5) I.D. **17** – .635 (16.1) I.D. **18** – .695 (17.7) I.D. **19** – .885 (22.5) I.D. **20** – 1.070 (27.2) I.D. **21** – 1.135 (28.8) I.D. **22** – 1.210 (30.7) I.D. **23** – 1.275 (32.4) I.D. **24** – 1.530 (38.9) I.D. **26** – .510 (13.0) I.D. **27** – .766 (19.5) I.D. **28** – 1.015 (25.8) I.D. **29** – .315 (8.0) I.D. **30** – 1.380 (35.1) I.D. **31** – .820 (20.8) I.D. **32** – .265 (6.7) I.D. **33** – .510 (13.0) I.D.

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 802 AquaMouse™ Submersible 3500 PSI Protective Cover

667-241 and 667-242 Dimensions

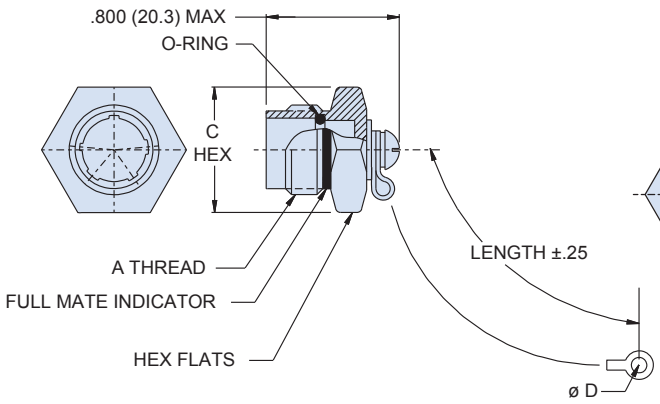


667-241 High-Pressure Plug Cover

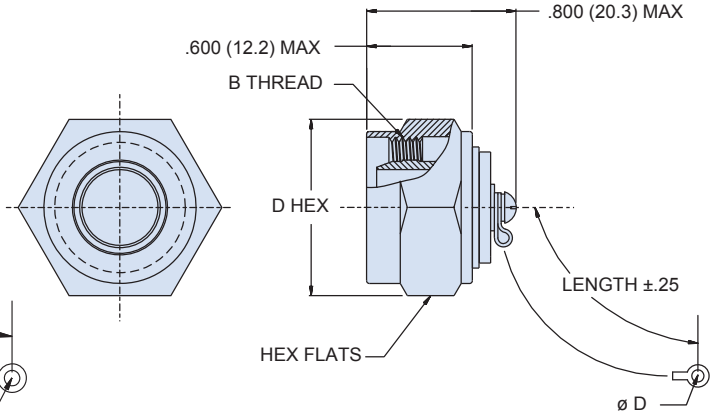

667-242 High-Pressure Receptacle Cover

667-241 (Plug Cover) Dimensions				
Attachment Code	Shell Size	A Thread	C Hex.	
			In.	mm.
32	5	.4375-28 UNEF-2A	.500	12.70
14	6	.5625-20 UN-2A	.625	15.88
33	7	.6250-20 UN-2A	.688	17.48
16	8	.6875-20 UN-2A	.750	19.05
17	9	.7500-20 UNEF-2A	.812	20.62
17	10	.8125 20 UNEF-2A	.875	22.23
18	12	.8750-20 UNEF-2A	.938	23.83
19	14	1.0625-20 UN-2A	1.125	28.58
26	15	1.1250-20 UN-2A	1.188	30.18
23	21	1.4375-20 UN-2A	1.562	39.67

667-242 (Receptacle Cover) Dimensions				
Attachment Code	Shell Size	B Thread	D Hex	
			In.	mm.
33	5	.4375-28 UNEF-2B	.500	12.70
17	6	.5625-20 UN-2B	.625	15.88
18	7	.6250-20 UN-2B	.688	17.48
27	8	.6875-20 UN-2B	.750	19.05
31	9	.7500-20 UNEF-2B	.812	20.62
19	10	.8125-20 UNEF-2B	.875	22.23
26	12	.8750-20 UNEF-2B	.938	23.83
21	14	1.0625-20 UN-2B	1.125	28.58
22	15	1.1250-20 UN-2B	1.188	30.2
24	21	1.4375-20 UN-2B	1.562	39.7

Table V: Lanyard Options	
 Nylon Rope	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Teflon Jacketed Wire Rope	Translucent FEP jacket over stainless steel rope, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain	Stainless steel, #8 chain, .240" (6mm)

NOTES

Materials and Finishes

- Plug Cover: 316 Stainless Steel
- Receptacle Cover: Nickel-Aluminum-Bronze.
- Receptacle Shell: 316 Stainless Steel
- Plug O-Ring: Viton
- Receptacle Gasket: Fluorosilicone

X

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse
¼ Turn Bayonet Coupling Protective Cover
660-082 and 660-083 Ordering Information



Protect Connectors From Damage
Machined aluminum covers prevent ingress of contamination and water.

Stainless Steel Fittings and Rings
Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope
offers high strength, excellent abrasion resistance and good flexibility. Or, choose Fluoropolymer jacket for high temperature exposure.

Braided Nylon Rope
provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order

Sample Part Number	660-082	-M	S	12	04	-6
Series (See Table I)	**660-082** = Plug Cover **660-083** = Receptacle Cover					
Shell Material / Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **UCR** -= Aluminum / Zinc-Cobalt with Black Chromate RoHS Compliant **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Attachment Type	**D** = Bead Chain, CRES, Passivate **F** = Wire Rope, Nylon Jacket **G** = Nylon Rope **H** = SST Wire Rope, Fluoropolymer Jacket **N** = No Attachment **R** = Wire Rope, PVC Jacket **S** = SST Sash Chain **SK** = Nylon Rope With Slip Knot **T** = SST Wire Rope, No Jacket **U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel					
Shell Size	**5**, **6**, **7**, **8**, **9**, **10**, **12**, **14**, **15**					
Attachment Code (See Table II)	Small Ring = **01** thru **06** Large Ring = **14** thru **33** Split Ring = **50** thru **68**					
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example "-6" equals six inch length					

Table I: Cover Style





	
660-082 Bayonet Plug Cover	**660-083** Bayonet Receptacle Cover

Table II: Attachment Code

Omit for attachment types N (No Attachment) and SK (Slip Knot)


 Small Ring	**01** – .126 (3.20) I.D. **02** – .145 (3.68) I.D. **04** – .188 (4.78) I.D. **06** – .197 (5.00) I.D.
 Large Ring	**14** – .385 (9.8) **15** – .445 (11.3) **16** – .570 (14.5) **17** – .635 (16.1) **18** – .695 (17.7) **19** – .885 (22.5) **20** – 1.070 (27.2) **21** – 1.135 (28.8) **22** – 1.210 (30.7) **23** – 1.275 (32.4) **25** – 1.530 (38.9) **26** – .950 (24.1) **27** – .766 (19.5) **28** – 1.015 (25.8) **29** – .315 (8.0) **30** – 1.380 (35.1) **31** – .820 (20.8) **32** – .265 (6.7) **33** – .510 (13.0)
 Split Ring	**50** – .420 (10.67) I.D. **52** – .480 (12.19) I.D. **54** – .635 (16.13) I.D. **56** – .745 (18.92) I.D. **58** – .885 (22.48) I.D. **60** – 1.010 (25.65) I.D. **64** – 1.125 (28.58) I.D. **68** – 1.345 (34.16) I.D.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse
¼ Turn Bayonet Coupling Protective Cover
660-082 and 660-083 Dimensions

660-083 Cover Attachment to RPM Jam Nut Receptacle

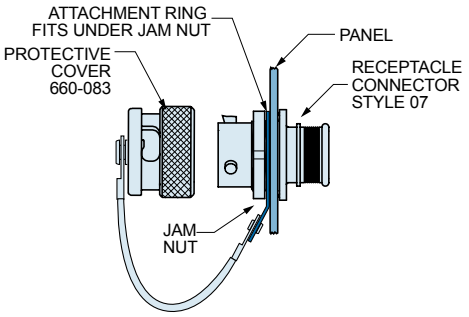





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
14	5	.385	9.78	.51	12.95
15	6	.445	11.30	.57	14.48
16	7	.570	14.48	.69	17.53
17	8, 9	.635	16.13	.76	19.30
27	10	.766	19.46	.89	22.61
19	12	.885	22.48	1.01	25.65
20	14	1.070	27.18	1.20	30.48
21	15	1.135	28.83	1.25	31.75

660-082 & 083 Cover Attachment to Cable Assembly

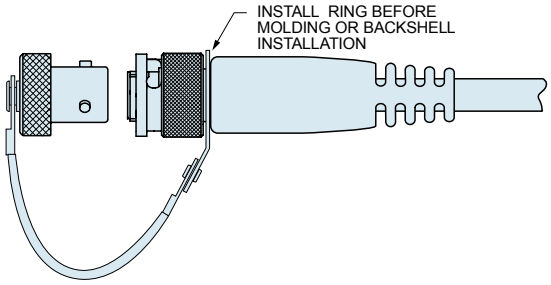


Plug cover shown




Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
29	5	.315	8.00	.44	11.18
14	6	.315	8.00	.44	11.18
33	7, 8	.510	12.95	.62	15.75
16	9	.570	14.48	.69	17.53
17	10	.635	16.13	.76	19.30
18	12	.695	17.65	.82	20.83
26	14, 15	.950	24.13	1.14	28.96

660-083 Cover Attachment to Panel

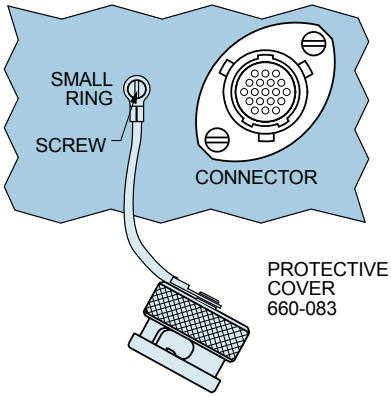





Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Screw Size	Ring I.D. In. ±.005	Ring I.D. mm. ±0.13	Ring O.D. In. Max.	Ring O.D. mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

660-082 & 083 Cover Attachment to Cable

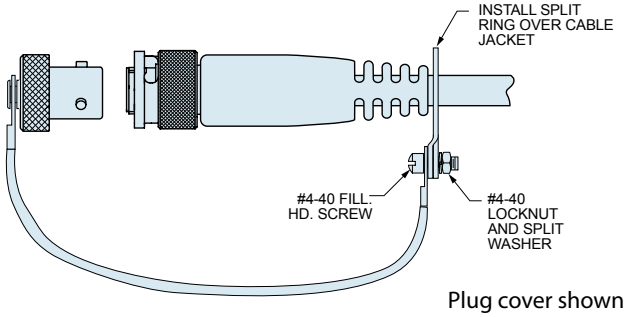

Plug cover shown



Large Split Ring for Attaching Covers to Cables


Attch. Code	Max. Cable Dia. (in.)	Ring Diameter Min. ID In.	Ring Diameter Min. ID mm.	Ring Diameter Max. OD In.	Ring Diameter Max. OD mm.
50	.410	.420	10.67	.580	14.73
52	.470	.480	12.19	.640	16.26
54	.625	.635	16.13	.796	20.22
56	.735	.745	18.92	.905	22.99
58	.875	.885	22.48	1.046	26.57
60	1.000	1.010	25.65	1.171	29.74
64	1.115	1.125	28.58	1.285	32.64
68	1.335	1.345	34.16	1.505	38.23

X


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 803 Mighty Mouse
¼ Turn Bayonet Coupling Protective Cover
660-082 and 660-083 Dimensions

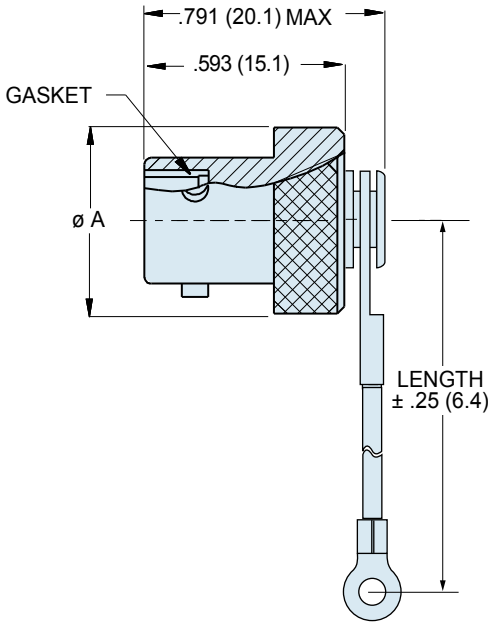

Plug Cover
660-082

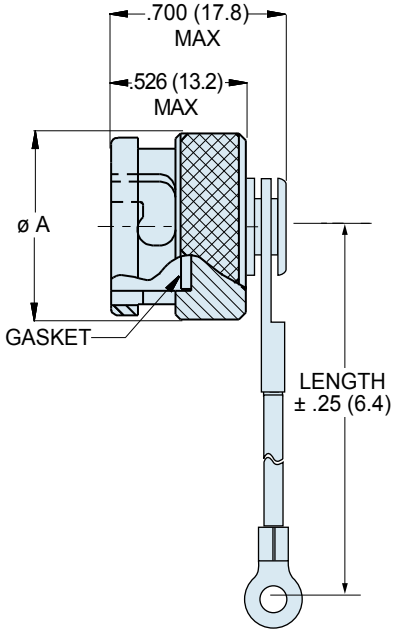

Receptacle Cover
660-083

Dimensions		
Shell Size	Ø A Max.	
	In.	mm.
5	.620	15.7
6	.620	15.7
7	.620	15.7
8	.690	17.5
9	.760	19.3
10	.850	21.6
12	.940	23.8
14	1.170	29.7
15	1.170	29.7

Lanyard Options	
 Nylon Rope (G)	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope (U)	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Fluoropolymer Jacketed Wire Rope (H)	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain (S)	Stainless steel, #8 chain, .240" (6mm)
 Slip Knot (SK) for Attaching Covers to Cable	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

NOTES

Materials and Finishes

- Cover: aluminum alloy or stainless steel
- Gasket: fluorosilicone rubber
- Wire,hardware: stainless steel, passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 804 Push-Pull Mighty Mouse Protective Receptacle Cover

667-202 Ordering Information

Protect Connectors From Damage
Machined aluminum covers prevent ingress of contamination and water.


Stainless Steel Fittings and Rings
Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Fluoropolymer jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order							
Sample Part Number	**667-202**	**M**	**9**	**H**	**6**	**-14**	**R**
Series (See Table I)	**667-202** = Receptacle Cover						
Shell Material / Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size	**5**, **6**, **7**, **8**, **9**, **10**, **11**, **12**, **14**,						
Attachment Type	**D** = Bead Chain, CRES, Passivate **F** = Wire Rope, Nylon Jacket **G** = Nylon Rope **H** = SST Wire Rope, Fluoropolymer Jacket **N** = No Attachment **R** = Wire Rope, PVC Jacket **S** = SST Sash Chain **SK** = Nylon Rope With Slip Knot **T** = SST Wire Rope, No Jacket **U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel						
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example: "-6" equals six inch length						
Attachment Code (See Table II)	Small Ring = **01** thru **06** Large Ring = **14** thru **33** Split Ring = **50** thru **68**						
Pull Ring Option	**R** = Supplied with Pull Ring (Omit for none)						



Table I: Cover Style



667-202
Push Pull Receptacle Cover with Pull Ring

Table II: Attachment Code

Omit for attachment types **N** (No Attachment) and **SK** (Slip Knot)


 Small Ring	**-01** – .126 (3.20) I.D. **-02** – .145 (3.68) I.D. **-04** – .188 (4.78) I.D. **-06** – .197 (5.00) I.D.
 Large Ring	**-15** – .445 (11.3) I.D. **-33** – .510 (13.0) I.D. **-17** – .635 (16.1) I.D. **-18** – .695 (17.7) I.D. **- 27** – .766 (19.4) I.D. **- 31** – .820 (20.) I.D. **-19** – .885 (22.5) I.D. **-28** – 1.015 (25.8) I.D. **-20** – 1.135 (28.8) I.D.
 Split Ring	**-50** – .420 (10.67) I.D. **-52** – .480 (12.19) I.D. **-54** – .635 (16.13) I.D. **-56** – .745 (18.92) I.D. **-58** – .885 (22.48) I.D. **-60** – 1.010 (25.65) I.D. **-64** – 1.125 (28.58) I.D. **-68** – 1.345 (34.16) I.D.


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse
Protective Receptacle Cover
667-202 Dimensions


667-202 Cover Attachment to RPM Jam Nut Receptacle

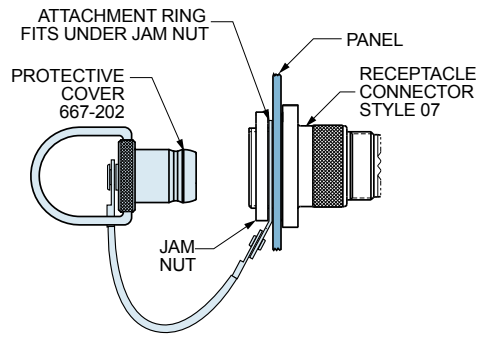



Solid Ring


Dia. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
15	5	.445	11.30	.57	14.48
33	6	.510	12.95	.62	15.75
17	7, 8	.635	16.13	.76	19.30
18	9	.695	17.65	.82	20.83
27	10	.766	19.46	.89	22.61
31	11	.820	20.83	1.00	25.40
19	12	.885	22.48	1.01	25.65
28	14	1.015	25.78	1.20	30.48
20	15	1.070	27.18	1.20	30.48

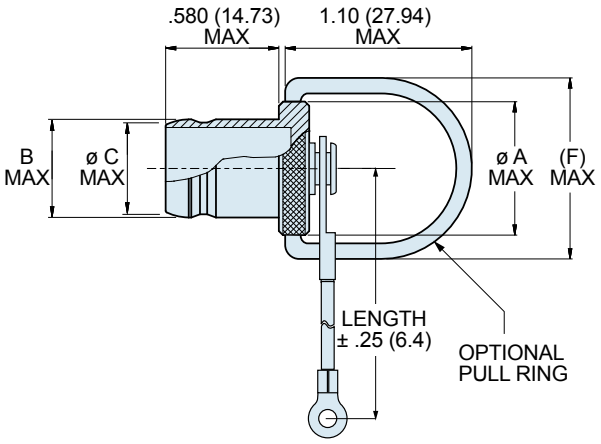


Dimensions

Shell Size	Ø A Max.	ØB	ØC	F Max	Shell Size	Ø A Max.	ØB	ØC	F Max
5	.490 (12.45)	.234 (5.94)	.203 (5.16)	.74 (18.80)	10	.773 (19.63)	.548 (13.92)	.513 (13.03)	1.03 (26.16)
6	.490 (12.45)	.297 (7.54)	.266 (6.76)	.74 (18.80)	11	.805 (20.45)	.600 (15.24)	.569 (14.45)	1.06 (26.92)
7	.570 (14.48)	.367 (9.32)	.335 (8.51)	.82 (20.83)	12	.860 (21.84)	.658 (16.71)	.627 (15.93)	1.11 (28.19)
8	.614 (15.60)	.414 (10.52)	.383 (9.73)	.87 (22.10)	14	.980 (24.89)	.781 (19.84)	.749 (19.02)	1.23 (31.24)
9	.680 (17.27)	.467 (11.86)	.435 (11.05)	.92 (23.37)	15	1.045 (26.54)	.843 (21.41)	.811 (20.60)	1.30 (33.02)

667-202 Cover Attachment to Panel

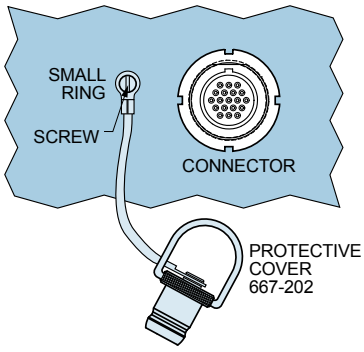



Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Dia. Code	Screw Size	Ring I.D. In. ±.005	Ring I.D. mm. ±0.13	Ring O.D. In. Max.	Ring O.D. mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

Lanyard Options

 Nylon Rope	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Fluoropolymer® Jacketed Wire Rope	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain	Stainless steel, #8 chain, .240" (6mm)
 **Slip Knot (SK)** for Attaching Covers to Cable	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Protective Plug Cover

809-198 Ordering Information



Protect Connectors From Damage Machined aluminum covers prevent ingress of contamination and water.

Stainless Steel Fittings and Rings Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Teflon® jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order

Sample Part Number	809-198	M	9	H	6	-14	A
Series (See Table I)	**809-198** = Plug Cover						
Shell Material / Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant						
Shell Size	**5, 6, 7, 8, 9, 10, 11, 12, 14, 15**						
Attachment Type	**D** = Bead Chain, CRES, Passivate **F** = Wire Rope, Nylon Jacket **G** = Nylon Rope **H** = SST Wire Rope, Fluoropolymer Jacket **N** = No Attachment **R** = Wire Rope, PVC Jacket **S** = SST Sash Chain **SK** = Nylon Rope With Slip Knot **T** = SST Wire Rope, No Jacket **U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel						
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example: "-6" equals six inch length						
Attachment Code (See Table II)	Small Ring = **01** thru **06** Large Ring = **14** thru **33** Split Ring = **50** thru **68**						
Alternate Key Position	Omit for master keyway only, for all other positions indicate **A, B, C, D, E,** or **F**						




Table I: Cover Style



809-198
Push-Pull Plug Cover

Table II: Attachment Code

Omit for attachment Type **N** (No Attachment) and **SK** (Slip Knot)

 **Small Ring**	**-01** – .126 (3.20) I.D. **-02** – .145 (3.68) I.D. **-04** – .188 (4.78) I.D. **-06** – .197 (5.00) I.D.
 **Solid Ring**	**-32** – .265 (6.73) **-29** – .315 (8.00) **-14** – .385 (9.78) **-33** – .510 (12.95) **-15** – .445 (11.30) **-16** – .570 (14.48) **-17** – .635 (16.13) **-18** – .695 (17.65) **-27** – .766 (19.46) **-26** – .950 (24.13) **-31** – .820 (20.83) **-28** – 1.015 (25.78) **-20** – 1.070 (27.18) **-21** – 1.135 (28.83)
 **Split Ring**	**-50** – .420 (10.67) I.D. **-52** – .480 (12.19) I.D. **-54** – .635 (16.13) I.D. **-56** – .745 (18.92) I.D. **-58** – .885 (22.48) I.D. **-60** – 1.010 (25.65) I.D. **-64** – 1.125 (28.58) I.D. **-68** – 1.345 (34.16) I.D.

X

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Protective Plug Cover


809-198 Dimensions

809-198 Cover Attachment to Cable Assembly

Install cover onto the back of the connector before overmolding or backshell installation.

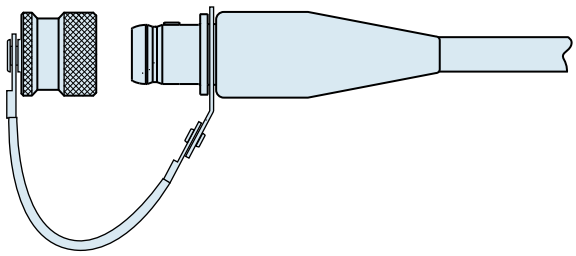

Plug cover shown




Solid Ring


Dia. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		± .010	±0.25	± .015	± 0.38
29	5	.315	8.00	.44	11.18
14	6	.385	9.80	.51	13.00
33	7	.510	13.00	.62	15.70
16	9	.570	14.48	.69	17.53
17	10	.635	16.13	.76	19.30
27	11, 12	.766	19.50	.89	22.60
26	14, 15	.950	24.13	1.14	28.96

809-198 Cover Attachment to Cable

Split rings can be installed onto finished cables.

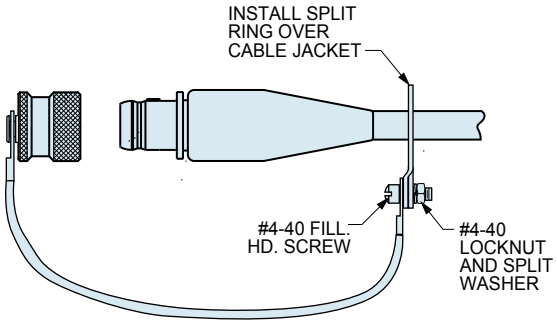


Plug cover shown



Large Split Ring for Attaching Covers to Cables

Dia. Code	Max. Cable Dia. (in.)	Ring Diameter			
		Min. ID		Max. OD	
		In.	mm.	In.	mm.
50	.410	.420	10.67	.580	14.73
52	.470	.480	12.19	.640	16.26
54	.625	.635	16.13	.796	20.22
56	.735	.745	18.92	.905	22.99
58	.875	.885	22.48	1.046	26.57
60	1.000	1.010	25.65	1.171	29.74
64	1.115	1.125	28.58	1.285	32.64
68	1.335	1.345	34.16	1.505	38.23

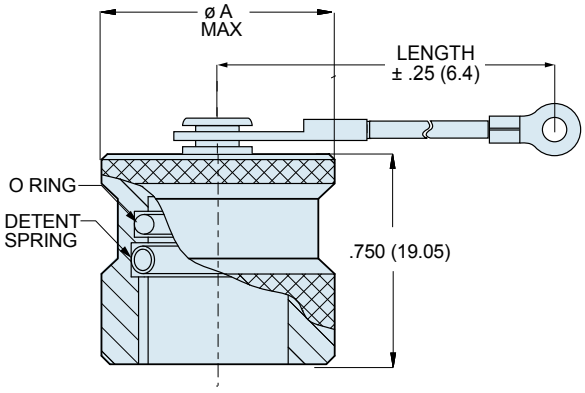

Dimensions					
Shell Size	Ø A Max.		Shell Size	Ø A Max.	
	In	mm		In	mm
5	.496	12.60	10	.790	20.07
6	.540	13.72	11	.835	21.21
7	.645	16.38	12	.915	23.24
8	.665	16.89	14	1.040	26.42
9	.720	18.29	15	1.100	27.94

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Rubber Covers

809-083 and 809-087 Dimensions



809-083 Plug Cover



809-087 Receptacle Cover

Splash proof Molded Rubber Covers fit all Series 804 plugs and receptacles. Braided black nylon lanyard is available with metal rings, cable tie or slipknot for attachment to panel or to cable.

How To Order						
Sample Part Number	**809-083**	**-05**	**G**	**6**	**-SK**	**C**
Series (See Table I)	**809-083** = Plug Cover **809-087** = Receptacle Cover					
Shell Size	**-05**, **-06**, **-07**, **-08**, **-09**, **-10**, **-11**, **-12**, **-14**, **-15**					
Attachment Type	**-G** = Nylon Rope **Omit** = No Lanyard					
Attachment Length (inches)	Length in Inches					
Attachment Code (See Table II)	**-WS** = Nylon Cable Tie **-SK** = Slip Knot **-SCS** = Slip/Crimp Sleeve **-00** = Lanyard with no Attachment Lug Terminal = **-01** thru **-06** Solid Ring = **-14** thru **-33**					
Conductive Rubber	Omit for Standard Neoprene **C** = Conductive Rubber					

Table I: Series Style




	
809-083 Push-Pull Receptacle Cover	**809-087** Push-Pull Receptacle Cover

Table II: Attachment Code



-WS
Nylon Cable Tie, 1.77 Inch (45mm) Maximum Wire Bundle Diameter





-SK
Slip Knot



-00
Lanyard With No Attachment (Fused End)

Lug Terminals and Rings

 Lug Terminal	**-01** – .126 (3.20) I.D. **-02** – .145 (3.68) I.D. **-05** – .188 (4.78) I.D. **-06** – .197 (5.00) I.D.
 Solid Ring	**-32** – .265 (6.73) I.D. **-29** – .315 (8.00) I.D. **-14** – .385 (9.78) I.D. **-15** – .445 (11.30) I.D. **-33** – .510 (12.95) I.D. **-16** – .570 (14.48) I.D. **-17** – .635 (16.13) I.D. **-18** – .695 (17.65) I.D. **-27** – .766 (19.46) I.D. **-31** – .820 (20.83) I.D. **-19** – .885 (22.48) I.D. **-26** – .950 (24.13) I.D. **-28** – 1.015 (25.75) I.D. **-20** – 1.070 (27.18) I.D.

X


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 804 Push-Pull Mighty Mouse Rubber Covers

809-083 and 809-087 Dimensions

809-087 Cover Attachment to RPM Jam Nut Receptacle

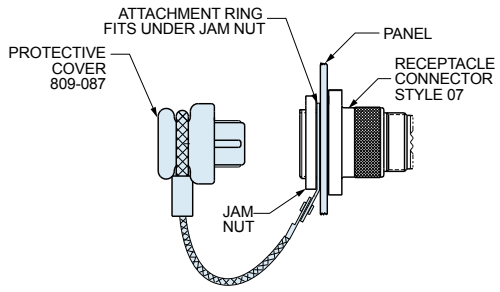





Solid Ring

Attch. Code	Shell Size	Ring I.D.		Ring O.D.	
		in.	mm.	in.	mm.
		± .010	± .025	± .015	± 0.38
15	5	.445	11.30	.57	14.48
33	6	.510	12.95	.62	15.75
17	7,8	.635	16.13	.76	19.30
18	9	.695	17.65	.82	20.83
27	10	.766	19.46	.89	22.61
31	11	.820	20.83	.94	23.88
19	12	.885	22.48	1.01	25.65
28	14	1.015	25.78	1.20	30.48
20	15	1.070	27.18	1.20	30.48

809-083 & -087 Cover Attachment to Cable Aseembly

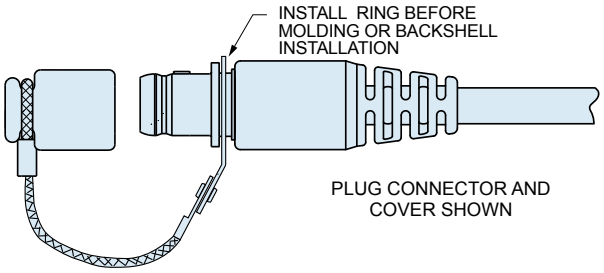





Solid Ring

Attch. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		± .010	±0.25	± .015	± 0.38
29	5	.315	8.00	.440	11.20
14	6	.385	9.80	.510	13.00
33	7	.510	13.00	.620	15.70
16	8,9	.570	14.48	.570	14.48
17	10	.635	16.13	.635	16.13
27	11, 12	.766	19.50	.890	22.60
26	14, 15	.950	24.13	.950	24.13

809-087 Cover Attachment to Panel

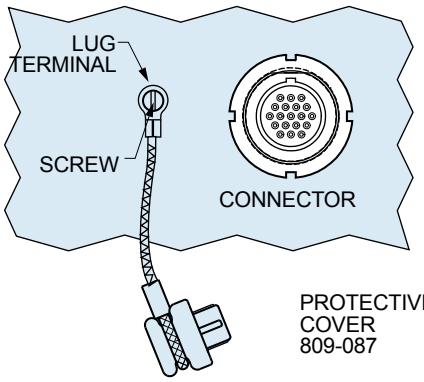



Lug Terminal for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		±.005	±0.13	Max.	Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
05	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Series 804 Push-Pull Mighty Mouse Rubber Covers


809-083 and 809-087 Dimensions

809-083 Cover Attachment to Cable with Slip Knot

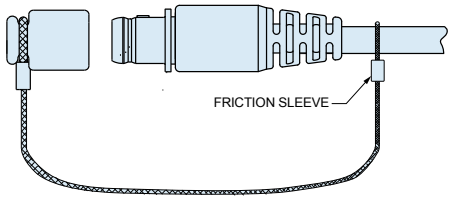

809-083 Cover Attachment to Cable with Type WS Cable Tie

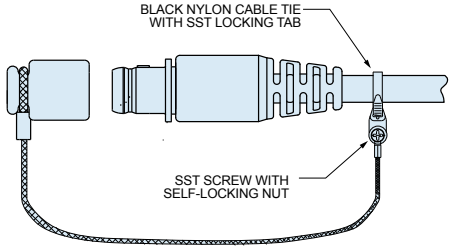

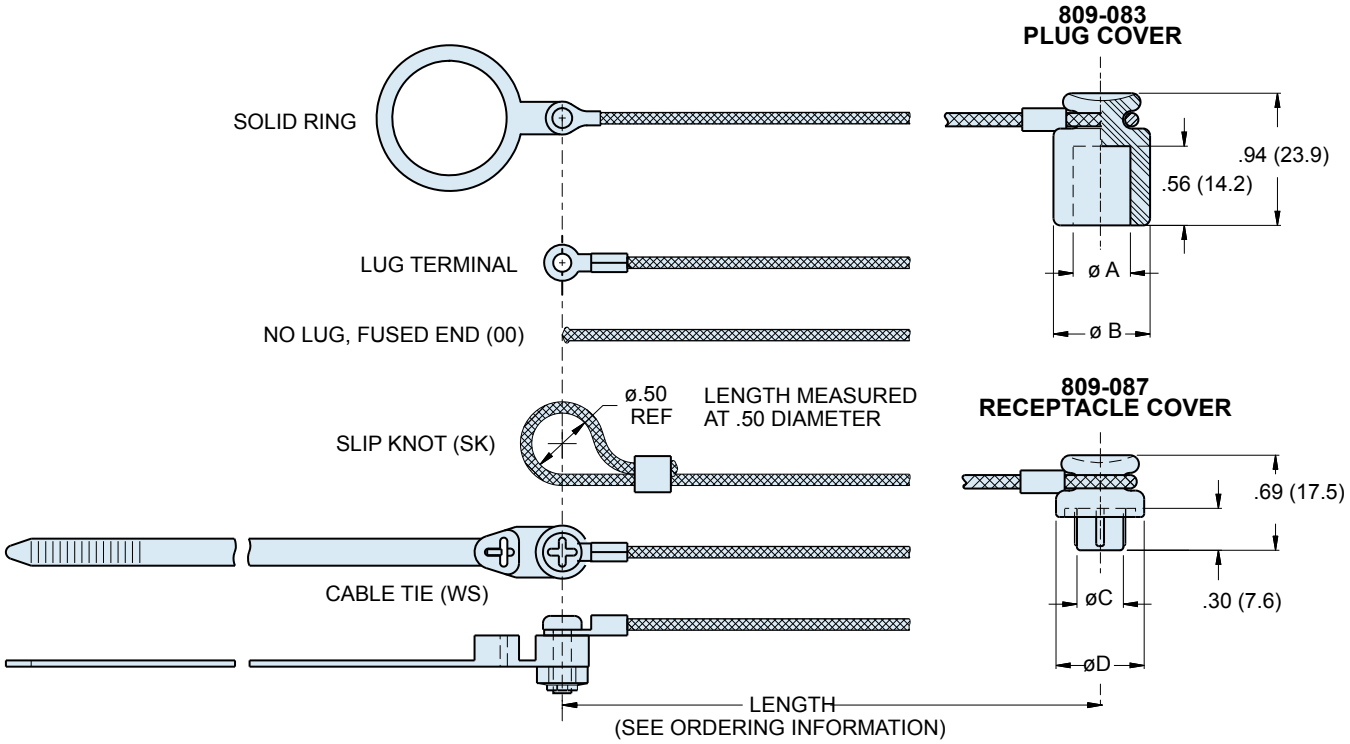

Dimensions								
Shell Size	Ø A		Ø B		Ø C		Ø D	
	In	mm	In	mm	In	mm	In	mm
5	.23	5.8	.56	14.2	.27	6.9	.59	15.0
6	.29	7.4	.56	14.2	.33	8.4	.65	16.5
7	.36	9.1	.56	14.2	.40	10.2	.78	19.8
8	.41	10.4	.68	17.3	.44	11.2	.78	19.8
9	.46	11.7	.68	17.3	.50	12.7	.84	21.3
10	.54	13.7	.79	20.1	.57	14.5	.90	22.9
11	.61	15.5	.94	23.9	.63	16.0	.96	24.4
12	.66	16.8	.94	23.9	.69	17.5	1.03	26.2
14	.78	19.8	1.11	28.2	.82	20.8	1.15	29.2
15	.84	21.3	1.11	28.2	.87	22.1	1.21	30.7

NOTES

Materials and Finishes

1. Cover: Neoprene rubber blend, black
2. Lanyard: .062" (1.57) diameter nylon cord, black
3. Cable Tie: 6/6 nylon, black, SST locking tab
4. Ring: Stainless steel, black zinc-cobalt finish

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.


Spring-Loaded Cover for Series 804 Jam Nut Receptacles





"Flop lid" snaps shut when cable is disconnected. Silicone gasket provides watertight seal when closed. Fits standard Series 804 rear-mount jam nut receptacles. For .057/.067 inch (1.45/1.70 mm) panel thickness. Aluminum alloy or stainless steel.

Part Number					
Shell Size	Aluminum				Stainless Steel
	Electroless Nickel	Cadmium/Olive Drab	Nickel-PTFE	Black Zinc-Nickel	Passivated
5	667-282M05	667-282NF05	667-282MT05	667-282ZNU05	667-282Z105
6	667-282M06	667-282NF06	667-282MT06	667-282ZNU06	667-282Z106
7	667-282M07	667-282NF07	667-282MT07	667-282ZNU07	667-282Z107
8	667-282M08	667-282NF08	667-282MT08	667-282ZNU08	667-282Z108
9	667-282M09	667-282NF09	667-282MT09	667-282ZNU09	667-282Z109
10	667-282M10	667-282NF10	667-282MT10	667-282ZNU10	667-282Z110
11	667-282M11	667-282NF11	667-282MT11	667-282ZNU11	667-282Z111
12	667-282M12	667-282NF12	667-282MT12	667-282ZNU12	667-282Z112
14	667-282M14	667-282NF14	667-282MT14	667-282ZNU14	667-282Z114
15	667-282M15	667-282NF15	667-282MT15	667-282ZNU15	667-282Z115

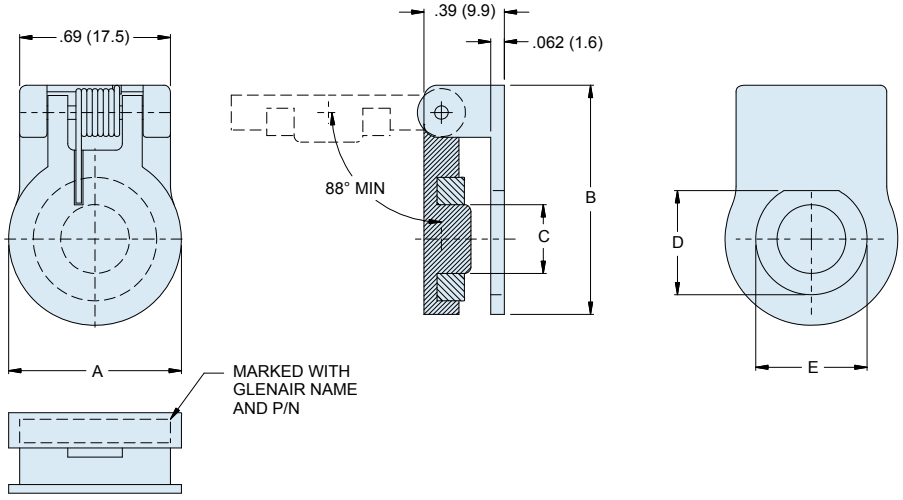

Dimensions										
Shell Size	A		B		C		D Flat		E Dia	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	.63	16.0	.93	23.6	.251	6.4	.427/.423	10.8/10.74	.443	11.3
6	.69	17.5	.99	25.1	.315	8.0	.479/.475	12.2/12.07	.505	12.8
7	.82	20.8	1.11	28.2	.383	9.7	.606/.601	15.4/15.27	.630	16.0
8	.82	20.8	1.11	28.2	.429	10.9	.606/.601	15.4/15.27	.630	16.0
9	.88	22.4	1.18	30.0	.485	12.3	.667/.663	16.9/16.84	.693	17.6
10	.94	23.9	1.24	31.5	.560	14.2	.734/.729	18.6/18.52	.755	19.2
11	1.00	25.4	1.30	33.02	.619	15.7	.801/.796	20.3/20.22	.820	20.8
12	1.07	27.2	1.36	34.5	.678	17.2	.855/.851	21.7/21.62	.880	22.4
14	1.19	30.2	1.49	37.8	.801	20.3	.98/.976	24.9/24.79	1.005	25.5
15	1.25	31.75	1.55	39.37	.860	21.8	1.041/1.037	26.4/26.34	1.067	27.1

NOTES

Materials and Finishes

1. Cover, Housing: Aluminum Alloy or Stainless Steel
2. Gasket: Sponge Silicone Rubber
3. Sleeve: Delrin
4. Spring, Shaft: Stainless Steel

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc. Series 80 Mighty Mouse U.S. CAGE Code 06324 Printed in U.S.A.

Series 805 Mighty Mouse Triple-Start Protective Cover

667-261 and 667-262 Ordering Information



Plug Cover



Receptacle Cover

Protect Connectors From Damage Machined aluminum or stainless steel protective covers have fluorosilicone gasket for a watertight fit.

Stainless Steel Fittings and Rings Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope provide resistance and good flexibility. Or, choose a Fluoropolymer jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order						
Sample Part Number	**667-262**	**-M**	**-G**	**9**	**04**	**-6**
Series (See Table I)	**667-261** = Plug Cover **667-262** = Receptacle Cover					
Shell Material / Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **MT** = Aluminum / Nickel-PTFE RoHS Compliant **Z1** = Stainless Steel / Passivated RoHS Compliant					
Attachment Type	**D** = Bead Chain, CRES, Passivate **F** = Wire Rope, Nylon Jacket **G** = Nylon Rope **H** = SST Wire Rope, Fluoropolymer Jacket **N** = No Attachment **R** = Wire Rope, PVC Jacket **S** = SST Sash Chain **SK** = Nylon Rope With Slip Knot **T** = SST Wire Rope, No Jacket **U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel					
Shell Size	**8, 9, 10, 11, 12, 13, 15, 18, 19, 21, 23**					
Attachment Code (See Table II)	Small Ring = **01** thru **06** Large Ring = **14** thru **33** Split Ring = **50** thru **68**					
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example "-6" equals six inch length					

Table I: Cover Style





	
667-261 Plug Cover	**667-262** Receptacle Cover

Table II: Attachment Code

Omit for attachment types **N** (No Attachment) and **SK** (Slip Knot)

 Small Ring	**01** – .126 (3.20) I.D. **02** – .145 (3.68) I.D. **04** – .188 (4.78) I.D. **06** – .197 (5.00) I.D.
 Large Ring	**14** – .385 (9.78) I.D. **15** – .445 (11.30) I.D. **16** – .570 (14.48) I.D. **17** – .635 (16.13) I.D. **18** – .695 (17.65) I.D. **19** – .885 (22.48) I.D. **20** – 1.070 (27.17) I.D. **22** – 1.210 (30.73) I.D. **23** – 1.275 (32.39) I.D. **25** – 1.530 (38.86) I.D. **26** – .950 (24.13) I.D. **27** – .766 (19.46) I.D. **28** – 1.015 (25.78) I.D. **29** – .315 (8.0) I.D. **30** – 1.380 (35.05) I.D. **31** – .820 (20.83) I.D. **32** – .265 (6.7) I.D. **33** – .510 (12.95) I.D.
 Split Ring	**50** – .420 (10.67) I.D. **52** – .480 (12.19) I.D. **54** – .635 (16.13) I.D. **56** – .745 (18.92) I.D. **58** – .885 (22.48) I.D. **60** – 1.010 (25.65) I.D. **64** – 1.125 (28.58) I.D. **68** – 1.345 (34.16) I.D.

X


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start Protective Cover

667-261 and 667-262 Dimensions

667-262 Cover Attachment to RPM Jam Nut Receptacle

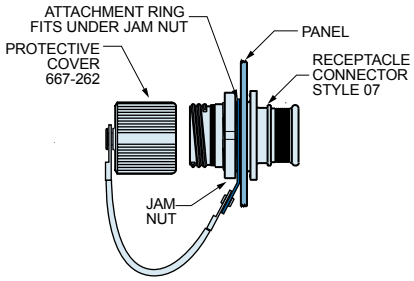





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
16	8	.570	14.48	.69	17.53
18	9, 10	.695	17.65	.82	20.83
27	11	.766	19.46	.89	22.61
31	12	.820	20.83	1.00	25.40
19	13	.885	22.48	1.01	25.65
28	15	1.015	25.78	1.20	30.48
22	18	1.210	30.73	1.31	33.27
23	19	1.275	32.39	1.37	34.80
30	21	1.380	35.05	1.48	37.59
25	23	1.530	38.86	1.63	41.40

667-262 Cover Attachment to Panel

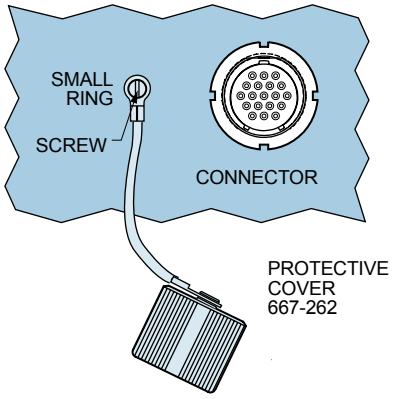





Small Ring for Attaching Receptacle Covers to a Panel with a Screw

Attch. Code	Screw Size	Ring I.D. In. ±.005	Ring I.D. mm. ±0.13	Ring O.D. In. Max.	Ring O.D. mm. Max.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

667-261 & -262 Cover Attachment to Cable Assembly

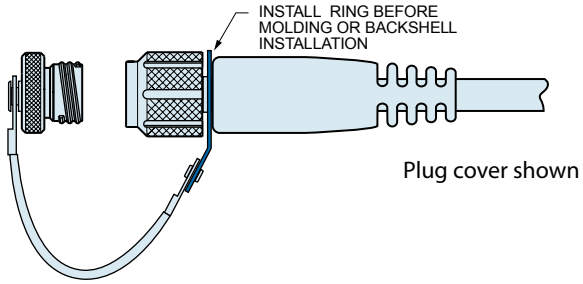





Solid Ring

Attch. Code	Shell Size	Ring I.D. In. ± .010	Ring I.D. mm. ±0.25	Ring O.D. In. ± .015	Ring O.D. mm. ± 0.38
14	8	.385	9.78	.51	12.95
33	9	.510	12.95	.62	15.75
16	10, 11	.570	14.48	.69	17.53
17	12	.635	16.13	.76	19.30
27	13, 15	.766	19.46	.89	22.61
26	18, 19	.950	24.13	1.14	28.96
20	21	1.070	27.18	1.20	30.48
22	23	1.210	30.73	1.31	33.27

667-261 Cover Attachment to Cable

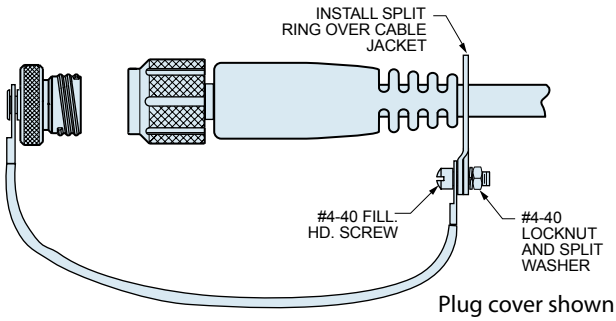



Large Split Ring for Attaching Covers to Cables

Attch. Code	Max. Cable Dia. (in.)	Ring Diameter Min. ID In.	Ring Diameter Min. ID mm.	Ring Diameter Max. OD In.	Ring Diameter Max. OD mm.
50	.410	.420	10.67	.580	14.73
52	.470	.480	12.19	.640	16.26
54	.625	.635	16.13	.796	20.22
56	.735	.745	18.92	.905	22.99
58	.875	.885	22.48	1.046	26.57
60	1.000	1.010	25.65	1.171	29.74
64	1.115	1.125	28.58	1.285	32.64
68	1.335	1.345	34.16	1.505	38.23


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start Protective Cover


667-261 and 667-262 Dimensions

Shell Size	A ±.015 (.38)	
	In.	mm.
8	.653	16.59
9	.715	18.16
10	.778	19.76
11	.841	21.36
12	.903	22.94
13	.965	24.51
15	1.091	27.71
18	1.278	32.46
19	1.340	34.04
21	1.490	37.85
23	1.600	40.64

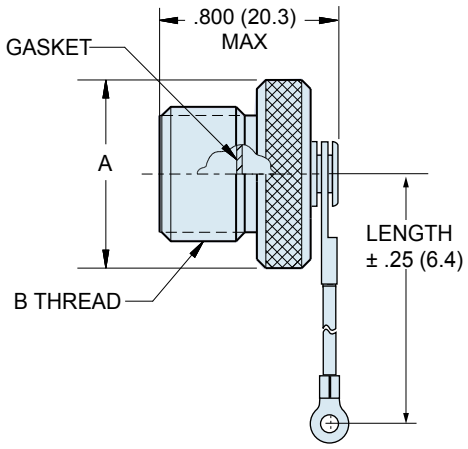

667-261 Plug Cover

Shell Size	D ±.015 (.38)	
	In.	mm.
8	.653	16.59
9	.715	18.16
10	.778	19.76
11	.850	21.59
12	.903	22.94
13	.965	24.51
15	1.091	27.71
18	1.278	32.46
19	1.340	34.04
21	1.490	37.85
23	1.600	40.64

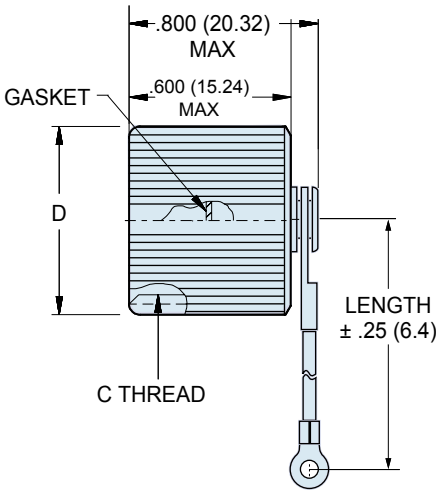

667-262 Receptacle Cover

X

Dimensions		
Shell Size	B Thread	C Thread
8	.5000-.1P-.3L-TS-2A	.5000-.1P-.3L-TS-2B
9	.5625-.1P-.3L-TS-2A	.5625-.1P-.3L-TS-2B
10	.6250-.1P-.3L-TS-2A	.6250-.1P-.3L-TS-2B
11	.6875-.1P-.3L-TS-2A	.6875-.1P-.3L-TS-2B
12	.7500-.1P-.3L-TS-2A	.7500-.1P-.3L-TS-2B
13	.8125-.1P-.3L-TS-2A	.8125-.1P-.3L-TS-2B.
15	.9375-.1P-.3L-TS-2A	.9375-.1P-.3L-TS-2B
18	1.1250-.1P-.3L-TS-2A	1.1250-.1P-.3L-TS-2B
19	1.1870-.1P-.3L-TS-2A	1.1870-.1P-.3L-TS-2B
21	1.3125-.1P-.3L-TS-2A	1.3125-.1P-.3L-TS-2B
23	1.4375-.1P-.3L-TS-2A	1.4375-.1P-.3L-TS-2B

Lanyard Options	
 Nylon Rope	-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter
 Polyurethane Coated Wire Rope	Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter
 Fluoropolymer Jacketed Wire Rope	Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter
 Sash Chain	Stainless steel, #8 chain, .240" (6mm)
 Slip Knot (SK) for Attaching Covers to Cable	65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

NOTES

Materials and Finishes

1. Cover: Aluminum alloy or stainless steel
2. Gasket: Fluorosilicone rubber
3. Wire,Hardware: Stainless steel, passivated

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 805 Mighty Mouse Triple-Start Locking Ratchet Type Receptacle Cover

809-200 Ordering Information



Protect Connectors From Damage Machined aluminum or stainless steel protective covers have fluorosilicone gasket for a watertight fit.

Stainless Steel Fittings and Rings Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.


Polyurethane-Coated SST Wire Rope provide resistance and good flexibility. Or, choose a Fluoropolymer jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order

Sample Part Number	809-200	-M	-S	12	04	-6
Series (See Table I)	**809-200** = Receptacle Cover					
Shell Material / Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy/ Black Chromate **ZNU** = Aluminum / Black over Electroless Nickel					
Attachment Type	**-G** = Nylon Rope **-H** = SST Wire Rope, Fluoropolymer Jacket **-N** = No Attachment **-S** = SST Sash Chain **-SK** = Nylon Rope with Slip Knot **-T** = SST Wire Rope, No Jacket **-U** = SST Wire Rope, Polyurethane Jacket "SST" = Stainless Steel					
Shell Size (See Table III)	**8**, **9**, **10**, **11**, **12**, **13**, **15**, **18**, **19**, **21**, **23**					
Attachment Code (See Table II)	Small Ring = **01** thru **06** Large Ring = **14** thru **33** Split Ring = **50** thru **68**					
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example "-6" equals six inch length					



Table I: Cover Style



809-200
Receptacle Cover

Table II: Attachment Code


Omit for attachment types **N** (No Attachment) and **SK** (Slip Knot)


 Small Ring	**01** – .125 (3.2) I.D. **02** – .140 (3.6) I.D. **04** – .182 (4.6) I.D. **06** – .197 (5.0) I.D.
 Large Ring	**16** – .570 (14.5) I.D. **18** – .695 (17.7) I.D. **27** – .766 (19.46) I.D. **31** – .820 (20.83) I.D. **19** – .885 (22.5) I.D. **28** – 1.015 (25.78) I.D. **22** – 1.210 (30.7) I.D. **23** – 1.275 (32.4) I.D. **30** – 1.380 (35.05) I.D. **25** – 1.530 (38.86) I.D.
 Split Ring	**50** – .432 (11.0) I.D. **52** – .492 (12.5) I.D. **54** – .648 (16.5) I.D. **56** – .757 (19.2) I.D. **58** – .898 (22.8) I.D. **60** – 1.023 (26.0) I.D. **64** – 1.137 (28.9) I.D. **68** – 1.357 (34.5) I.D.

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

809-200 Cover Attachment to RPM Jam Nut Receptacle

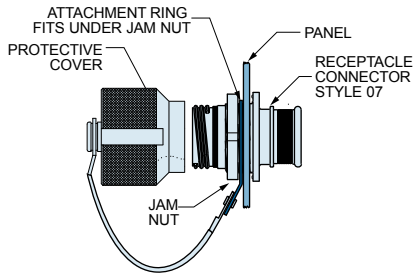





Solid Ring

Dia. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		± .010	±0.25	± .015	± 0.38
16	8	.570	14.48	.69	17.53
18	9, 10	.695	17.65	.85	21.59
27	11	.766	19.46	.89	22.61
31	12	.820	20.83	1.00	25.40
19	13	.885	22.48	1.01	25.65
28	15	1.015	25.78	1.20	30.48
22	18	1.210	30.73	1.31	33.27
23	19	1.275	32.39	1.37	34.80
30	21	1.395	35.43	1.52	38.61
25	23	1.530	38.86	1.63	41.40

809-200 Cover Attachment to Panel

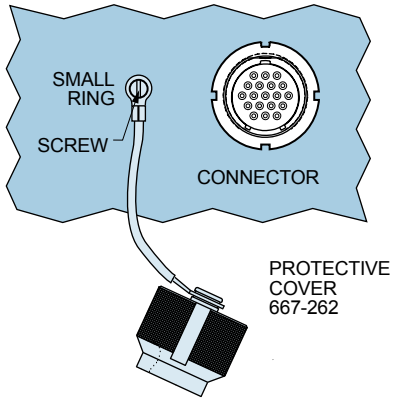




Small Ring
for attaching
receptacle covers to
a panel with a screw

Dia. Code	Screw Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
		±.005	±0.13	Max.	Max.
01	#4, M3	.125	3.20	.30	7.6
02	#6	.140	3.60	.30	7.6
04	#8, M4	.182	4.60	.30	7.6
06	#10	.197	5.00	.30	7.6

X

Table II: Dimensions


Shell Size	B Thread	C	
		In.	mm.
8	.5000-.1P-.3L-TS-2B	.69	17.53
9	.5625-.1P-.3L-TS-2B	.79	20.07
10	.6250-.1P-.3L-TS-2B	.827	21.01
11	.6875-.1P-.3L-TS-2B	.918	23.32
12	.7500-.1P-.3L-TS-2B	.984	24.99
13	.8125-.1P-.3L-TS-2B	1.047	26.59
15	.9375-.1P-.3L-TS-2B	1.098	27.89
18	1.1250-.1P-.3L-TS-2B	1.287	32.69
19	1.1875-.1P-.3L-TS-2B	1.311	33.30
21	1.3125-.1P-.3L-TS-2B	1.448	36.78
23	1.4375-.1P-.3L-TS-2B	1.562	39.67

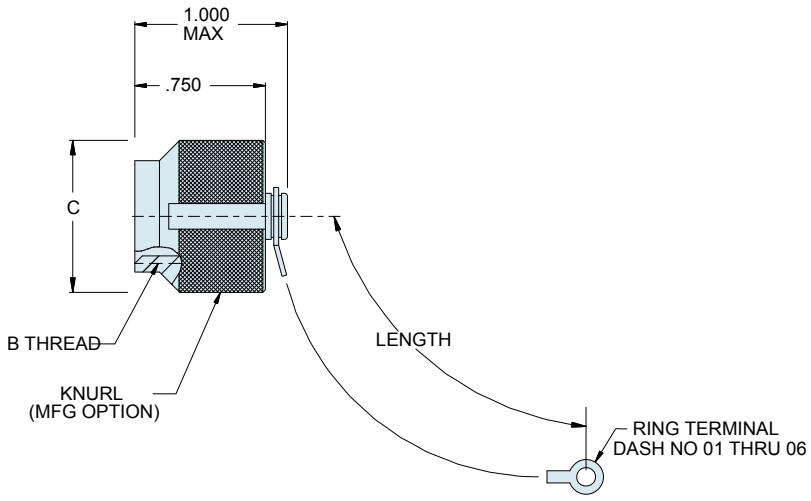

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Dummy Receptacle for 800 Connectors
809-173 Flange Mount - Dimensions

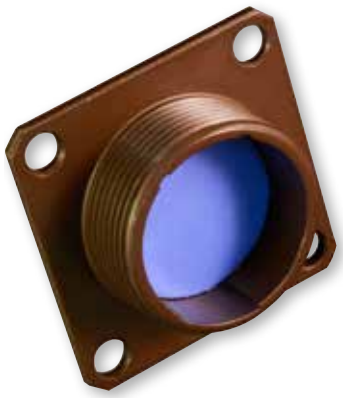

How To Order			
Sample Part Number	**809-173**	**-M**	**10**
Series	**809-173**		
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy / Black Chromate		
Shell Size (See Table II)	**5**, **6**, **7**, **8**, **9**, **10**, **12**		

These flange mount syle Series 800 dummy stowage receptacles provide a safe and convenient place to store and protect cabled connectors when not in use, due to routine maintenance or during repair of plug cables.

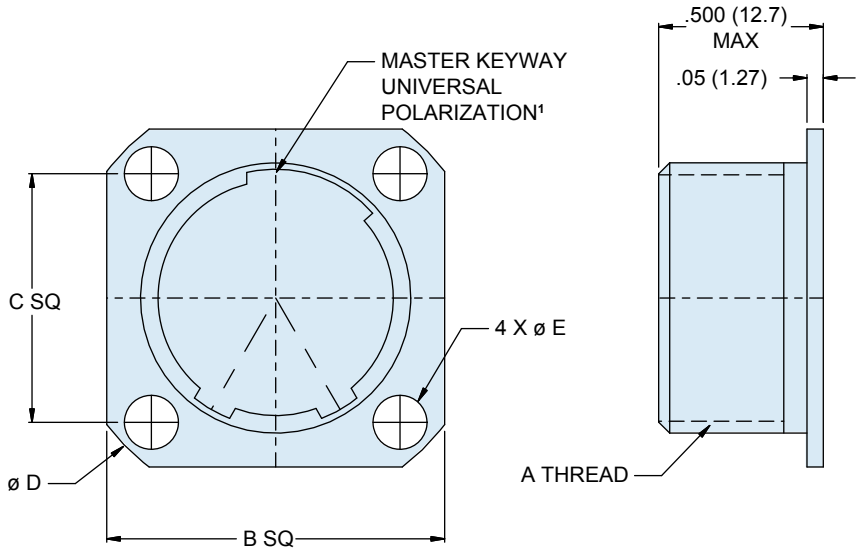

NOTES
1. Master keyway is rotated 90° clockwise for shell sizes 7 thru 12

Material/Finish:
- Shell: Al alloy or CRES
- Gasket: Fluorosilicone

Table II

Shell Size	A Thread	B Sq		C Sq		Ø D		Ø E	
		In.	mm.	In.	mm.	In.	mm.	In.	mm.
5	.3125-28 UN-2A	.527	13.4	.363	9.2	.680	17.3	.096 .091	2.4 2.3
6	.3750-28 UN-2A	.588	14.9	.423	10.7	.750	19.1	.096 .091	2.4 2.3
7	.4375-28 UNEF-2A	.680	17.3	.483	12.3	.880	22.4	.128	3.3
8	.5000-32 UN-2A	.710	18.0	.542	13.8	.938	23.8	.128	3.3
9	.5625-32 UN-2A	.938	23.8	.719	18.3	1.250	31.8	.128	3.3
10	.6250-32 UN-2A	.938	23.8	.719	18.3	1.250	31.8	.128	3.3
12	.7500-28 UN-2A	1.031	26.2	.812	20.6	1.375	34.9	.128	3.3

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Dummy Receptacle for 801 Connectors
657-072 Flange Mount - Dimensions



How To Order			
Sample Part Number	**657-072**	**M**	**10**
Series	**657-072**		
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy / Black Chromate		
Shell Size (See Table II)	**5**, **6**, **7**, **8**, **9**, **10**, **11**, **13**, **16**,**17**, **19**, **21**		

These flange mount syle Series 800 dummy stowage receptacles provide a safe and convenient place to store and protect cabled connectors when not in use, due to routine maintenance or during repair of plug cables.

NOTES

Materials and Finishes

- Cover: Al Alloy or Stainless Steel
- Seal: Fluorosilicone

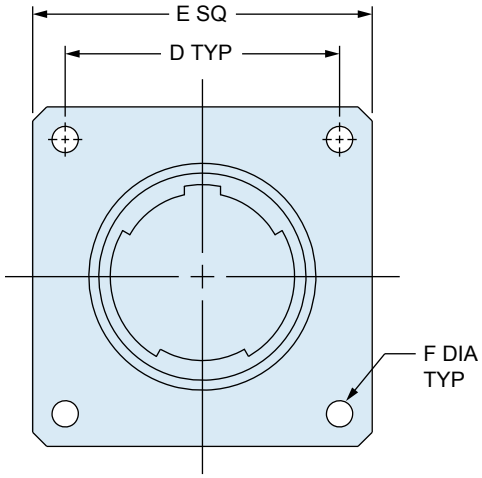


Table II: Dimensions

Shell Size	A thread	B		C		D		E		F Dia	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
5	.3125-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.363	9.22	.530	13.46	.093	2.36
6	.3750-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.423	10.74	.590	14.99	.093	2.36
7	.4375-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.483	12.27	.650	16.51	.093	2.36
8	.5000-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.545	13.84	.712	18.08	.093	2.36
9	.5265-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.607	15.42	.850	21.59	.128	3.25
10	.6250-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.670	17.02	.890	22.61	.128	3.25
11	.6875-.05P-.1L-DS-2A	.370	9.40	.060	1.52	.715	18.16	.935	23.75	.128	3.25
13	.8125-.1P-.2L-DS-2A	.480	12.19	.090	2.29	.812	20.62	1.030	26.16	.128	3.25
16	1.0000-.1P-.2L-DS-2A	.480	12.19	.090	2.29	.981	24.92	1.219	30.96	.128	3.25
17	1.0625-.1P-.2L-DS-2A	.480	12.19	.090	2.29	1.060	26.92	1.280	32.51	.128	3.25
19	1.1875-.1P-.2L-DS-2A	.480	12.19	.090	2.29	1.191	30.25	1.432	36.37	.128	3.25
21	1.3125-.1P-.2L-DS-2A	.480	12.19	.090	2.29	1.322	33.58	1.565	39.75	.128	3.25

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Dummy Receptacle for 803 Connectors
809-092 Bayonet Receptacle - Dimensions




These Series 803 bayone receptacle dummy stowage receptacles for shell size 5 thru 15, provide a safe a convenient place to store and protect cabled connectors when not in use due to routine maintenance or repair of plug cables.

X

How To Order						
Sample Part Number		809-092	-07	M	7	N
Series	809-092					
Shell Style	02 = Flange Receptacle for front or rear panel mounting 07 = Jam nut receptacle for rear panel mounting					
Shell Material and Finish	C = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant M = Aluminum / Electroless Nickel NF = Aluminum / Cadmium with Olive Drab ZN = Aluminum / Zinc-Nickel with Olive Drab Chromate Z1 = Stainless Steel / Passivated ZB = Stainless Steel / Olive Drab Chromate over Cadmium ZC = Stainless Steel / Zinc Cobalt Alloy / Black Chromate					
Shell Size (See Table II)	5, 6, 7, 8, 9, 10, 12, 14,15					
Key Position	N = Normal, X, Y, Z, U = Universal					


Series 803 Plug Key Positions





Pos.	A°	B°
N	150°	210°
X	75°	210°
Y	95°	230°
Z	140°	275°


Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

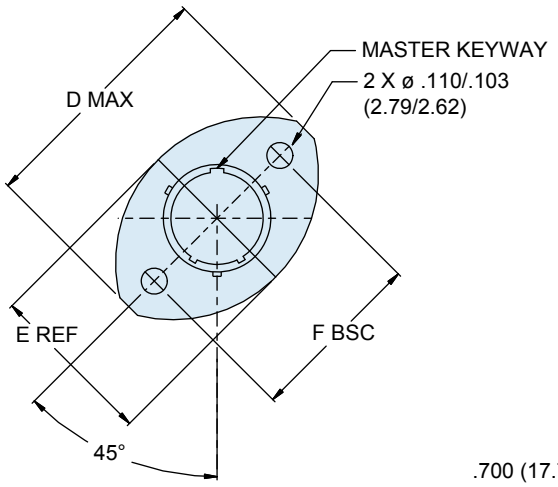

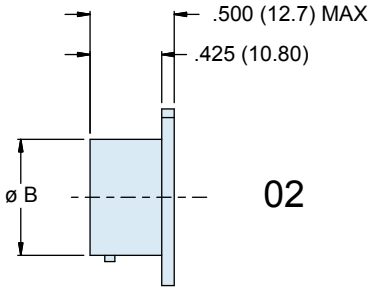

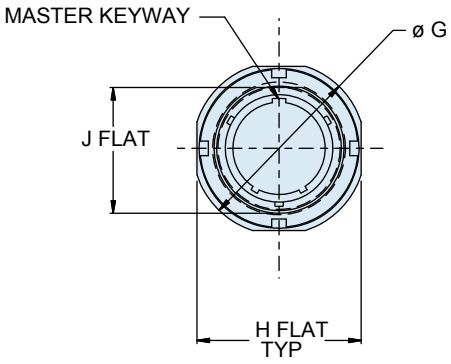

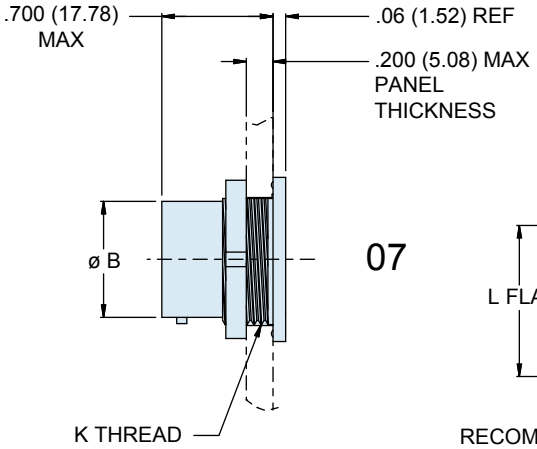

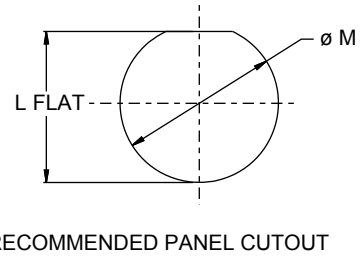


Table II: Dimensions


Shell Size	Ø B		Ø D		E Ref		F Bsc		Ø G		H Flat		J Flat		K Thread	L Flat		Ø M	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		in. ± .002	mm. ± .002	in.	mm.
5	.300	7.62	.703	17.86	.460	11.68	.513	13.03	.575	14.61	.545	13.84	.350	8.89	.3750-28 UN-2A	.360	9.14	.385	9.78
6	.362	9.19	.788	20.02	.522	13.26	.598	15.19	.635	16.13	.595	15.11	.410	10.41	.4375-28 UNEF-2A	.420	10.67	.448	11.38
7	.436	11.07	.890	22.61	.590	14.99	.708	17.98	.755	19.18	.723	18.36	.536	13.61	.5625-32 UN-2A	.546	13.87	.573	14.55
8	.508	12.90	1.154	29.31	.668	16.97	.964	24.49	.830	21.08	.790	20.07	.593	15.06	.6250-28 UN-2A	.603	0.60	.635	16.13
9	.561	14.25	1.207	30.66	.721	18.31	1.017	25.83	.830	21.08	.790	20.07	.593	15.06	.6250-28 UN-2A	.603	15.32	.635	16.13
10	.635	16.13	1.291	32.79	.795	20.19	1.101	27.97	.955	24.26	.925	23.50	.721	18.31	.7500-28 UN-2A	.731	18.57	.760	19.30
12	.714	18.14	1.394	35.41	.874	22.20	1.204	30.58	1.078	27.38	1.044	26.52	.845	21.46	.8750-28 UN-2A	.855	21.72	.885	22.48
14	.865	21.97	1.545	39.24	1.050	26.67	1.280	32.51	1.264	32.11	1.230	31.24	1.022	25.96	1.0625-20 UN-2A	1.032	26.21	1.075	27.31
15	.925	23.50	1.630	41.40	1.150	29.21	1.370	34.80	1.325	33.66	1.290	32.77	1.096	27.84	1.1250-28 UN-2A	1.106	28.09	1.135	28.83

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Rear Panel Mount Dummy Receptacle for 804 Connectors
650-061 Ordering Information


Series 804 rear panel mounted dummy stowage receptacles provide a safe a convenient place to store and protect cabled connectors when not in use due to routine maintenance or repair of plug cables.




RECOMMENDED PANEL CUTOUT

How To Order					
Sample Part Number		**650-061**	**NF**	**15**	**A**
Series	**650-061**				
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black over Electroless Nickel **Z1** = Stainless Steel / Passivated **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy / Black Chromate				
Shell Size (See Table II)	**5, 6, 7, 8, 9, 10, 11, 12, 14,15**				
Key Position	**A, B, C, D, E, F** **Omit** = Single key (non-Polarized)				

Alternate Key Positions



Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

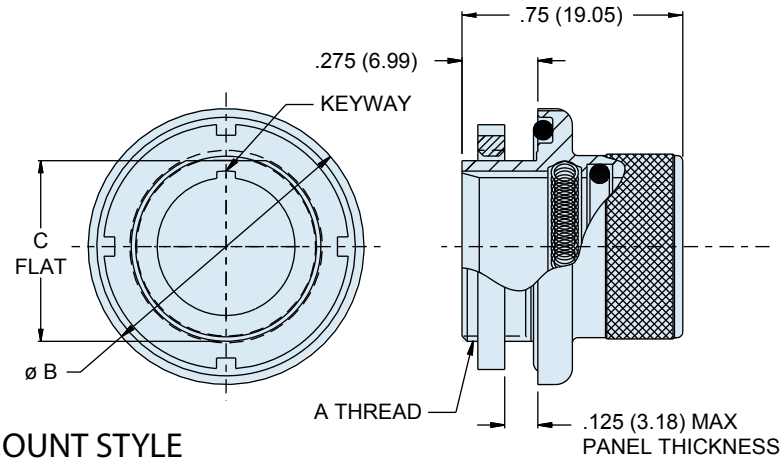

REAR MOUNT STYLE

NOTES:

1. Glenair 600 series backshell assembly tools are recommended for assembly and installation.

Material and Finish:

- Receptacle: Al Alloy or SST/
- Seal: Fluorosilicone
- Spring: CRES/gold plated

Table I: Dimensions

Shell Size	A Thread	Ø B		C-Flat		D-Flat		Ø E	
		in.	mm.	in.	mm.	in. ± .04	mm. ± .04	in.	mm.
5	.4375-32 UN-2A	.790	20.07	.415	10.54	.425	10.80	.448	11.38
6	.5000-32 UN-2A	.830	21.08	.467	11.86	.477	12.12	.510	12.95
7	.6250-28 UN-2A	.910	23.11	.594	15.09	.603	15.32	.635	16.13
8	.6250-28 UN-2A	.955	24.26	.594	15.09	.603	15.32	.635	16.13
9	.6875-28 UN-2A	1.000	25.40	.655	16.64	.665	16.89	.695	17.65
10	.7500-28 UN-2A	1.085	27.56	.721	18.31	.731	18.57	.760	19.30
11	.8125-28 UN-2A	1.135	28.83	.788	20.02	.798	20.27	.822	20.88
12	.8750-28 UN-2A	1.180	29.97	.843	21.41	.853	21.67	.885	22.48
14	1.0000-28 UN-2A	1.325	33.66	.968	24.59	.978	24.84	1.010	25.65
15	1.0625-20 UN-2A	1.390	35.31	1.029	26.14	1.039	26.39	1.070	27.18

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Dummy Stowage Plug for 804 Connectors
809-213 Ordering Information



Dummy stowage receptacles provide a safe a convenient place to store and protect cabled connectors when not in use due to routine maintenance or repair of plug cables.


NOTES:

1. Red stripe indicator for allignment during mating.
2. This stowage plug mates with 804 series receptacles with compatible polarization.

Material and Finish:

- Shell, jam nut: Al Alloy or CRES
- O-rings: Fluorosilicone.

Alternate Key Positions



Pos.	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

How To Order

Sample Part Number	809-213	-07	M	9	A

Series	**809-213**
Shell Style	**-07** = Rear Mount, Jam Nut **-02** = Flange Mount **-00** = Front Mount, Jam Nut
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black over Electroless Nickel **Z1** = Stainless Steel / Passivated **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy / Black Chromate
Shell Size (See Table II)	**5**, **6**, **7**, **8**, **9**, **10**, **11**, **12**, **14**,**15**
Key Position	**A**, **B**, **C**, **D**, **E**, **F** **Omit** = Single Key (non-polarized)


Dimensions


Shell size	Ø A		Ø B		C Thread	Ø D		Ø E		F Flat		Ø G		H		J		K		L Flat ± .005		Ø M	
	in.	mm.	in.	mm.		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
5	.219	5.56	.250	6.35	.4375-32 UN-2A	0.790	20.07	.244	6.20	.415	10.54	.562	14.27	.320	8.13	.755	19.18	1.055	26.80	.423	10.74	.448	11.38
6	.282	7.16	.313	7.95	.5000-32 UN-2A	.830	21.08	.330	8.38	.467	11.86	.625	15.88	.385	9.78	.820	20.83	1.120	28.45	.475	12.07	.510	12.95
7	.351	8.92	.383	9.73	.6250-28 UN-2A	.910	23.11	.432	10.97	.594	15.09	.750	19.05	.450	11.43	.885	22.48	1.185	30.10	.602	15.29	.635	16.13
8	.398	10.11	.429	10.90	.6250-28 UN-2A	.955	24.26	.493	12.52	.594	15.09	.750	19.05	.495	12.57	.930	23.62	1.230	31.24	.602	15.29	.635	16.13
9	.454	11.53	.486	12.34	.6875-28 UN-2A	1.000	25.40	.551	14.00	.655	16.64	.812	20.62	.555	14.10	.990	25.15	1.290	32.77	.663	16.84	.698	17.73
10	.529	13.44	.563	14.30	.7500-28 UN-2A	1.085	27.56	.620	15.75	.721	18.31	.875	22.23	.625	15.88	1.060	26.92	1.360	34.54	.729	18.52	.760	19.30
11	.587	14.91	.618	15.70	.8125-28UN-2A	1.140	28.96	.662	16.81	.790	20.06	.938	23.83	.690	17.53	1.120	28.45	1.420	36.07	.798	20.27	.823	20.90
12	.646	16.41	.676	17.17	.8750-28 UN-2A	1.180	29.97	.703	17.86	.843	21.41	1.000	25.40	.750	19.05	1.185	30.10	1.485	37.72	.851	21.62	.885	22.48
14	.768	19.51	.800	20.32	1.000-28 UN-2A	1.325	33.66	.863	21.92	.968	24.59	1.125	28.58	.865	21.97	1.300	33.02	1.600	40.64	.976	24.79	1.010	25.65
15	.828	21.03	.860	21.84	1.0625-20 UN-2A	1.390	35.31	.912	23.16	1.029	26.14	1.188	30.18	.930	23.62	1.365	34.67	1.665	42.29	1.037	26.34	1.072	27.23


Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Dummy Stowage Plug for 804 Connectors
809-213 Ordering Information

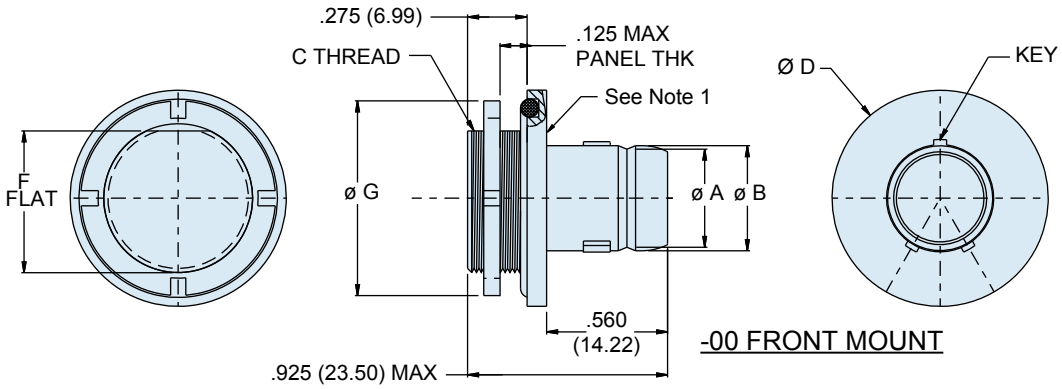

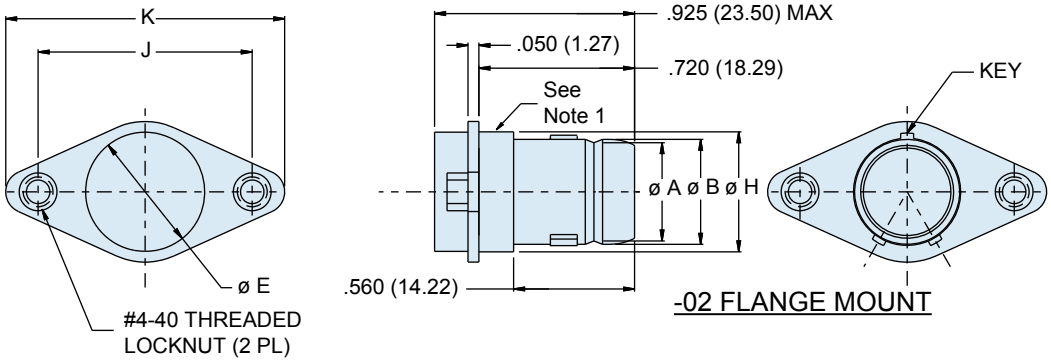

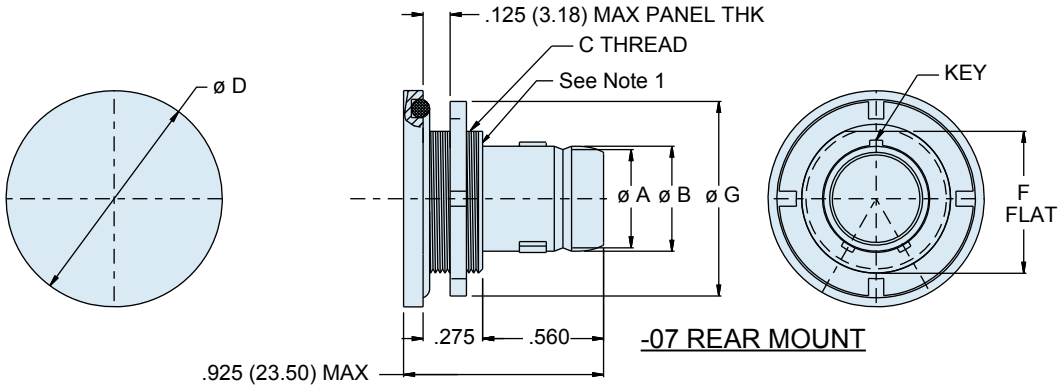



RECOMMENDED PANEL CUTOUT

Dimensions in Inches (millimeters) are subject to change without notice.


© 2014 Glenair, Inc.

Series 80 Mighty Mouse
Dummy Stowage Receptacle for 805 Connectors
657-079 Ordering Information



How To Order			
Sample Part Number	**657-079**	**NF**	**15**
Series	**657-079** = Universal Polarity		
Shell Material and Finish	**C** = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant **M** = Aluminum / Electroless Nickel **NF** = Aluminum / Cadmium with Olive Drab **ZN** = Aluminum / Zinc-Nickel with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black over Electroless Nickel **Z1** = Stainless Steel / Passivated **ZB** = Stainless Steel / Olive Drab Chromate over Cadmium **ZC** = Stainless Steel / Zinc Cobalt Alloy / Black Chromate		
Shell Size (See Table II)	**8**, **9**, **10**, **11**, **12**, **13**, **15**, **18**, **19**, **21**, **23**		

These Series 805 dummy stowage receptacles universal polarity provide a safe a convenient place to store and protect cabled connectors when not in use due to routine maintenance or repair of plug cables.

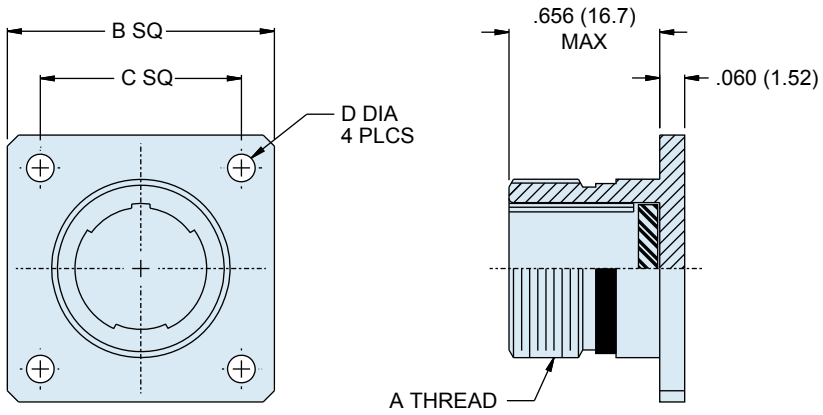

NOTES:

1. Glenair 600 series backshell assembly tools are recommended for assembly and installation.

Material and Finish:

- Receptacle: Al Alloy or SST/
- Seal: Fluorosilicone

Table II: Dimensions

Shell Size	A Thread 2A	B Sq		C Sq		D Dia	
		in.	mm.	in.	mm.	in.	mm.
8	.5000-.1P-.3L-TS	.850	21.59	.660	16.76	.097 .091	2.46 2.31
9	.5625-.1P-.3L-TS	.913	23.19	.723	18.36		
10	.6250-.1P-.3L-TS	.975	24.77	.785	19.94		
11	.6875-.1P-.3L-TS	1.039	26.39	.848	21.54		
12	.7500-.1P-.3L-TS	1.099	27.91	.909	23.09		
13	.8125-.1P-.3L-TS	1.163	29.54	.973	24.71		
15	.9375-.1P-.3L-TS	1.288	32.72	1.058	26.87	.131 .125	3.33 3.18
18	1.1250-.1P-.3L-TS	1.475	37.47	1.255	31.88		
19	1.1870-.1P-.3L-TS	1.537	39.04	1.327	33.71		
21	1.3125-.1P-.3L-TS	1.663	42.24	1.452	36.88		
23	1.4375-.1P-.3L-TS	1.787	45.39	1.570	39.88		

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

INTRODUCING...

MIGHTY MOUSE FIBER OPTIC
CONNECTORS AND TERMINI



Series 801 Plug
with 181-057 pin termini



Series 801 receptacle
with 181-075 socket termini

- ***Three snap-in, rear release fiber optic termini sizes: #23, #20HD, and #16 for use in any Series 80 Mighty Mouse connector***
- ***The smallest mil-aero caliber fiber optic connection system available***
- ***Singlemode and multimode***
- ***Precision ceramic ferrules***
- ***0.5 dB typical attenuation***
- ***1 to 130 channels***

RoHS COMPLIANT

Size #16 Fiber Optic Termini

Series 801 9-4 with size #16 fiber optic termini vs. equivalent functionality D38999

Series 801
Shell size 9, 4 channel
6 Grams
(less contacts)





D38999 Series III
Shell size13, 4 channel
27 Grams (less contacts)

Size #20HD Fiber Optic Termini

Series 801 8-8 with size #20 HD fiber optic termini vs. equivalent functionality D38999

Series 801
Shell size 8, 8 channel
8 Grams
(less contacts)





D38999 Series III
Shell size 17, 8 channel
40 Grams (less contacts)

Size #23 Fiber Optic Termini


Series 801 6-4 with size #23 fiber optic termini vs. equivalent functionality D38999

Series 801
Shell size 6, 4 channel
5 Grams
(less contacts)





D38999 Series III
Shell size 13, 4 channel
21 Grams (less contacts)



181-057
Pin Terminus

Termini Type	Optical Fiber Type	Part Number
Pin	Multi Mode	181-057-126
	Single Mode	181-057-125
Socket	Multi Mode	181-075-126
	Single Mode	181-075-125

Termini Type	A Ferrule I.D.*	Fiber Size Core/Cladding*
Pin	126.0 microns	50/125, 62.5/125
	125.5 microns	9/125
Socket	126.0 microns	50/125, 62.5/125
	125.5 microns	9/125

*Consult factory for additional sizes



181-084
Pin Terminus

181-085
Socket Terminus

Termini Type	Optical Fiber Type	Part Number
Pin	Multi Mode	181-084-126
	Single Mode	181-084-1255
Socket	Multi Mode	181-085-126
	Single Mode	181-085-1255

Termini Type	A Ferrule I.D.*	Fiber Size Core/Cladding*
Pin	126.0 microns	50/125, 62.5/125
	125.5 microns	9/125
Socket	126.0 microns	50/125, 62.5/125
	125.5 microns	9/125

*Consult factory for additional sizes



181-063
Pin Terminus

181-064
Socket Terminus

Termini Type	Optical Fiber Type	Part Number
Pin	Multi Mode	181-063-126
	Single Mode	181-063-1255
Socket	Multi Mode	181-064-126
	Single Mode	181-064-1255

Termini Type	A Ferrule I.D.*	Fiber Size Core/Cladding*
Pin	126.0 microns	50/125, 62.5/125
	125.5 microns	9/125
Socket	126.0 microns	50/125, 62.5/125
	125.5 microns	9/125

*Consult factory for additional sizes

GLENAIR, INC. • 1211 Air Way • Glendale, CA 91201-2497 • Tel: 818-247-6000 • email: sales@glenair.com • www.glenair.com

181-057-125. . . . . W-10
181-057-126 . . . . . W-10
181-063-1255. . . . . .W-5
181-063-126 . . . . . .W-5
181-064-1255. . . . . .W-5
181-064-126 . . . . . .W-5
181-075-125. . . . . W-10
181-075-126 . . . . . W-10
181-084-1255. . . . . .W-7
181-084-126 . . . . . .W-7
181-085-1255. . . . . .W-7
181-085-126 . . . . . .W-7
240-800 . . . . . .J-22
240-801. . . . . J-8
240-804 . . . . . .J-14
240-805 . . . . . .J-16
249-003-800 . . . . . .X-15
249-003-801. . . . . .X-15
340MS001 . . . . . .X-21
340MS026. . . . . X-20
370MA038. . . . . X-29
370MB038. . . . . X-29
370MS037 . . . . . X-29
370MS038 . . . . . X-29
380MA137 . . . . . .X-31
380MB137 . . . . . .X-31
380MS135 . . . . . .X-31
380MS137 . . . . . .X-31
380MS141 . . . . . X-33
390MA077. . . . . .X-37
390MB077 . . . . . .X-37
390MS076 . . . . . .X-37
390MS077 . . . . . .X-37
440MK135 . . . . . X-25
440ML135 . . . . . X-25
440MS134 . . . . . .X-27
440MS135 . . . . . X-25
447MS981 . . . . . X-35
600-061 . . . . . .A-14
600-137. . . . . .A-15
600-140 . . . . . A-16
600-141. . . . . A-16
600-146 . . . . . .A-15
600-147. . . . . .A-15
600-154. . . . . .A-15
600-185. . . . . A-16
600-197. . . . . .A-15
600M005 . . . . . A-16
600MM005 . . . . . A-16
601-060 . . . . . .A-14
601-061. . . . . .A-14
601-064 . . . . . .A-14
601-065. . . . . .A-14
620MA065. . . . . X-22
620MB065. . . . . X-22
620MS064. . . . . X-22
620MS065. . . . . X-22
650-061. . . . . .X-77
657-072. . . . . .X-74
657-079. . . . . X-80
660-082 . . . . . .X-57
660-083 . . . . . .X-57
660-087 . . . . . X-54
660-088 . . . . . X-54
667-184. . . . . X-40
667-185. . . . . X-40
667-202. . . . . X-60
667-217 . . . . . X-43
667-218. . . . . X-43
667-218. . . . . X-49
667-241. . . . . X-55
667-242. . . . . X-55
667-261. . . . . X-68
667-262. . . . . X-68
667-282. . . . . X-67
667-347. . . . . X-49
800-006 . . . . . C-6
800-007 . . . . . C-6
800-008 . . . . . C-6
800-009 . . . . . C-6
800-010 . . . . . C-8
800-011 . . . . . C-8
800-012. . . . . .C-12
800-013. . . . . C-20
800-024 . . . . . U-4
800-032 . . . . . .C-15
800-034 . . . . . C-26
800-036 . . . . . .U-12
800-037 . . . . . U-14
800-038 . . . . . C-26
800-039 . . . . . C-26
800-040 . . . . . .C-12
800-041 . . . . . C-26
800-052 . . . . . .C-31
800-053 . . . . . .C-31
800-054 . . . . . .C-31
800-055 . . . . . .C-31
800-056 . . . . . C-26
800-057 . . . . . C-26
800-058 . . . . . C-26
800-059 . . . . . C-26
800-060 . . . . . C-24
80-093 . . . . . A-6
801-007. . . . . D-9
801-007. . . . . K-9
801-007. . . . . .S-10
801-007. . . . . W-11
801-008 . . . . . D-9
801-008 . . . . . K-9
801-008 . . . . . .S-10
801-008 . . . . . W-11
801-009 . . . . . D-15
801-009 . . . . . .K-11
801-009 . . . . . .S-12
801-009 . . . . . W-13
801-010. . . . . D-15
801-010. . . . . .K-11
801-010. . . . . .S-12
801-010. . . . . W-13
801-011 . . . . . D-20
801-011 . . . . . .S-16
801-012. . . . . D-30
801-017 . . . . . D-36
801-023. . . . . D-23
801-026. . . . . D-38
801-028. . . . . .U-12
801-029. . . . . U-14
801-031 . . . . . D-41
801-032. . . . . D-41
801-033. . . . . D-20
801-033. . . . . .S-16
801-034. . . . . D-38
801-036. . . . . P-4
801-037. . . . . P-6
801-038. . . . . .P-10
801-039. . . . . P-4
801-040 . . . . . P-6
801-045. . . . . .P-13
801-046 . . . . . .P-14
801-047. . . . . .P-15
801-065. . . . . D-42
801-066 . . . . . D-42
801-067. . . . . D-42
801-068 . . . . . D-42
801-069 . . . . . D-13
801-070. . . . . D-38
801-071 . . . . . D-38
801-072. . . . . D-41
801-073. . . . . D-41
801-074. . . . . D-34
801-075. . . . . D-28
801-076. . . . . .P-16
801-077. . . . . .P-17
801-078. . . . . .P-18
801-081. . . . . .P-19
801-082. . . . . T-7
801-083. . . . . T-7
801-084 . . . . . T-8
801-085. . . . . T-8
801-087. . . . . T-9
801-088 . . . . . T-9
801-089 . . . . . .T-10
801-090 . . . . . .T-10
801-091. . . . . T-11
801-113 . . . . . .D-11
801-114 . . . . . .D-11
802-0009 . . . . . W-18
802-008 . . . . . E-6
802-008 . . . . . W-18
802-009 . . . . . E-6
802-010. . . . . E-8
802-010. . . . . W-20
802-011 . . . . . E-8
802-011 . . . . . W-20
802-012. . . . . .E-12
802-013. . . . . .E-16
802-019. . . . . .E-23
802-022 . . . . . .E-23
802-026 . . . . . .E-25
802-027. . . . . .E-25
802-028 . . . . . .E-25
802-029 . . . . . .E-25
802-030 . . . . . .E-12
802-032 . . . . . .E-23
802-033 . . . . . .E-23
802-050 . . . . . E-48
803-001. . . . . F-6
803-002 . . . . . F-6
803-003 . . . . . F-8
803-004 . . . . . F-8
803-005 . . . . . .F-12
803-006 . . . . . .F-14
803-007 . . . . . U-4
803-010. . . . . .F-16
803-011 . . . . . .U-12
803-012. . . . . U-14
803-013. . . . . .F-18
803-014. . . . . .F-18
803-015. . . . . .F-12
803-026 . . . . . .F-23
803-027. . . . . .F-23
803-028 . . . . . .F-23
803-029 . . . . . .F-23
803-032 . . . . . .F-18
803-033 . . . . . .F-18
803-034 . . . . . .F-18
803-041. . . . . .F-18
803-056 . . . . . .F-18
803-057 . . . . . .F-18
804-001 . . . . . G-10
804-002 . . . . . G-10
804-003 . . . . . .G-12
804-004 . . . . . .G-12
804-005 . . . . . G-20
804-006 . . . . . G-23
804-009 . . . . . G-16
804-013. . . . . U-4
804-015. . . . . G-28
804-016 . . . . . .U-12
804-017. . . . . U-14
804-018 . . . . . G-28
804-019 . . . . . G-28
804-020 . . . . . G-20
804-021. . . . . .G-11

© 2014 Glenair, Inc.

Index

804-022 . . . . . G-28
804-026 . . . . . Q-4
804-027 . . . . . Q-4
804-028 . . . . . Q-6
804-029 . . . . . Q-6
804-030 . . . . . Q-10
804-031 . . . . . Q-10
804-058 . . . . . G-32
804-059 . . . . . G-32
804-060 . . . . . G-32
804-061 . . . . . G-32
804-062 . . . . . G-28
804-063 . . . . . G-28
804-064 . . . . . G-30
804-065 . . . . . G-30
804-066 . . . . . G-8
804-067 . . . . . G-25
804-070 . . . . . Q-12
804-071 . . . . . Q-13
804-072 . . . . . Q-14
804-073 . . . . . Q-15
804-074 . . . . . Q-16
804-075 . . . . . Q-17
804-076 . . . . . Q-18
805-001 . . . . . H-8
805-001 . . . . . K-8
805-001 . . . . . W-24
805-002 . . . . . H-8
805-002 . . . . . K-8
805-002 . . . . . W-24
805-003 . . . . . H-13
805-003 . . . . . K-18
805-003 . . . . . W-26
805-004 . . . . . H-13
805-004 . . . . . K-18
805-004 . . . . . W-26
805-005 . . . . . H-18
805-006 . . . . . H-22
805-007 . . . . . U-4
805-009 . . . . . H-43
805-010 . . . . . H-41
805-011 . . . . . H-29
805-012 . . . . . U-12
805-013 . . . . . U-14
805-015 . . . . . H-43
805-016 . . . . . H-43
805-017 . . . . . H-18
805-018 . . . . . H-43
805-020 . . . . . R-4
805-021 . . . . . R-4
805-022 . . . . . R-6
805-023 . . . . . R-6
805-057 . . . . . H-47
805-058 . . . . . H-47
805-059 . . . . . H-47
805-060 . . . . . H-47
805-061 . . . . . H-10
805-062 . . . . . H-43
805-063 . . . . . H-43
805-064 . . . . . H-43
805-065 . . . . . H-43
805-066 . . . . . H-39
805-067 . . . . . H-27
805-109 . . . . . H-33
805-110 . . . . . H-35
805-111 . . . . . H-37
805-112 . . . . . R-11
805-113 . . . . . R-12
805-114 . . . . . R-13
805-115 . . . . . R-14
805-116 . . . . . R-15
805-117 . . . . . R-16
805-118 . . . . . R-17
809-001 . . . . . A-3
809-001 . . . . . N-10
809-002 . . . . . A-3
809-002 . . . . . N-10
809-005 . . . . . A-11
809-005 . . . . . N-12
809-013 . . . . . A-10
809-015 . . . . . M-23
809-015 . . . . . N-12
809-035 . . . . . X-11
809-042 . . . . . A-3
809-042 . . . . . N-10
809-043 . . . . . A-10
809-043 . . . . . N-10
809-054 . . . . . X-15
809-055 . . . . . N-12
809-057 . . . . . A-11
809-057 . . . . . N-12
809-060 . . . . . X-5
809-065A A-3
809-065C A-3
809-066A A-3
809-066C A-3
809-067 . . . . . X-15
809-077 . . . . . M-23
809-083 . . . . . X-65
809-087 . . . . . X-65
809-088 . . . . . A-13
809-088 . . . . . N-12
809-092 . . . . . X-76
809-094 . . . . . X-10
809-107 . . . . . A-13
809-108 . . . . . X-12
809-110 . . . . . A-7
809-111 . . . . . A-7
809-112 . . . . . A-7
809-113 . . . . . A-7
809-114 . . . . . A-8
809-115 . . . . . A-8
809-116 . . . . . A-8
809-117 . . . . . A-8
809-118 . . . . . A-8
809-119 . . . . . A-8
809-120 . . . . . A-8
809-121 . . . . . A-8
809-124 . . . . . A-11
809-125 . . . . . A-11
809-126 . . . . . A-12
809-127 . . . . . A-12
809-128 . . . . . A-11
809-131 . . . . . A-13
809-132 . . . . . A-13
809-133 . . . . . A-12
809-134 . . . . . A-12
809-135 . . . . . A-11
809-136 . . . . . A-12
809-137 . . . . . A-12
809-138 . . . . . A-12
809-141 . . . . . X-39
809-150 . . . . . X-17
809-155 . . . . . A-10
809-155 . . . . . N-12
809-165 . . . . . X-16
809-173 . . . . . X-74
809-189 . . . . . X-16
809-190 . . . . . X-47
809-191 . . . . . X-47
809-198 . . . . . X-63
809-199 . . . . . X-18
809-200 . . . . . X-72
809-203 . . . . . A-13
809-204 . . . . . A-6
809-205 . . . . . A-6
809-206 . . . . . A-11
809-207 . . . . . A-13
809-209 . . . . . X-16
809-213 . . . . . X-79
809-299 . . . . . A-4
809-300 . . . . . A-4
809-301 . . . . . A-11
809-303 . . . . . X-18
811-001-06 . . . . . L-6
811-003-01 . . . . . L-7
811-003-02 . . . . . L-8
811-004-02 . . . . . L-8
811-003-07 . . . . . L-9
811-004-07 . . . . . L-9
811-005-02 . . . . . L-12
811-005-07 . . . . . L-12
811-006-02 . . . . . L-13
811-006-07 . . . . . L-11
811-007 . . . . . L-14
824-001 . . . . . G-40
824-003 . . . . . G-41
830-004/857-010[1] A-10
830-003/857-011[2] A-10
841-002 . . . . . M-4
841-003 . . . . . M-6
841-004 . . . . . M-6
844-001 . . . . . M-10
844-002 . . . . . M-10
844-003 . . . . . M-12
844-004 . . . . . M-12
845-001 . . . . . M-16
845-002 . . . . . M-16
845-003 . . . . . M-18
845-004 . . . . . M-18
850-002-20-363 . . . . . A-7
850-003-20-357 . . . . . A-7
850-013 . . . . . K-22
850-014 . . . . . K-22
852-006 . . . . . K-34
852-007 . . . . . K-34
852-015 . . . . . A-9
852-016 . . . . . A-9
852-017 . . . . . A-9
852-018 . . . . . A-9
852-042 . . . . . K-26
852-043 . . . . . K-26
852-056 . . . . . K-24
852-057 . . . . . K-24
853-003 . . . . . K-30
853-004 . . . . . K-30
853-013 . . . . . K-32
853-014 . . . . . K-32
853-015 . . . . . S-4
853-016 . . . . . S-5
853-020 . . . . . S-6
853-021 . . . . . S-7
854-001 . . . . . K-28
854-002 . . . . . K-28
859-006 . . . . . A-11
859-012 . . . . . A-10
859-013 . . . . . A-10
859-014 . . . . . A-10
859-078 . . . . . M-23
859-079 . . . . . M-23
963-001 . . . . . V-3
963-002 . . . . . V-4
963-003 . . . . . V-5
963-004 . . . . . V-6
963-005 . . . . . V-7
963-006 . . . . . V-9
963-012 . . . . . V-8
963-013 . . . . . V-10

NOTES


1. 857-010 superceded by 857-010
2. 857-011 supceded by 830-003

© 2014 Glenair, Inc.

Why CHOOSE Glenair?




Plenty of Raw Materials!

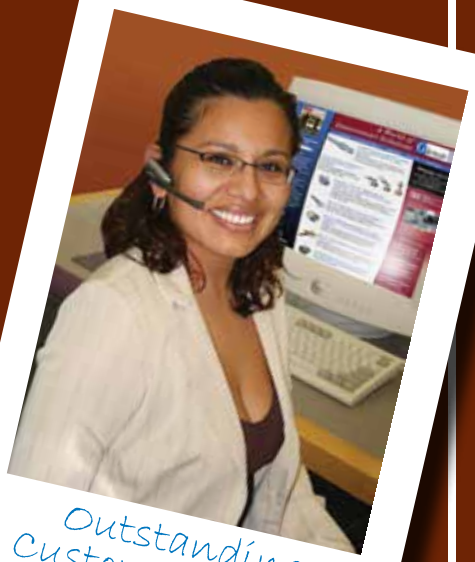

Outstanding Customer Service!



In-House Assembly!

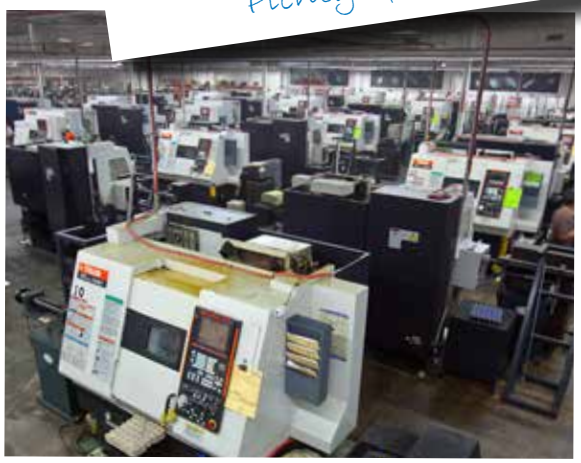

Abundant Machining Capacity!



Huge "Same-Day" Inventory!

Glenair®

Glenair®

Out of This World

INTERCONNECT SOLUTIONS

Glenair, Inc.
1211 Air Way • Glendale, California • 91201-2497
Telephone: 818-247-6000 • Fax: 818-500-9912 • sales@glenair.com
www.glenair.com

Glenair Power Products Group
860 N. Main Street Extension
Wallingford, CT
06492
Telephone: 203-741-1115
Facsimile: 203-741-0053
sales@glenair.com

Glenair UK Ltd
40 Lower Oakham Way
Oakham Business Park
P.O. Box 37, Mansfield
Notts, NG18 5BY England
Telephone: +44-1623-638100
Facsimile: +44-1623-638111
sales@glenair.co.uk

Glenair Microway Systems
7000 North Lawndale Avenue
Lincolnwood, IL
60712
Telephone: 847-679-8833
Facsimile: 847-679-8849

Glenair Nordic AB
Gustav III : S Boulevard 46
S - 169 27 Solna
Sweden
Telephone: +46-8-50550000
Facsimile: +46-8-50550001
sales@glenair.se

Glenair Electric GmbH
Schaberweg 28
61348 Bad Homburg
Germany
Telephone: 06172 / 68 16 0
Facsimile: 06172 / 68 16 90
germany@glenair.com

Glenair Iberica
C/ La Vega, 16
45612 Velada
Spain
Telephone: +34-925-89-29-88
Facsimile: +34-925-89-29-87
sales@glenair.es

Glenair Italia S.p.A.
Via Del Lavoro, 7
40057 Quarto Inferiore –
Granarolo dell'Emilia
Bologna, Italy
Telephone: +39-051-782811
Facsimile: +39-051-782259
info@glenair.it

Glenair France SARL
7, Avenue Parmentier
Immeuble Central Parc #2
31200 Toulouse
France
Telephone: +33-5-34-40-97-40
Facsimile: +33-5-61-47-86-10
sales@glenair.fr

© 2014 Glenair, Inc.

Printed in U.S.A.

SERIES 80 MIGHTY MOUSE CONNECTORS AND CABLES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:
804-002-06Z19-210P