


NOTES:

1. MATERIALS AND FINISHES:
 HD-BNC STR PLUG - BRASS, NICKEL PLATING
 BNC STR JACK - BRASS, NICKEL PLATING
 CABLE - BELDEN 4505R, BLACK
2. ELECTRICAL:
 A. IMPEDANCE: 75 OHM
3. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 95-850-215-XXX AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	20-Nov-18	9701	PL

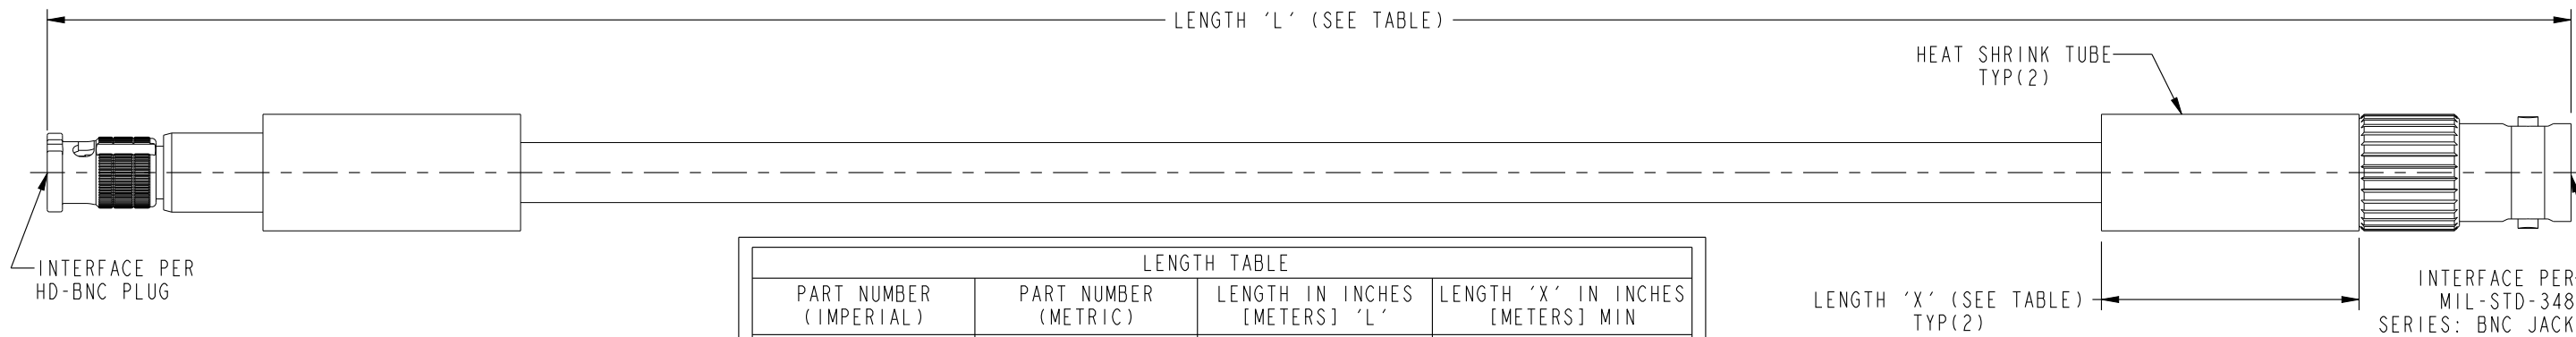

LENGTH TABLE			
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH IN INCHES [METERS] 'L'	LENGTH 'X' IN INCHES [METERS] MIN
95-850-215-006	-	6.00 [0.152]	0.75 [0.019]
-	95-850-215M025	9.84 [0.250]	
95-850-215-012	-	12.00 [0.305]	
95-850-215-018	-	18.00 [0.457]	1.50 [0.038]
-	95-850-215M050	19.69 [0.500]	
95-850-215-024	-	24.00 [0.610]	
-	95-850-215M075	29.53 [0.750]	
95-850-215-036	-	36.00 [0.914]	
-	95-850-215M100	39.37 [1.000]	
95-850-215-048	-	48.00 [1.219]	
-	95-850-215M125	49.21 [1.250]	
-	95-850-215M150	59.06 [1.500]	
95-850-215-060	-	60.00 [1.524]	
95-850-215-072	-	72.00 [1.829]	
-	95-850-215M200	78.74 [2.000]	
-	95-850-215M300	118.11 [3.000]	
95-850-215-120	-	120.00 [3.048]	
95-850-215-144	-	144.00 [3.658]	
95-850-215-180	-	180.00 [4.572]	
-	95-850-215M500	196.85 [5.000]	
95-850-215-300	-	300.00 [7.620]	
-	95-850-215M10L	393.70 [10.000]	
95-850-215L050	-	600.00 [15.240]	
-	95-850-215M20L	787.40 [20.000]	
95-850-215L075	-	900.00 [22.860]	
-	95-850-215M30L	1181.10 [30.000]	
95-850-215L100	-	1200.00 [30.480]	

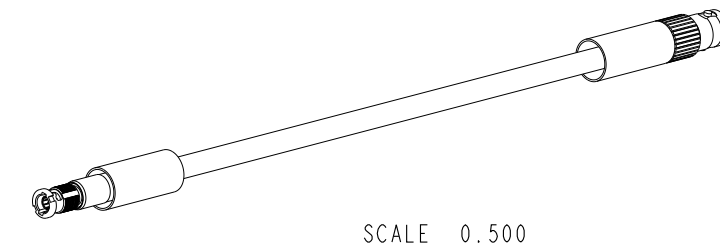

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:			
<input checked="" type="checkbox"/> FREQUENCY: DC - 12 GHz	<input checked="" type="checkbox"/> CONTINUITY	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> VSWR: _____ : 1 MAX	<input checked="" type="checkbox"/> HI-POT : 300 VRMS	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> INS. LOSS : _____ dB MAX	<input type="checkbox"/> OTHER	<input type="checkbox"/>	<input type="checkbox"/>

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0.381 mm) ±.005 (0.127 mm) ± 1°	MATERIAL SEE NOTES	DRAWN LOKESH P	DATE 24-Sep-18	TITLE 75 OHM HD-BNC STR PLUG TO BNC STR JACK USING BELDEN 4505R CABLE VARIOUS LENGTH	Amphenol RF www.amphenolrf.com
	REFERENCE EAR # 8638	ENGINEER LOKESH P	DATE 24-Sep-18		
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CONFIGURATION LEVEL: In Work	APPROVED K.CAPOZZI	DATE 20-Nov-18	SCALE: 1.5:1.0 SHEET 2 OF 2	DRAWING NO.95-850-215-XXX
	FINISH	CAD FILE	DWG SIZE B	REV A	ITEM NO.95-850-215-XXX
					PART NO.95-850-215-XXX

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[095-850-215-072](#) [095-850-215M050](#) [095-850-215-144](#) [095-850-215-180](#) [095-850-215-300](#) [095-850-215-060](#) [095-850-215M300](#) [095-850-215-024](#) [095-850-215M075](#) [095-850-215M100](#) [095-850-215-018](#) [095-850-215M125](#) [095-850-215M025](#) [095-850-215L100](#) [095-850-215M20L](#) [095-850-215-036](#) [095-850-215L050](#) [095-850-215M150](#) [095-850-215M30L](#) [095-850-215M500](#) [095-850-215-012](#) [095-850-215L075](#) [095-850-215M200](#) [095-850-215-120](#) [095-850-215-006](#) [095-850-215M10L](#) [095-850-215-048](#)