


## PRODUCT NUMBER

88902-XXX

88902-XXYLF

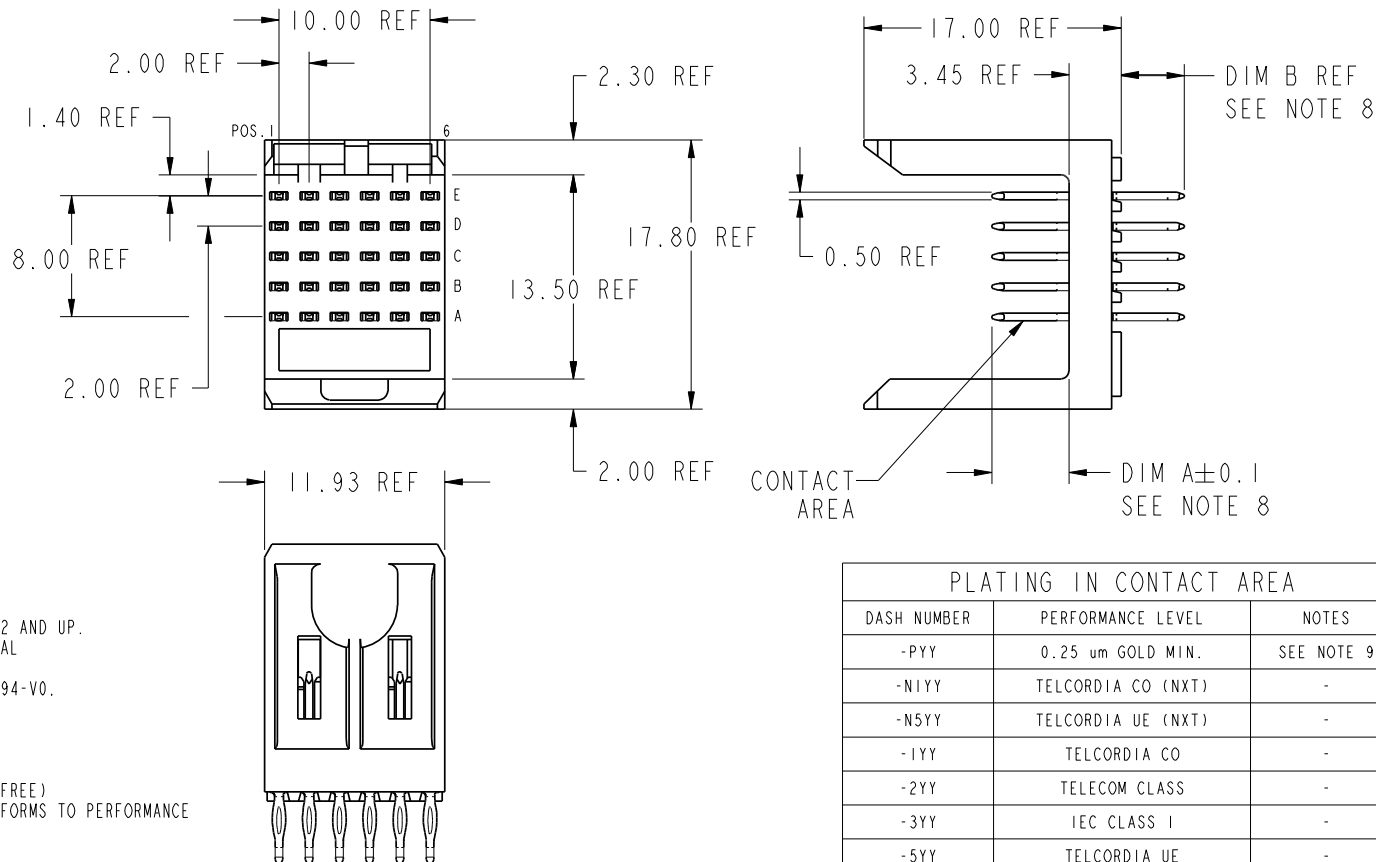

## NOTES:

1. FOR DIM A, AND B SEE SHEET 2 AND UP.
2. BODY MATERIAL: LIQUID CRYSTAL POLYMER 30 % GLASS. FLAME RETARDANT ACC. UL 94-V0.
3. PIN MATERIAL: PHOSPHOR BRONZE
4. PLATING ON PRESS-FIT TAIL:  
88902-XXX IS SnPb  
88902-XXYLF IS Sn (LEAD FREE)  
PLATING ON CONTACT AREA CONFORMS TO PERFORMANCE LEVEL SHOWN IN TABLE BELOW.
5. PRODUCT MARKING:  
PART NUMBER DESIGNATION J & BATCH I.D.
6. ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES. IF TRAY PACKAGING IS REQUIRED, SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER. EXAMPLE: XXXXX-XXXP OR XXXXX-XXXPPLF
7. PRODUCT SPECIFICATION: GS-12-180  
APPLICATION SPECIFICATION: BUS-20-073
8. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
9. -Ayy PLATING HAS Au FLASH IN PRESS-FIT AREA (LEAD FREE)
10. THE PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. FOR LEAD FREE PART NUMBERS, ADD AN 'LF' SUFFIX. EXAMPLE: 88902-X01LF.
12. ALL PRODUCTS EXCEPT THOSE WITH PART NUMBERS CONTAINING (DRAWING NO.)-N1--- OR (DRAWING NO.)-N5--- WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. PART NUMBERS (DRAWING NO.)-N1--- AND (DRAWING NO.)-N5--- WILL NOT WITHSTAND REFLOW AND Au CONTACT SURFACES OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM OF 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.

## PLATING IN CONTACT AREA


DASH NUMBER	PERFORMANCE LEVEL	NOTES
-PYY	0.25 um GOLD MIN.	SEE NOTE 9
-NIYY	TELCORDIA CO (NXT)	-
-N5YY	TELCORDIA UE (NXT)	-
-1YY	TELCORDIA CO	-
-2YY	TELECOM CLASS	-
-3YY	IEC CLASS I	-
-5YY	TELCORDIA UE	-
-NIYYLF	TELCORDIA CO (NXT) IEC CLASS I	SEE NOTE 10
-N5YYLF	TELCORDIA UE (NXT)	SEE NOTE 10
-1YYLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YYLF	TELECOM CLASS	SEE NOTE 10
-5YYLF	TELCORDIA UE	SEE NOTE 10

MATERIAL CODE				SEE NOTES		TOLERANCES UNLESS OTHERWISE SPECIFIED		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	0.X ± 0.3	projection	0.XX ± 0.13	COPY	www.fciconnect.com	title	
X	DG09-0256	TER	2009-08-19				.XXX ± 0.051			METRAL SIGNAL HEADER	
Y	DG09-0306	TER	2009-09-14				0° ± 2°			1 MOD, 5 ROW PRESS-FIT	
AA	DG09-0366	TER	2009-11-24	angles						product family	
AB	DG10-0165	TER	2010-05-05	dr	T.BRUNGARD	11/19/99				METRAL	
AC	DG10-0243	TER	2010-06-28	engr	M. STRAWSER	11/19/99				size	
-	-	-	-	chr	M. STRAWSER	11/19/99				dwg no	
W	DG09-0169	TER	2009-05-25	appd	M. STRAWSER	02/29/00				A	
sheet index	revision sheet	AC	AC	AC	AC					88902	
		1	2	3	4					213	
										sheet	
										1 of 4	

1 | 2

3 |

4

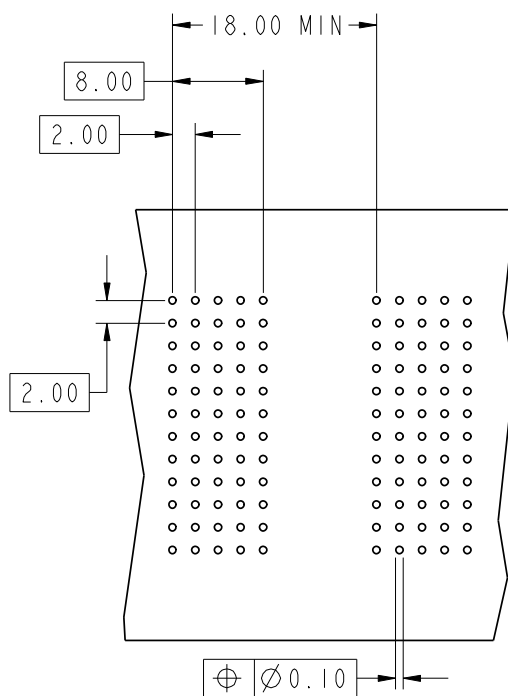

KEY (SIGNAL PRESS-FIT)		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
19	8.00	4.30
20	8.00	13.60
39	8.00	14.10
54	5.00	11.55
55	5.75	11.55
57	7.25	11.55

REQUIRED PC BOARD LAYOUT  
COMPONENT SIDE  
SEE PRINT 58351 FOR  
ADDITIONAL PCB INFORMATION

This document is the property of and embodies  
CONFIDENTIAL and PROPRIETARY information of FCI.  
No part of the information shown on this  
document may be used in any way or disclosed  
to others without the written consent of FCI.  
Copyright FCI.



mat'l code				tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	0.X ±0.3	projection	COPY	www.fciconnect.com	
AC					0.XX ±0.13				
					.XXX ±0.051				
				angles	0° ±2°	MM	scale	product family METRAL	
				dr	T.BRUNGARD 11/19/99				
				enr	M.STRAWSER 11/19/99				
				chr	M.STRAWSER 11/19/99	A	88902	code 213	
				appd	M.STRAWSER 02/29/00				
sheet index	revision sheet								

1 | 2

Pro/E

PDM: Rev:AC

STATUS Released

Printed: Jul 01, 2010



METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X01 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	19 19
	D	2	2	2	2	19 19
	C	2	1	2	3	2 2
	B	2	2	2	2	19 19
	A	2	2	2	2	19 19
88902-X02 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	20 20
	D	6	6	6	6	20 20
	C	6	5	6	7	6 6
	B	6	6	6	6	20 20
	A	6	6	6	6	20 20
88902-X03 SEE NOTE 11 FOR LEAD FREE	E	5	3	3	3	3 3
	D	5	3	3	3	3 3
	C	5	3	3	3	3 3
	B	5	3	3	3	3 3
	A	5	3	3	3	3 3
88902-X04 SEE NOTE 11 FOR LEAD FREE	E	7	6	6	6	6 6
	D	7	6	6	6	6 6
	C	7	6	6	6	6 6
	B	7	6	6	6	6 6
	A	7	6	6	6	6 6
88902-X05 SEE NOTE 11 FOR LEAD FREE	E	3	3	2	4	4 19
	D	3	3	2	4	4 19
	C	3	3	2	4	4 19
	B	3	3	2	4	4 19
	A	3	3	2	4	4 19

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X06 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	4	2 2
	D	2	2	2	4	2 2
	C	2	2	2	4	2 2
	B	2	2	2	4	2 2
	A	2	2	2	4	2 2
88902-X07 SEE NOTE 11 FOR LEAD FREE	E	57	55	55	55	55 55
	D	57	55	55	55	55 55
	C	57	55	55	55	55 55
	B	57	55	55	55	55 55
	A	57	55	55	55	54 57
88902-X08 SEE NOTE 11 FOR LEAD FREE	E	3	2	2	2	2 2
	D	3	2	2	2	2 2
	C	3	2	2	2	2 2
	B	3	2	2	2	2 2
	A	3	1	2	2	2 2
88902-X09 SEE NOTE 11 FOR LEAD FREE	E	39	39	39	39	39 39
	D	39	39	39	39	39 39
	C	39	39	39	39	39 39
	B	39	39	39	39	39 39
	A	39	39	39	39	39 39
88902-X10 SEE NOTE 11 FOR LEAD FREE	E	4	2	2	2	2 2
	D	4	2	2	2	2 2
	C	4	2	2	2	1 4
	B	4	2	2	2	2 2
	A	4	2	2	2	2 2

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X11 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2 1
	D	2	2	2	2	2 2
	C	2	2	2	1	2 1
	B	2	2	2	2	2 2
	A	2	2	2	1	2 1
88902-X12 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	5	6 5
	D	6	6	6	6	6 6
	C	6	6	6	5	6 5
	B	6	6	6	6	6 6
	A	6	6	6	5	6 5
88902-X13 SEE NOTE 11 FOR LEAD FREE	E	2	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	2	-	2 -
	B	-	2	-	2	- 2
	A	2	-	2	-	2 -
88902-X14 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	19	2	2	2	2 2
	B	2	2	2	2	2 2
	A	2	2	2	2	2 2
88902-X15 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	3	2	4	2	2 4
	B	2	2	2	2	2 2
	A	2	4	2	2	2 2

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X16 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	3 2
	D	2	2	2	2	2 2
	C	3	2	4	2	2 4
	B	2	2	2	2	2 2
	A	2	4	2	2	2 3
88902-X17 SEE NOTE 11 FOR LEAD FREE	E	4	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	4	-	4 -
	B	-	2	-	1	- 2
	A	2	-	1	-	2 -
88902-X18 SEE NOTE 11 FOR LEAD FREE	E	2	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	4	-	4 -
	B	-	2	-	2	- 2
	A	2	-	2	-	2 -
88902-X19 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	6 6
	D	6	6	6	6	6 6
	C	8	6	6	6	6 6
	B	6	6	6	6	20 20
	A	5	6	6	6	20 20
88902-X20 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	6 6
	D	6	6	6	6	6 6
	C	6	6	6	6	6 8
	B	20	20	6	6	6 6
	A	20	20	6	6	6 6

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X21 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	2	2	2	2	2 2
	B	2	19	2	19	2 2
	A	2	19	2	19	2 2
88902-X22 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	4	2	2	2	2 2
	B	2	2	2	2	19 19
	A	1	2	2	2	19 19
88902-X23 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	19	2	2	2	2 2
	B	1	2	2	2	2 2
	A	19	2	2	2	2 2
88902-X24 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	2	2	2	2	2 4
	B	19	19	2	2	2 2
	A	19	19	2	2	2 2
88902-X25 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 19
	D	2	2	2	2	2 19
	C	2	2	2	2	2 19
	B	2	2	2	2	2 19
	A	2	2	2	2	2 19

mat'l code				tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	0.X ±0.3	COPY	www.fciconnect.com		
AC					0.XX ±0.13	projection	title		
					.XXX ±.051		METRAL SIGNAL HEADER		
				angles	0° ±2°		1 MOD, 5 ROW PRESS-FIT		
				dr	T.BRUNGARD 11/19/99	scale	product family		
				engr	M.STRAWSER 11/19/99	1:1	METRAL		
				chr	M.STRAWSER 11/19/99		size		
				appd	M.STRAWSER 02/29/00		dwg no		
sheet	revision						A		
index	sheet						88902		
							213		
							sheet		
							3		

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X26 SEE NOTE 11 FOR LEAD FREE	E	1	2	2	2	2	1
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	1	2	2	2	2	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X27 SEE NOTE 11 FOR LEAD FREE	E	5	5	5	1	1	1
	D	5	5	5	1	1	1
	C	5	5	5	1	1	1
	B	5	5	5	1	1	1
	A	5	5	5	1	1	1



METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X28 SEE NOTE 11 FOR LEAD FREE	E	19	2	19	2	2	1
	D	2	19	2	19	19	2
	C	19	2	19	2	2	19
	B	2	19	2	19	19	2
	A	19	2	19	2	2	19

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X29 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2	2
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	1	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X30 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2	4
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X31 SEE NOTE 11 FOR LEAD FREE	E	4	2	3	3	2	4
	D	4	2	3	3	2	4
	C	4	2	3	3	2	4
	B	4	2	3	3	2	4
	A	4	2	3	3	2	4



mat'l code				--		tolerances unless otherwise specified		CUSTOMER		FCI		www.fciconnect.com		
lfr	ecn no.	dr	date	linear	0.X ±0.3		COPY			title METRAL SIGNAL HEADER 1 MOD, 5 ROW PRESS-FIT				
AC					0.XX ±0.13		projection							
					.XXX ±.051									
				angles	0° ±2°									
				dr	T.BRUNGARD	11/19/99			product family				METRAL	code
				enrg	M.STRAWSER	11/19/99			size	dwg no	88902			213
				chr	M.STRAWSER	11/19/99			scale	A				
				appd	M.STRAWSER	02/29/00	1:1						4	
sheet index	revision sheet													

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## FCI / Amphenol:

<a href="#"><u>88902-113LF</u></a>	<a href="#"><u>88902-101LF</u></a>	<a href="#"><u>88902-116LF</u></a>	<a href="#"><u>88902-123LF</u></a>	<a href="#"><u>88902-131LF</u></a>	<a href="#"><u>88902-126LF</u></a>	<a href="#"><u>88902-124LF</u></a>	<a href="#"><u>88902-120LF</u></a>
<a href="#"><u>88902-122LF</u></a>	<a href="#"><u>88902-102LF</u></a>	<a href="#"><u>88902-111LF</u></a>	<a href="#"><u>88902-119LF</u></a>	<a href="#"><u>88902-129LF</u></a>	<a href="#"><u>88902-125LF</u></a>	<a href="#"><u>88902-121LF</u></a>	<a href="#"><u>88902-110LF</u></a>
<a href="#"><u>88902-127LF</u></a>	<a href="#"><u>88902-130LF</u></a>	<a href="#"><u>88902-201LF</u></a>	<a href="#"><u>88902-202LF</u></a>	<a href="#"><u>88902-210LF</u></a>	<a href="#"><u>88902-211LF</u></a>	<a href="#"><u>88902-213LF</u></a>	<a href="#"><u>88902-216LF</u></a>
<a href="#"><u>88902-219LF</u></a>	<a href="#"><u>88902-220LF</u></a>	<a href="#"><u>88902-221LF</u></a>	<a href="#"><u>88902-222LF</u></a>	<a href="#"><u>88902-223LF</u></a>	<a href="#"><u>88902-224LF</u></a>	<a href="#"><u>88902-225LF</u></a>	<a href="#"><u>88902-226LF</u></a>
<a href="#"><u>88902-229LF</u></a>	<a href="#"><u>88902-231LF</u></a>	<a href="#"><u>88902-212LF</u></a>					