
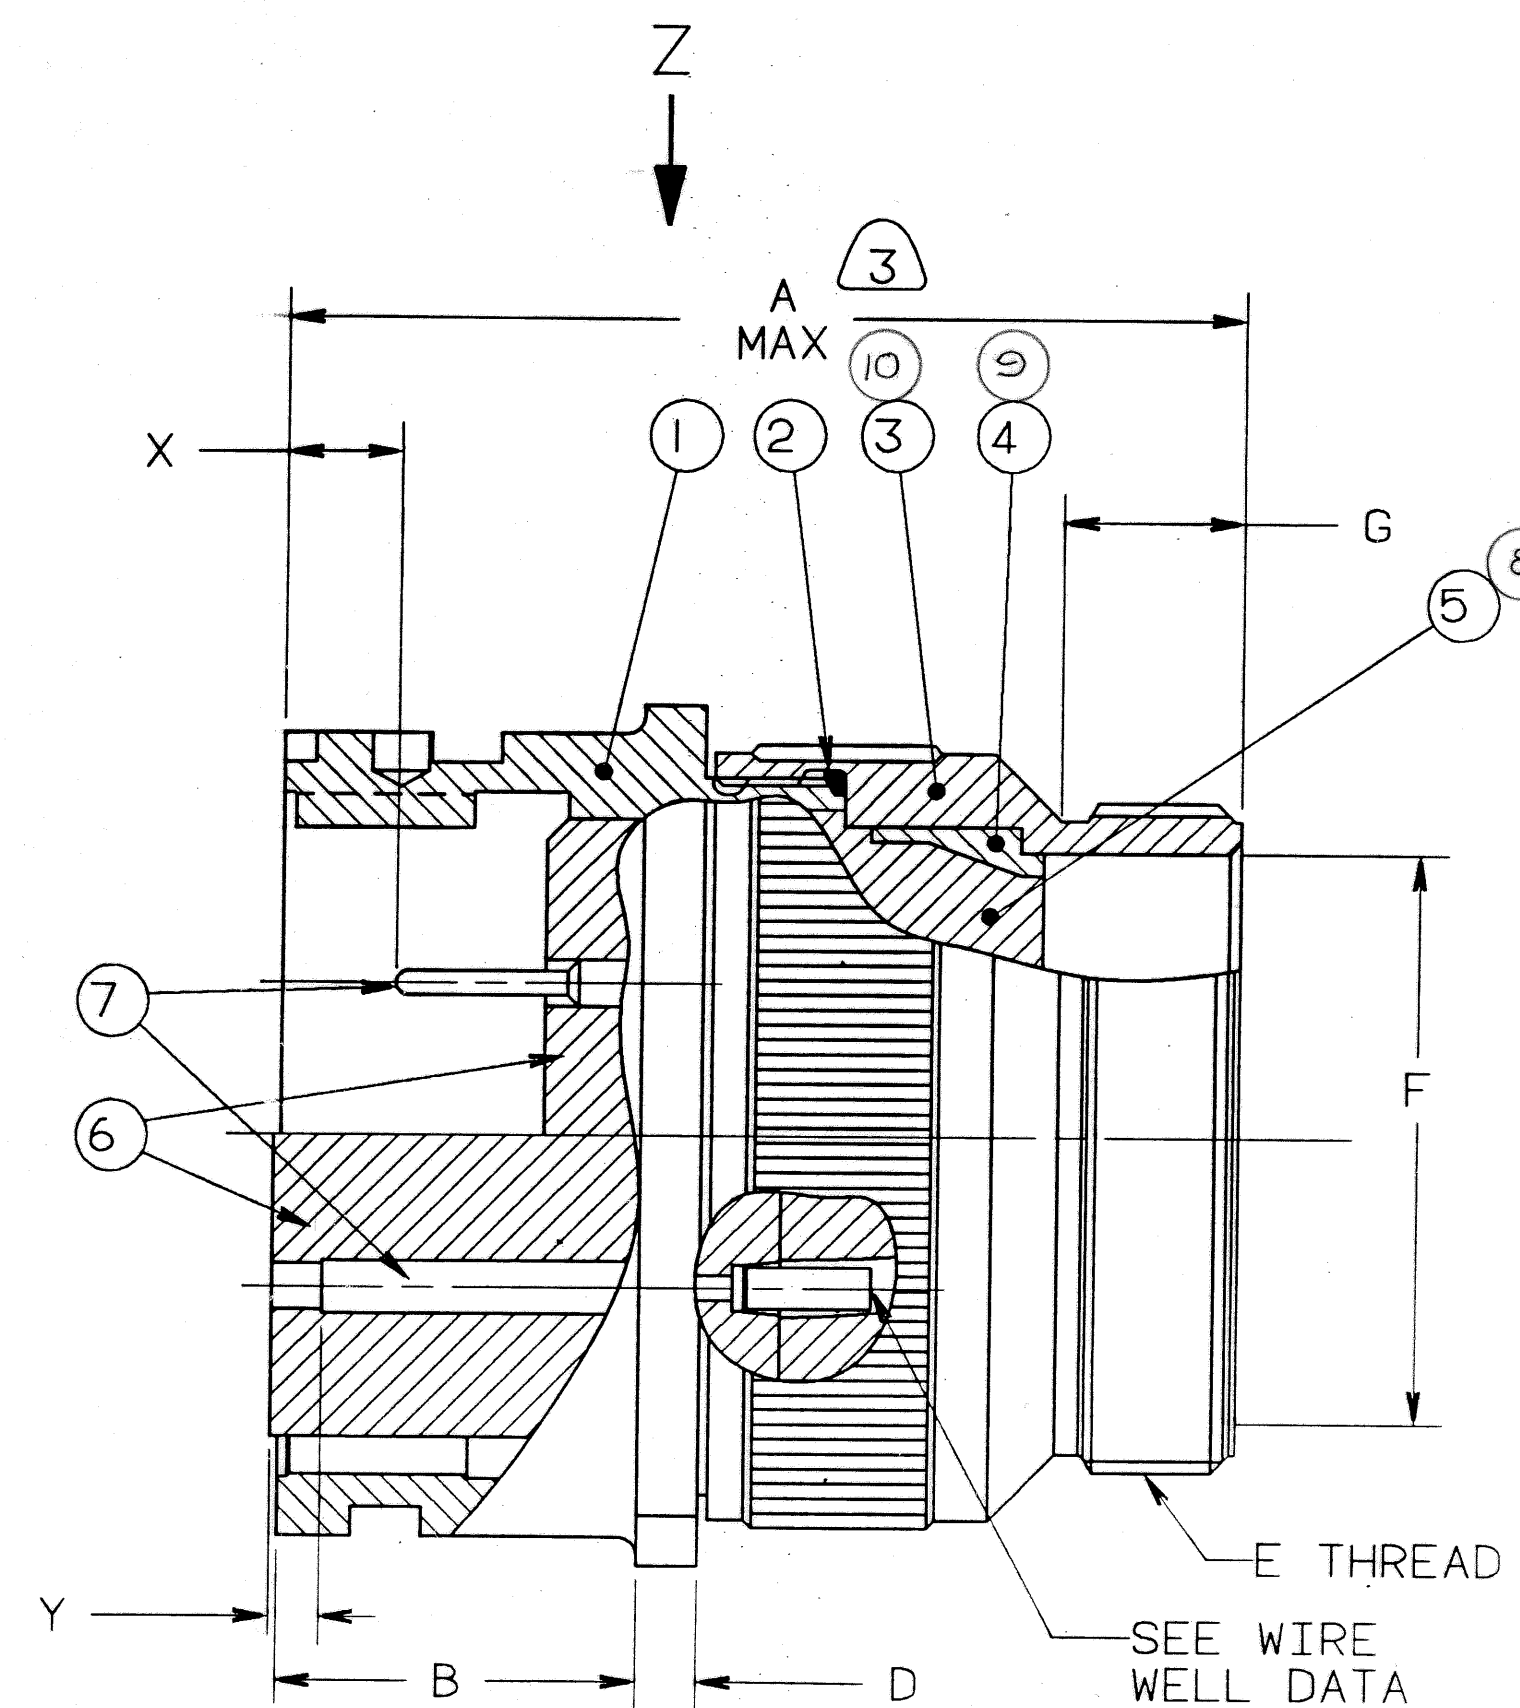


CONTACT SIZE	SHELL SIZE	X	Y ±.040
16 SHORT	10SL, 14S, 16S	.087±.039	.079
16 LONG	14, 16, THRU 40	.260 ⁺ .052 - .041	.102
12	14, 16, THRU 40	.118 ⁺ .039 - .056	.102
4,8,0	14, 16, THRU 40	.091±.039	.102

REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
A		INITIAL RELEASE NUM: 70093-443	
B		(CL II) SEE CHG NOTICE ECN: 28358	6/7/94 Prescott
C		(CL II) SEE ECN: 95006 FOR CHANGED DETAILS	7/9/04 A. B. Harrison

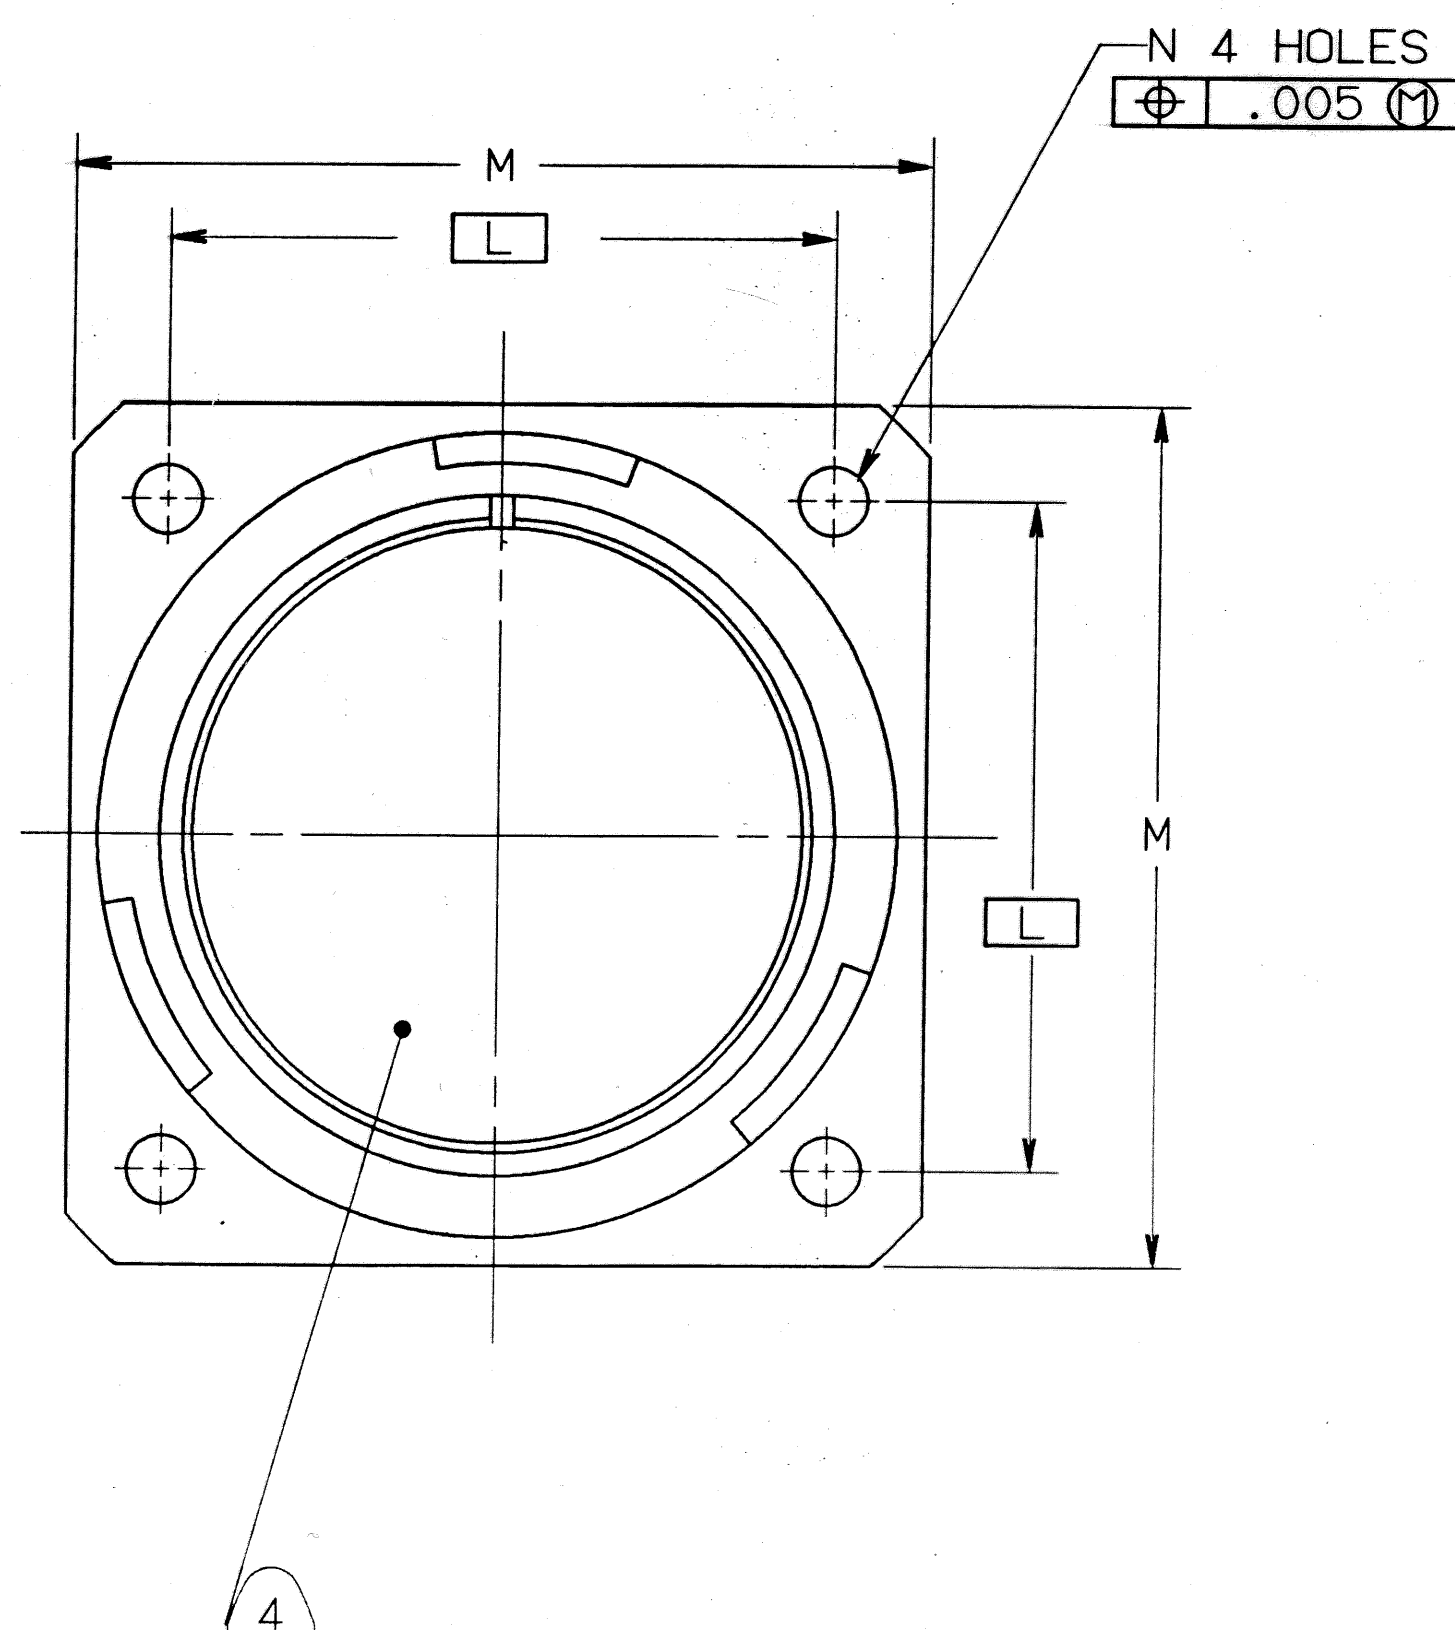

10	1	10-581821-XX3	ADAPTER	3,13
9	1	10-581819-XX1	SLEEVE	13
8	1	SEE COLUMN	GROMMET	13,12
7	SEE NOTE 10		CONTACT	
6	1	10-748XX-XXX	INSERT	
5	1	10-607XX-XX	GROMMET	14,3
4	1	10-564869-XX	SLEEVE	14
3	1	10-564867-XX3	ADAPTER	14,3
2	1	10-101379-XX1	GASKET	9
1	1	SEE COLUMN	SHELL	

SEE SHEET 2
NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

COMPANY ID: 2
CODED/MS/CUST: Y
INTERNAL: N
LOTNO: N
DATE CODE: 9-3895
SEE PRINT: N

N/A
N/A
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED
LINEAR DIMENSIONS ARE IN INCHES.
TOLERANCES: .XXX±.010,
.XX ±.03, .X ±.1, ANGLES ±2°.
OTHER STANDARDS PER 9-3800
AND DOD-D-1000. NOTE REF = XX

FIND NO.	QTY RECD.	FSCM NO.	PART NUMBER	DESCRIPTION	NOTE REF.
PARTS LIST					
SPECIFICATIONS			AMPHENOL CORPORATION		
MATERIAL SPEC. N/A			BENDIX CONNECTOR OPERATIONS SIDNEY, N.Y.		
PROCESS SPEC. SEE NOTE 5			CONNECTOR, ELECTRICAL RECEPTACLE, FRONT PANEL MOUNT, REVERSE BAYONET COUPLING TYPE GTCOOR ()-(), SOLDERLESS		
1ST PART NO. 71-581753-115			SIZE D 77820	FSCM NO. 71-581740/759	REV C
SCALE NONE			VT. N/A	REF N/A	SHEET 1 OF 2

COMPUTER GENERATED DRAWING

000000001

01653


TAB.

8		7		6		5		4		3		2		1	
ASSEMBLY NUMBER	SHELL SIZE	GT NUMBER	SHELL		A MAX	B +.016 -.000	D ±.008	E THREAD -2A	F DIA MIN	G MIN	L M ±.012	N DIA +.004 -.000	GROMMET		
71-581740-()	8S	NOT AVAILABLE													
71-581741-()	10S	NOT AVAILABLE													
71-581742-()	10SL	GTC00 R10SL-()	10-580920-113	1.969	.717		.110	.6250-24UNEF	.409	.374	.717	1.000	.126	10-581825-()	
71-581743-()	12S	NOT AVAILABLE													
71-581744-()	12	NOT AVAILABLE													
71-581745-()	14S	GTC00 R14S-()	10-580920-143	1.969	.717		.126	.7500-20UNEF	.520	.374	.906	1.181	.126	10-581827-()	
71-581746-()	14	NOT AVAILABLE													
71-581747-()	16S	GTC00 R16S-()	10-580920-163	1.969	.717		.126	.8750-20UNEF	.638	.374	.969	1.280	.126	10-581829-()	
71-581748-()	16	GTC00 R16-()	10-580920-173	2.362	.846		.126	.8750-20UNEF	.638	.374	.969	1.280	.126	10-581830-()	
71-581749-()	18	GTC00 R18-()	10-580920-183	2.362	.907		.157	1.0000-20UNEF	.756	.374	1.063	1.378	.126	10-581831-()	
71-581750-()	20	GTC00 R20-()	10-580920-203	2.362	.907			1.1875-18UNEF	.866	.374	1.157	1.496	.126	10-581832-()	
71-581751-()	22	GTC00 R22-()	10-580920-223	2.362	.907			1.1875-18UNEF	.965	.374	1.252	1.614	.126	10-581833-()	
71-581752-()	24	GTC00 R24-()	10-580920-243	2.559	.907			1.4375-18UNEF	1.094	.374	1.374	1.752	.146	10-581834-()	
71-581753-()	28	GTC00 R28-()	10-580920-283	2.559	.947			1.4375-18UNEF	1.228	.374	1.563	2.000	.146	10-581835-()	
71-581754-()	32	GTC00 R32-()	10-580920-323	2.559	.947			1.7500-18UNS	1.488	.433	1.752	2.244	.169	10-581836-()	
71-581755-()	36	GTC00 R36-()	10-580920-363	3.150	.947			2.0000-18UNS	1.780	.465	1.937	2.500	.169	10-581837-()	
71-581756-()	40	GTC00 R40-()	10-580920-403	3.150	.947			2.2500-16UN	2.016	.465	2.185	2.752	.169	10-581838-()	
71-581757/759		NOT AVAILABLE													

TO COMPLETE, ADD APPLICABLE INSERT
ARRANGEMENT SUFFIX PER 9-2437

WIRE WELL DATA						
CONTACT SIZE	0	4	8	12	16	16M
WELL DIA	.453±.005	.281 ±.005 -.004	.179 ±.004 -.002	.098 ±.004 -.000	.063 ±.004 -.000	.063 ±.004 -.000
WELL DEPTH	+.031 -.000	.592	.500	.500	.250	.250

BLACK INK STAMP PER 9-3856-5
"BENDIX", GT NUMBER (SEE COLUMN)
& DATE CODE (9-3895).
CHARACTERS TO BE .094-.125 HIGH.
AND LOCATED APPROX IN LINE
WITH BLUE DOT ON SHELL
EXAMPLE:
BENDIX GTC00R22-15P 8944

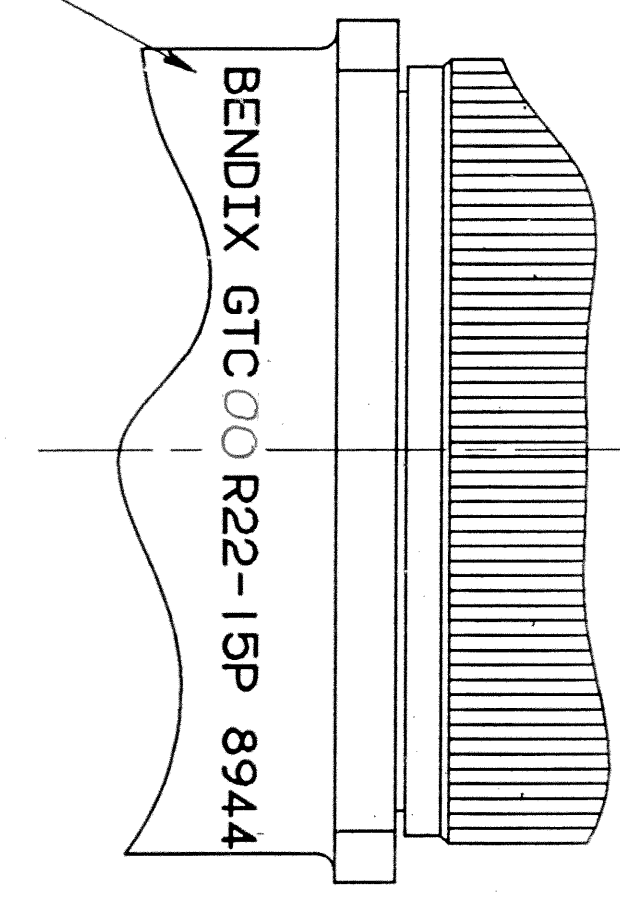

VIEW AT Z

7. FOR MATING CONNECTOR ASSEMBLIES, SEE 71-580450/469 & OTHERS.
6. SEE WORK ORDER FOR PERMISSIBLE ADDITIONAL OR ALTERNATE STAMPING.
5. PROCESS SPEC:
ASSY 9-9238
TEST 9-3106-18
9-3856-5, 9-3895, 9-2437, 9-1936
4. INSERTS ARE NOT REMOVABLE.
3. DRAWING ILLUSTRATES FINAL ASSEMBLY. FOR STORAGE & SHIPPING, ADAPTER MUST BE LOOSELY COUPLED. CONTACTS ARE SHIPPED UNASSEMBLED.
2. FOR CONTACT SIZE, SPACING & SERVICE RATING, SEE MIL-STD-1651 OR L-11908-()/L-11948-().
1. UNITS MEET THE APPLICABLE REQUIREMENTS OF MIL-C-5015.
14. INDICATED ITEMS F/NS 3,4&5 ARE APPLICABLE TO CONNECTORS CONTAINING CONTACT ARRANGEMENTS OTHER THAN THOSE SPECIFIED IN NOTE 13.
13. INDICATED ITEMS F/NS 8,9&10 ARE APPLICABLE TO CONNECTORS CONTAINING CONTACT ARRANGEMENTS WITH SIZE 4&8.
12. TO COMPLETE INDICATED GROMMET PART NO. ADD APPLICABLE ARRANGEMENT SUFFIX.
11. PACKAGE PER PRODUCTION PROCESS SHEET.
10. SEE SEPARATE PARTS LIST FOR COMPONENT PART NUMBERS AND QUANTITIES.
9. APPLY A LIGHT FILM OF LUBRICANT 9-1936 TO GASKET.
8. FOR FINAL INSTALLATION, CONTACTS MUST BE ASSEMBLED INTO ALL INSERT HOLES. ALL UNUSED GROMMET HOLES MUST BE FILLED WITH THE APPROPRIATE SIZE SEALING PLUG.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS
REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

SIZE	77820	71-581740/759	REV	C
SCALE			SHEET	2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[GTC00R36-3S\(RDS\)](#) [GTC00R16S1S](#) [GTC00R-22-19P](#) [GTC00R2027P](#) [GTC00R2015P](#) [GTC00R24-10S-LC](#)
[GTC00R20-7S](#) [GTC00R18-1S](#) [GTC00R18-1P](#) [GTC00R18-10P](#) [GTC00R20-23S](#) [GTC00R18-10P-B30](#) [GTC00R20-3S](#) [GTC00R20-24S](#) [GTC00R20-29P](#) [GTC00R36-5P](#) [GTC00R20-24P](#) [GTC00R20-29S](#) [GTC00R20-23P](#)
[GTC00R14S-9P-027-B30](#) [GTC00R22-1S](#) [GTC00R22-1P](#) [GTC00R36-77S-025](#) [GTC00R18-10S](#) [GTC00R22-2SY](#) [GTC00R22-8SZ](#) [GTC00R22-18S-A24](#) [GTC00R10SL-4P](#) [GTC00R28-21P-LC](#) [GTC00R10SL-3P](#) [GTC00R22-1SZ](#)
[GTC00R22-23S](#) [GTC00R18-11PX](#) [GTC00R28-AYS](#) [GTC00R18-19S](#) [GTC00R28-5S](#) [GTC00R22-22P](#) [GTC00R22-1SY](#) [GTC00R22-8SY](#) [GTC00R22-63P](#) [GTC00R28-21S-LC](#) [GTC00R28-22S-RDS](#) [GTC00R28-51S](#) [GTC00R36-78P](#)
[GTC00R28-15S](#) [GTC00R28-51S-LC](#) [GTC00R32-1S](#) [GTC00R32-76P-025](#) [GTC00R36-52P](#) [GTC00R40-53P](#) [GTC00R40-56P](#) [GTC00R40-56S](#) [GTC00R20-18SW](#) [GTC00R24-10PW](#) [GTC00R24-12P](#) [GTC00R24-12S](#)
[GTC00R24-19S-B30](#) [GTC00R32-17P](#) [GTC00R14S-1S](#) [GTC00R14S-2S](#) [GTC00R14S-2S-A24](#) [GTC00R20-15P-LC](#) [GTC00R20-18P](#) [GTC00R20-18S](#) [GTC00R24-10P](#) [GTC00R24-10S](#) [GTC00R28-22S](#) [GTC00R32-22S](#) [GTC00R36-5S](#)
[GTC00R14S-9P](#) [GTC00R14S-9S](#) [GTC00R24-9P](#) [GTC00R32-5P](#) [GTC00R32-17S](#) [GTC00R20-27S](#)