


△ N=NUMBER OF CONTACTS

DIM		TOL		
		3×2P--3×5P	3×6P--3×16P	3×17P--3×24P
Dim A	(N/3-1)×3.5+14.4	±0.20	±0.25	±0.30
Dim B	(N/3-1)×3.5			
Dim P	(N/3-1)×3.5			

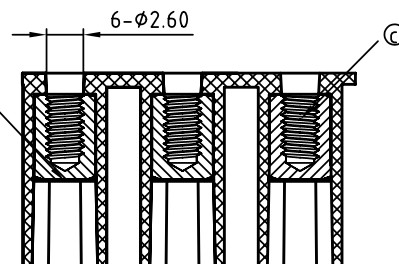

SECTION Q-Q

SIGN	DATE	DESCRIPTION	APPROVER
△	04/16 '12	Flange nut is changed	Runner
△	04/16 '12	The dimension is added	Runner

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal(housing): PA66 30% GF (UL94V-0)
- Item ② Contact pin of : copper Tin plated
- Item ③ Flange screw NUT: Brass M 2.5

Electrical:

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ±10°C/5 Sec
- APPROVAL:
- Critical dimension:

K3 xx 1 2 x 0 xxxx G

No. OF POLES  
06: 3×2 POLES  
09: 3×3 POLES  
:  
72: 3×24 POLES

COLOR

- 0 Black (RAL9005)
- 3 Orange(RAL2011/P)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

RoHS compliant  
(lead<4%)  
In copper Alloy


A000: "A" Logo (Standard)  
A00A: "ANYTEK" Mark

Any special item by  
customer request.  
please contact sales  
department.

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		K3 3.5mm With Flange Series (180°-Vertical) DIP type							
PART NO.		K3xx12x0xxxxG			DWG NO.		8K30011		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Runner 2012.04.17	Runner 2010.06.28					UNIT: mm	
					SCALE: NONE		X.X ±0.30		
					SHEET: 01/01		REV.: C	X.XX ±0.10	
								X° ±1°	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Amphenol:

<a href="#"><u>K3061250A000G</u></a>	<a href="#"><u>K3091250A000G</u></a>	<a href="#"><u>K3121250A000G</u></a>	<a href="#"><u>K3151250A000G</u></a>	<a href="#"><u>K3181250A000G</u></a>	<a href="#"><u>K3211250A000G</u></a>
<a href="#"><u>K3241250A000G</u></a>	<a href="#"><u>K3271250A000G</u></a>	<a href="#"><u>K3301250A000G</u></a>	<a href="#"><u>K3331250A000G</u></a>	<a href="#"><u>K3361250A000G</u></a>	<a href="#"><u>K3391250A000G</u></a>
<a href="#"><u>K3421250A000G</u></a>	<a href="#"><u>K3451250A000G</u></a>	<a href="#"><u>K3481250A000G</u></a>	<a href="#"><u>K3511250A000G</u></a>	<a href="#"><u>K3541250A000G</u></a>	<a href="#"><u>K3571250A000G</u></a>
<a href="#"><u>K3601250A000G</u></a>	<a href="#"><u>K3631250A000G</u></a>	<a href="#"><u>K3661250A000G</u></a>	<a href="#"><u>K3691250A000G</u></a>	<a href="#"><u>K3721250A000G</u></a>	