
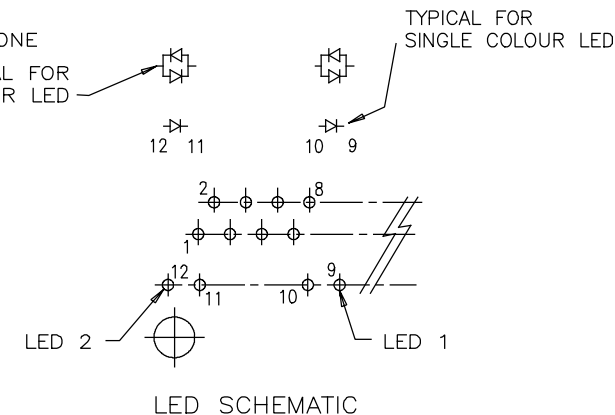


GREEN  
10 OR 12  
RED  
9 OR 11

**BI-COLOUR LED DETAIL**  
(GREEN/YELLOW, RED/YELLOW AND GREEN/ORANGE ARE ALSO AVAILABLE)

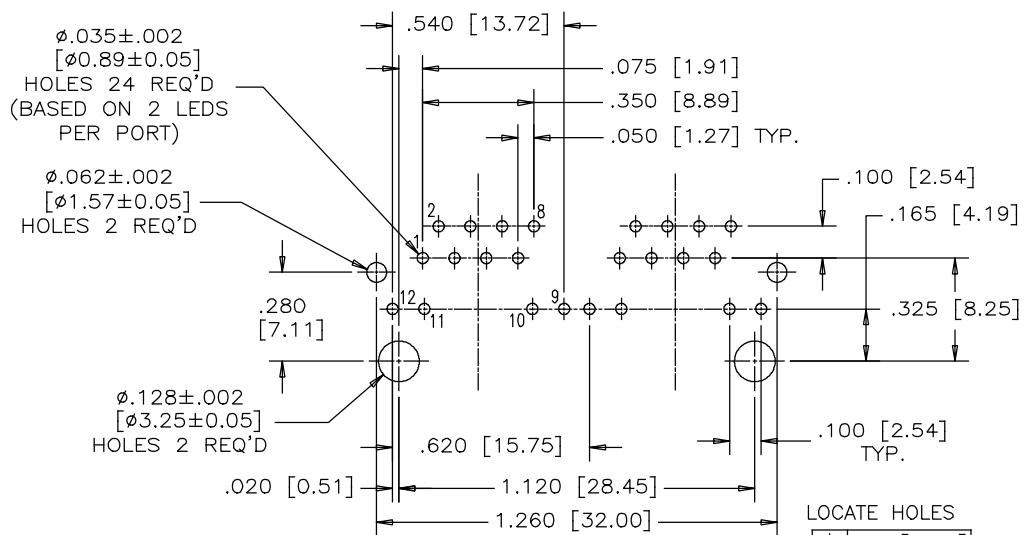

#### MATERIALS:

**CONTACTS:** PHOSPHOR BRONZE,  
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES.  
SEE PART NO. FOR THICKNESS.  
50 MICRO" MIN. NICKEL OVERALL.  
100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.

**HOUSING:** HIGH TEMPERATURE THERMOPLASTIC  
COLOR - BLACK, FLAMMABILITY RATING UL 94V-0

**SHIELD:** COPPER ALLOY  
PLATING: NICKEL WITH PURE-TIN DIPPED PCB TAILS.

**RECOMMENDED SOLDERING TEMPERATURE:**  
WAVE SOLDERING AT 260°C MAX. FOR 5 SEC MAX.

**PART NUMBER:** RJSBE-X38X-C2X

GOLD PLATING OPTION: REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

D = 6u" GOLD PLATING  
G = 15u" GOLD PLATING  
J = 30u" GOLD PLATING  
5 = 50u" GOLD PLATING

#### RECOMMENDED PANEL CUTOUT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE		DRAWN	RONNIE.C	APR 07/17	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS	INCHES	CHECKED	AMY.Z	APR 07/17		
SECONDARY	MILLIMETERS	M.E. APP'D			TITLE 2 PORT MODULAR JACK, 8 POSITIONS, 8 CONTACTS, WITH LED OPTIONS, SHIELDED, GOLD PLATING OPTIONS- RoHS COMPLIANT	
REFERENCE IN PARENTHESES		Q.A. APP'D				
1 DECIMAL PLACE		DWG APP'D			DWG NO. P-RJSBE-X38X-C2X	
2 DECIMAL PLACES		ENG. REL. NO.				
3 DECIMAL PLACES ±0.015		REF.			REV A	
ANGULAR DEGREES ±1.5°		THIRD ANGLE PROJECTION				
		DO NOT SCALE DRAWING			CODE ID NO. 03554	DWG SIZE
					SCALE	SHEET 1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Amphenol:

[RJSBE538TC2](#) [RJSBE5387C2](#) [RJSBE5388C2](#) [RJSBE5384C2](#) [RJSBE538GC2](#) [RJSBE538HC2](#) [RJSBE538AC2](#)  
[RJSBE538VC2](#) [RJSBE5389C2](#) [RJSBE5382C2](#) [RJSBE538KC2](#) [RJSBE5383C2](#) [RJSBE538JC2](#) [RJSBE538BC2](#)  
[RJSBE538CC2](#) [RJSBE538LC2](#) [RJSBE538NC2](#) [RJSBE538DC2](#) [RJSBE538PC2](#) [RJSBE5381C2](#) [RJSBE538RC2](#)  
[RJSBE5385C2](#) [RJSBE538MC2](#) [RJSBE538FC2](#) [RJSBE538EC2](#) [RJSBE5386C2](#) [RJSBE538WC2G](#) [RJSBE538WC18](#)