

Accelerometer with integral cable

780FM-2-J88C

SPECIFICATIONS

Sensitivity, $\pm 15\%$, 25°C		100 mV/g
Acceleration range		80 g peak
Amplitude nonlinearity		1%
Frequency response:	$\pm 5\%$	1 - 6,000 Hz
	$\pm 10\%$	0.7 - 8,000 Hz
	± 3 dB	0.4 - 12,000 Hz
Resonance frequency		30 kHz
Transverse sensitivity, max		5% of axial
Temperature response:	-25°C	-10%
	+120°C	+10%
Power requirement:		
Voltage source		18 - 30 VDC
Current regulating diode		2 - 10 mA
Electrical noise, equiv. g:		
Broadband	2.5 Hz to 25 kHz	500 μ g
Spectral	10 Hz	7 μ g/ $\sqrt{\text{Hz}}$
	100 Hz	4 μ g/ $\sqrt{\text{Hz}}$
	1,000 Hz	2 μ g/ $\sqrt{\text{Hz}}$
Output impedance, max		100 Ω
Bias output voltage		12 VDC
Grounding		case isolated, internally shielded
Temperature range:	Sensor head	-50° to +120°C
	Cable	-40° to +80°C
Vibration limit		500 g peak
Shock limit		5,000 g peak
Electromagnetic sensitivity, equiv. g, max		70 μ g/gauss
Sealing		hermetic
Base strain sensitivity, max		0.0002 g/ μ strain
Sensing element design		PZT, shear
Weight		150.5 grams
Case material		316L stainless steel
Mounting		1/4-28 UNF tapped hole
Integral cable		J88C


Note: Frequency response and spectral noise values are typical.

Accessories supplied: Two-pole 40 lbf magnet; calibration data (level 2)



Key features

- Designed for walkaround monitoring programs
- Manufactured in ISO 9001 facility

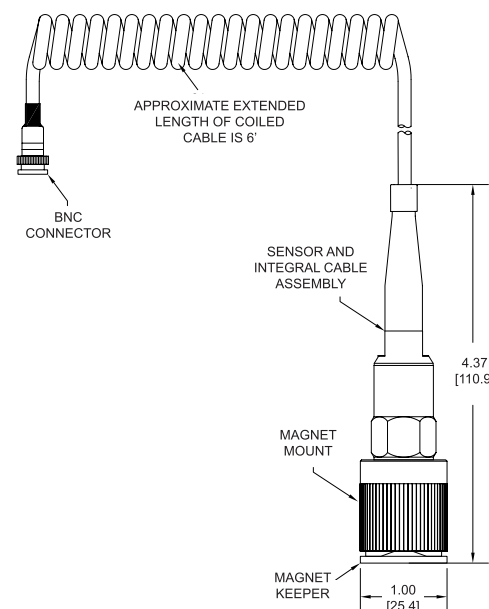

Connections

Function	Connector pin
power/signal	center pin
common	outer shell
shield	outer shell



Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[780FM-2-J88C](#)