

*Now you're connected!*

### About Amphenol Commercial Products

Amphenol's commercial connector products are used in a variety of end user applications including networking, telecom, server & computer, storage & HDD, consumer electronics and entertainment, professional audio & Industrial & Military/Aerospace.


### Related Products

#### RJSSE




P/N RJSSE-5081 SHOWN  
SINGLE PORT, 8 POSITION,  
WITH SHIELD AND LIGHT PIPE

#### RJSAE



P/N RJSAE-5385-02 SHOWN  
STACKED 2x1, 8 POSITION,  
WITH SHIELD AND LEDs

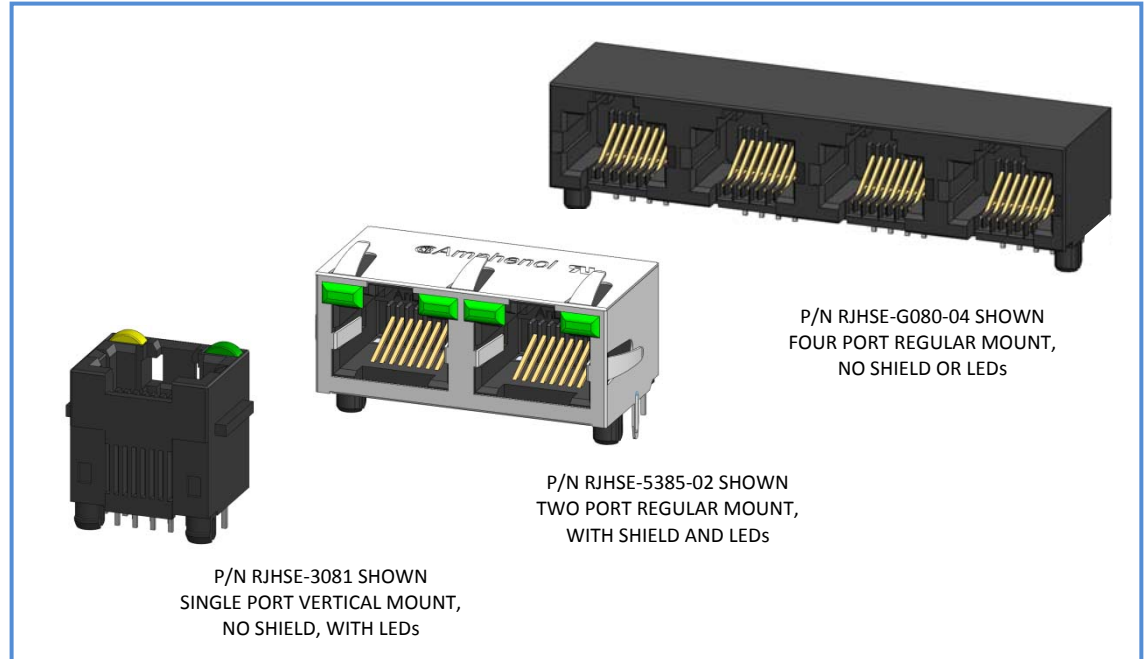

P/N RJHSE-3081 SHOWN  
SINGLE PORT VERTICAL MOUNT,  
NO SHIELD, WITH LEDs

P/N RJHSE-5385-02 SHOWN  
TWO PORT REGULAR MOUNT,  
WITH SHIELD AND LEDs

P/N RJHSE-G080-04 SHOWN  
FOUR PORT REGULAR MOUNT,  
NO SHIELD OR LEDs

### Overview

This product specification defines the general use and performance parameters for Amphenol's RJHSE series of inverted modular jacks.

Availability: Single, multiport, vertical and right angle connectors with a wide variety of LED and shielding options.

### Usage

The RJHSE inverted modular jacks with superior EMI performance supports Ethernet Protocols. Shielding available for increased EMI performance and LEDs for Link Activity and Network Speed verification.

### Applications

Intended for use in applications such as:  
Networking & Telecom

- Wireless (WiMAX)
- Network servers
- Hubs, routers, switches

Office & Home Equipment

- PC's, Laptops, Copiers/Printers
- Telephones, modems
- Surge Protectors
- ATMs, Vending Machines

Consumer Goods

- Security Systems
- Set Top Boxes
- Video Game Systems

Miscellaneous

- Multi-Media Equipment
- Industrial Equipment
- POS Terminals


# Now you're connected!

## About Amphenol Commercial Products

Amphenol's commercial connector products are used in a variety of end user applications including networking, telecom, server & computer, storage & HDD, consumer electronics and entertainment, professional audio & Industrial & Military/Aerospace.

## Related Products

### RJSSE



P/N RJSSE-5081 SHOWN  
SINGLE PORT, 8 POSITION,  
WITH SHIELD AND LIGHT PIPE

### RJSAE



P/N RJSAE-5385-02 SHOWN  
STACKED 2x1, 8 POSITION,  
WITH SHIELD AND LEDs

## Electrical Characteristics

Contact resistance:	20 mΩ max.
Insulation resistance:	500 MΩ minimum at 500V DC for 2 minutes max.
Current rating:	1.5 Amps
Voltage rating:	125 Volts AC
DWV	1000 VAC, 60 Hz. 1 min.
LED forward DC current:	20mA typical
LED forward Voltage:	1.9 Volts max. @ 2mA (for single colors) 2.6 Volts max. @ 20mA (for Bi-colors)
LED reverse voltage:	5 Volts minimum
LED light intensity:	0.4 to 1.5 mcd @ 2mA (for single colors) 0.5 mcd min. @ 2mA (for Bi-colors)
LED wave length:	Yellow: 587± 7 nm measured @ 20mA Green: 565± 6 nm measured @ 20mA Red: 625± 5 nm measured @ 20mA

## Mechanical Characteristics

Mating connector insertion force: 5.0 lbs. Maximum.  
Mating connector pull retention force: 20 lbs Minimum.  
Durability: 750 mating & unmating cycles  
Recommended soldering temperature: Wave soldering peaked at 260° C for 5 seconds maximum.  
Connectors without LED's are suitable for IR Reflow

Operating temperature: -55° C to +85° C

## Material Requirements

RJHSE connectors are RoHS compliant.

Unless otherwise specified, the materials for each component shall be:

Insulator:

- High Temp thermoplastic. Complies with UL 94V-0, Black color

Contacts:

- Phosphor Bronze hard temper with gold thickness options (6μ", 15μ", 30μ", 50μ") over 50μ" minimum Nickel on contact mating area.
- 100μ" minimum matte tin plating on soldering tail

Shield:

- Stainless Steel with tin dipped tails

LED:

- Tin plating on LED tails

## Available Documents

### Drawing Numbers:

P-RJHSE-5XXX-XXX	8 Position Modular Jack, optional LEDs and Shielding, 1, 2, 4, 5, 6 and 8 port versions
P-RJHSE-7XXX-XXX	6 Position Modular Jack, Optional LEDs and Shielding, 1, 2 and 4 port versions
P-RJHSE-3XXX-XXX	Vertical Mount, Single Port Modular Jack, Optional LEDs and Shielding
P-RJHSE-LXXX-XXX	Low Profile Modular Jack, Optional LEDs and Shielding, 1 and 2 port versions

Contact factory or Authorized Amphenol representative for additional configurations

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Amphenol:

[RJHSE-3085](#) [RJHSE-5080-02](#) [RJHSE-5082-02](#) [RJHSE-5082](#) [RJHSE-5081-08](#) [RJHSE-5081-04](#) [RJHSE-5081-02](#)  
[RJHSE-5080-08](#) [RJHSE-5080-04](#) [RJHSE-5084-02](#) [RJHSE-5088-04](#) [RJHSE-5382-02](#) [RJHSE-5381-08](#) [RJHSE-5380-](#)  
[08](#) [RJHSE-508B-08](#) [RJHSE-508B-04](#) [RJHSE-508B-02](#) [RJHSE-508A-08](#) [RJHSE-508A-04](#) [RJHSE-5088](#) [RJHSE-](#)  
[5088-08](#) [RJHSE-5085-04](#) [RJHSE-5088-02](#) [RJHSE-5087-08](#) [RJHSE-5087-04](#) [RJHSE-5087-02](#) [RJHSE-5086-08](#)  
[RJHSE-5086-04](#) [RJHSE-5086-02](#) [RJHSE-5086](#) [RJHSE-5085-08](#) [RJHSE-508A-02](#) [RJHSE-5382-08](#) [RJHSE-5084-08](#)  
[RJHSE-7365](#) [RJHSE-7360-08](#) [RJHSE-7365-08](#) [RJHSE-7365-02](#) [RJHSE-7364-08](#) [RJHSE-7364-04](#) [RJHSE-7364-](#)  
[02](#) [RJHSE-7364](#) [RJHSE-7361-08](#) [RJHSE-7361-02](#) [RJHSE-7365-04](#) [RJHSE-5082-08](#) [RJHSE-5385-08](#) [RJHSE-7361](#)  
[RJHSE-5387-04](#) [RJHSE-7060](#) [RJHSE-7361-04](#) [RJHSE-538B-08](#) [RJHSE-5388-08](#) [RJHSE-5388-04](#) [RJHSE-7360-](#)  
[04](#) [RJHSE-5387-08](#) [RJHSE-7060-02](#) [RJHSE-5387-02](#) [RJHSE-5387](#) [RJHSE-5386-08](#) [RJHSE-5386-04](#) [RJHSE-](#)  
[5386-02](#) [RJHSE-5386](#) [RJHSE-5388](#) [RJHSE-7065](#) [RJHSE-7360-02](#) [RJHSE-7065-08](#) [RJHSE-7065-02](#) [RJHSE-7060-](#)  
[04](#) [RJHSE-7064-08](#) [RJHSE-7064-04](#) [RJHSE-7064-02](#) [RJHSE-7064](#) [RJHSE-7061-08](#) [RJHSE-7061-04](#) [RJHSE-](#)  
[7061-02](#) [RJHSE-7061](#) [RJHSE-7060-08](#) [RJHSE-7065-04](#) [RJHSE308A](#) [RJHSE3386](#) [RJHSE-5381-A2](#) [RJHSE-5484](#)  
[RJHSE-5381-A1](#) [RJHSE-538B](#) [RJHSE-538B-02](#) [RJHSE-5385-02](#) [RJHSE-5385-04](#) [RJHSE-5085](#) [RJHSE-5081](#)  
[RJHSE-5080](#) [RJHSE-5084](#) [RJHSE-5384](#) [RJHSE-5380](#) [RJHSE-5385](#) [RJHSE-5381-02](#) [RJHSE-5381-04](#) [RJHSE-](#)  
[5381-03](#) [RJHSE-5384-08](#) [RJHSE-5384-04](#)