

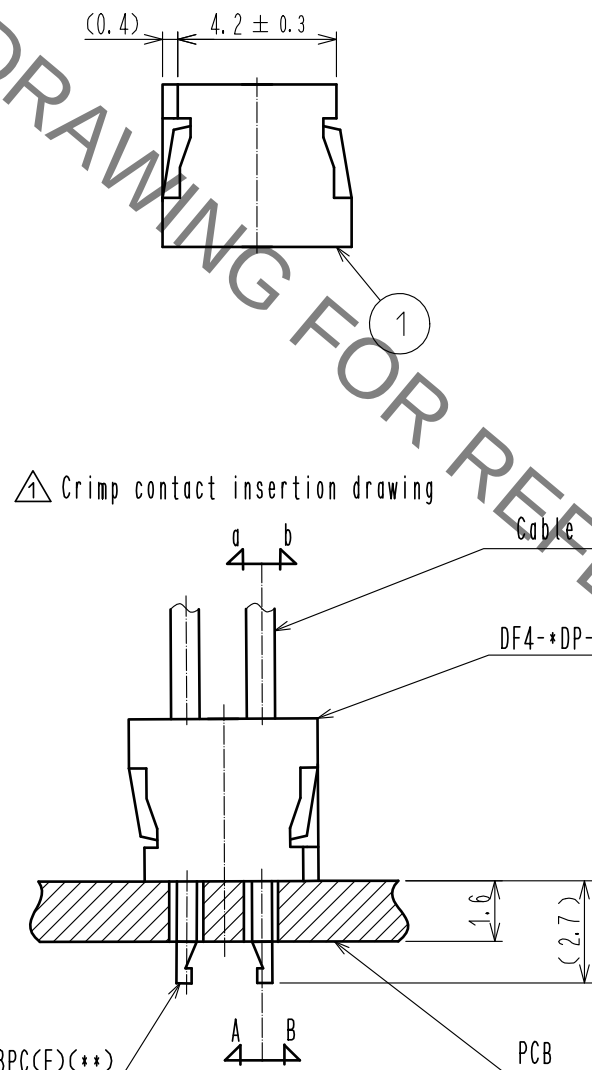
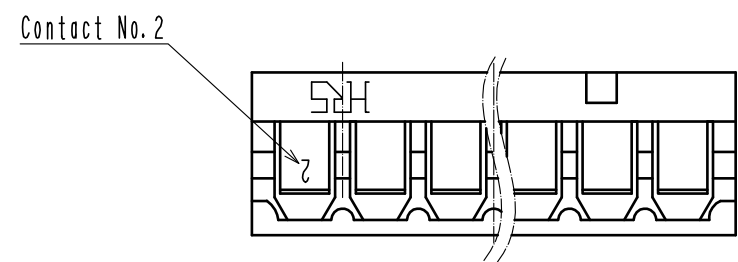
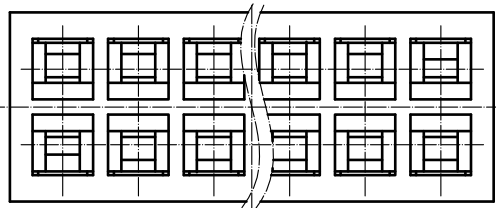
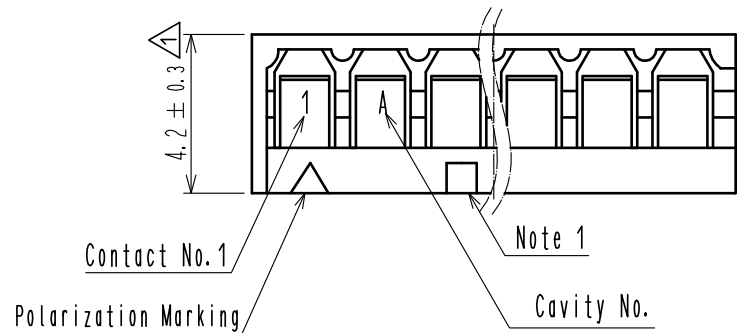


Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

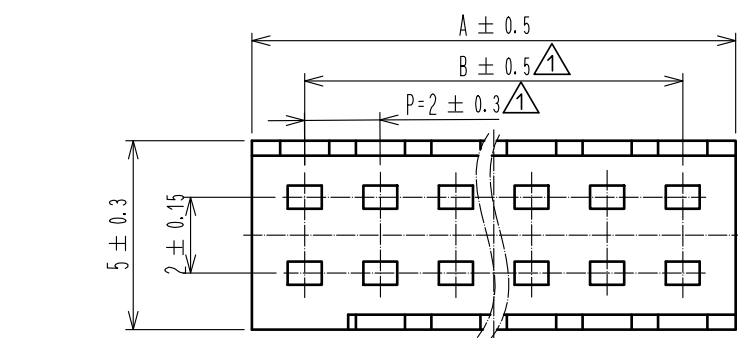

Part No.	Code No.	Number of contact	A	B
DF4- 4DP-2C	544-0078-3	4	4.8	2.0
DF4- 6DP-2C	544-0079-6	6	6.8	4.0
DF4- 8DP-2C	544-0080-5	8	8.8	6.0
DF4-10DP-2C	544-0081-8	10	10.8	8.0
DF4-12DP-2C	544-0082-0	12	12.8	10.0
DF4-14DP-2C	544-0083-3	14	14.8	12.0
DF4-16DP-2C	544-0084-6	16	16.8	14.0
DF4-18DP-2C	544-0085-9	18	18.8	16.0
DF4-20DP-2C	544-0086-1	20	20.8	18.0
DF4-22DP-2C	544-0087-4	22	22.8	20.0
DF4-24DP-2C	544-0088-7	24	24.8	22.0
DF4-26DP-2C	544-0089-0	26	26.8	24.0
DF4-28DP-2C	544-0090-9	28	28.8	26.0
DF4-30DP-2C	544-0091-1	30	30.8	28.0
DF4-32DP-2C	544-0092-4	32	32.8	30.0

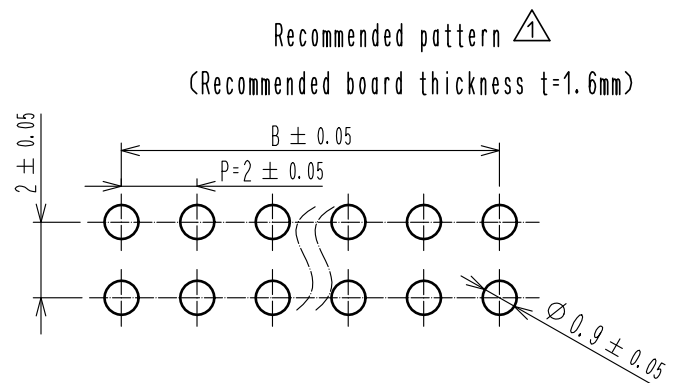

- Note 1. Square marks are indicated in relief on the part of following contact No. : 5,10,15,20,25,30
2. Recommended PCB hole diameter $0.9 \pm 0.05\text{mm}$
3. In case of some thin jacket wires, tips are hard to put together. however, the way of holding these wires makes easier to put them into PCB.
Ex. When the direction of contact tip is (A), Please hold a wire to the direction(a).

			1		Polyamide		UL94V-0 (BLACK)				
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS		
UNITS mm			SCALE 5 : 1		COUNT 6	DESCRIPTION OF REVISIONS DIS-H-00004425		DESIGNED HT. SATO		CHECKED SZ. ONO	DATE 20181116
 HIROSE ELECTRIC CO., LTD.			APPROVED : KJ. KATAYOSE		20050105		DRAWING NO. EDC-160366-00-00				
			CHECKED : TY. OMA		20050105		PART NO. DF4- * DP-2C				
			DESIGNED : IO. DENPOUYA		20050105		CODE NO. CL544				
			DRAWN : IO. DENPOUYA		20050105		 1 / 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF4-10DP-2C](#)