


GT21 Series

— Compact Coaxial Cable Connector —

〈In-line type and Board type〉

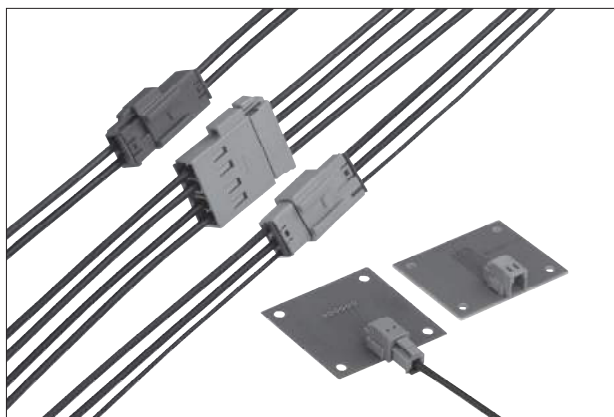


■ Features

- Consistent harness quality: “One-step” crimping design for center and outer conductors. Operators can complete harnessing without touching the center conductor. Therefore, the positional precision of the center conductor can be maintained regardless of the operators’ skill levels.
- Reduced harnessing man-hours ... “One-step” crimping of the center and outer conductors helps reduce harnessing man-hours.
- Space-saving design ... Even smaller than our GT5 Series.
- Excellent high frequency characteristics ... V.S.W.R. is 1.5 or less from DC to 2.5 GHz.
- The GT21 Series supports coaxial wire diameters up to $\phi 3.1\text{mm}$.

■ Applications

Digital TV, radio, automobile sensors (temperature, pressure, etc.), VICS, GPS, Bluetooth, TEL, satellite radio, etc.

■ TEST DATA (using 1.5D-2V Type cable)

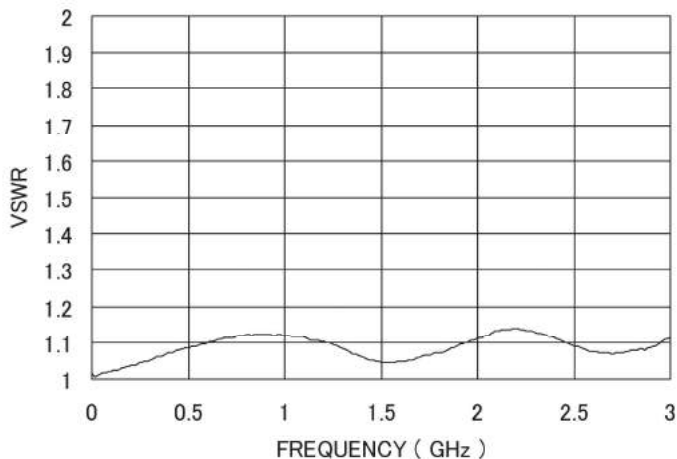


Note : The above measurement data is for GT21-1S-HU and GT21-1P-DS.

■ Cable Assembly Instructions


1. Strip the cable and crimp the entire terminal in one step.



2. Insert the terminal into the housing and check that the lance is locked.




3. Insert the retainer into the housing. Check that the lock is secure and the retainer cannot be pulled out. Connection is now complete.




GT21 Series

Coaxial Cable Terminal for F Connector

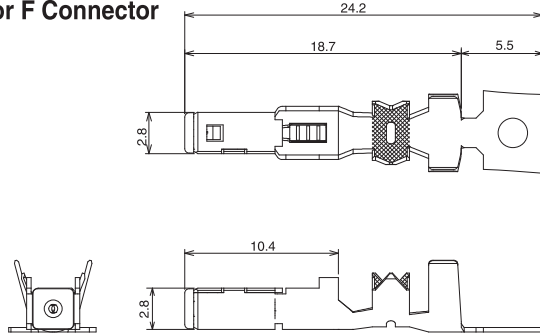


Part No.	HRS No.	Material / Finish or color	Conductor size	Insulator outer diameter	Jacket outer diameter	Sales unit	RoHS
GT21-30/1.6-2.9SCF	771-0012-4	Insulator : PPS/Black Center terminal : Phosphor bronze/Tin plating Outer terminal : Brass/Tin plating	AWG#30 strand wire	$\phi 1.5 \sim 2.0$	$\phi 2.6 \sim 3.1$	5,500 pcs/reel	
GT21-30/1.6-2.9SCF(ID)	771-0057-2		AWG#30 single wire				
GT21-2428/1.6-2.9SCF	771-0004-6		AWG#24~28				
GT21-30/1.1-2.2SCF	771-0040-0		Single $\phi 0.32$ strand wire				
GT21B-2426/1.6-2.9SCF	771-0087-0	Center terminal : Phosphor bronze/Tin plating Insulator : PBT	AWG24~26	$\phi 1.5 \sim 2.0$	$\phi 2.6 \sim 3.1$	2,000 pcs/reel	
GT21D-1822/F4-5SCF	771-0111-0	Outer terminal : Brass/Tin plating	AWG18~22	$\phi 2.6 \sim 3.2$	$\phi 4.8 \sim 5.2$	1,200 pcs/reel	

Coaxial Cable Terminal for M Connector

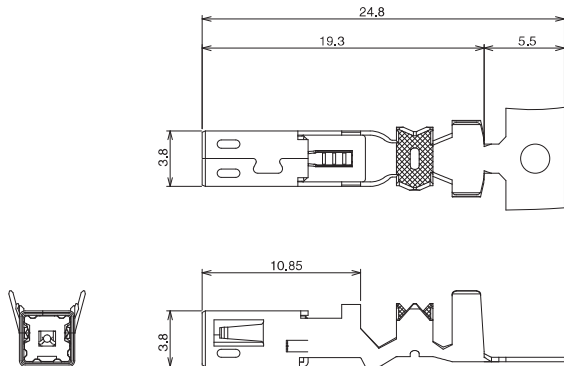

Part No.	HRS No.	Material / Finish or color	Conductor size	Insulator outer diameter	Jacket outer diameter	Sales unit	RoHS
GT21-30/0.7-1.5PCF	771-0056-0	Insulator : PBT/Black Center terminal : Brass /Tin plating Outer terminal : Brass/Tin plating	AWG#30 strand wire	$\phi 0.6\sim 0.9$	$\phi 1.4\sim 1.8$	5,000 pcs/reel	○
GT21-30/1.6-2.9PCF	771-0051-6		AWG#30 strand wire	$\phi 1.5\sim 2.0$	$\phi 2.6\sim 3.1$		
GT21-30/1.6-2.9PCF(ID)	771-0066-3						
GT21-2428/1.6-2.9PCF	771-0013-7						
GT21B-2426/1.6-2.9PCF	771-0088-0	Center terminal : Brass /Tin plating Insulator : PBT	AWG24~26	$\phi 1.5\sim 2.0$	$\phi 2.6\sim 3.1$	2,000 pcs/reel	
GT21D-1822/F4-5PCF	771-0112-0	Outer terminal : Brass/Tin plating	AWG18~22	$\phi 2.6\sim 3.2$	$\phi 4.8\sim 5.2$	1,200 pcs/reel	

■ Power Terminal for F Connector




Part No.	HRS No.	Material	Finish	Conductor size	Jacket outer diameter	Sales unit	RoHS
GT7-2022SCF(70)	757-0001-1 70	Copper alloy	Tin plating	AWG#20~22	φ1.4~2.4	5,000 pcs/reel	○
GT7A-2022SCF(70)	757-0003-7 70				φ2.6~3.1	3,300 pcs/reel	

Note 1 : This product is sold in units of reels. (See the table above for number of pcs per reel.)

Note 2 : This product cannot be used with housings from other manufacturers.

■ Power Terminal for M Connector

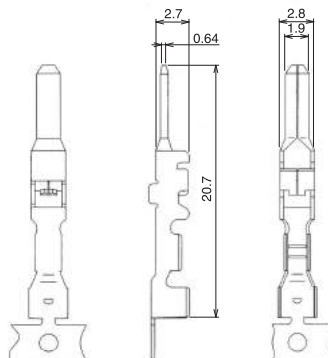



Part No.	HRS No.	Material	Finish	Conductor size	Jacket outer diameter	Sales unit	RoHS
GT7-2022PCF(70)	757-0002-4 70	Brass	Tin plating	AWG#20~22	φ1.4~2.4	5,000 pcs/reel	○
GT7A-2022PCF(70)	757-0004-0 70				φ2.6~3.1	3,300 pcs/reel	

Note 1 : This product is sold in units of reels. (See the table above for number of pcs per reel.)

Note 2 : This product cannot be used with housings from other manufacturers.

GT5
GT13
GT16
GT19
GT21
GT36
GT43
GT17
GT32
GT25
KM37
ZE05
ZG05L2
HM-H20
ZE64W
R207L
FX26
DF40
DF40GL
FH28K
FH52K
FH65
FH40
FH63S
FH67

■ Housing for F Connector (1 Coaxial)

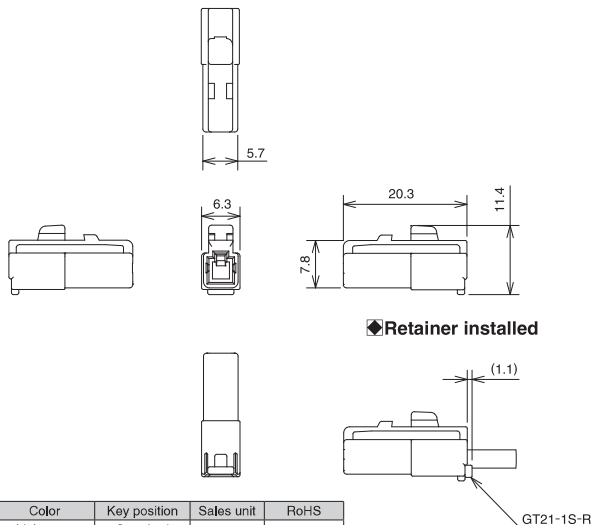



Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21-1S-HU	771-0005-9	PBT	Light gray	Standard	1	○
GT21-1S-HU(A)	771-0031-9		Brown	(A)		
GT21-1S-HU(B)	771-0032-1		Green	(B)		
GT21-1S-HU(C)	771-0033-4		Blue	(C)		

*Applicable terminal : Coaxial terminal for GT21 Series F connector

*Use together with retainer (GT21-1S-R) sold separately.

■ Housing for F Connector (1 Coaxial)


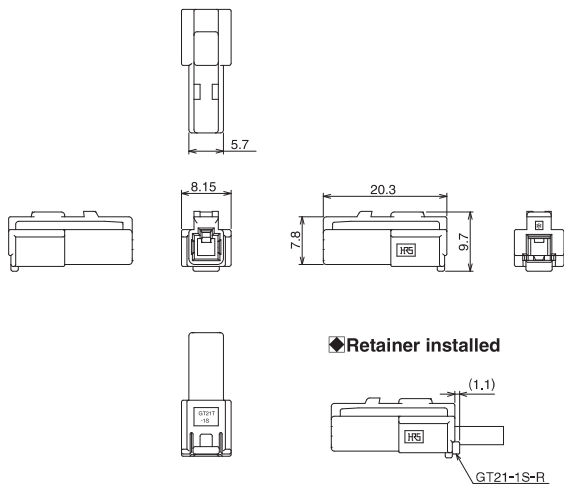



Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21T-1S-HU	771-0018-0	PBT	Light gray	1	○

*Applicable terminal : Coaxial terminal for GT21 Series F connector


*Use together with retainer (GT21-1S-R) sold separately.

■ Retainer for F Connector (1 Coaxial)

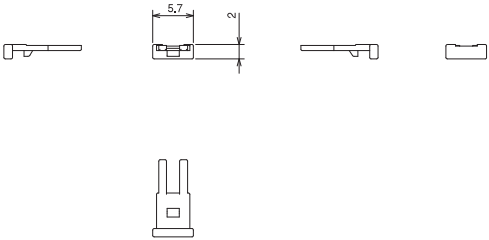


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-1S-R	771-0006-1	PBT	Dark gray	1	○

■ Housing for M Connector (1 Pole Coaxial, Bracket N type)

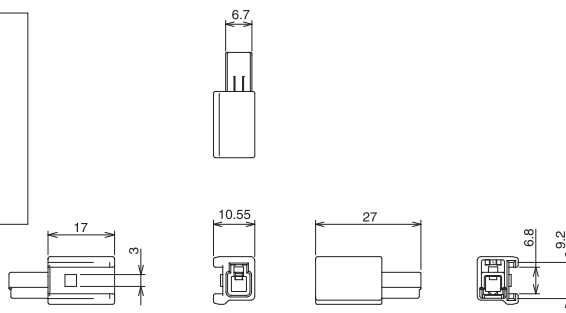

◆ Mated connector


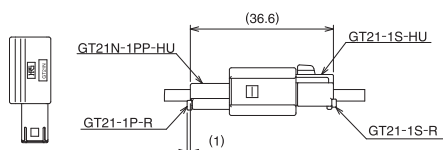


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21N-1PP-HU	771-0015-2	PBT	Light gray	1	○

*Applicable terminal : Coaxial terminal for GT21 Series M connector



*Use together with retainer (GT21-1P-R) sold separately.

■ Retainer for M Connector (1 Coaxial)

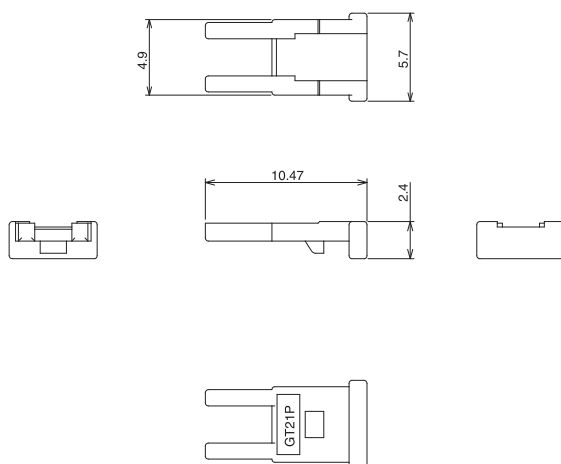



Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-1P-R	771-0016-5	PBT	Dark gray	1	○


■ Board Connector (1 Coaxial, DIP type)



◆ Mated connector




◆ Recommended Board Dimensions





Part No.	HRS No.	Material / Finish or color	Sales unit	RoHS
GT21-1P-DS	771-0007-4	Housing : PPS/ Light gray Center terminal : Copper alloy /Tin plating Outer terminal : Copper alloy /Tin plating Metal reinforcement : Copper alloy /Tin plating	1	○


■ Board Connector (1 Coaxial, SMT type)



◆ Mated connector




◆ Recommended Board Dimensions



Part No.	HRS No.	Material / Finish or color	Sales unit	RoHS
GT21T-1P-H(55)	771-0014-0 55	Housing : PA/ Light gray Center terminal : Copper alloy /Tin plating Outer terminal : Copper alloy /Tin plating Metal reinforcement : Copper alloy /Tin plating	400 pcs/reel	○

■Housing for F Connector (2 Coaxial + 1 Power)

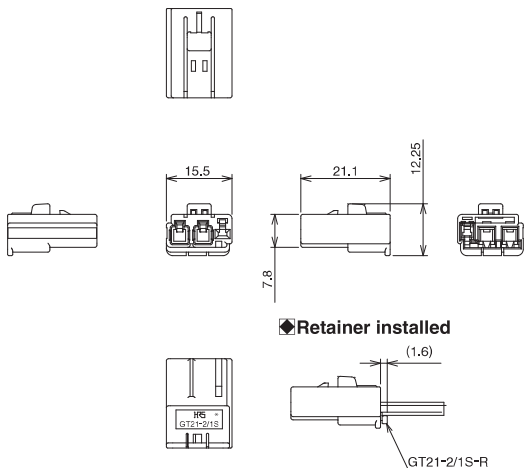


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-2/1S-HU	771-0058-5	PBT	Dark gray	1	○

*Applicable terminal : Coaxial terminal for GT21 Series F connector

Power terminal for GT21 Series F connector


*Use together with retainer (GT21-2/1S-R) sold separately.

■Retainer for F Connector (2 Coaxial + 1 Power)

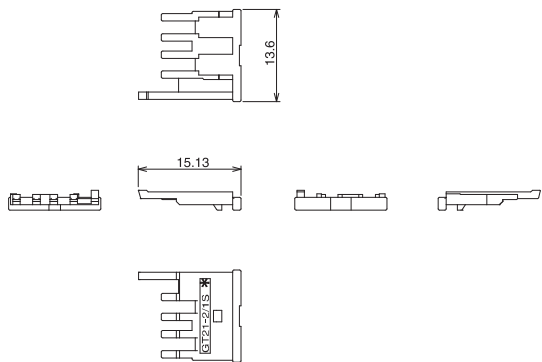

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-2/1S-R	771-0059-8	PBT	Dark gray	1	○

■Housing for M Connector (2 Coaxial + 1 Power, Bracket N type)

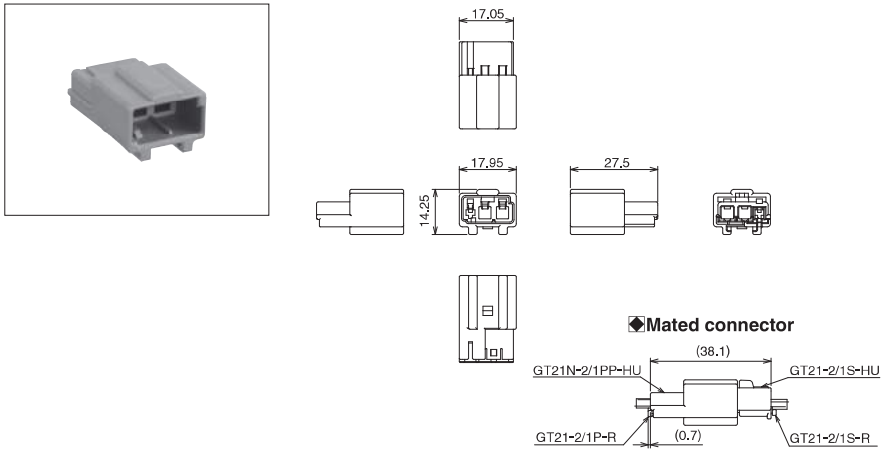


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21N-2/1PP-HU	771-0060-7	PBT	Light gray	1	○

*Applicable terminal : Coaxial terminal for GT21 Series M connector

Power terminal for GT21 Series M connector

*Use together with retainer (GT21-2/1P-R) sold separately.

■Retainer for M Connector (2 Coaxial + 1 Power)



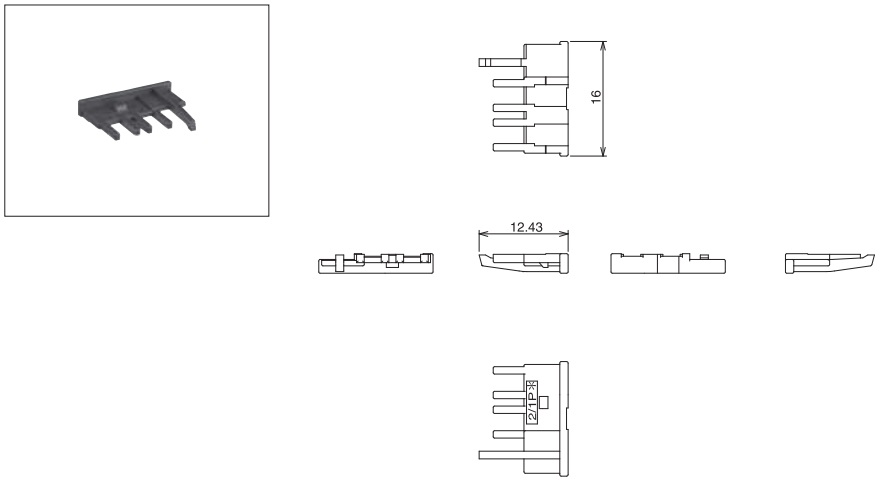


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-2/1P-R	771-0061-0	PBT	Dark gray	1	○

GT21A Series

Both OD ϕ 3.1 & 5.2mm coax cable applicable ver.

■Housing for F Connector (2 Coaxial)




Signal No.	Max cable diameter
1	ϕ 5.2
2	ϕ 3.1

Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21A-2S-HU	771-0044-0	PBT	Light gray	Standard	1	○
GT21A-2S-HU(A)	771-0048-1		Brown	(A)		
GT21A-2S-HU(B)	771-0068-9		Green	(B)		


*Applicable terminal : Coaxial terminal for GT21 Series F connector

*Use together with retainer (GT21A-2S-R) sold separately.

◆Retainer installed




■Retainer for M Connector (2 Coaxial)

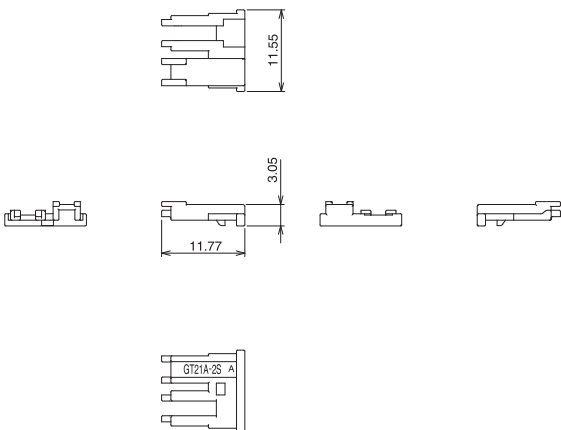

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21A-2S-R	771-0046-6	PBT	Dark gray	1	○

Housing for M Connector (2 Coaxial, Bracket N type)

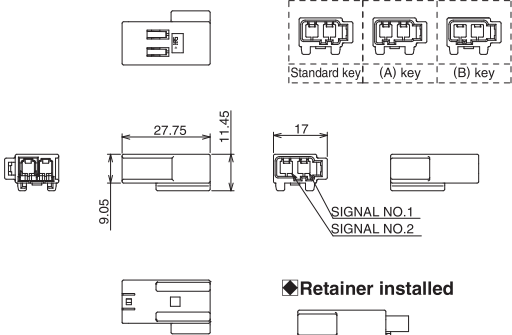


Signal No.	Max cable diameter
1	φ5.2
2	φ3.1

Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21AN-2PP-HU	771-0045-3	PBT	Light gray	Standard	1	○
GT21AN-2PP-HU(A)	771-0049-4		Brown	(A)		
GT21AN-2PP-HU(B)	771-0069-1		Green	(B)		


*Applicable terminal : Coaxial terminal for GT21 Series M connector
*Use together with retainer (GT21A-2P-R) sold separately.

Retainer for M Connector (2 Coaxial)

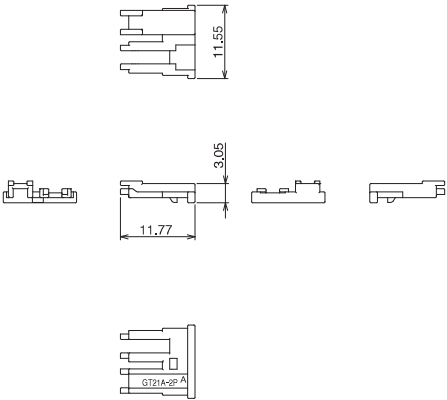

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21A-2P-R	771-0047-9	PBT	Dark gray	1	○

■Housing for F Connector (3 Coaxial)

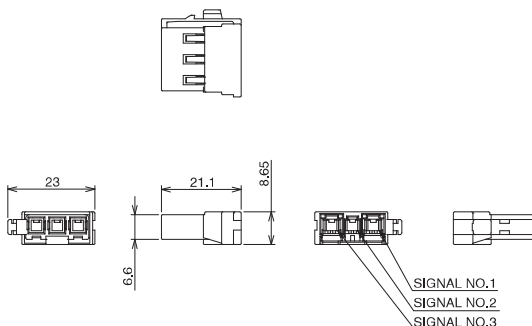


Signal No.	Max cable diameter
1	φ5.2
2	φ3.1
3	φ5.2

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21A-3S-HU	771-0036-2	PBT	Light gray	1	○


*Applicable terminal : Coaxial terminal for GT21 Series F connector

*Use together with retainer (GT21A-3P/S-R) sold separately.

◆Retainer installed



■Housing for M Connector (3 Coaxial, Bracket N type)

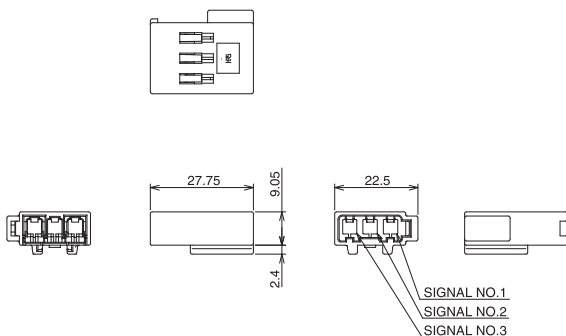


Signal No.	Max cable diameter
1	φ5.2
2	φ3.1
3	φ5.2

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21AN-3PP-HU	771-0037-5	PBT	Light gray	1	○




*Applicable terminal : Coaxial terminal for GT21 Series M connector

*Use together with retainer (GT21A-3P/S-R) sold separately.


◆Mated connector

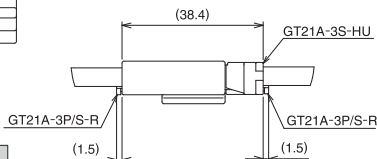

Common Retainer for F and M Connectors (3 Coaxial)




Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21A-3P/S-R	771-0038-8	PBT	Dark gray	1	○

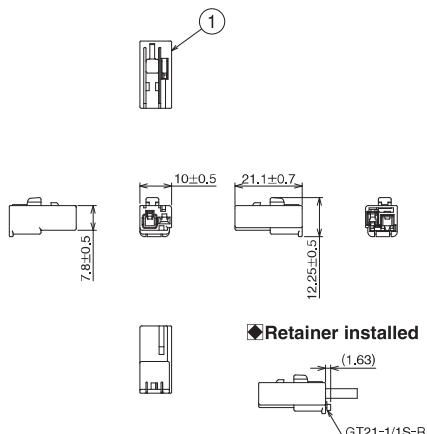GT21C SeriesThick power cable ($\phi 2.6 \sim 3.1$ mm) applicable ver.**■Housing for F Connector (1 Coaxial + 1 Power)**

Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21C-1/1S-HU	771-0106-0	PBT	Black	Standard	1	○
GT21C-1/1S-HU(A)	771-0107-0		Brown	(A)		


*Applicable terminal : Coaxial terminal for GT21 Series F connector and Power terminal (GT7 or GT7A)

*Use together with retainer (GT21-1/1S-R) sold separately.

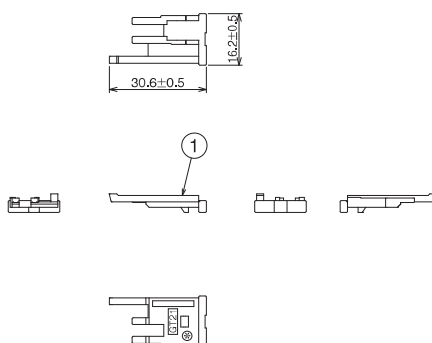■Retainer for F Connector (1 Coaxial + 1 Power)

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-1/1S-R	771-0009-0	PBT	Dark gray	1	○

■Housing for M Connector (1 Coaxial + 1 Power)

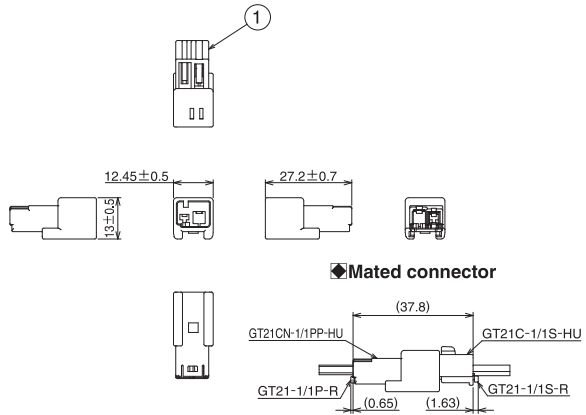


Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21CN-1/1PP-HU	771-0108-0	PBT	Black	Standard	1	○
GT21CN-1/1PP-HU(A)	771-0109-0		Brown	(A)		

*Applicable terminal : Coaxial terminal for GT21 Series F connector and Power terminal (GT7 or GT7A)


*Use together with retainer (GT21-1/1P-R) sold separately.

■Retainer for M Connector (1 Coaxial + 1 Power)

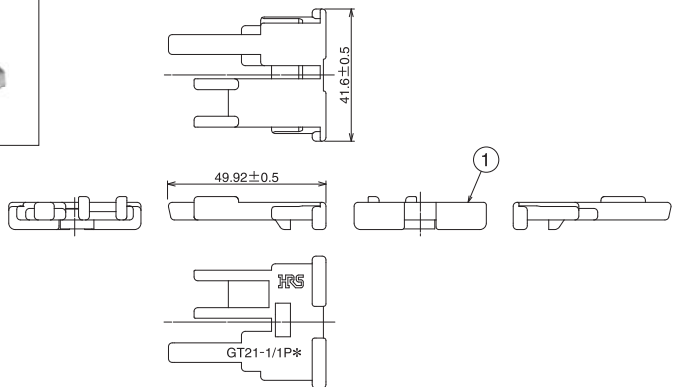


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21-1/1P-R	771-0076-0	PBT	Dark gray	1	○

GT5	GT13	GT16	GT19	GT21	GT36	GT43	GT17	GT32	GT25	KM32	ZE05	ZG05J2	HVH-280	ZE064W	FX32KX3	FX20	DF40	DF40GL	FH28K	FH52K	FH65	FH40	FH63S	FH67
-----	------	------	------	-------------	------	------	------	------	------	------	------	--------	---------	--------	---------	------	------	--------	-------	-------	------	------	-------	------

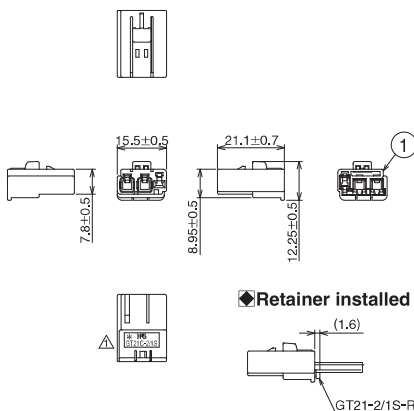


*Use together with retainer (GT21-2/1S-R) sold separately.

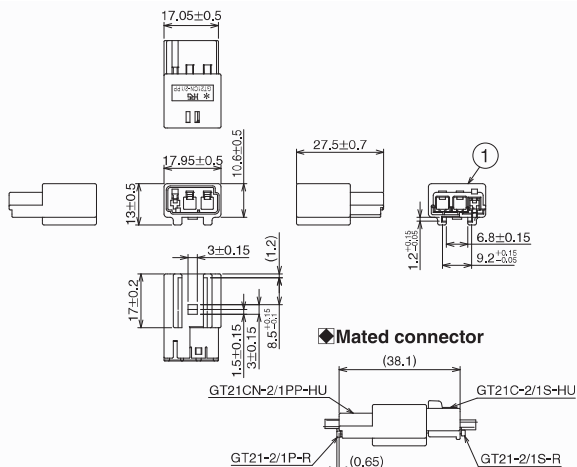


*Use together with retainer (GT21-2/1P-R) sold separately.

■Retainer for M Connector (2 Coaxial + 1 Power)

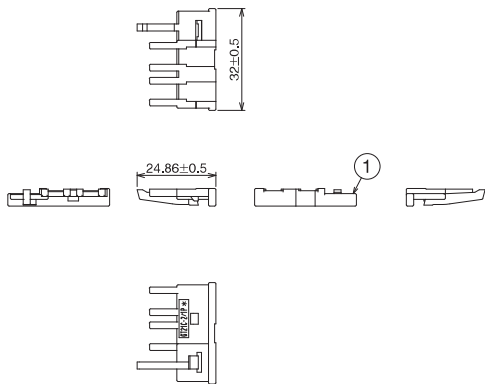


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21C-2/1P-R	771-0110-0	PBT	Dark gray	1	○

■Housing for F Connector (4 Coaxial + 1 Power)

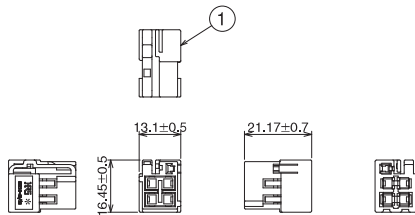

◆Retainer installed




△ Note 1 : When assembling, be sure to refer to the following instruction manuals.
ATAD-T0472, ATAD-T0685, ATAD-T0735

Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21C-4D/1S-HU	771-0094-0	PBT	Black	Standard	1	○
GT21C-4D/1S-HU(A)	771-0095-0		Brown	(A)		
GT21C-4D/1S-HU(B)	771-0096-0		Green	(B)		


*Applicable terminal : Coaxial terminal for GT21 Series F connector and Power terminal (GT7 or GT7A)
*Use together with retainer (GT21C-4D/1S-R) sold separately.

■Retainer for F Connector (4 Coaxial + 1 Power)

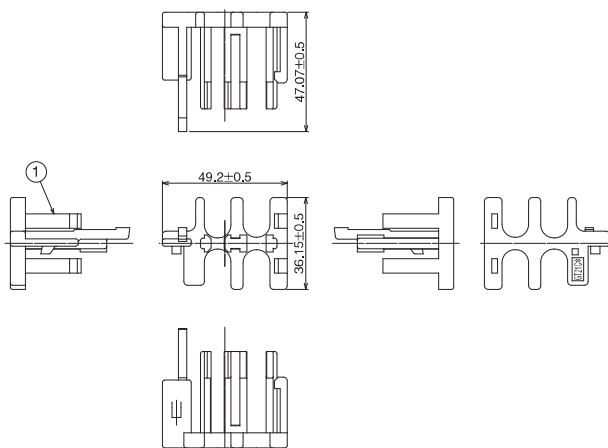

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21C-4D/1S-R	771-0099-0	PBT	Black	1	○

■Housing for M Connector (4 Coaxial + 1 Power)

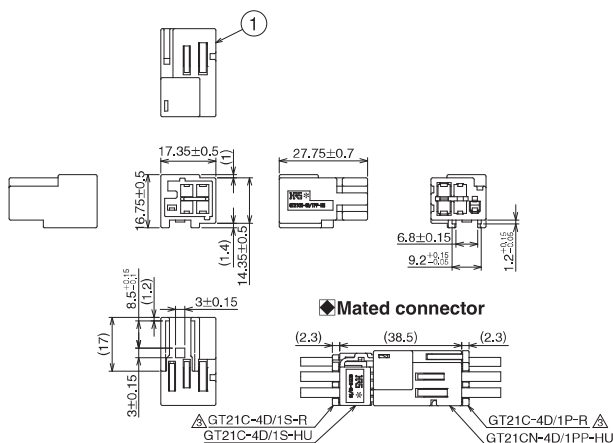


△ Note 1 : When assembling, be sure to refer to the following instruction manuals.
ATAD-T0472, ATAD-T0685, ATAD-T0735

Part No.	HRS No.	Material	Color	Key position	Sales unit	RoHS
GT21CN-4D/1PP-HU	771-0090-0	PBT	Black	Standard	1	○
GT21CN-4D/1PP-HU(A)	771-0091-0		Brown	(A)		
GT21CN-4D/1PP-HU(B)	771-0092-0		Green	(B)		

*Applicable terminal : Coaxial terminal for GT21 Series M connector and Power terminal (GT7 or GT7A)


*Use together with retainer (GT21C-4D/1P-R) sold separately.

■Retainer for M Connector (4 Coaxial + 1 Power)

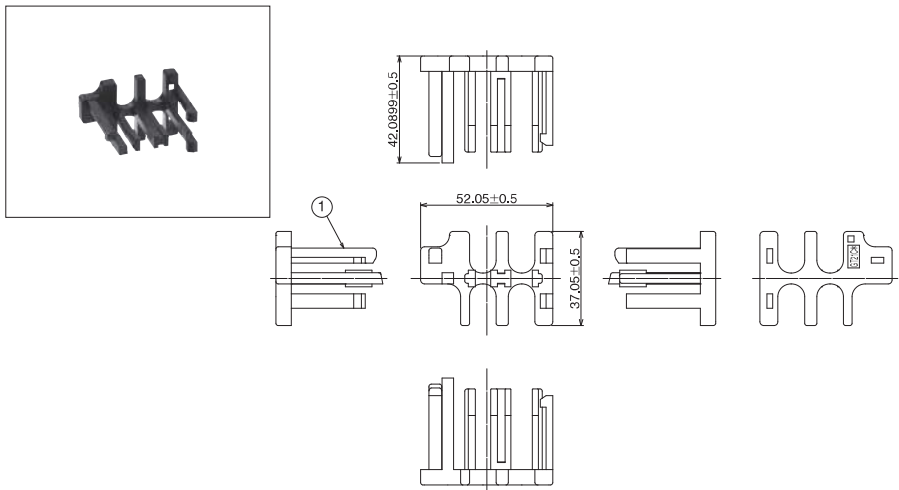

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21C-4D/1P-R	771-0098-0	PBT	Black	1	○

■Housing for F Connector (4 Coaxial)

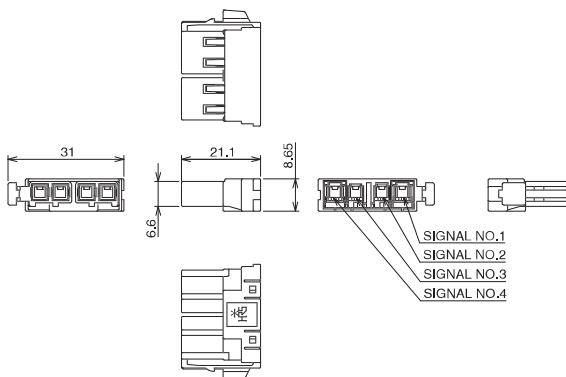


Signal No.	Max cable diameter
1	φ5.2
2	φ3.1
3	φ3.1
4	φ5.2

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21A-4S-HU	771-0063-5	PBT	Light gray	1	○



*Applicable terminal : Coaxial terminal for GT21 Series F connector

*Use together with retainer (GT21A-4P/S-R) sold separately.

◆Retainer installed



■Housing for M Connector (4 Coaxial, Bracket N type)

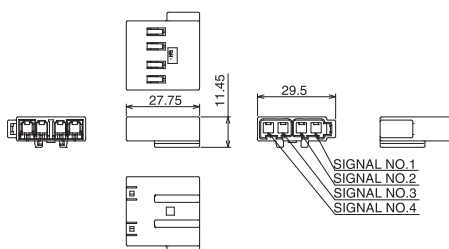


Signal No.	Max cable diameter
1	φ5.2
2	φ3.1
3	φ3.1
4	φ5.2


Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT21AN-4PP-HU	771-0064-8	PBT	Light gray	1	○

*Applicable terminal : Coaxial terminal for GT21 Series M connector

*Use together with retainer (GT21A-4P/S-R) sold separately.

◆Retainer installed



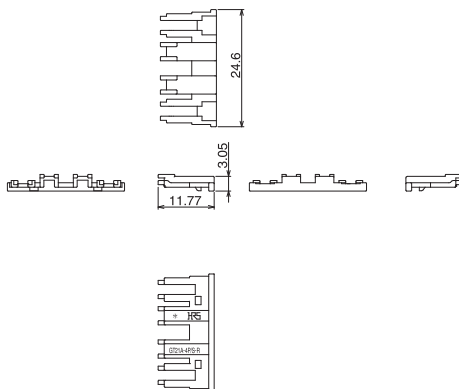

Crimping Tools

Automatic Crimping Machine



Specifications

Part No. CM-105C

*Special reel stand (CM105/RS-ED) and applicator are required for each cable.

Applicator (for Mounting to Automatic Crimping Machines)

Please refer to our cable termination procedure manual for performing terminations.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

[GT21B-2426/1.6-2.9SCF](#) [GT21C-2/1S-HU](#) [GT21C-2/1S-HU\(B\)](#) [GT21C-4D/1S-HU\(A\)](#) [GT21C-4D/1S-HU\(B\)](#) [GT21C-2/1S-HU\(A\)](#) [GT21CN-2/1PP-HU](#) [GT21CN-2/1PP-HU\(A\)](#) [GT21CN-2/1PP-HU\(B\)](#) [GT21CN-4D/1PP-HU\(A\)](#) [GT21CN-4D/1PP-HU\(B\)](#) [GT21C-2/1P-R](#)