


# 1mm Contact Pitch, Board-to-Cable, Board-to-FPC, Board-to-Micro-coaxial Cable Connectors

## DF19 Series

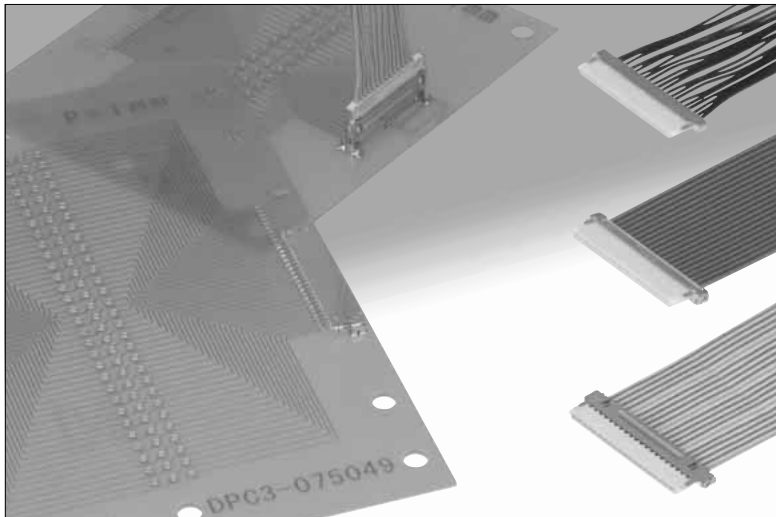

### Overview

Industry and market accepted as “De facto” standard for LCD panel connections (panels under 12 inches). High-performance connectors for LVDS high-speed differential signals.

### Features

#### 1. Small configuration and board space

Thin design accepts discrete wire, thin micro-coaxial cable ( $\phi 1.5\text{mm}$ ,  $\phi 1.6\text{mm}$  max.) and FPC 1.7mm maximum thick.

#### 2. Common use of receptacle

The same receptacle will accept plugs terminated with discrete wire, FPC or micro-coaxial cable.

#### 3. Uniform external dimensions

The plug assembly external dimensions remain the same when is terminated with discrete wire, FPC or micro-coaxial cable.

#### 4. Variety of mounting styles

Device design engineers have a choice of mounting styles : top-board, offset, reverse mount offset and vertical.


#### 5. Ground connection

Metal grounding plates connect with the common ground line.


#### 6. Glow wire compliance (Compliant with IEC60695-2-11)

### Applications


LCD connections in small consumer devices : digital cameras, notebook computers, PDA's. Any device requiring high-density interconnection for consistent high speed transmission data rates.

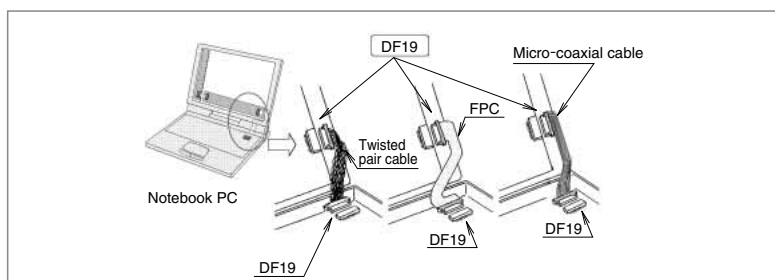

#### Small configuration and board space

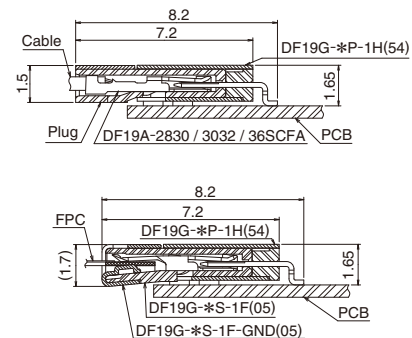

#### Horizontal mounting

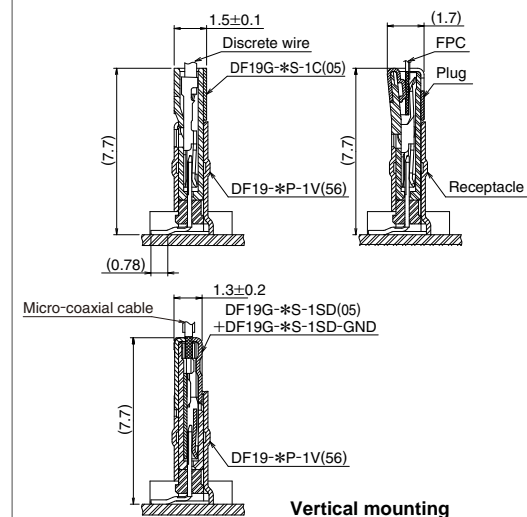

#### Vertical mounting


#### Top-board mounting




#### Discrete wire



#### Offset mounting




#### FPC



#### Reverse, offset mounting



#### Micro-coaxial cable



#### Vertical mounting



## ■Product Specifications

Rating	Current rating	28 AWG : 1A 30 AWG : 0.9A 32 AWG : 0.8A 36 AWG : 0.5A FPC : 0.5A Micro-coaxial cable 40 AWG : 0.3A	Operating temperature range	-35℃ to 85℃ Note 1 Note 2	Storage temperature range	-10℃ to 60℃ Note 2
	Voltage rating	100V AC	Operating humidity range	20% to 80%	Storage humidity range	40% to 70%

Item	Specification	Conditions
1.Insulation resistance	500MΩ min.	100 V DC
2.Withstanding voltage	No flashover or insulation breakdown.	300 V AC / one minute
3.Contact resistance	30mΩ max. (50mΩ max. for FPC)	100 mA
4.Insertion-Extraction force (per contact)	Min. 0.2N, Max. 3N	Measured with a steel pin $\phi 0.2 \pm 0.005$
5.Vibration	No electrical discontinuity of 1μs or more.	Frequency : 10 to 55 Hz, single amplitude of 0.75mm, 2 hours in each of the 3 directions.
6.Humidity (Steady state)	Contact resistance : 30mΩ max. (50mΩ max. for FPC) Insulation resistance : 500MΩ min.	96 hours at temperature of 40±2℃ and humidity of 90% to 95%
7.Temperature cycle	Contact resistance : 30mΩ max. (50mΩ max. for FPC) Insulation resistance : 500MΩ min.	Temperature : -55℃ → +5℃ to +35℃ → +85℃ → +5℃ to +35℃ Time (Minutes) : 30 → 10 → 30 → 10 5 cycles
8.Durability (insertion/ withdrawal)	Contact resistance : 30mΩ max. (50mΩ max. for FPC)	30 cycles
9.Resistance to soldering heat	No deformation of the insulator parts affecting performance.	Re-flow soldering : At the recommended temperature profile Manual soldering : Soldering iron temperature 300℃, 3 seconds

Note1 : Includes temperature rise caused by current flow.

Note2 : The term “storage” refers to connectors stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non-conducting condition of installed connectors in storage, shipment or during transportation.

## ■Materials / Finish

Product	Component	Material	Finish/Color	Remarks
Receptacle	Insulator	Polyamide	Black or Beige	UL94V-0
	Contacts	Phosphor bronze	Gold plated	———
	Grounding plate	Phosphor bronze	Tin plated or Tin-copper plated	———
Plug	Insulator	Polyamide	Beige	———
	Tin-lead plated	Stainless steel	Tin-copper plated	———
Crimp contact	Contact	Phosphor bronze	Gold Plated	———
Plug for PPC	Insulator	Polyamide	Beige	UL94V-0
	Contact	Phosphor bronze	Gold plated	———
Grounding plate for PPC	Grounding plate	Stainless steel	Tin-copper plated	———
Plug for micro-coaxial cable	Insulator	LCP	Beige	UL94V-0
	Contact	Phosphor bronze	Gold plated	———
	Grounding plate	Phosphor bronze	Tin plated	———
Grounding plate for micro-coaxial cable	Grounding plate	Phosphor bronze	Tin plated	———

## Product Number Structure

Refer to the chart below when determining the product specifications from the product number.  
Please select from the product numbers listed in this catalog when placing orders.

### Connector

**DF19 # - \* P - 1 H**  
①      ②      ③      ④      ⑤      ⑥

**DF19 # - \* S - 1 F - GND**  
①      ②      ③      ④      ⑤      ⑥      ⑦

① Series Name : DF19	③ Number of contacts : 8,14,20,30 (Note 1)
② Configuration	④ Connector type
<div>■ Receptacle</div> <div>G : Top-board mounting (1.65mm high)</div> <div>K : Offset mounting (1.0mm high)</div> <div>L : Offset mounting (1.1mm high)</div> <div>KR : Reverse offset mounting version of DF19K (1.0mm high)</div> <div>■ Plug for discrete wire</div> <div>Blank : No grounding plate</div> <div>G : With grounding plate</div> <div>■ Plug for FPC</div> <div>G : With grounding plate</div> <div>■ Grounding plate for FPC</div> <div>G : With grounding plate</div> <div>■ Plug for micro-coaxial cable</div> <div>G : With grounding plate</div> <div>■ Grounding plate for micro-coaxial cable</div> <div>G : With grounding plate</div>	<div>S : Plug</div> <div>P : Receptacle</div>
	⑤ Contact pitch : 1mm
	⑥ Mounting type/Termination type
	<div>H : Horizontal SMT</div> <div>V : Vertical SMT</div> <div>C : Plug – discrete wire (crimp contact)</div> <div>F : Plug – FPC</div> <div>SD : Plug – micro-coaxial cable</div>
	⑦ Additional separate component
	GND : Ground plate (Note 2)

Note 1 : Number of contacts will differ depending on the connector style.



Note 2 : Grounding plates are required when terminating with the FPC and micro-coaxial cable.

### Contact


**DF19A - 2830 SCF A (\*\*)**  
①      ②      ③      ④

① Conductor size	③ Plating
2830 : 28 to 30 AWG	A : Gold
3032 : 30 to 32 AWG	
36 : 36 AWG	
② Contact type	④ Packaging
SCF : Plug contact, tape and reel packaging	Blank : 10,000 pcs/reel
	(41) : 20,000 pcs/reel

## ■Right angle receptacle, top-board mounting

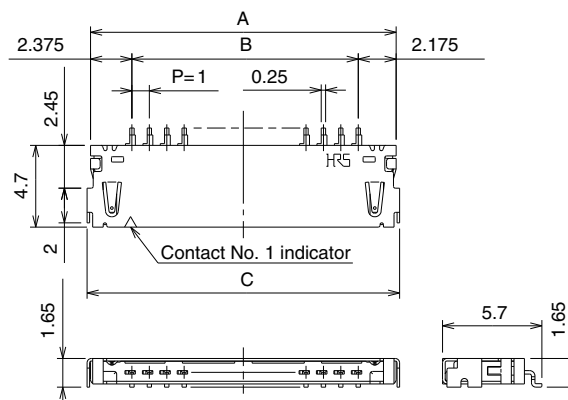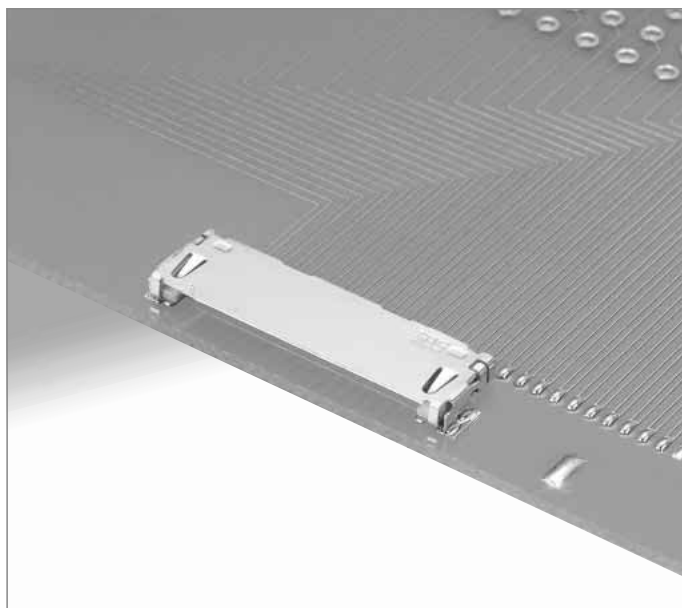

## ◆PCB mounting pattern

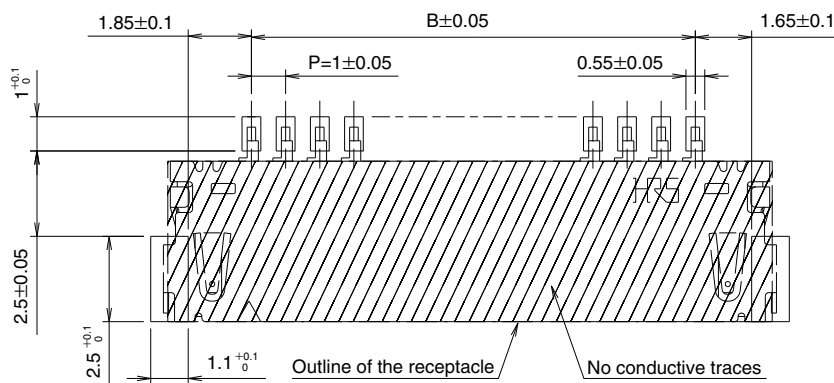



Specification  
(54) : Tape & reel packaging  
(1,000 pcs/reel)

Unit : mm


Part No.	HRS No.	No. of contacts	A	B	C	Remarks	RoHS
DF19G- 8P-1H (54)	685-0021-0 54	8	11.55	7	11.95	1.65mm high	YES
DF19G-14P-1H (54)	685-0004-0 54	14	17.55	13	17.95		
DF19G-20P-1H (54)	685-0006-6 54	20	23.55	19	23.95		
DF19G-30P-1H (54)	685-0015-7 54	30	33.55	29	33.95		

Note : Order by number of reels.

## ■Right angle receptacle, offset mounting

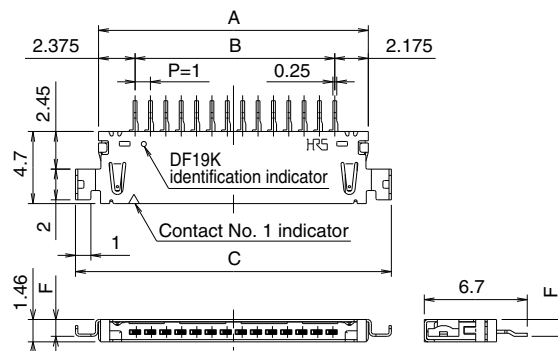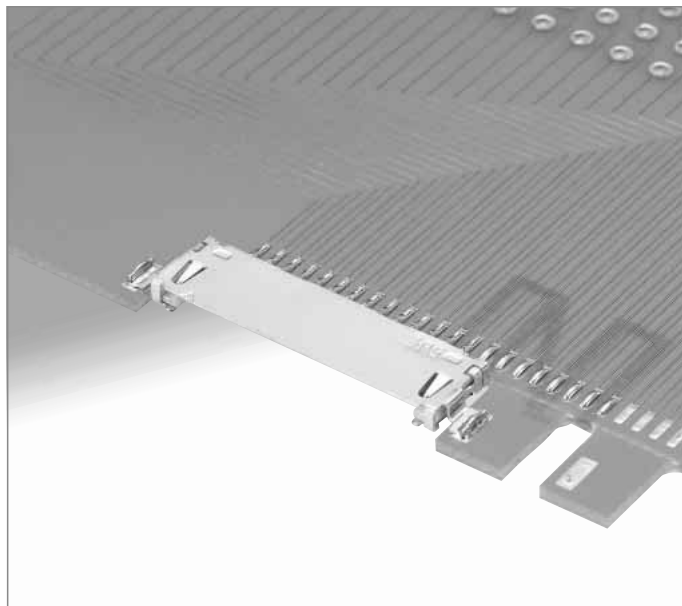

## ◆PCB mounting pattern

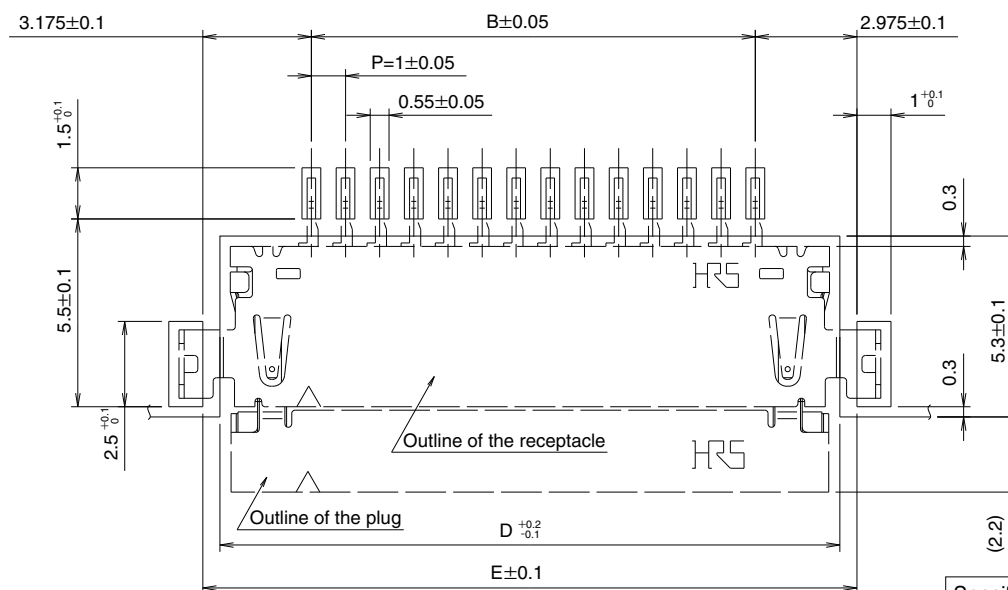

Specification  
(54) : Tape & reel packaging  
(1,000 pcs/reel)



Unit : mm

Part No.	HRS No.	No. of contacts	A	B	C	D	E	F	Remarks	RoHS
DF19K-20P-1H (54)	685-0008-1 54	20	23.55	19	26.55	24.15	25.15	0.1	1.0mm high	YES
DF19K-30P-1H (54)	685-0032-6 54	30	33.55	29	36.55	34.15	35.15	0.1		


Part No.	HRS No.	No. of contacts	A	B	C	D	E	F	Remarks	RoHS
DF19L-14P-1H (54)	685-0003-8 54	14	17.55	13	20.55	18.15	19.15	1.1	1.1mm high	YES
DF19L-20P-1H (54)	685-0019-8 54	20	23.55	19	26.55	24.15	25.15	1.1		
DF19L-30P-1H (54)	685-0016-0 54	30	33.55	29	36.55	34.15	35.15	1.1		

Note : Order by number of reels.

## Right angle receptacle, reverse offset mounting

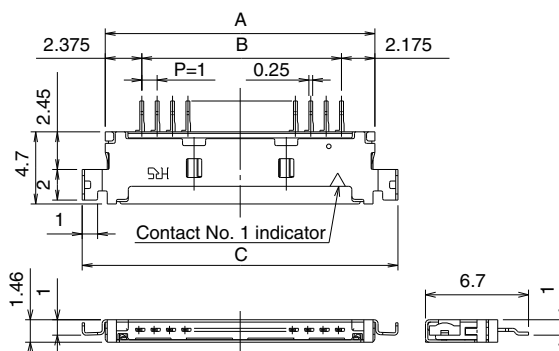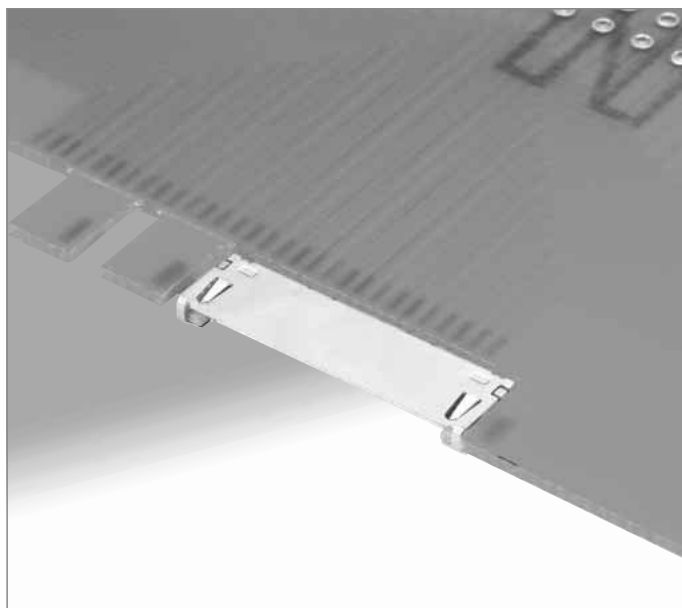

## PCB mounting pattern

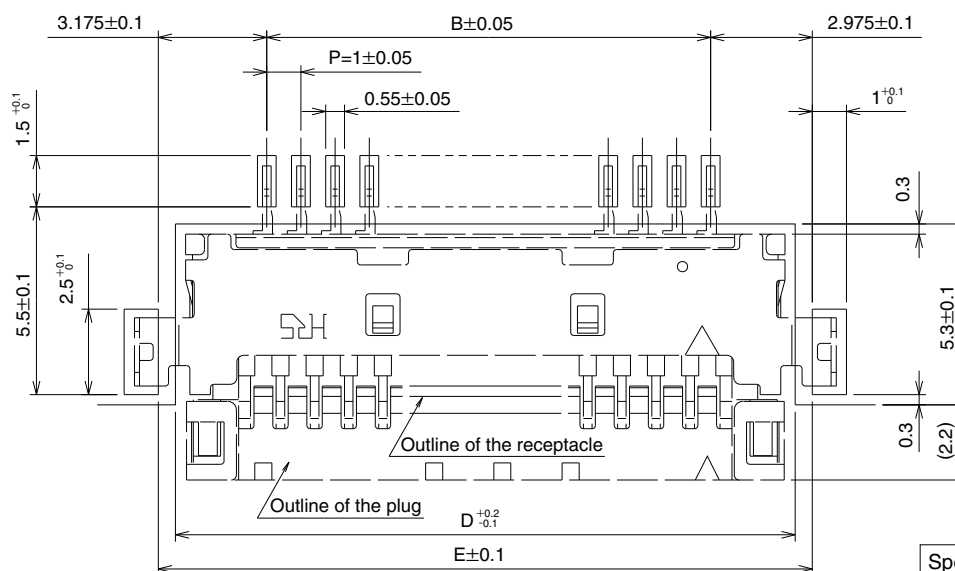



Specification  
(54) : Tape & reel packaging  
(1,000 pcs/reel)

Unit : mm


Part No.	HRS No.	No. of contacts	A	B	C	D	E	Remarks	RoHS
DF19KR-14P-1H (54)	685-0024-8 54	14	17.55	13	20.55	18.15	19.15	1.0mm high	YES
DF19KR-20P-1H (54)	685-0023-5 54	20	23.55	19	26.55	24.15	25.15		

Note : Order by number of reels.

## Vertical receptacle

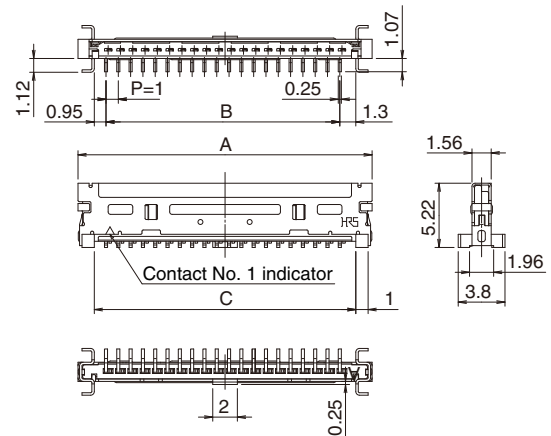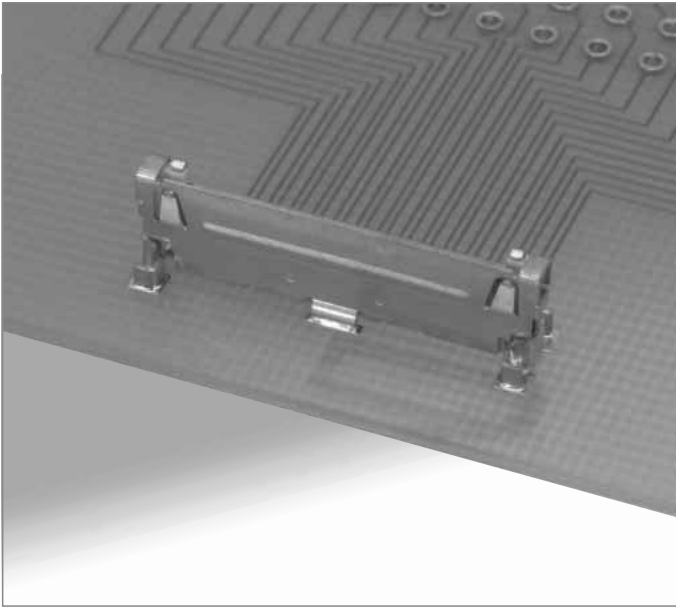

## PCB mounting pattern

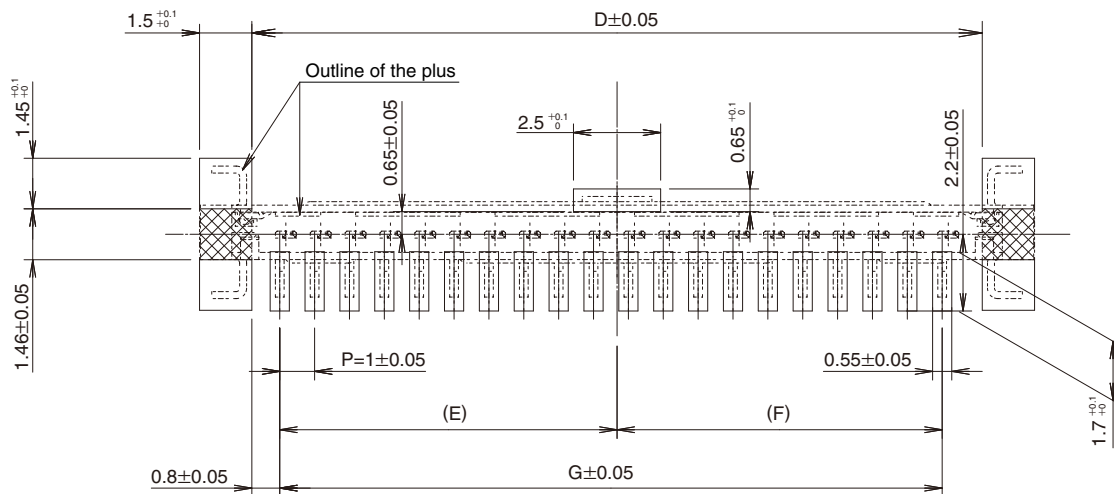

Conductive traces in this area must be covered by dielectric compound.


Specification  
(56) : Tape & reel packaging  
(1,000 pcs/reel)

Unit : mm

Part No.	HRS No.	No. of contacts	A	B	C	D	E	F	G	RoHS
DF19-14P-1V (56)	685-0036-7 56	14	17.9	13	15.25	14.95	6.675	6.325	13	YES
DF19-20P-1V (56)	685-0037-0 56	20	23.9	19	21.25	20.95	9.675	9.325	19	

Note : Order by number of reels.

## ■Plug (Discrete wire)

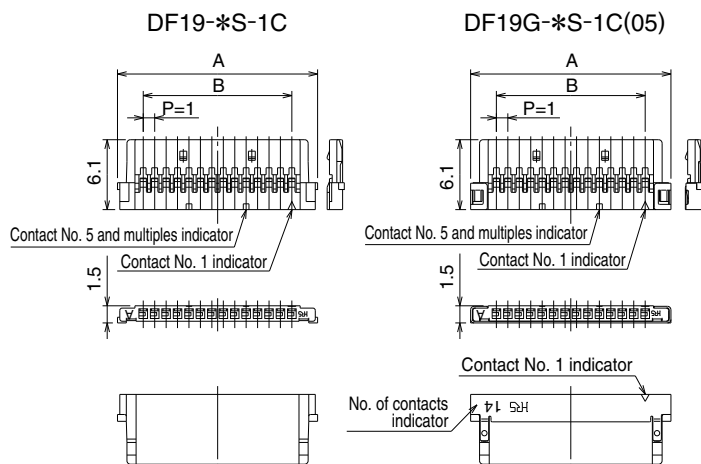

Specification  
Blank,(05) : Bag packaging  
(100 pcs/pack)

Part No.	HRS No.	No. of contacts	A	B	RoHS
DF19 - 8S-1C	685-0029-1	8	11.5	7	YES
DF19 -14S-1C	685-0012-9	14	17.5	13	
DF19 -20S-1C	685-0011-6	20	23.5	19	
DF19 -30S-1C	685-0013-1	30	33.5	29	

Note: Order by number of bags.

Part No.	HRS No.	No. of contacts	A	B	RoHS
DF19G - 8S-1C(05)	685-0022-2 05	8	11.5	7	YES
DF19G -14S-1C(05)	685-0005-3 05	14	17.5	13	
DF19G -20S-1C(05)	685-0007-9 05	20	23.5	19	
DF19G -30S-1C(05)	685-0014-4 05	30	33.5	29	

## ■Crimp contacts

Part No.	HRS No.	Packaging	Quantity	Finish	RoHS
DF19A-2830SCFA (* *)	685-0048-6 **	Tape & reel	See Specifications number below	Gold plated	YES
DF19A-3032SCFA (* *)	685-0046-0 **				
DF19A- 36SCFA (* *)	685-0047-3 **				

Specification number \* \* ( \* )

Blank : Tape & reel packaging (10,000 pcs/reel)

(41) : Tape & reel packaging (20,000 pcs/reel)

### ●Applicable cable (Tin plated annealed conductor)

Wire size (stranded wire conductor)	Jacket diameter
28 AWG (7/ 0.127mm)	0.5mm to 0.6mm
30 AWG (7/ 0.1mm)	
32 AWG (7/ 0.08mm)	
36 AWG (7/ 0.05mm)	0.27mm

### ●Applicable UL style UL1571(thin type) (Note2)

### ●Strip length 1.2mm to 1.9mm

Note 1 : When using other than the recommended wire, contact your Hirose sales representative.

Note 2 : Contact your Hirose sales representative when using 36 AWG.


### ●Tools

Part	Part No.	HRS No.
Applicator	AP105-DF19S	901-4571-3
Press unit	CM-105C	901-0001-0

Note 1 : Use of other than Hirose Electric approved tools will void the product warranties.



Note 2 : Contact Hirose for the wire stripping, contact crimp and contact insertion instructions.

Note 3 : Please do the crimping operations according to the "Crimping quality standard" and "Crimping condition table".

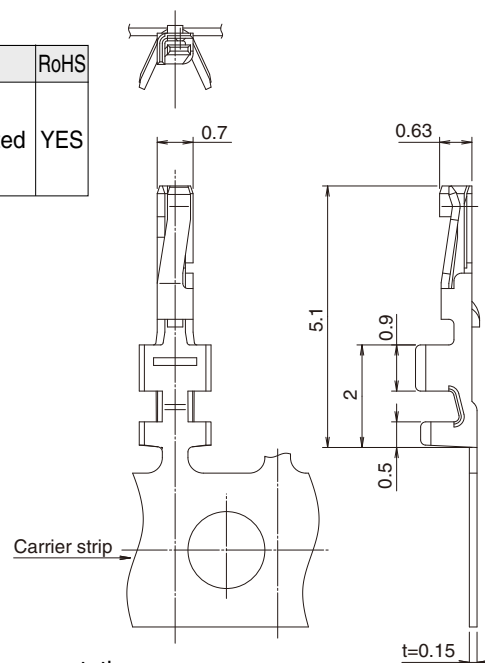





Note: Socket and grounding plate is required.

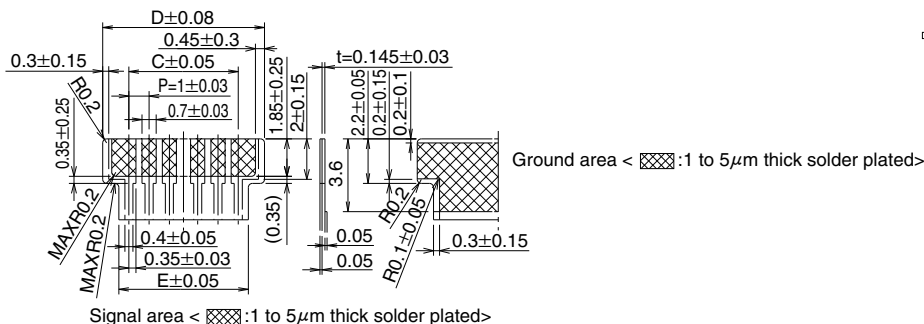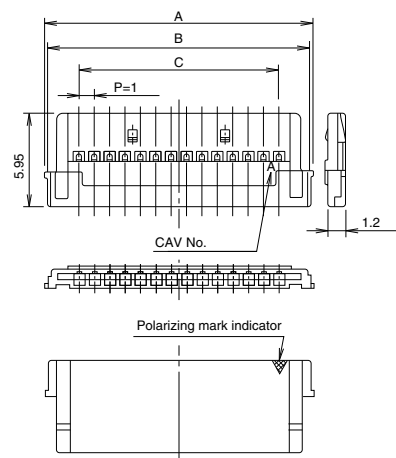

Part No.	HRS No.	No. of contacts	A	B	C	D	E	RoHS	Specification (05) : Bag packaging (100 pcs/package)
DF19G-14S-1F(05)	685-0017-2 05	14	17.5	17.1	13	15.6	14	YES	
DF19G-20S-1F(05)	685-0009-4 05	20	23.5	23.1	19	21.6	20		
DF19G-30S-1F(05)	685-0033-9 05	30	33.5	33.1	29	31.6	30		

## ■Ground plate for FPC

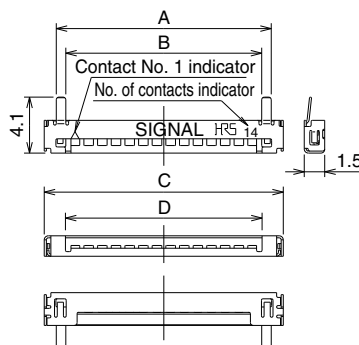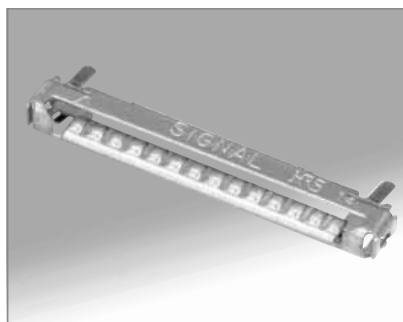

Part No.	HRS No.	No. of contacts	A	B	C	D	RoHS
DF19G-14S-1F-GND(05)	685-0018-5 05	14	15.75	14.35	17.5	14.4	YES
DF19G-20S-1F-GND(05)	685-0010-3 05	20	21.75	20.35	23.5	20.4	
DF19G-30S-1F-GND(05)	685-0034-1 05	30	31.75	30.35	33.5	30.4	



Specification  
 (05) : Bag packaging  
 (100 pcs/pack)

## ●Grounding plate installation tools

Type	Part No.	HRS No.
Desktop tool (for 14 pos.)	DF19G-14S/PR-MD2	902-4514-6
Desktop tool (for 20 pos.)	DF19G-20S/PR-MD2	902-4513-3
Desktop tool (for 30 pos.)	DF19G-30S/PR-MD2	902-4518-7

HRS B261

## ■Plug (Micro-coaxial cable)

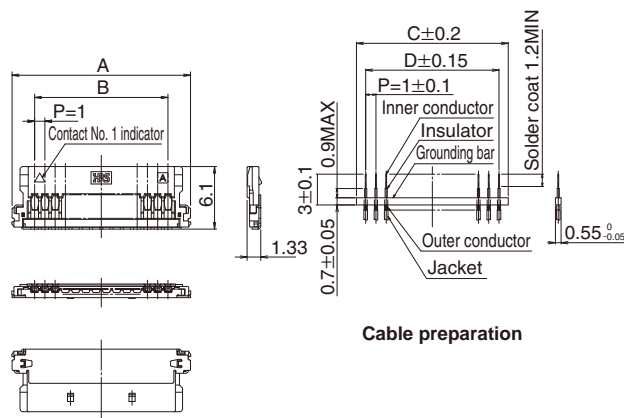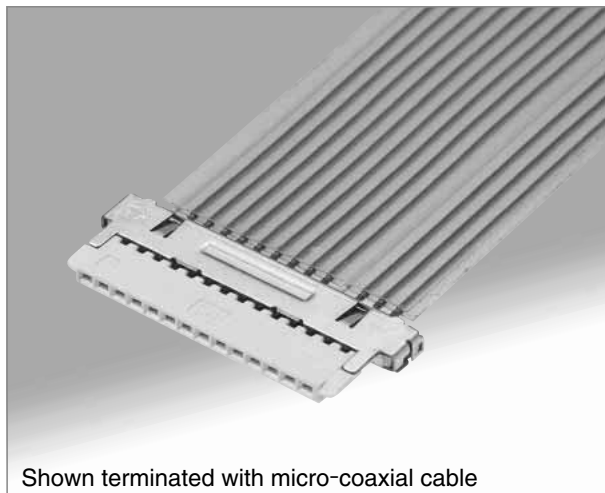

Note 1 : Connectors are designed to allow termination without cutting of the pitch loss prevention tape.

Note 2 : Required Solder coating for inner conductor.

Note 3 : When using 2-conductor micro-coaxial cable some contact positions will not be used.

Contact your Hirose sales representative.

Part No.	HRS No.	No. of contacts	A	B	C	D	RoHS
DF19G-14S-1SD(05)	685-0026-3 05	14	17.4	13	14.8	13	YES
DF19G-20S-1SD(05)	685-0025-0 05	20	23.4	19	20.8	19	


Specification  
(05) : Bag packaging  
(100 pcs/pack)

Note : Order by number of bags.


### ●Applicable cable (Micro-coaxial cable)

Wire size (stranded wire center conductor)	Jacket diameter
40 AWG (7/ 0.03mm)	0.3mm to 0.4mm

## ■Grounding plate for micro-coaxial cable

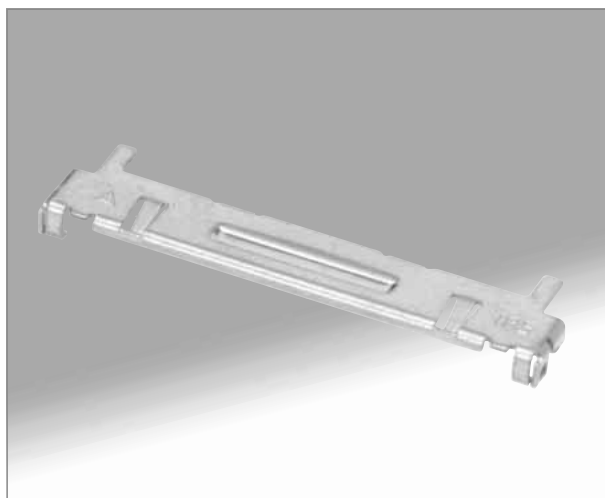

Specification  
Blank : Bag packaging  
(100 pcs/pack)

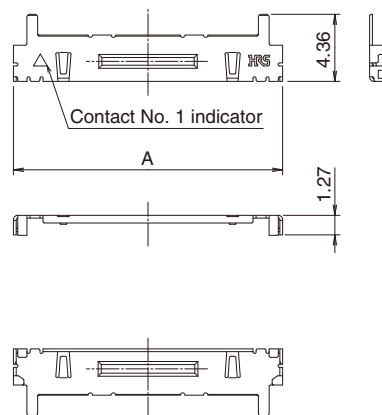


Unit : mm

Part No.	HRS No.	No. of contacts	A	RoHS
DF19G-14S-1SD-GND	685-0028-9	14	17.5	YES
DF19G-20S-1SD-GND	685-0027-6	20	23.5	

## ◆ Embossed Carrier Tape Dimensions Receptacles


- DF19G-**\*P-1H**(54)
- DF19K-**\*P-1H**(54)
- DF19L-**\*P-1H**(54)

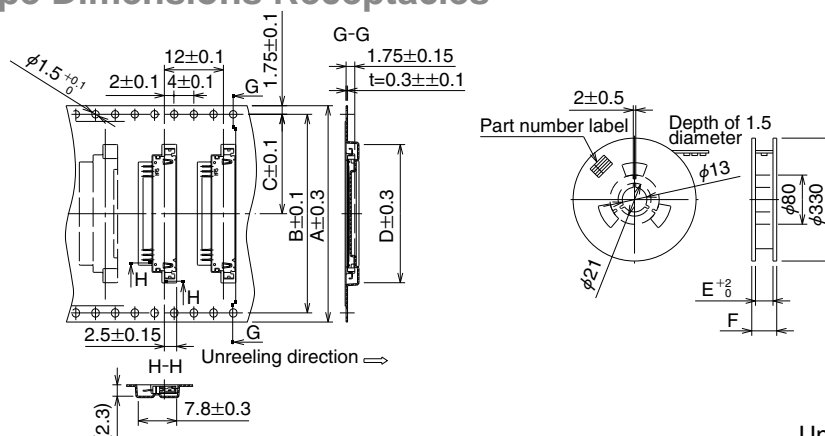

Unit : mm

Connector	No. of contacts	A	B	C	D	E	F	Remarks
DF19G- 8P-1H(54)	8	24	—	11.5	16.1	24.4	30.4	Top-board mounting (1.65mm high)
DF19G-14P-1H(54)	14	44	40.4	20.2	22.1	44.4	50.4	
DF19G-20P-1H(54)	20	44	40.4	20.2	28.1	44.4	50.4	
DF19G-30P-1H(54)	30	56	50.2	26.2	38.1	56.4	62.4	
DF19K-20P-1H(54)	20	44	40.4	20.2	28.1	44.4	50.4	Offset mounting (1.0mm high)
DF19K-30P-1H(54)	30	56	52.4	26.2	38.1	56.4	62.4	
DF19L-14P-1H(54)	14	44	40.4	20.2	22.1	44.4	50.4	Offset mounting (1.1mm high)
DF19L-20P-1H(54)	20	44	40.4	20.2	28.1	44.4	50.4	
DF19L-30P-1H(54)	30	56	52.4	26.2	38.1	56.4	62.4	


- DF19KR-**\*P-1H**(54)

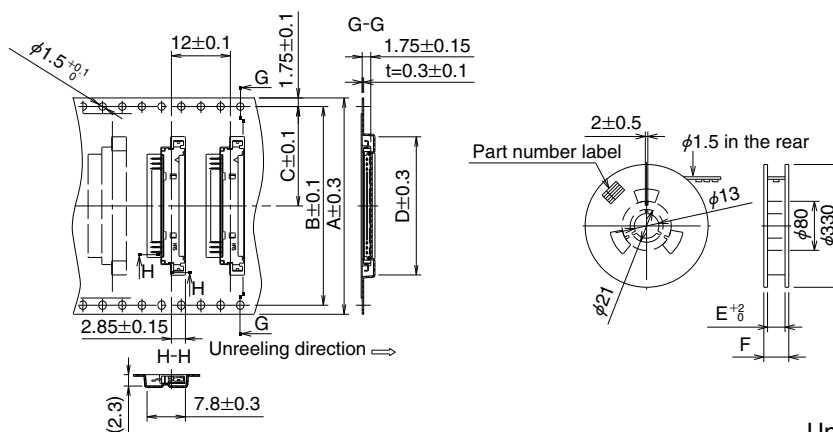

Unit : mm

Connector	No. of contacts	A	B	C	D	E	F	Remarks
DF19KR-14P-1H(54)	14	44	40.4	20.2	22.1	44.4	50.4	Reverse type of DF19K
DF19KR-20P-1H(54)	20	44	40.4	20.2	28.1	44.4	50.4	Offset mounting (1.0mm high)

- DF19-**\*P-1V**(56)

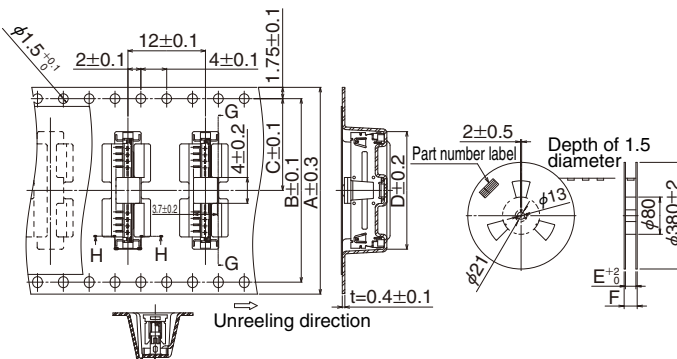


Unit : mm

Connector	No. of contacts	A	B	C	D	E	F	Remarks
DF19-14P-1V(56)	14	32	28.4	14.2	18.2	32.4	38.4	Vertical receptacle
DF19-20P-1H(56)	20	44	40.4	20.2	24.2	44.4	50.4	

◆Use recommendations


1. Recommended temperature profile

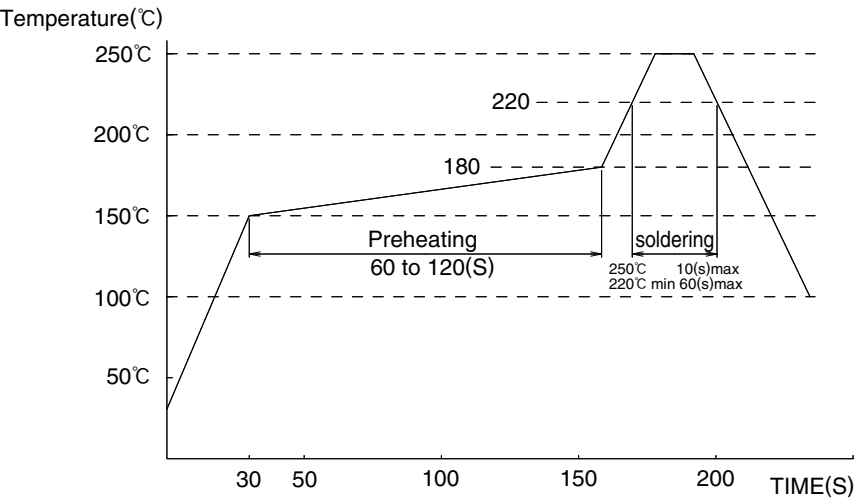

- Note 1 : Up to 2 cycles of Reflow soldering are possible under the same conditions, provided that there is a return to normal temperature between the first and second cycle.
- Note 2 : The temperature profile indicates the board surface temperature at the point of contacts with the connector terminals.
- Note 3 : The product can be used without trouble though the surface of a grounding plate might discolor.

2. Manual soldering	Manual soldering : 290±10℃ for 3 seconds
3. Screen thickness	0.15mm
4. Board warpage	Maximum of 0.03mm at the connector center, with both ends of the connector as reference points.
5. Cleaning conditions	Refer to “Wire-to-Board Connector Use Handbook.”
6. Termination conditions	Refer to “Wire-to-Board Connector Use Handbook.”
7. Cautions	■ Do not twist when mating/un-mating.
8. Precautions	Refer to “Wire-to-Board Connector Use Handbook.”

## ◆Plug (FPC Type) Termination Procedures (Dedicated Assembly Tooling is required.)

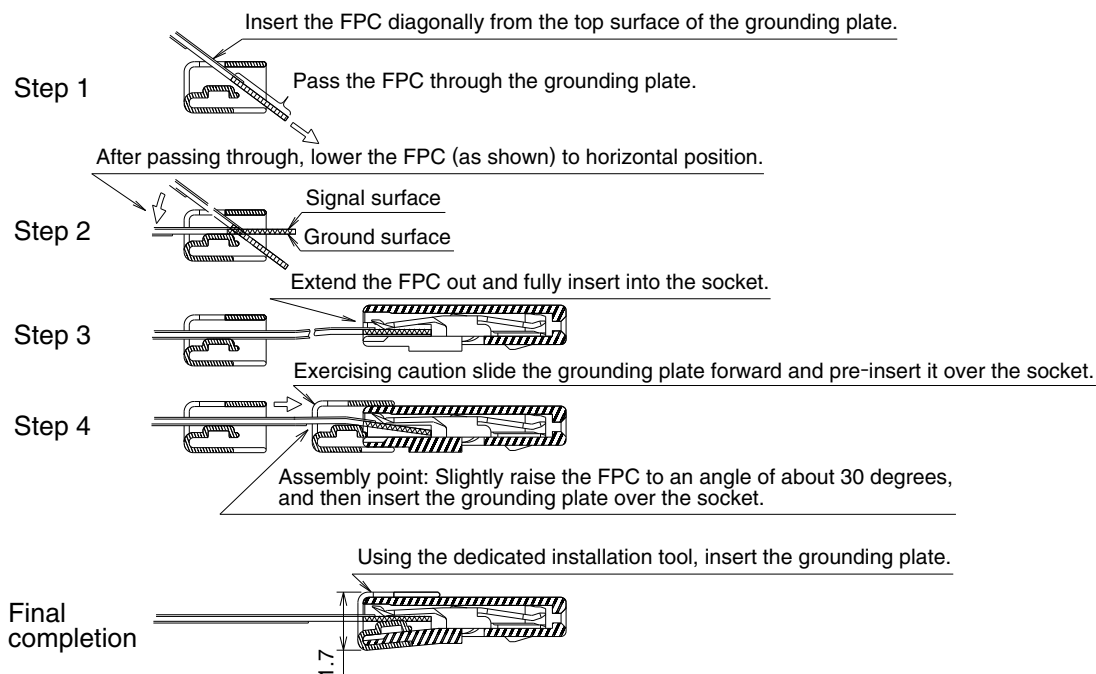

Note 1 : The grounding plate and the plug are supplied as separate components.


Note 2 : Dedicated assembly fixtures are required at each stage of the termination process. For detail, refer to the instruction manual supplied with the tools.

Note 3 : Do not apply excessive forces to FPC (Bending or twisting) as it may introduce cracks in the copper foil (on the cover film edge).

Note 4 : To protect the FPC, insertion and disconnection of the connectors should be performed parallel to the mating direction.

Note 5 : Do not apply excessive tension to FPC.

Note 6 : Refer to FPC manufacturer for bend radius and other specific recommendation. Distance should be allowed for the bending position, as illustrated below.

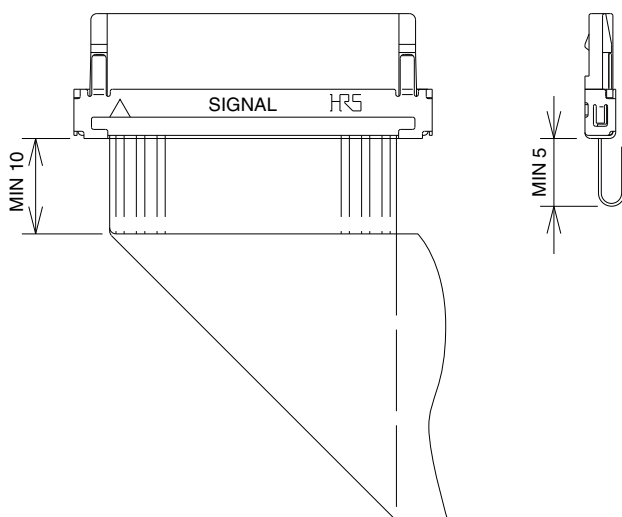

Note 7 : Follow the instruction manuals for the termination and assembly fixtures and tools.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF19G-20S/PR-MD2](#) [DF19G-30S/PR-MD2](#) [DF19G-14S/PR-MD2](#)