

Product Family Name

Push/Pull Switch

FEATURES

- Moisture and contaminant resistant
- Designed for severe temperatures
- Vibration resistant
- Sliding contacts
- Knob available in variety of colors

TYPICAL APPLICATIONS

- Construction
- Agricultural
- Marine
- Material Handling
- Machine Tools
- Mining

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.



The Honeywell push/pull switch is a robust, environmentally sealed, sliding contact switch incorporating two circuits with multiple combinations. The sliding contacts provide positive contact closure and opening when the switch knob is operated. The switch can be designed with a single circuit in either the push or pull position, two circuits in either the push or pull positions, or a single circuit in both the push and pull position. The dual o-ring design protects the contact chamber by isolating it from any moisture or any other contaminant.

Replacement for Unsealed:

- PTO Switches
- Park Brake Switches
- Emergency Stop Switches

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.


Product Family Name

Push/Pull Switch

Part #	Circuitry
87941	2 NO Circuits in Push
87942	1 NO Circuit in Push
87943	1 NO and 1 NC Circuits in Push
87944	2 NC Circuits in Push
87945	1 NC Circuit in Push

SPECIFICATIONS

Maximum Design Electrical Load:	20 A @ 12-14 Vdc 10 A @ 24 Vdc
Operating Temperature Extremes:	-40 °C to 100 °C [-40 °F to 212 °F]
Endurance Test Cycle Life at Design Electrical Load:	25,000 cycles
Standard Electrical Connection:	Integral Packard Connector Screw Terminals

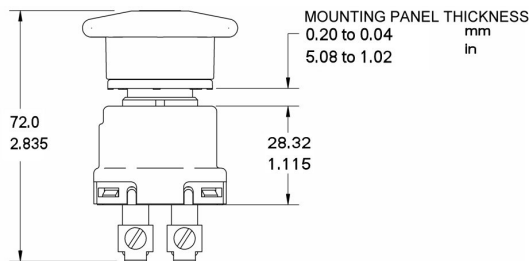

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. **The foregoing is Buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

For application assistance, current specifications, or name of the nearest Authorized Distributor, contact a nearby sales office. Or call:

1-800-537-6945 USA/Canada

1-815-235-6847 International

FAX

1-815-235-6545 USA

INTERNET

www.honeywell.com/hobbs

honeywellhobbs.marketing@honeywell.com

Honeywell

www.honeywell.com/hobbs

Honeywell

1034 East Ash Street

Springfield, Illinois 62703

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[087941 08](#) [87941-08](#)