
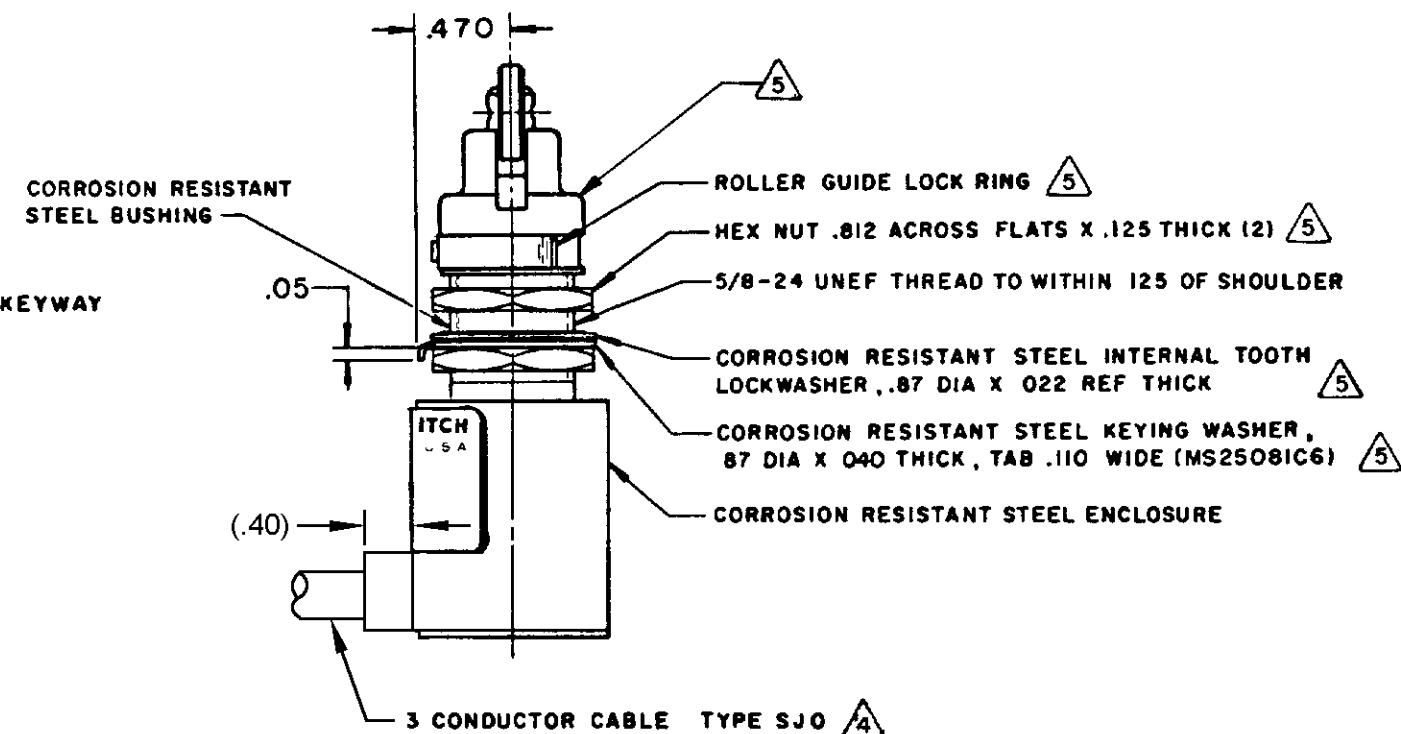


CATALOG LISTING  
21 CH 28

FED. MFR CODE 91929

- ROLLER GUIDE MAY BE LOCKED IN INCREMENTS OF 45° AZIMUTH. IT MAY ALSO BE UNSCREWED AND REMOVED FROM BUSHING TO FACILITATE INSTALLATION

CIRCUIT DIAGRAM

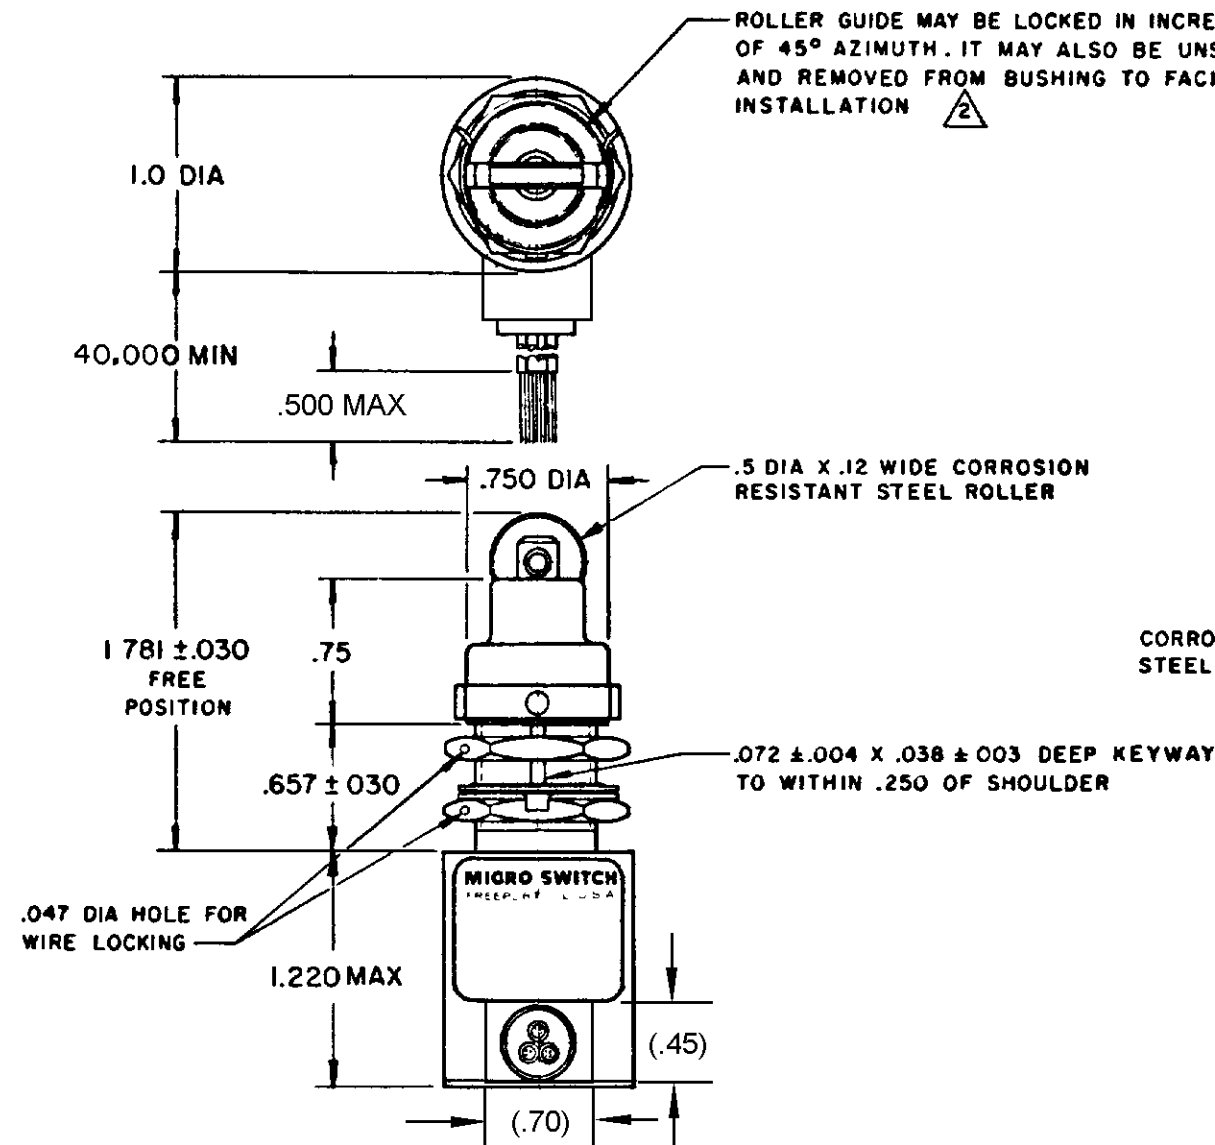

- 1 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3  
TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING,  
SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW  
TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK  
RING
- 3 - CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ARE SHOWN ON  
NAMEPLATE
- 4 - LEAD WIRES COLOR CODED TO SHOW LEAD IDENTIFICATION
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL
OPERATING FORCE ----- 6-12 LB		CONTACT ARRANGEMENT		DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE ---- 30 LB MAX		S P D T		UNLESS OTHERWISE SPECIFIED	
RELEASE FORCE ----- 4 LB MIN		LOAD	28 VDC		DIMENSIONS ARE IN INCHES
PRETRAVEL ----- 0.010 MAX			SEA LEVEL	50,000 FT.	TOLERANCES ARE:
DIFFERENTIAL TRAVEL ----- .020 MAX		RES	4	4	ONE PLACE (0) 1.000
OVERTRAVEL ----- .250 MIN		IND	2	2	TWO PLACE (.001) 1.010
		MOTOR	4		THREE PLACE (.000) 1.000
					ANGLES 1/2
				WEIGHT 9.0 OZ MAX	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[21CH28](#)