


HONEYWELL PART NUMBER
23AC80
KC-RI632


REV	DOCUMENT	CHANGED BY	CHECK
4	0012977	DVM 04MAY05	AK

PUSH TO OPERATE-RETURNS
AUTOMATICALLY TO POSITION
SHOWN
PULL TO OPERATE-REMAINS IN
OPERATED POSITION UNTIL RESET
FOR AUTOMATIC RETURN BY NEXT
FULL STROKE "PUSH" OPERATION

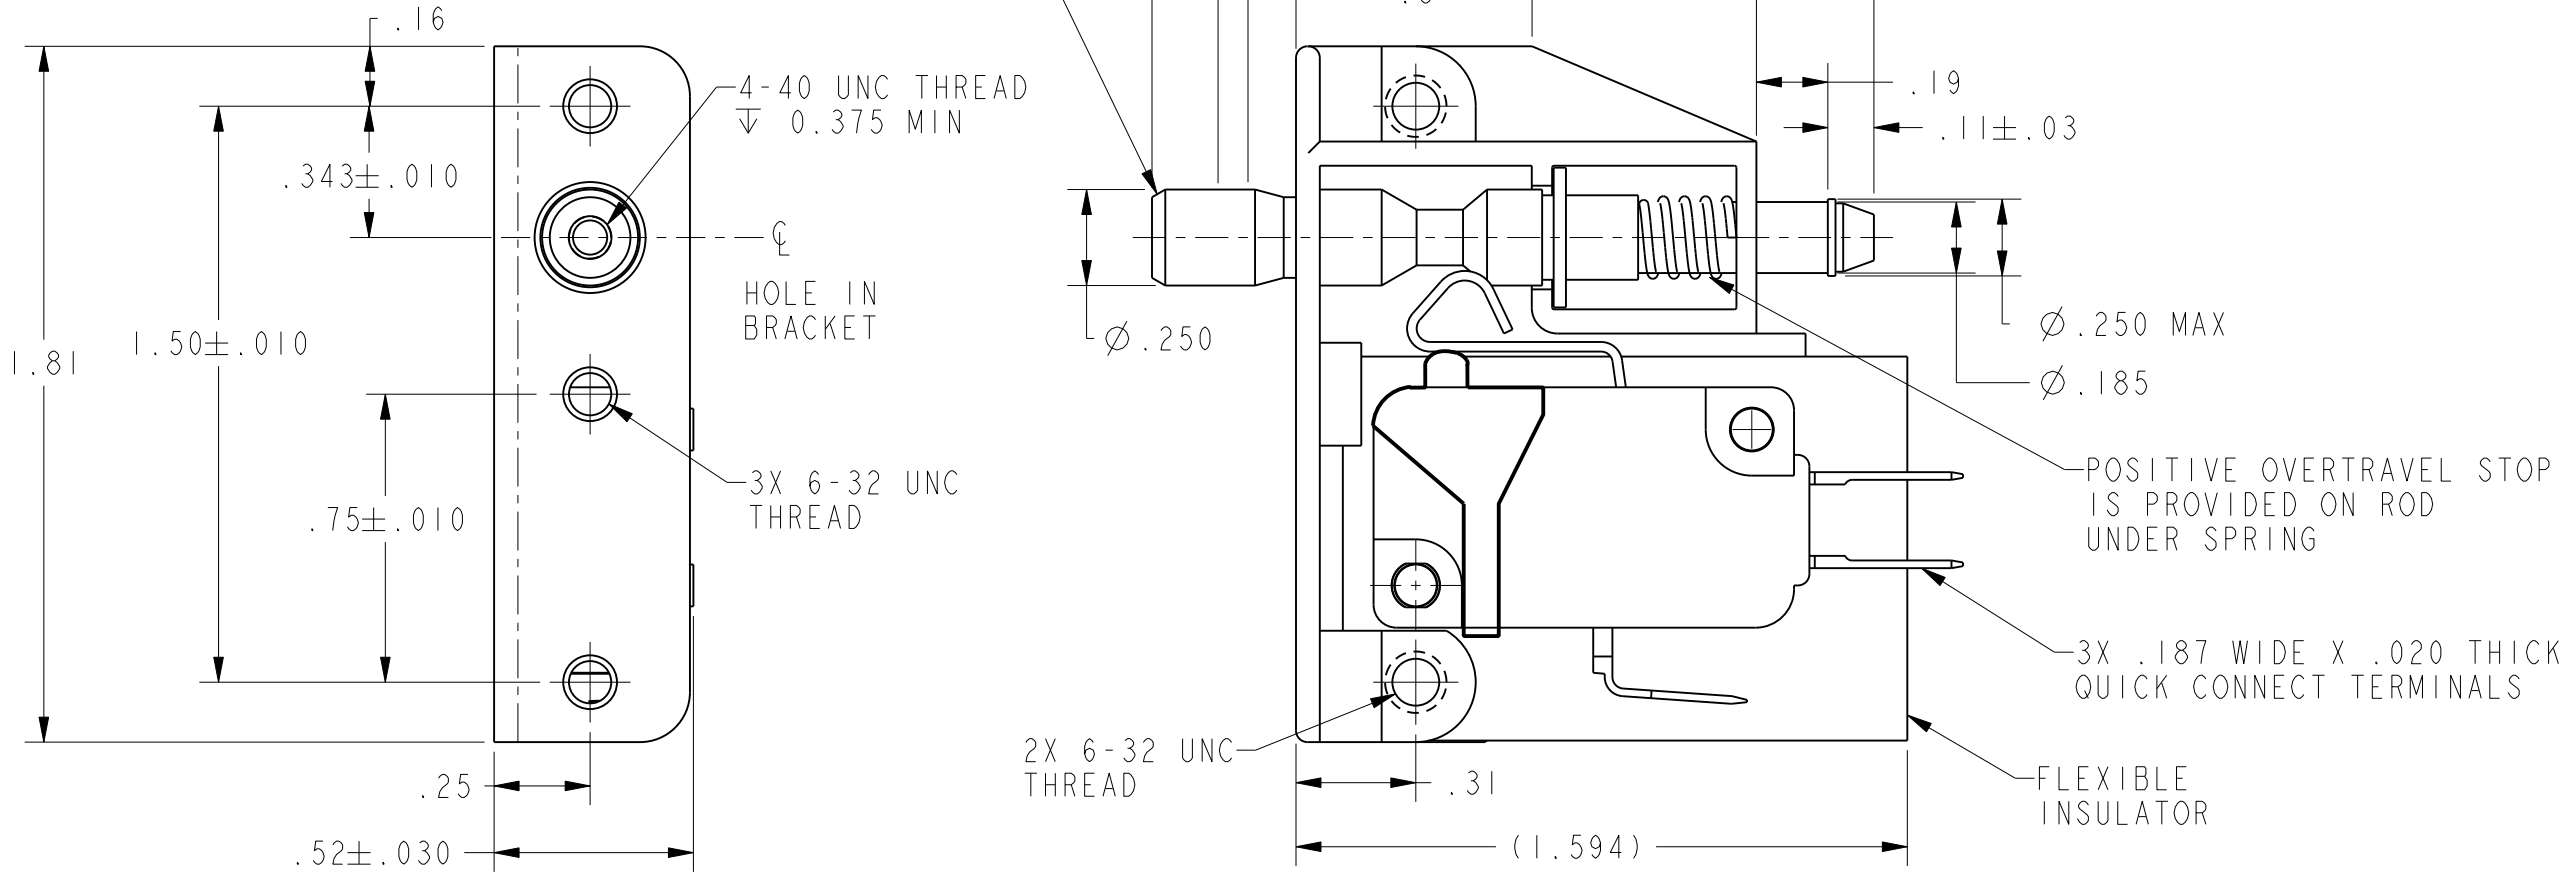

- NOTES
- 1. UNIT INCLUDES CATALOG LISTING "V7-6A17D8-296-S" BASIC SWITCH
 - 2. BASIC SWITCH PLASTIC PARTS ARE MADE OF GLASS FILLED PBT AND TEFLON FILLED PHENOLIC
 - 3. ACTUATOR ROD MADE OF HIGH STRENGTH PLASTIC
 - 4. UL AND CSA APPROVALS APPLY TO BASIC SWITCH ONLY

REPLACES: X110597-AC

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN		DCS		26FEB98		Honeywell							
TOTAL TRAVEL:		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK		J A F		10JUN98									
.250 APPROX PUSH DIRECTION		S P D T		NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.		THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE						ASSEMBLY-SWITCH			
.187 APPROX PULL DIRECTION				ONE PLACE .X ±		TWO PLACE .XX ±													
				THREE PLACE .XXX ±		FOUR PLACE .XXXX ±													
FULLY DEPRESSED FORCE-- 4 LBS MAX		5A 125, <u>250</u> , 277 VAC		0.030		0.015		0.005		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE		TYPE		DRAWING NAME		REV	
		1/10HP <u>250</u> VAC										B		I		23AC80		4	
						THIRD ANGLE PROJECTION													
																			
								Pro/ENGINEER		3D		SCALE		2 : 1				SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[23AC80](#)