Issue C

MIP SERIES

Heavy Duty, Media-Isolated Pressure Transducers 1 bar to 60 bar | 15 psi to 870 psi

DESCRIPTION

The MIP Series offers a heavy duty, media-isolated pressure transducer in a compact, stainless steel construction for use with a wide range of media including aggressive fluids and water. The MIP Series provides a cost-competitive solution for wide-ranging potential applications in tough environments.

VALUE TO CUSTOMERS

- Total Error Band (TEB) ±0.75 %FSS
 (Full Scale Span) from -40°C to 125°C
 for ratiometric output: Provides true
 measurement performance over the
 compensated temperature range;
 small error promotes system uptime
 and efficiency (see Figure 5).
- 4 mA to 20 mA output: Supports transmission of output signals over longer distances
- EMC performance: Operates reliably in the presence of electromagnetic fields, such as wireless signals, RF communication, and electrical devices.
- Hermetically welded design: Supports almost any media without the use of an internal seal. The sensors are designed to be used in harsh environments which see aggressive media.

DIFFERENTIATION

- Diagnostics: Beneficial in applications where the sensor functionality and the need to know internal or external failure modes is critical.
- Great customer value: Multiple configuration possibilities provide flexibility of use in the application with no up front NRE or tooling charges.
- Durable: Provides the tough environmental capabilities needed, including long-term stability, insulation resistance and dielectric strength, external freeze-thaw resistance for the Metri-Pack 150 versions and EMC performance.





FEATURES

- Rugged, stainless steel construction
- Ratiometric output: 0.5 Vdc to 4.5 Vdc
- Current output: 4 mA to 20 mA
- Operating temperature: -40°C to 125°C
- Total Error Band: ±0.75 %FSS to ±1.0 %FSS (-40°C to 125°C) for voltage output
- Industry-leading accuracy: ±0.15 %FSS BFSL for voltage output
- Long term stability: ±0.25 %FSS
- Radiated immunity: 100 V/m
- Drinking water approval: NSF/ANSI/CAN 61
- CE, UKCA, RoHS, REACH compliant
- Mis-wiring protection

TABLE 1. POTENTIAL APPLICATIONS				
INDUSTRY	MEDIA			
Industrial:				
pumps	water, hydraulic fluids			
compressors	compressed air			
process	food, beverage, oil, gas, steam			
HVAC/R	refrigerants (butane, propane, ammonia, CO ₂ , R134A, R407C, R410A, R448A/Solstice* N40, R32 and R1234ze, R1234yf, glycol + water			
Transportation	gasoline, diesel fuel, engine oil, brake fluid, coolants, CNG			
Medical	O ₂ , N ₂ , CO ₂ , N ₂ O, air			





TABLE 2. ELECTRICAL SPECIFICATIONS (AT 25°C [77°F] AND UNDER UNLESS OTHERWISE NOTED.)					
CHARACTERISTIC	RATIOMETRIC OUTPUT (AA)	CURRENT OUTPUT (CH)			
Supply voltage (V _s)	5.0 Vdc ±0.25 Vdc	8 Vdc to 30 Vdc¹			
Output transfer function	10 % to 90 % of $V_{\rm s}$	4 mA to 20 mA			
Output load (pull up or pull down)	≥ 2 kΩ	$(V_s - 8) \times 50\Omega^2$			
Short circuit protection	yes				
Current consumption	6.5 mA ±1 mA				
Over/reverse voltage	±40 Vdc	±35 Vdc			

¹ Supply voltage: Must be de-rated to 8 Vdc to 25 Vdc for above 100°C to 125°C [212°F to 257°F].

²Applies at 25°C [77°F]. See Figure 4 for Current Output Supply Voltage.

TABLE 3. PERFORMANCE SPECIFICATIONS (AT 25°C [77°F] AND UNDER UNLESS OTHERWISE NOTED.)				
CHARACTERISTIC	RATIOMETRIC OUTPUT	CURRENT OUTPUT		
Total Error Band ¹	>10 bar or >150 psi: ±0.75 %FSS (-40°C to 125°C) ≤10 bar or ≤150 psi: ±1.0 %FSS² (-40°C to 125°C)	±1.0 %FSS (-20°C to 85°C) ±2.0 %FSS (-40°C to 125°C)		
Operating temperature range	-40°C to 125°C	[-40°F to 257°F]		
Accuracy BFSL ³	±0.15 %FSS	±0.25 %FSS		
Long term stability (1000 hr, 25°C)	±0.25 %FSS			
Typical output resolution	0.05 % Full Scale Pressure			
Typical response time ⁴	1 ms	2 ms		
Startup time ⁵	7 ms			
EMC rating (CE Conformity):				
surge immunity (all leads)	±1 kV line to ground	per IEC 61000-4-5		
electrostatic discharge	±4 kV contact, ±8 kV air per IEC 61000-4-2			
radiated immunity	10 V/m (80 MHz to 1000 MHz) per IEC 61000-4-3			
fast transient burst	±1 kV per IEC 61000-4-4			
immunity to conducted disturbances	3 V (150 kHz to 80 MHz) per IEC 61000-4-6			
radiated emissions	40 dBμV (30 MHz to 230 MHz), 47 dBμV (230 MHz to 1000 MHz) per CISPR 11			
Radiated immunity	100 V/m (200 MHz to 2.5 GHz) per ISO 11452-2	100 V/m (300 MHz to 2.7 GHz) per ISO 11452-2 100 V/m (100 kHz to 400 MHz) per ISO 11452-5		
Insulation resistance	>100 M Ω at 1k Vdc (60 s)			
Dielectric strength	<1 mA at 500 Vac (60 s)	<1 mA at 1000 Vac (60 s)		
Life	>10 million full scale pressure cycles			

 $^{^{1}}$ Total Error Band: The maximum deviation from the ideal transfer function over the entire compensated temperature and pressure range. Includes all errors due to offset, full scale span, pressure non-linearity, pressure hysteresis, pressure non-repeatability, thermal effect on offset, thermal effect on span, and thermal hysteresis (see Figure 5).

⁵**Startup time:** The time needed to receive valid output after power up.

TABLE 4. ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS			
CHARACTERISTIC	PARAMETER		
Shock	100 G per MIL-STD-202, Method 213, Cond. C (at 25°C [77°F])		
Vibration	20 G sweep, 10 Hz to 2000 Hz (at 25°C [77°F])		
Ingress protection: Metri-Pack 150 versions cable harness versions	IP65, IP67 IP65, IP67, IP69K		
External freeze/thaw resistance	>6 cycles from -30°C to 50°C [-22°F to 122°F] (Metri-Pack 150 versions only)		
Wetted materials: port diaphragm external seal for ports	stainless steel 304L stainless steel 316L nitrile (-30°C to 100°C [-22°F to 212°F]) (other materials available)		
Electrical connector material	PBT 30 %GF (UL V-0)		
Cable material (jacket and insulation)	TPE (Thermoplastic Elastomer) flame retardant-type cable is FT1 rated per CSA AWM-I-A/B-II-A/B specification, -40°C to 125°C [-40°F to 257°F], three 24 AWG wires.		


² **TEB:** Above 100°C [212°F] for pressure ratings less than 4 bar [58 psi], TEB is ±1.5 %FSS for ratiometric outputs and 2.0 % FSS for other outputs.

³Accuracy: The maximum deviation in output from a Best Fit Straight Line (BFSL) fitted to the output measured over the pressure range at 25°C [77°F]. Includes all errors due to pressure non-linearity, pressure hysteresis, and pressure non-repeatability.

^{*}Response time: The time taken by the transducer to change output from 10 % to 90 % of full scale in response to a 0 % to 100 % full scale step input pressure.

FIGURE 1. NOMENCLATURE AND ORDER GUIDE

For example, MIPAN1XX010BSAAX defines an MIP Series Heavy Duty, Media Isolated Pressure Transducer, Metri-Pack 150, standard (UL V-0) electrical connector type, 1/4-18 NPT pressure port type, 10 bar pressure range, sealed gage pressure reference, ratiometric: 5 Vs, 10% to 90% Vs output transfer function

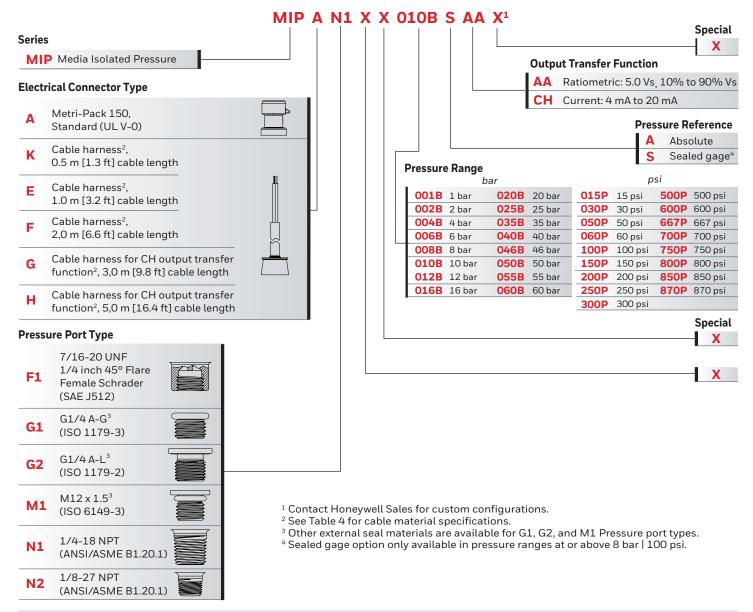

CAUTION

PRODUCT DAMAGE DUE TO MISUSE

- Ensure torque specifications are determined for the specific application. Values provided are for reference only. (Mating materials and thread sealants can result in significantly different torque values from one application to the next.)
- Use appropriate tools (such as an open-ended wrench or deep well socket) to install transducers.
- Ensure that the proper mating electrical connector with a seal is used to connect the transducer. Improper or damaged seals can compromise ingress protection, leading to short circuits.
- Ensure that filters are used upstream of the transducers to keep media flow free of particulates. MIP Series transducers are dead-end devices. Particulate accumulation may clog the port or damage the diaphragm.
- Ensure that the transducer is mounted in a vertical position with the process connection (pressure port) downward to avoid particular deposits.
- Ensure that the media does not create a residue when dried. Build-up of residue inside the transducer may affect transducer output.
- Ensure that the transducer housing is properly grounded.
- For cable harness versions, ensure that the cable bend radius is maintained at a minimum of 38 mm [1.50 in] in the end application assembly.


Failure to comply with these instructions may result in product damage.

TABLE 5. PRESSURE RATINGS					
BAR			PSI		
OPERATING PRESSURE	OVER- PRESSURE ¹	BURST PRESSURE ²	OPERATING PRESSURE	OVER- PRESSURE ¹	BURST PRESSURE ²
1 to 3	6		15 to 43.5	87	
>3 to 12	24	207	>43.5 to 174	348	3000
>12 to 60	120		>174 to 870	1740	

¹Overpressure: The maximum pressure which may safely be applied to the product for it to remain in specification once pressure is returned to the operating pressure range. Exposure to higher pressures may cause permanent damage to the product.

FIGURE 2. RATIOMETRIC OUTPUT TRANSFER FUNCTION

The transfer function shown here is applicable to a ratiometric output ranging between 10 % V_{supply} at null pressure to $90 \% V_{\text{supply}}$ at full scale pressure.

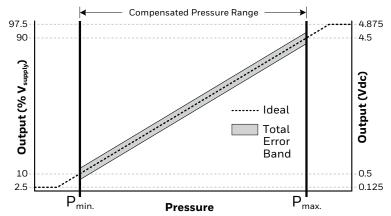

 $\frac{0.8 \times V_{supply}}{2} \times (Pressure_{applied} - P_{min.}) + 0.10 \times V_{supply}$ Output (V) =

FIGURE 3. ABSOLUTE VS SEALED GAGE

Example shown is for 100 psi.





FIGURE 4. CURRENT OUTPUT SUPPLY VOLTAGE VS TEMPERATURE

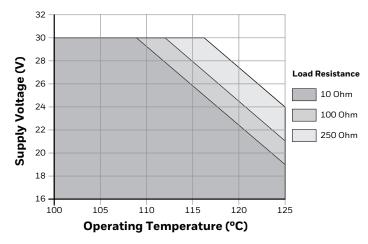

²Burst Pressure: The maximum pressure which may be applied without causing escape of pressure media. The product should not be expected to function after exposure to the burst pressure.

TOTAL ERROR BAND

Total Error Band (TEB) is a single specification that includes the major sources of sensor error. TEB should not be confused with accuracy, which is actually a component of TEB. TEB is the maximum error that the sensor could experience.

Honeywell uses the TEB specification in its datasheet because it is the most comprehensive measurement of a sensor's true accuracy. Honeywell also provides the accuracy specification in order to provide a common comparison with competitors' literature that does not use the TEB specification.

Many competitors do not use TEB—they simply specify the accuracy of their device. Their accuracy specification, however, may exclude certain parameters. On their datasheet, the errors are listed individually. When combined, the total error (or what would be TEB) could be significant.

FIGURE 5. TEB COMPONENTS FOR THE MIP SERIES

Sources of Error

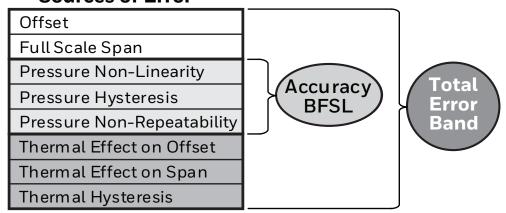


TABLE 6. OUTPUT DIAGNOSTIC CODE FOR RATIOMETRIC OUTPUT			
FAULT CONDITION	ANALOG DIAGNOSTIC RAIL		
Sensor internal failures	97.5 % of V _{supply} (See Figure 2.)		
Over pressure	97.5 % of V _{supply} (See Figure 2.)		
Under pressure (for sealed gage only)	2.5 % of V _{supply} (See Figure 2.)		
Power or ground loss	high (external pull-up resistor)		
Power or ground loss	low (external pull-down resistor)		

FIGURE 6. METRI-PACK 150 MOUNTING DIMENSIONS (FOR REFERENCE ONLY. MM/[IN])

Pinout -Pin A 22 0 A/F [0.87]

Ratiometric Voltage Output

Pin A = Ground Pin B = V+ Pin C = V_{out}

Current Output

Pin A = Return Pin B = Supply Pin C = Not connected

MIPXXXXXXXXXXXX 16-Digit product listing YYMMDD XXXXX (Product 5-Digit serial number Honeywell logo -6-Digit date marking) NSF-61 CF Mark NSF Mark UKCA Mark


Product Marking

F1: 7/16-20 UNF 1/4 inch 45° Flare Female Schrader (SAE J512)

Seal: 45° cone

Mating geometry: SAE J512 Installation torque: 17 N m [12 ft-lb]

Weight: 36 g [1.3 oz]




G2: G1/4 A-L (ISO 1179-2)

Seal: ISO 9974-2/DIN 3869 profile ring (included)

Mating geometry: ISO 1179-1 Installation torque: 20 N m [15 ft-lb]

Weight: 36 g [1.3 oz]




N1: 1/4-18 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 38 g [1.3 oz]



G1: G1/4 A-G (ISO 1179-3)

Seal: O-ring (included) and retaining ring ISO 1179-3-G1/4

(not included)

Mating geometry: ISO 1179-1


Installation torque: 20 N m [14.7 ft-lb]

Weight: 33 g [1.1 oz] Ø17,0 [0.67] 35,0 [1.38] 46,2 [1.82] 10,2 [0.40] O-ring

M1: M12 x 1.5 (ISO 6149-3)

Seal: O-ring (included) Mating geometry: ISO 6149-1 Installation torque: 20 N m [15 ft-lb]

Weight: 34 g [1.2 oz]



N2: 1/8-27 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 30 g [1.0 oz]






FIGURE 7. CABLE HARNESS MOUNTING DIMENSIONS (FOR REFERENCE ONLY. MM/[IN])

Wireout with Free Ends






Product Marking

F1: 7/16-20 UNF 1/4 inch 45° Flare Female Schrader (SAE J512)

Seal: 45° cone

Mating geometry: SAE J512 Installation torque: 17 N m [12 ft-lb]

Weight: 68 g [2.4 oz]




G2: G1/4 A-L (ISO 1179-2)

Seal: ISO 9974-2/DIN 3869 profile ring (included)

Mating geometry: ISO 1179-1 Installation torque: 20 N m [15 ft-lb]

Weight: 68 g [2.4 oz]




N1: 1/4-18 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 79 g [2.5 oz]




G1: G1/4 A-G (ISO 1179-3)

Seal: O-ring (included) and retaining ring ISO 1179-3-G1/4

(not included)

Mating geometry: ISO 1179-1


Installation torque: 20 N m [14.7 ft-lb]



M1: M12 x 1.5 (ISO 6149-3)

Seal: O-ring (included) Mating geometry: ISO 6149-1

Installation torque: 20 N m [15 ft-lb] **Weight:** 66 g [2.3 oz]




N2: 1/8-27 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 62 g [2.2 oz]



ADDITIONAL MATERIALS

The following associated literature is available on our <u>website</u>:

- Product range guide
- Application-specific and technical information
- CAD Models

FOR MORE INFORMATION

Honeywell Advanced Sensing
Technologies services its customers
through a worldwide network of sales
offices and distributors. For application
assistance, current specifications,
pricing or the nearest Authorized
Distributor, visit our website or call:

USA/Canada +1 302 613 4491 Latin America +1 305 805 8188 Europe +44 1344 238258 Japan +81 (0) 3-6730-7152 Singapore +65 6355 2828 Greater China +86 4006396841

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

△ WARNINGPERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

Honeywell Advanced Sensing Technologies

830 East Arapaho Road Richardson, TX 75081 sps.honeywell.com/ast



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

MIPAM1XX050PAAAX	MIPAN1XX100PAAAX	MIPAN2XX060PAAAX	MIPAF1XX250PAAAX	MIPAM1XX010BAAAX
MIPAM1XX012BAAAX	MIPAN1XX500PAAAX	MIPAF1XX004BAAAX	MIPAN1XX015PAAAX	MIPAG1XX004BAAAX
MIPAF1XX010BAAAX	MIPAF1XX012BAAAX	MIPAG1XX050PAAAX	MIPAM1XX004BAAAX	MIPAF1XX667PAAAX
MIPAG1XX001BAAAX	MIPAG1XX002BAAAX	MIPAF1XX200PAAAX	MIPAF1XX150PAAAX	MIPAF1XX500PAAAX
MIPAN1XX006BAAAX	MIPAN2XX015PAAAX	MIPAN1XX001BAAAX	MIPAG1XX016BAAAX	MIPAN1XX050PAAAX
MIPAG1XX006BAAAX	MIPAM1XX100PAAAX	MIPAN2XX100PAAAX	MIPAN2XX150PAAAX	MIPAN2XX006BAAAX
MIPAN2XX050PAAAX	MIPAN1XX030PAAAX	MIPAG1XX010BAAAX	MIPAF1XX016BAAAX	MIPAF1XX600PAAAX
MIPAG2XX001BAAAX	MIPAG2XX006BAAAX	MIPAG2XX010BAAAX	MIPAG2XX060BAAAX	MIPAM1XX030PAAAX
MIPAN2XX030PAAAX	MIPAN2XX200PAAAX	MIPAN2XX500PAAAX	MIPAG1XX100PSAAX	MIPAN2XX030PSAAC
MIPAG2XX040BSAAX	MIPAF1XX012BACHX	MIPAF1XX030BSAAX	MIPAF1XX030BSCHX	MIPAF1XX050BSCHX
MIPAF1XX100PAAAX	MIPAF1XX500PSCHX	MIPAG1XX001BACHX	MIPAG1XX002BACHX	
MIPAG1XX004BACHX	MIPAG1XX006BACHX	MIPAG1XX006BSCHX	MIPAG1XX008BSCHX	MIPAG1XX010BACHX
MIPAG1XX010BSCHX	MIPAG1XX016BACHX	MIPAG1XX025BSCHX	MIPAG1XX040BSCH	<u> </u>
MIPAG1XX050BSCHX	MIPAG1XX050PACHX	MIPAG1XX100PSCHX	MIPAG2XX001BACHX	MIPAG2XX010BACHX
MIPAG2XX016BACHX	MIPAG2XX050BSCHX	MIPAG2XX060BACHX	MIPAM1AA050PAAA	(
MIPAM1XX001BAAAX	MIPAM1XX010BACHX	MIPAM1XX050PACHX	MIPAM1XX100PACHX	MIPAM1XX150PSAAP
MIPAN1XX001BACHX	MIPAN1XX010BACHX	MIPAN1XX010BSCHX	MIPAN1XX016BSCHX	
MIPAN1XX025BAAAX	MIPAN1XX025BSCHX	MIPAN1XX030BACHX	MIPAN1XX033BACHX	MIPAN1XX035BSCHX
MIPAN1XX050BSCHX	MIPAN1XX070BSAAX	MIPAN1XX300PAAAX	MIPAN1XX300PACHX	MIPAN1XX300PSCHX
MIPAN1XX700PSAAX	MIPAN2XX010BSCHX	MIPAN2XX050PACHX	MIPAN2XX100PACHX	
MIPAN2XX100PSCHX	MIPAR1XX001BAAAX	MIPAR1XX020BAAAX	MIPAS2XX030PAAAX	MIPAS2XX050PAAAX