



### Applications

- High frequency DC-DC converters
- Lead-Free

| $V_{DSS}$ | $R_{DS(on)} \text{ max}$    | $I_D$ |
|-----------|-----------------------------|-------|
| 200V      | $0.17\Omega @ V_{GS} = 10V$ | 2.5A  |

### Benefits

- Low Gate to Drain Charge to Reduce Switching Losses
- Fully Characterized Capacitance Including Effective  $C_{OSS}$  to Simplify Design (See App. Note AN1001)
- Fully Characterized Avalanche Voltage and Current



### Absolute Maximum Ratings

|                                | Parameter                                | Max.                   | Units |
|--------------------------------|------------------------------------------|------------------------|-------|
| $I_D @ T_A = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10V$ | 2.5                    | A     |
| $I_D @ T_A = 70^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10V$ | 2.0                    |       |
| $I_{DM}$                       | Pulsed Drain Current ①                   | 20                     |       |
| $P_D @ T_A = 25^\circ\text{C}$ | Power Dissipation②                       | 2.5                    | W     |
|                                | Linear Derating Factor                   | 0.02                   | W/°C  |
| $V_{GS}$                       | Gate-to-Source Voltage                   | $\pm 30$               | V     |
| $dv/dt$                        | Peak Diode Recovery $dv/dt$ ③            | 11                     | V/ns  |
| $T_J$                          | Operating Junction and                   | -55 to + 150           | °C    |
| $T_{STG}$                      | Storage Temperature Range                |                        |       |
|                                | Soldering Temperature, for 10 seconds    | 300 (1.6mm from case ) |       |

### Thermal Resistance

| Symbol          | Parameter              | Typ. | Max. | Units |
|-----------------|------------------------|------|------|-------|
| $R_{\theta JL}$ | Junction-to-Drain Lead | —    | 20   | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient ④  | —    | 50   |       |

Notes ① through ④ are on page 8

www.irf.com

# IRF7450PbF

International  
**IR** Rectifier

## Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|                                 | Parameter                            | Min. | Typ. | Max. | Units    | Conditions                                                  |
|---------------------------------|--------------------------------------|------|------|------|----------|-------------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 200  | —    | —    | V        | $V_{GS} = 0V$ , $I_D = 250\mu A$                            |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.26 | —    | V/°C     | Reference to $25^\circ\text{C}$ , $I_D = 1\text{mA}$ ③      |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | —    | 0.17 | $\Omega$ | $V_{GS} = 10V$ , $I_D = 1.5A$ ③                             |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 3.0  | —    | 5.5  | V        | $V_{DS} = V_{GS}$ , $I_D = 250\mu A$                        |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —    | 25   | $\mu A$  | $V_{DS} = 200V$ , $V_{GS} = 0V$                             |
|                                 |                                      | —    | —    | 250  |          | $V_{DS} = 160V$ , $V_{GS} = 0V$ , $T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —    | 100  | nA       | $V_{GS} = 30V$                                              |
|                                 | Gate-to-Source Reverse Leakage       | —    | —    | -100 |          | $V_{GS} = -30V$                                             |

## Dynamic @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)





|                        | Parameter                       | Min. | Typ. | Max. | Units | Conditions                                            |
|------------------------|---------------------------------|------|------|------|-------|-------------------------------------------------------|
| $g_{fs}$               | Forward Transconductance        | 2.6  | —    | —    | S     | $V_{DS} = 50V$ , $I_D = 1.5A$                         |
| $Q_g$                  | Total Gate Charge               | —    | 26   | 39   | nC    | $I_D = 1.5A$                                          |
| $Q_{gs}$               | Gate-to-Source Charge           | —    | 6.0  | 9.0  |       | $V_{DS} = 160V$                                       |
| $Q_{gd}$               | Gate-to-Drain ("Miller") Charge | —    | 12   | 18   |       | $V_{GS} = 10V$ ,                                      |
| $t_{d(on)}$            | Turn-On Delay Time              | —    | 10   | —    | ns    | $V_{DD} = 100V$                                       |
| $t_r$                  | Rise Time                       | —    | 3.0  | —    |       | $I_D = 1.5A$                                          |
| $t_{d(off)}$           | Turn-Off Delay Time             | —    | 17   | —    |       | $R_G = 6.0\Omega$                                     |
| $t_f$                  | Fall Time                       | —    | 18   | —    |       | $V_{GS} = 10V$ ③                                      |
| $C_{iss}$              | Input Capacitance               | —    | 940  | —    | pF    | $V_{GS} = 0V$                                         |
| $C_{oss}$              | Output Capacitance              | —    | 160  | —    |       | $V_{DS} = 25V$                                        |
| $C_{rss}$              | Reverse Transfer Capacitance    | —    | 33   | —    |       | $f = 1.0\text{MHz}$                                   |
| $C_{oss}$              | Output Capacitance              | —    | 1100 | —    |       | $V_{GS} = 0V$ , $V_{DS} = 1.0V$ , $f = 1.0\text{MHz}$ |
| $C_{oss}$              | Output Capacitance              | —    | 66   | —    |       | $V_{GS} = 0V$ , $V_{DS} = 160V$ , $f = 1.0\text{MHz}$ |
| $C_{oss \text{ eff.}}$ | Effective Output Capacitance    | —    | 25   | —    |       | $V_{GS} = 0V$ , $V_{DS} = 0V$ to $160V$ ③             |

## Avalanche Characteristics

|          | Parameter                      | Typ. | Max. | Units |
|----------|--------------------------------|------|------|-------|
| $E_{AS}$ | Single Pulse Avalanche Energy② | —    | 230  | mJ    |
| $I_{AR}$ | Avalanche Current①             | —    | 2.5  | A     |


## Diode Characteristics

|          | Parameter                                 | Min. | Typ. | Max. | Units | Conditions                                                              |
|----------|-------------------------------------------|------|------|------|-------|-------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —    | —    | 2.3  | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ①   | —    | —    | 20   |       |                                                                         |
| $V_{SD}$ | Diode Forward Voltage                     | —    | —    | 1.3  | V     | $T_J = 25^\circ\text{C}$ , $I_S = 1.5A$ , $V_{GS} = 0V$ ③               |
| $t_{rr}$ | Reverse Recovery Time                     | —    | 97   | 146  | ns    | $T_J = 25^\circ\text{C}$ , $I_F = 1.5A$                                 |
| $Q_{rr}$ | Reverse Recovery Charge                   | —    | 350  | 525  | nC    | $di/dt = 100A/\mu s$ ③                                                  |

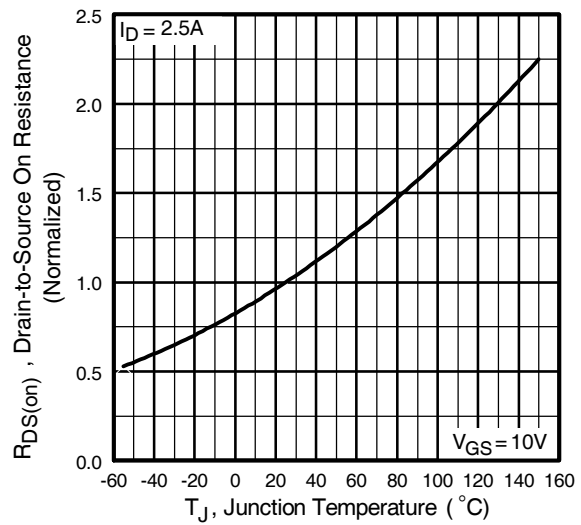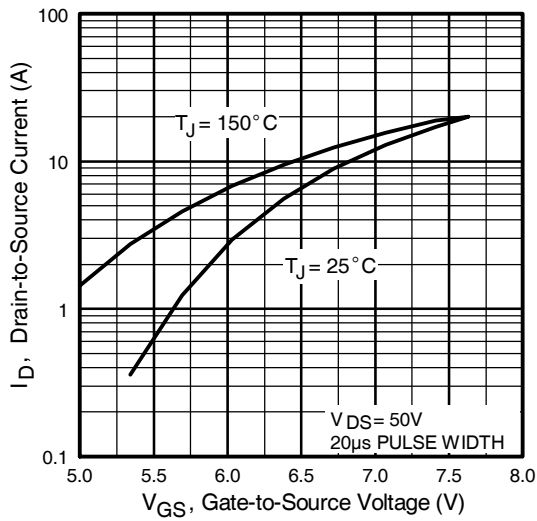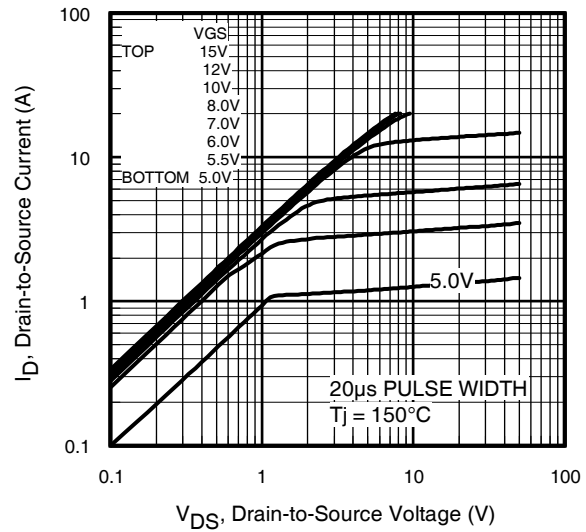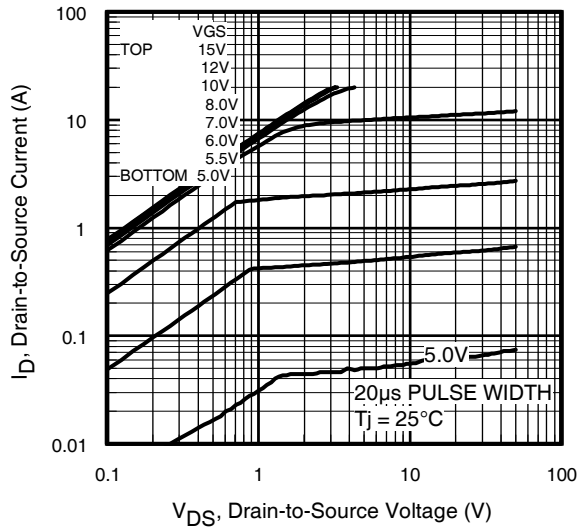


# IRF7450PbF


International  
**IR** Rectifier

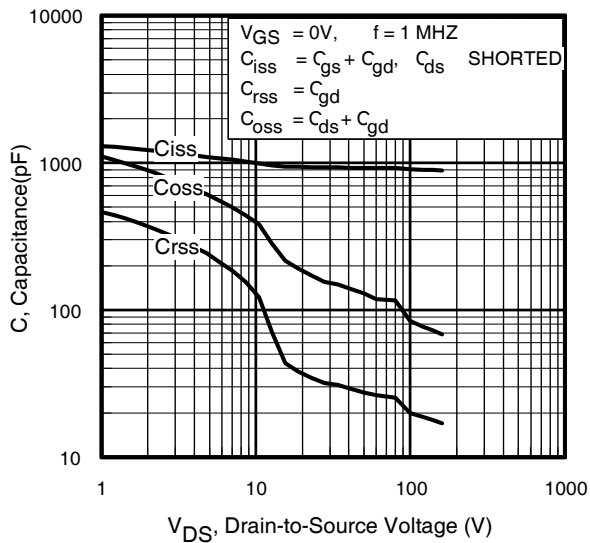


**Fig 5.** Typical Capacitance Vs. Drain-to-Source Voltage

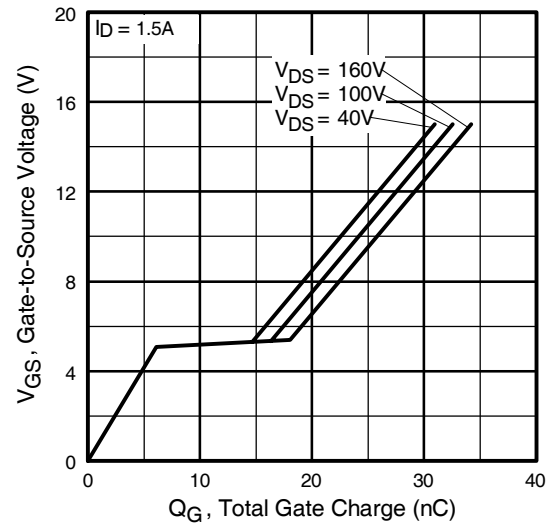


**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage

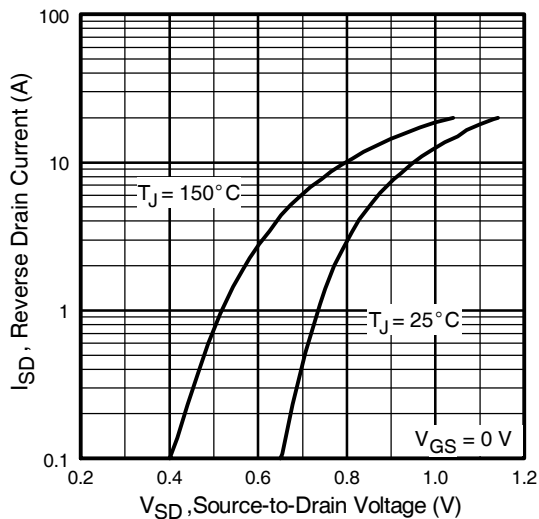


**Fig 7.** Typical Source-Drain Diode Forward Voltage

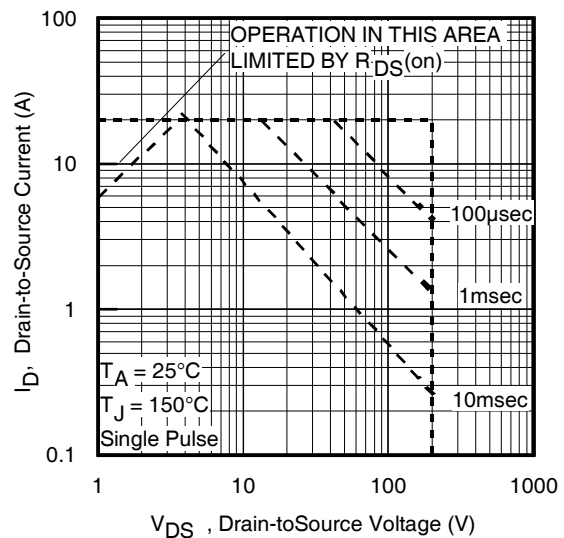


**Fig 8.** Maximum Safe Operating Area

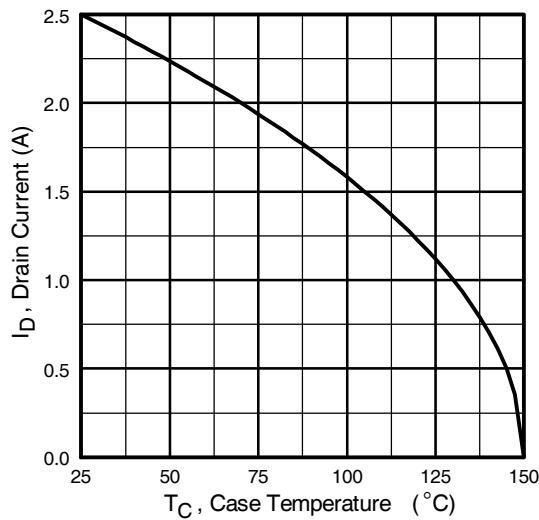


**Fig 9.** Maximum Drain Current Vs. Ambient Temperature

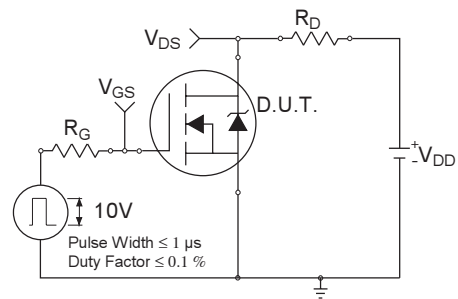

**Fig 10a.** Switching Time Test Circuit

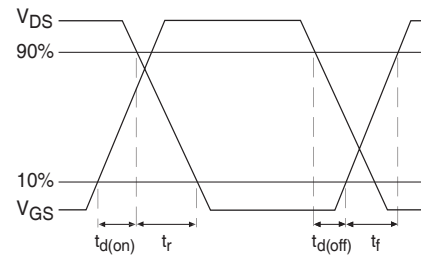


**Fig 10b.** Switching Time Waveforms

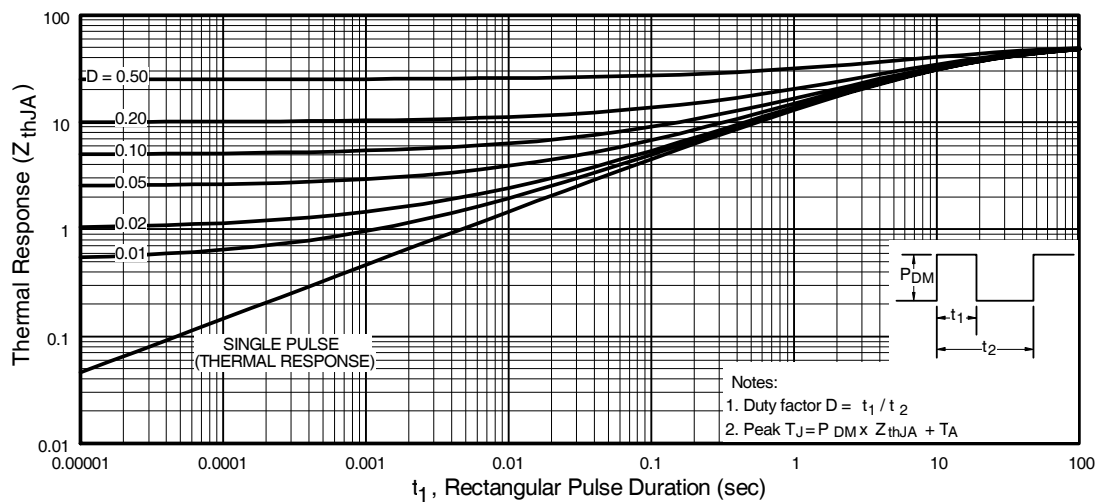


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

# IRF7450PbF


International  
**IR** Rectifier

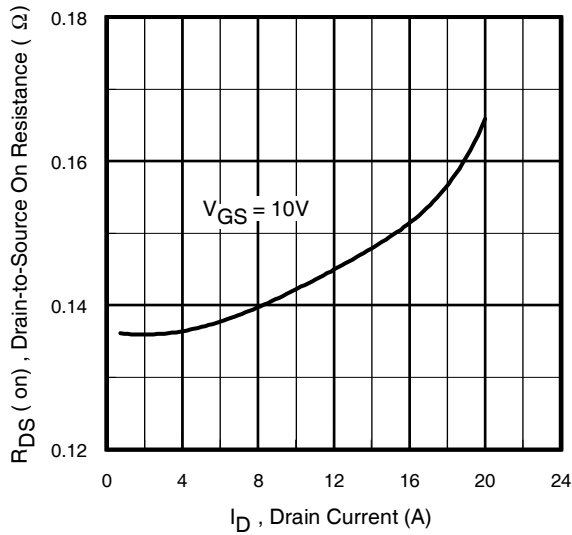


**Fig 12.** On-Resistance Vs. Drain Current

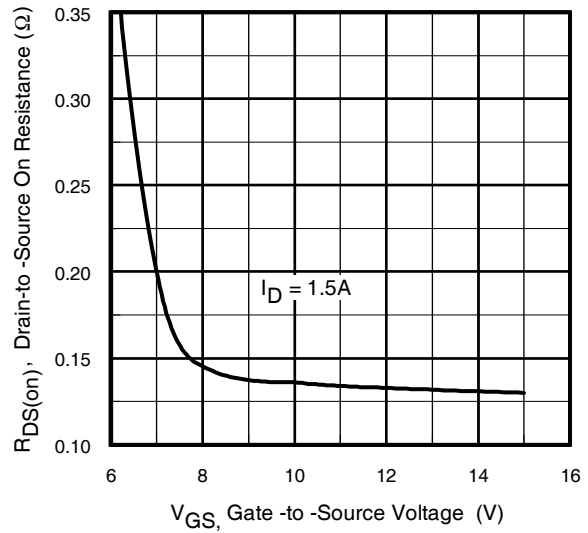


**Fig 13.** On-Resistance Vs. Gate Voltage

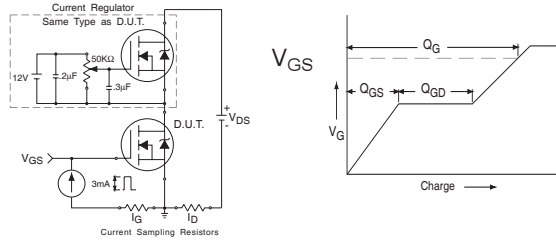

**Fig 14a&b.** Basic Gate Charge Test Circuit and Waveform

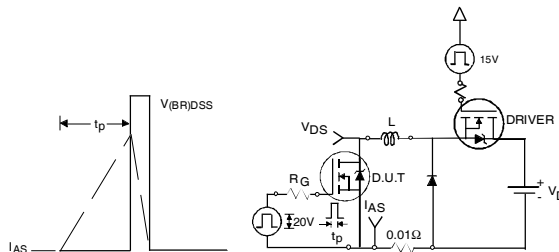


**Fig 15a&b.** Unclamped Inductive Test circuit and Waveforms

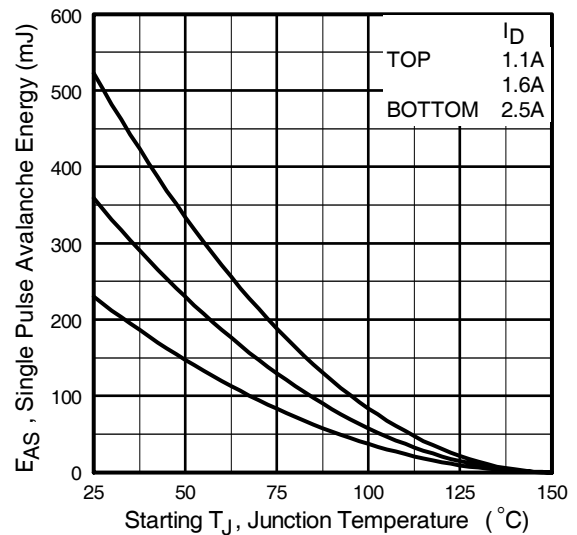



**Fig 15c.** Maximum Avalanche Energy Vs. Drain Current

## SO-8 Package Outline

Dimensions are shown in millimeters (inches)

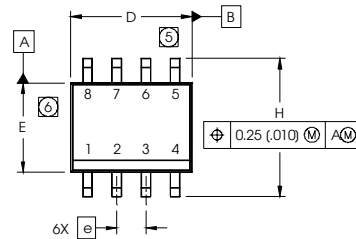


| DIM | INCHES     |       | MILLIMETERS |      |
|-----|------------|-------|-------------|------|
|     | MIN        | MAX   | MIN         | MAX  |
| A   | .0532      | .0688 | 1.35        | 1.75 |
| AI  | .0040      | .0098 | 0.10        | 0.25 |
| b   | .013       | .020  | 0.33        | 0.51 |
| c   | .0075      | .0098 | 0.19        | 0.25 |
| D   | .189       | .1968 | 4.80        | 5.00 |
| E   | .1497      | .1574 | 3.80        | 4.00 |
| e   | .050 BASIC |       | 1.27 BASIC  |      |
| e1  | .025 BASIC |       | 0.635 BASIC |      |
| H   | .2284      | .2440 | 5.80        | 6.20 |
| K   | .0099      | .0196 | 0.25        | 0.50 |
| L   | .016       | .050  | 0.40        | 1.27 |
| y   | 0°         | 8°    | 0°          | 8°   |

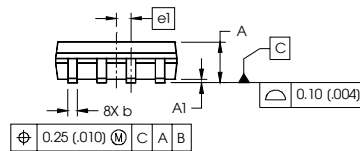


- NOTES:
1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
  2. CONTROLLING DIMENSION: MILLIMETER
  3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
  4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
  5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 (.006).
  6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 (.010).
  7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

### FOOTPRINT



## SO-8 Part Marking Information (Lead-Free)

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

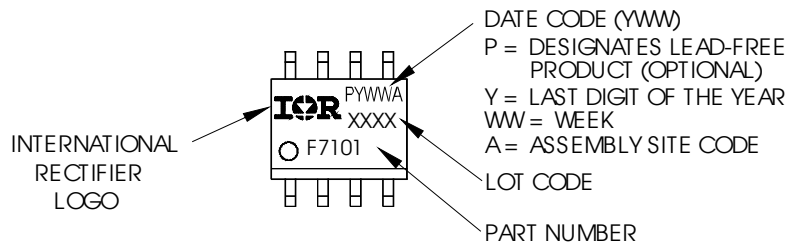


# IRF7450PbF


## SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

International  
**IR** Rectifier

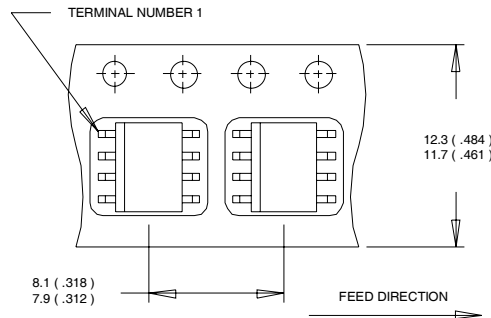

- NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
  2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
  3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

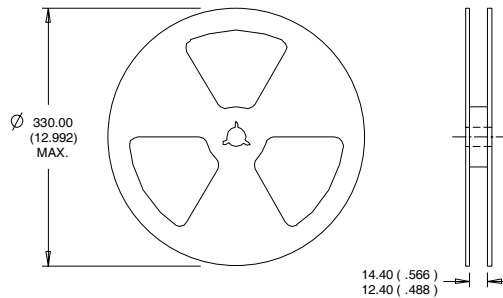

- NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
  2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

### Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 73\text{mH}$   
 $R_G = 25\Omega$ ,  $I_{AS} = 2.5\text{A}$ .
- ③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ④ When mounted on 1 inch square copper board

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.10/04

[www.irf.com](http://www.irf.com)



## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IRF7450TRPBF](#)