HEXFET® Power MOSFET


Orderable Part Number



- Advanced Process Technology
- Isolated Package
- High Voltage Isolation = 2.5KVRMS (\$)
- Sink to Lead Creepage Dist. = 4.8mm
- Fully Avalanche Rated

**Base Part Number** 

Lead-Free



$V_{ exttt{DSS}}$	55V
R <sub>DS(on)</sub>	0.04Ω
l <sub>D</sub>	21A

Trans-
TO-220 Full-Pak

G	D	S
Gate	Drain	Source

### Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low onresistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The TO-220 Full Pak eliminates the need for additional insulating hardware in commercial-industrial applications. The molding compound used provides a high isolation capability and a low thermal resistance between the tab and external heat sink. This isolation is equivalent to using a 100 micron mica barrier with standard TO-220 product. The Fullpak is mounted to a heat sink using a single clip or by a single screw fixing.

Package Type

		Form	Quantity		
IRFIZ34NPb	F TO-220 Full-Pak	Tube	50	50 IRFIZ34NPb	
Absolute Maximu	m Ratings				
Symbol		arameter	ı	Max.	Units
I <sub>D</sub> @ T <sub>C</sub> = 25°C	Continuous Drain Current, '	V <sub>GS</sub> @ 10V		21	
I <sub>D</sub> @ T <sub>C</sub> = 100°C	@ T <sub>C</sub> = 100°C Continuous Drain Current, V <sub>GS</sub> @ 10V			15	Α
I <sub>DM</sub>	Pulsed Drain Current ① ⑥		100		
$P_D @ T_C = 25^{\circ}C$	Maximum Power Dissipatio	n	37		W

**Standard Pack** 

$I_D @ T_C = 25^{\circ}C$	Continuous Drain Current, V <sub>GS</sub> @ 10V	21	
I <sub>D</sub> @ T <sub>C</sub> = 100°C	Continuous Drain Current, V <sub>GS</sub> @ 10V	15	А
I <sub>DM</sub>	Pulsed Drain Current ①⑥	100	
P <sub>D</sub> @T <sub>C</sub> = 25°C	Maximum Power Dissipation	37	W
	Linear Derating Factor	0.24	W/°C
$V_{GS}$	Gate-to-Source Voltage	± 20	V
E <sub>AS</sub>	Single Pulse Avalanche Energy (Thermally Limited) ②⑥	110	mJ
I <sub>AR</sub>	Avalanche Current ①⑥		A
E <sub>AR</sub>	Repetitive Avalanche Energy ①	3.7	mJ
dv/dt	Peak Diode Recovery dv/dt36	5.0	V/ns
T <sub>J</sub>	Operating Junction and	-55 to + 175	
T <sub>STG</sub>	Storage Temperature Range		°C
	Soldering Temperature, for 10 seconds (1.6mm from case)	300	
	Mounting torque, 6-32 or M3 screw	10 lbf•in (1.1N•m)	

### Thermal Resistance

Symbol	Parameter	Тур.	Max.	Units
$R_{ heta JC}$	Junction-to-Case		4.1	°C/W
$R_{ heta JA}$	Junction-to-Ambient		65	C/VV

2017-04-27



### Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)


	Parameter	Min.	Тур.	Max.	Units	Conditions	
V <sub>(BR)DSS</sub>	Drain-to-Source Breakdown Voltage	55			V	$V_{GS} = 0V, I_D = 250\mu A$	
$\Delta V_{(BR)DSS}/\Delta T_{J}$	Breakdown Voltage Temp. Coefficient		0.052		V/°C	Reference to 25°C, I <sub>D</sub> = 1mA 6	
R <sub>DS(on)</sub>	Static Drain-to-Source On-Resistance			0.04	Ω	V <sub>GS</sub> = 10V, I <sub>D</sub> = 11A	
$V_{GS(th)}$	Gate Threshold Voltage	2.0		4.0	V	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$	
gfs	Forward Trans conductance	6.5			S	V <sub>DS</sub> = 25V, I <sub>D</sub> = 16A <sup>®</sup>	
I	Drain-to-Source Leakage Current			25	uА	$V_{DS} = 55V, V_{GS} = 0V$	
I <sub>DSS</sub>	Dialii-to-Source Leakage Current			250	μΑ	$V_{DS} = 44V, V_{GS} = 0V, T_{J} = 150^{\circ}C$	
1	Gate-to-Source Forward Leakage			100	nA	$V_{GS} = 20V$	
I <sub>GSS</sub>	Gate-to-Source Reverse Leakage			-100	I IIA	$V_{GS} = -20V$	
$Q_g$	Total Gate Charge			34		I <sub>D</sub> = 16A	
$Q_{gs}$	Gate-to-Source Charge			6.8	nC	V <sub>DS</sub> = 44V	
$Q_{qd}$	Gate-to-Drain Charge			14		V <sub>GS</sub> = 10V , See Fig. 6 and 13④ @	
$\mathbf{t}_{d(on)}$	Turn-On Delay Time		7.0			$V_{DD} = 26V$	
t <sub>r</sub>	Rise Time		49			I <sub>D</sub> = 16A	
t <sub>d(off)</sub>	Turn-Off Delay Time		31		ns	$R_G = 18\Omega$	
t <sub>f</sub>	Fall Time		40		R <sub>D</sub> = 1.8Ω, See Fig. 10⊕6		
L <sub>D</sub>	Internal Drain Inductance		4.5		ъЦ	Between lead, 6mm (0.25in.)	
Ls	Internal Source Inductance		7.5		from package		
C <sub>iss</sub>	Input Capacitance		700			V <sub>GS</sub> = 0V	
C <sub>oss</sub>	Output Capacitance		240		pF	$V_{DS} = 25V$	
C <sub>rss</sub>	Reverse Transfer Capacitance		100		рг	f = 1.0MHz, See Fig. 56 f = 1.0MHz	
С	Drain to Sink Capacitance		12				
Source-Drain	Ratings and Characteristics	-					
	Parameter	Min.	Тур.	Max.	Units	Conditions	
I <sub>S</sub>	Continuous Source Current			21		MOSFET symbol	


	Parameter	Min.	Тур.	Max.	Units	Conditions
Is	Continuous Source Current (Body Diode)			21		MOSFET symbol showing the
I <sub>SM</sub>	Pulsed Source Current (Body Diode) ①			100		integral reverse p-n junction diode.
$V_{SD}$	Diode Forward Voltage			1.6	V	$T_J = 25^{\circ}C, I_S = 11A, V_{GS} = 0V $ ④
t <sub>rr</sub>	Reverse Recovery Time		57	86	ns	$T_J = 25^{\circ}C, I_F = 16A$
Q <sub>rr</sub>	Reverse Recovery Charge		130	200	μС	di/dt = 100A/µs ⊕⊚
t <sub>on</sub>	Forward Turn-On Time	Intrinsio	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S+L_D$ )			

### Notes:

- ②  $V_{DD} = 25V$ , starting  $T_J = 25$ °C,  $L = 610\mu H$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 16A$  (See fig. 12)
- $\label{eq:loss_def} \ensuremath{\Im} \quad I_{SD} \leq 16A, \ di/dt \leq 420A/\mu s, \ V_{DD} \leq V_{(BR)DSS}, \ T_J \leq 175^{\circ}C.$
- 4 Pulse width  $\leq 300 \mu s$ ; duty cycle  $\leq 2\%$ .
- ⑤ t=60s, *f*=60Hz
- 6 Uses IRFZ34N data and test conditions.

2017-04-27

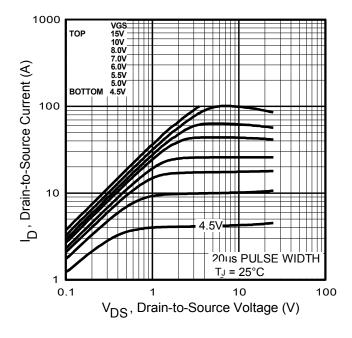



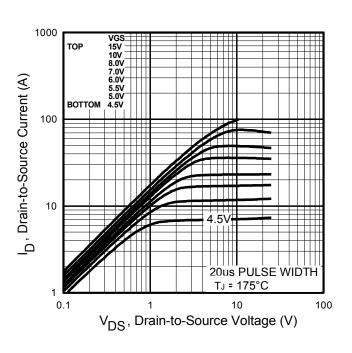


Fig. 2 Typical Output Characteristics


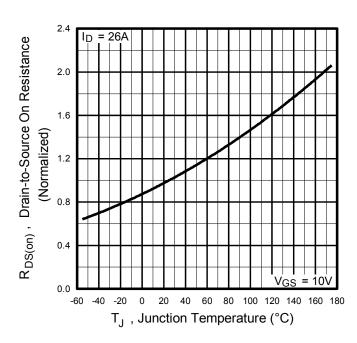
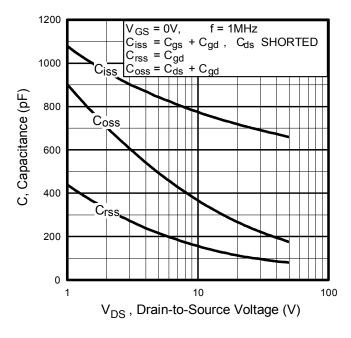


Fig. 3 Typical Transfer Characteristics




**Fig. 4** Normalized On-Resistance vs. Temperature





**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage



**Fig 6.** Typical Gate Charge vs. Gate-to-Source Voltage




Fig. 7 Typical Source-to-Drain Diode Forward Voltage

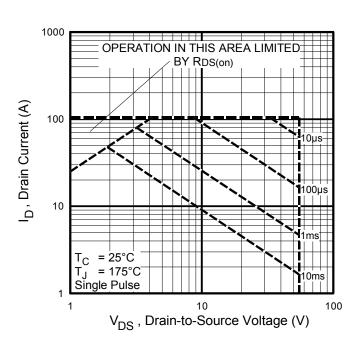


Fig 8. Maximum Safe Operating Area




Fig 9. Maximum Drain Current vs. Case Temperature




Fig 10a. Switching Time Test Circuit




Fig 10b. Switching Time Waveforms

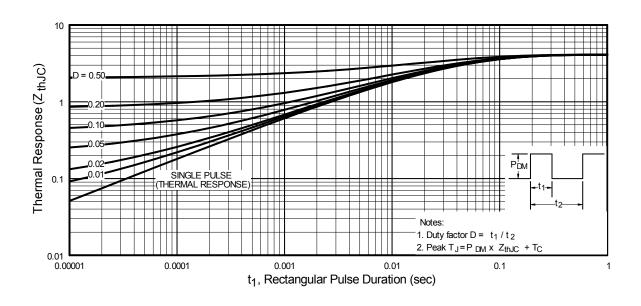


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case






Fig 12a. Unclamped Inductive Test Circuit

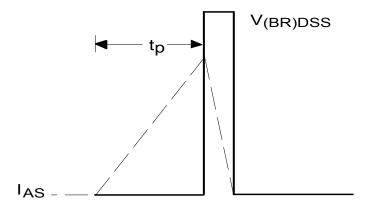


Fig 12b. Unclamped Inductive Waveforms




Fig 13a. Gate Charge Waveform




Fig 12c. Maximum Avalanche Energy vs. Drain Current





Fig 13b. Gate Charge Test Circuit

2017-04-27

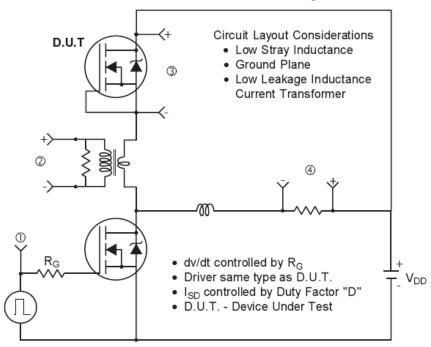

## Peak Diode Recovery dv/dt Test Circuit




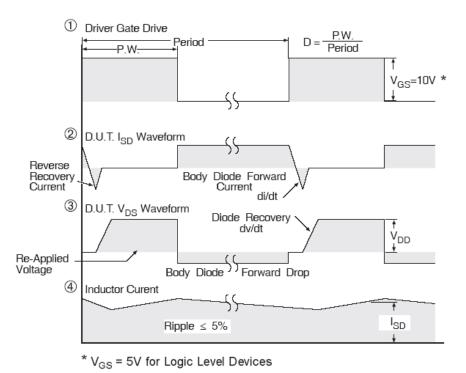



Fig 14. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs



### TO-220 Full-Pak Package Outline (Dimensions are shown in millimeters (inches))



LEAD TIP



#### NOTES:

1.0 DIMENSIONING AND TOLERANCING AS PER ASME Y14.5 M- 1994.

2,0 DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].

(1) LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.

DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTER MOST EXTREMES OF THE PLASTIC BODY.

DIMENSION 61, 63, 65 & c1 APPLY TO BASE METAL ONLY.

 $6.\overline{\delta}$  step optional on plastic body defined by dimensions u & v.

7.0 CONTROLLING DIMENSION: INCHES.

S Y M	DIMENSIONS				
B	MILLIM	ETERS	INC	HES	O T E S
L	MIN.	MAX.	MIN.	MAX.	S
Α	4.57	4.83	.180	.190	
A1	2.57	2.82	.101	.111	
A2	2.51	2.92	.099	.115	
ь	0.61	0.94	.024	.037	
ь1	0.61	0.89	.024	.035	5
b2	0.76	1.27	.030	.050	
ь3	0.76	1.22	.030	.048	5
b4	1.02	1.52	.040	.060	
b5	1.02	1.47	.040	.058	5
С	0.33	0.63	.013	.025	
c1	0.33	0.58	.013	.023	5
D	8.66	9.80	.341	.386	4
d1	15.80	16.13	.622	.635	
d2	13.97	14.22	.550	.560	
d3	12.29	12.93	.484	.509	
E	9.63	10.74	.379	.423	4
е		BSC		BSC	
L	13.21	13.72	.520	.540	
L1	3.10	3.68	.122	.145	3
n	6.05	6.60	.238	.260	
ØΡ	3.05	3.45	.120	.136	
u	2.39	2.49	.094	.098	6
V	0.41	0.51	.016	.020	6
Ø1	_	45°	_	45°	

### LEAD ASSIGNMENTS

### <u>HEXFET</u>

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE

#### IGBTs, CoPACK

- 1.- GATE
- 2.- COLLECTOR
- 3.- EMITTER


### **TO-220 Full-Pak Part Marking Information**

EXAMPLE: THIS IS AN IRFI840G WITH ASSEMBLY

LOT CODE 3432

ASSEMBLED ON WW 24, 2001 IN THE ASSEMBLY LINE "K"

Note: "P" in assembly line position indicates "Lead-Free"

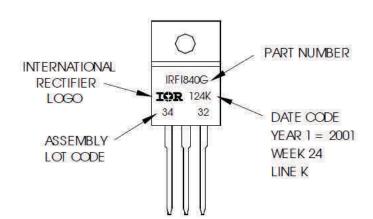

TO-220AB Full-Pak packages are not recommended for Surface Mount Application.

Note: For the most current drawing please refer to website at http://www.irf.com/package/



#### **Qualification Information**

Qualification Level	Industrial (per JEDEC JESD47F) †		
Moisture Sensitivity Level	TO-220 Full-Pak N/A		
RoHS Compliant	Yes		

† Applicable version of JEDEC standard at the time of product release.

### **Revision History**

Date	Comments	
04/27/2017	<ul> <li>Changed datasheet with Infineon logo - all pages.</li> <li>Corrected Package Outline on page 8.</li> <li>Added disclaimer on last page.</li> </ul>	

#### **Trademarks of Infineon Technologies AG**

µHVIC™, µIPM™, µPFC™, AU-ConvertIR™, AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolDP™, CoolGaN™, COOLIR™, CoolMOS™, CoolSET™, CoolSiC™, DAVE™, DI-POL™, DirectFET™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, GaNpowIR™, HEXFET™, HITFET™, HybridPACK™, iMOTION™, IRAM™, ISOFACE™, IsoPACK™, LEDrivIR™, LITIX™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OPTIGA™, OptiMOS™, ORIGA™, PowIRaudio™, PowIRStage™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, SmartLEWIS™, SOLID FLASH™, SPOC™, StrongIRFET™, SupIRBuck™, TEMPFET™, TRENCHSTOP™, TriCore™, UHVIC™, XHP™, XMC™

Trademarks updated November 2015

#### Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2016-04-19 Published by Infineon Technologies AG 81726 Munich, Germany

© 2016 Infineon Technologies AG. All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference ifx1

#### IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or **characteristics ("Beschaffenheitsgarantie").** 

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

#### IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

IRFIZ34NPBF