

- Surface Mount
- Dynamic dv/dt Rating
- Logic-Level Gate Drive
- Fast Switching
- Ease of Paralleling
- Advanced Process Technology
- Ultra Low On-Resistance
- Lead-Free

### Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The SOT-223 package is designed for surface-mount using vapor phase, infrared, or wave soldering techniques. Its unique package design allows for easy automatic pick-and-place as with other SOT or SOIC packages but has the added advantage of improved thermal performance due to an enlarged tab for heatsinking. Power dissipation of 1.0W is possible in a typical surface mount application.

### Absolute Maximum Ratings

|                                  | Parameter                                  | Max.         | Units |
|----------------------------------|--------------------------------------------|--------------|-------|
| $I_D$ @ $T_A = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS}$ @ 10V** | 6.5          | A     |
| $I_D$ @ $T_A = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS}$ @ 10V*  | 4.6          |       |
| $I_D$ @ $T_A = 70^\circ\text{C}$ | Continuous Drain Current, $V_{GS}$ @ 10V*  | 3.7          |       |
| $I_{DM}$                         | Pulsed Drain Current ①                     | 37           |       |
| $P_D$ @ $T_A = 25^\circ\text{C}$ | Power Dissipation (PCB Mount)**            | 2.1          | W     |
| $P_D$ @ $T_A = 25^\circ\text{C}$ | Power Dissipation (PCB Mount)*             | 1.0          | W     |
|                                  | Linear Derating Factor (PCB Mount)*        | 8.3          | mW/°C |
| $V_{GS}$                         | Gate-to-Source Voltage                     | $\pm 16$     | V     |
| $E_{AS}$                         | Single Pulse Avalanche Energy②             | 140          | mJ    |
| $I_{AR}$                         | Avalanche Current①                         | 4.6          | A     |
| $E_{AR}$                         | Repetitive Avalanche Energy①               | 0.10         | mJ    |
| dv/dt                            | Peak Diode Recovery dv/dt ③                | 1.3          | V/ns  |
| $T_J, T_{STG}$                   | Junction and Storage Temperature Range     | -55 to + 150 | °C    |

### Thermal Resistance

|                 | Parameter                                    | Typ. | Max. | Units |
|-----------------|----------------------------------------------|------|------|-------|
| $R_{\theta JA}$ | Junction-to-Amb. (PCB Mount, steady state)*  | 93   | 120  | °C/W  |
| $R_{\theta JA}$ | Junction-to-Amb. (PCB Mount, steady state)** | 48   | 60   |       |


\* When mounted on FR-4 board using minimum recommended footprint.

\*\* When mounted on 1 inch square copper board, for comparison with other SMD devices.

[www.irf.com](http://www.irf.com)

# IRLL3303PbF


HEXFET® Power MOSFET



$$V_{DSS} = 30V$$

$$R_{DS(on)} = 0.031\Omega$$

$$I_D = 4.6A$$




SOT-223

**Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|                                 | Parameter                            | Min. | Typ.  | Max.  | Units               | Conditions                                                 |
|---------------------------------|--------------------------------------|------|-------|-------|---------------------|------------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 30   | —     | —     | V                   | $V_{GS} = 0V$ , $I_D = 250\mu A$                           |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.034 | —     | V/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}$ , $I_D = 1mA$              |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | —     | 0.031 | $\Omega$            | $V_{GS} = 10V$ , $I_D = 4.6A$ ④                            |
|                                 |                                      | —    | —     | 0.045 |                     | $V_{GS} = 4.5V$ , $I_D = 2.3A$ ④                           |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 1.0  | —     | —     | V                   | $V_{DS} = V_{GS}$ , $I_D = 250\mu A$                       |
| $g_{fs}$                        | Forward Transconductance             | 5.5  | —     | —     | S                   | $V_{DS} = 10V$ , $I_D = 2.3A$                              |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —     | 25    | $\mu A$             | $V_{DS} = 30V$ , $V_{GS} = 0V$                             |
|                                 |                                      | —    | —     | 250   |                     | $V_{DS} = 24V$ , $V_{GS} = 0V$ , $T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —     | -100  | nA                  | $V_{GS} = -16V$                                            |
|                                 | Gate-to-Source Reverse Leakage       | —    | —     | 100   |                     | $V_{GS} = 16V$                                             |
| $Q_g$                           | Total Gate Charge                    | —    | 34    | 50    | nC                  | $I_D = 4.6A$                                               |
| $Q_{gs}$                        | Gate-to-Source Charge                | —    | 4.4   | 6.5   |                     | $V_{DS} = 24V$                                             |
| $Q_{gd}$                        | Gate-to-Drain ("Miller") Charge      | —    | 10    | 16    |                     | $V_{GS} = 10V$ , See Fig. 6 and 9 ④                        |
| $t_{d(on)}$                     | Turn-On Delay Time                   | —    | 7.2   | —     | ns                  | $V_{DD} = 15V$                                             |
| $t_r$                           | Rise Time                            | —    | 22    | —     |                     | $I_D = 4.6A$                                               |
| $t_{d(off)}$                    | Turn-Off Delay Time                  | —    | 33    | —     |                     | $R_G = 6.2\Omega$                                          |
| $t_f$                           | Fall Time                            | —    | 28    | —     |                     | $R_D = 3.2\Omega$ , See Fig. 10 ④                          |
| $C_{iss}$                       | Input Capacitance                    | —    | 840   | —     | pF                  | $V_{GS} = 0V$                                              |
| $C_{oss}$                       | Output Capacitance                   | —    | 340   | —     |                     | $V_{DS} = 25V$                                             |
| $C_{rss}$                       | Reverse Transfer Capacitance         | —    | 170   | —     |                     | $f = 1.0MHz$ , See Fig. 5                                  |

**Source-Drain Ratings and Characteristics**

|          | Parameter                              | Min.                                                                        | Typ. | Max. | Units | Conditions                                                                                                                                           |
|----------|----------------------------------------|-----------------------------------------------------------------------------|------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current (Body Diode) | —                                                                           | —    | 0.91 | A     | MOSFET symbol showing the integral reverse p-n junction diode.  |
| $I_{SM}$ | Pulsed Source Current (Body Diode) ①   | —                                                                           | —    | 37   |       |                                                                                                                                                      |
| $V_{SD}$ | Diode Forward Voltage                  | —                                                                           | —    | 1.3  | V     | $T_J = 25^\circ\text{C}$ , $I_S = 4.6A$ , $V_{GS} = 0V$ ④                                                                                            |
| $t_{rr}$ | Reverse Recovery Time                  | —                                                                           | 65   | 98   | ns    | $T_J = 25^\circ\text{C}$ , $I_F = 4.6A$                                                                                                              |
| $Q_{rr}$ | Reverse Recovery Charge                | —                                                                           | 160  | 240  | nC    | $di/dt = 100A/\mu s$ ④                                                                                                                               |
| $t_{on}$ | Forward Turn-On Time                   | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ ) |      |      |       |                                                                                                                                                      |

**Specification changes**

| Rev. # | Parameters          | Old spec. | New spec. | Comments                                  | Revision Date |
|--------|---------------------|-----------|-----------|-------------------------------------------|---------------|
| 1      | $V_{GS(th)}$ (Max.) | 2.5V      | No spec.  | Removed $V_{GS(th)}$ (Max). Specification | 11/1/96       |
| 1      | $V_{GS}$ (Max.)     | $\pm 20$  | $\pm 16$  | Decrease $V_{GS}$ (Max). Specification    | 11/1/96       |





**Notes:**

① Repetitive rating; pulse width limited by max. junction temperature. ( See fig. 11 )

②  $V_{DD} = 15V$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 13mH$   
 $R_G = 25\Omega$ ,  $I_{AS} = 4.6A$ . (See Figure 12)





③  $I_{SD} \leq 4.6A$ ,  $di/dt \leq 110A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  
 $T_J \leq 150^\circ\text{C}$


④ Pulse width  $\leq 300\mu s$ ; duty cycle  $\leq 2\%$ .

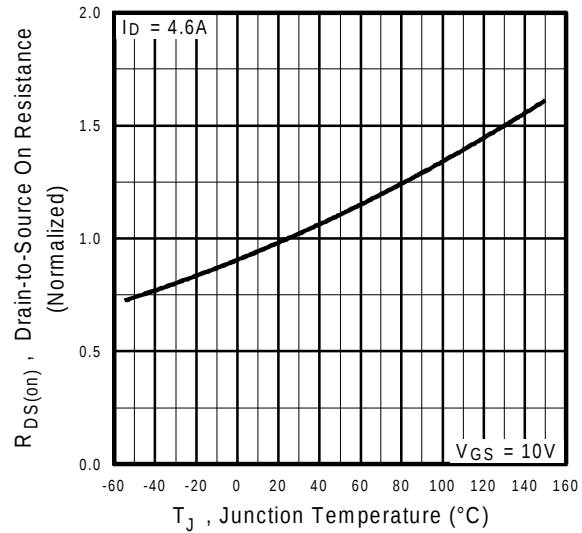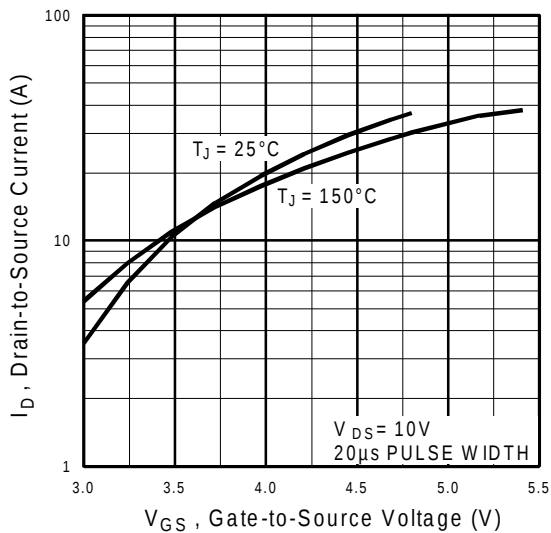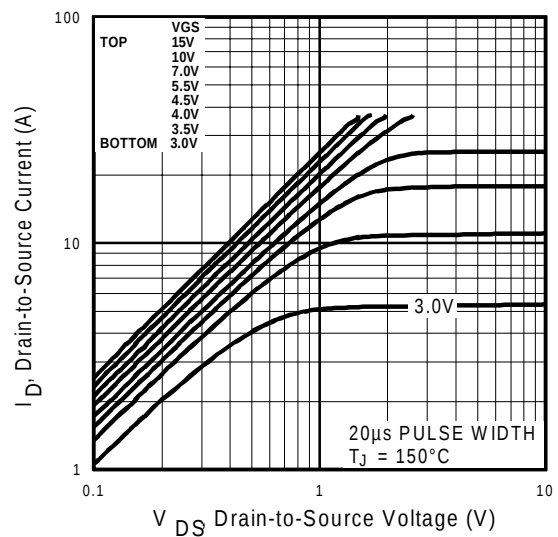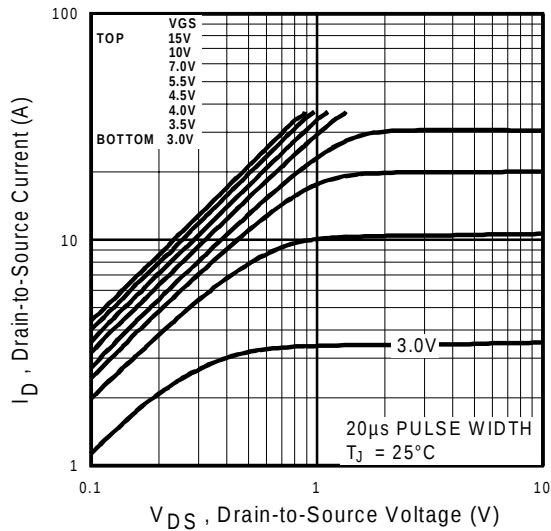


# IRLL3303PbF

International  
**IR** Rectifier

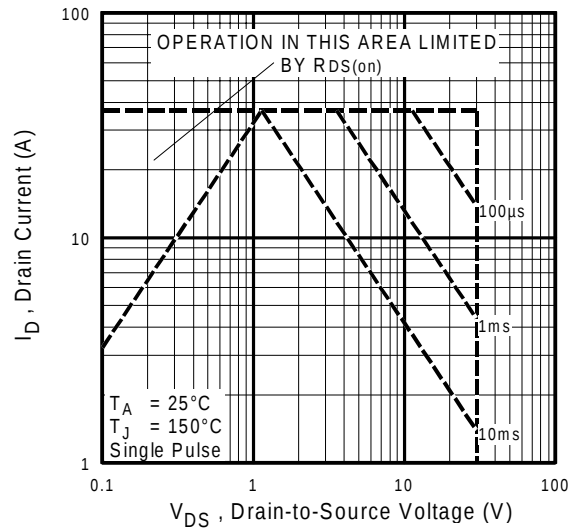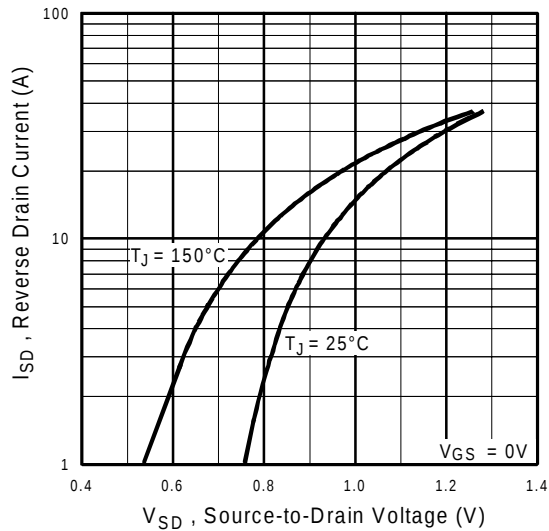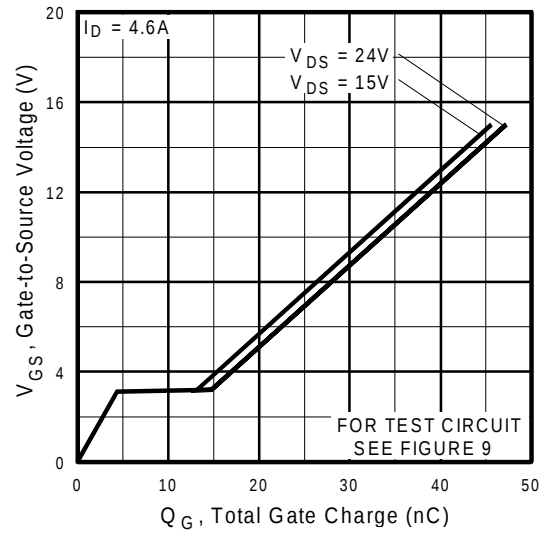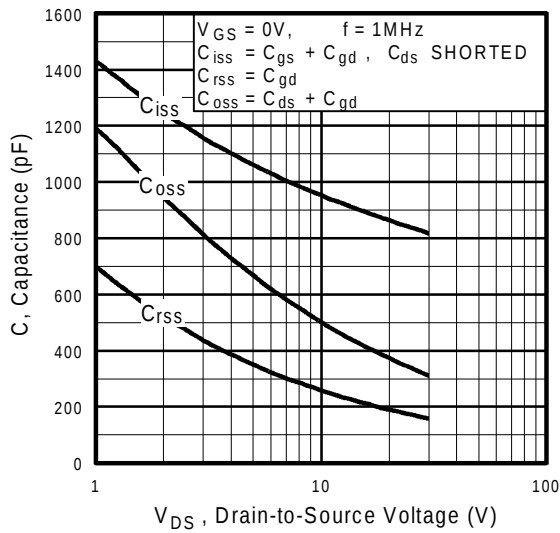


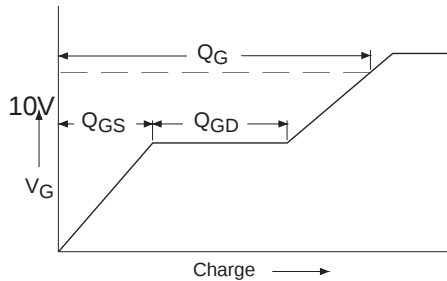


**Fig 9a.** Basic Gate Charge Waveform

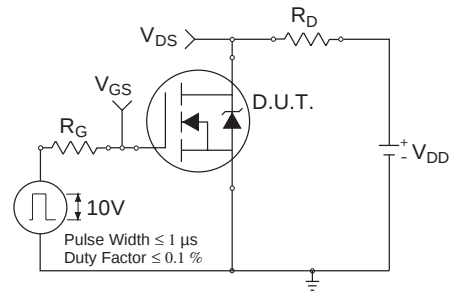


**Fig 10a.** Switching Time Test Circuit

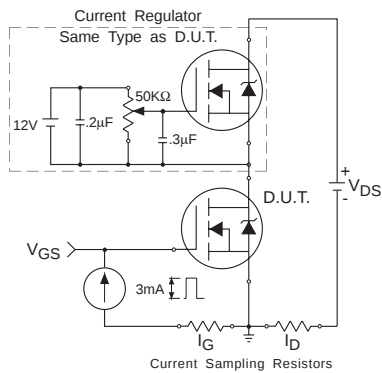

**Fig 9b.** Gate Charge Test Circuit

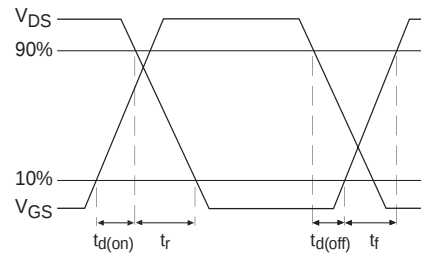

**Fig 10b.** Switching Time Waveforms

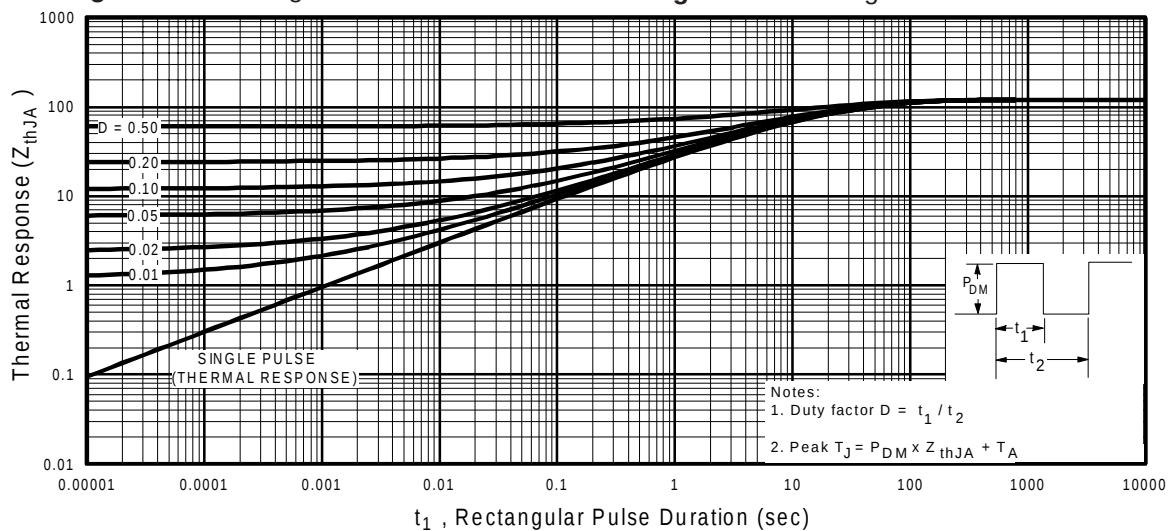

**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

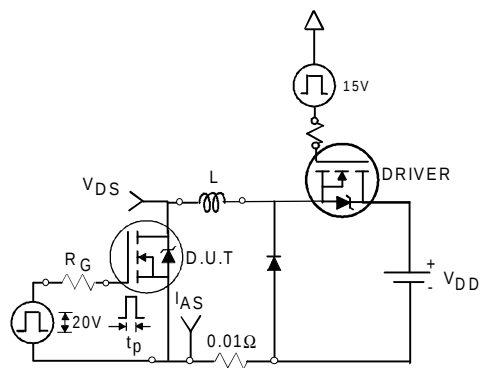


Fig 12a. Unclamped Inductive Test Circuit

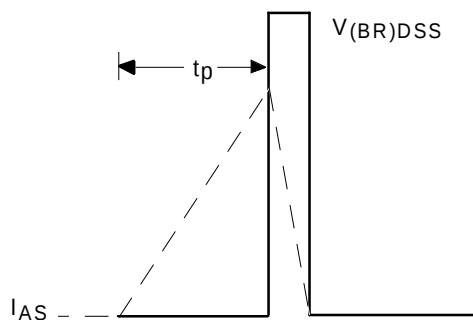


Fig 12b. Unclamped Inductive Waveforms



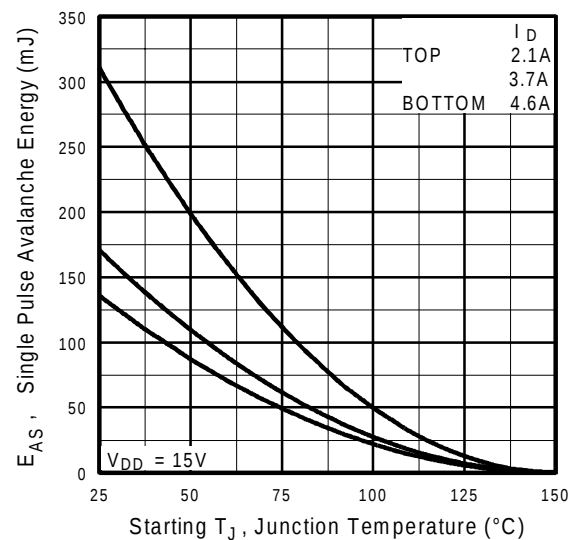


Fig 12c. Maximum Avalanche Energy  
Vs. Drain Current

## Peak Diode Recovery dv/dt Test Circuit

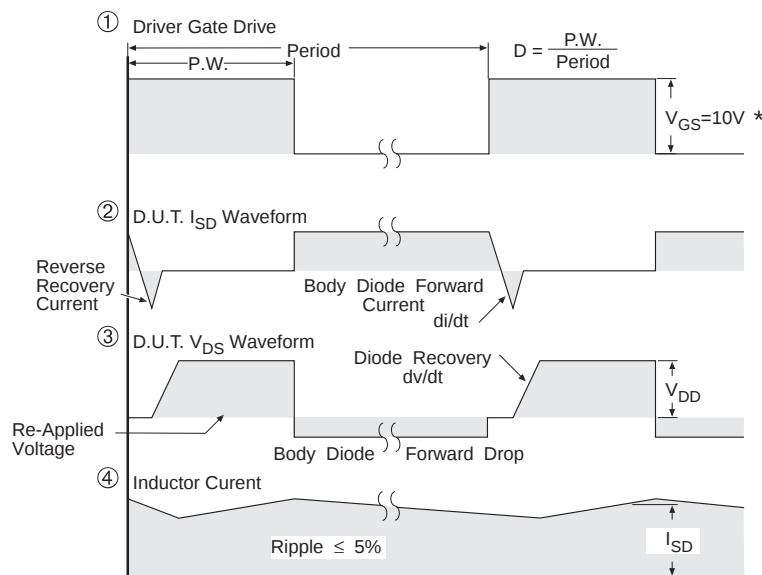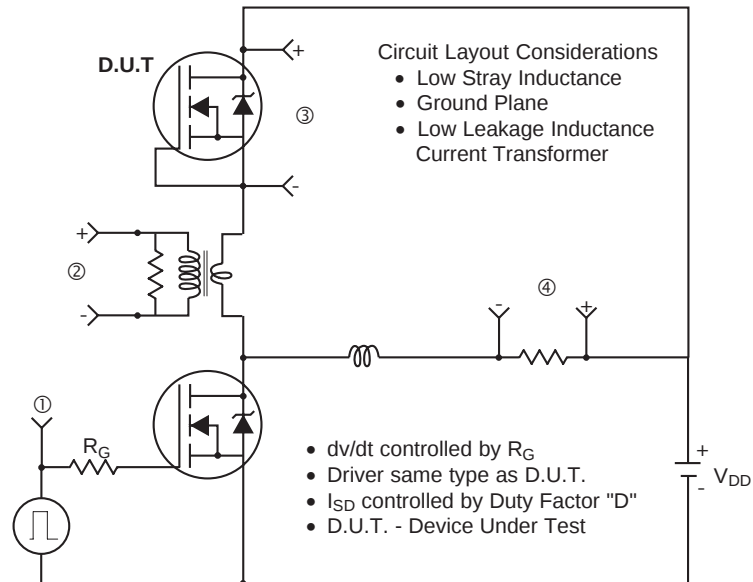

\*  $V_{GS} = 5V$  for Logic Level Devices


**Fig 13. For N-Channel HEXFETS**

# IRLL3303PbF

International  
**IR** Rectifier

## SOT-223 (TO-261AA) Package Outline


Dimensions are shown in millimeters (inches)

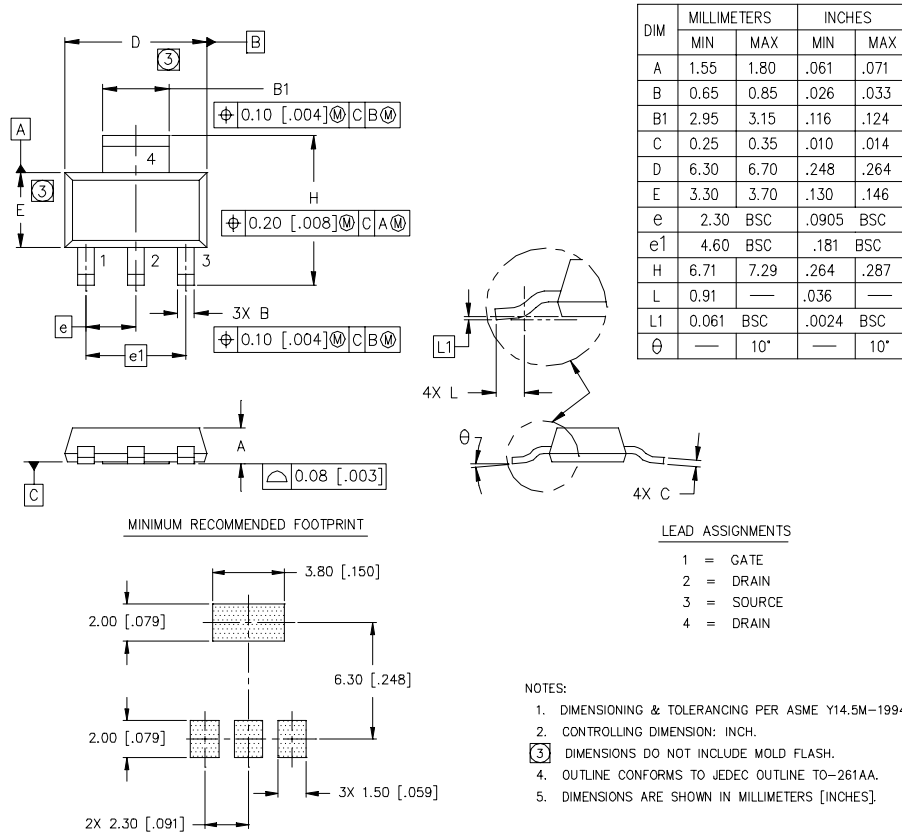

## SOT-223 (TO-261AA) Part Marking Information


### HEXFET PRODUCT MARKING

EXAMPLE: THIS IS AN IRFL014

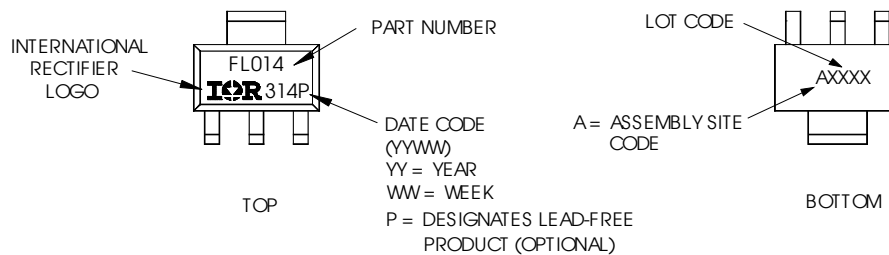


## SOT-223 (TO-261AA) Tape & Reel Information

Dimensions are shown in millimeters (inches)

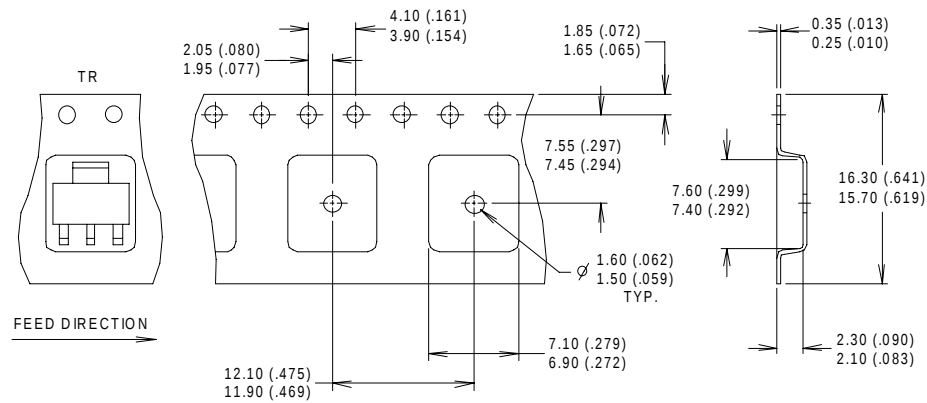


### NOTES :

1. CONTROLLING DIMENSION: MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.
3. EACH  $\varnothing 330.00$  (13.00) REEL CONTAINS 2,500 DEVICES.

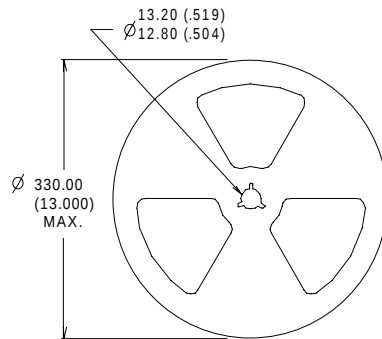

### NOTES :

1. OUTLINE CONFORMS TO EIA-418-1.
2. CONTROLLING DIMENSION: MILLIMETER..
- ③ DIMENSION MEASURED @ HUB.
- ④ INCLUDES FLANGE DISTORTION @ OUTER EDGE.

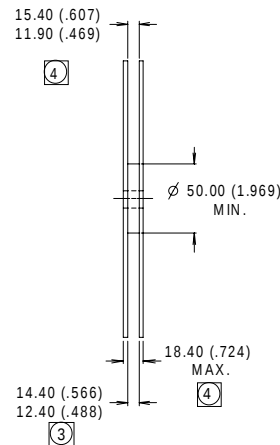

Data and specifications subject to change without notice.

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IRLL3303PBF](#) [IRLL3303TRPBF](#)