

NOTE1. SUFFIX "-E1000E" OF THE PART NUMBER INDICATES THAT 1000 PCS. OF IL-WX-*P*-HF-HD-S-*E" CONNECTORS ARE ACCOMMODATED IN 1 REEL.


2. THE LABEL, IN WHITCH PART NO., NO. OF CONNECTORS. LOT NO., TAPE WIDTH

- AND FEED PITCH ARE MARKED IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.
- 3. REFER TO THE DRAWING. SJ037738 (IL-WX-*P*-HF-HD-S-*E) FOR THE DIMENSIONS OF THE CONNECTOR.
- 4. IN CASE THAT DIMENSIONS B(TYPE WIDTH) IS 16mm, 24mm, THERE IS PILOT HOLES AT THE ONE SIDE ONLY.
- 注1. "IL-WX-*P*-HF-HD-S-*-E1000E"は収納数1000個入りのリールに収納された品名を表す。
- 2. 図示の位置に下記のシールを貼り、品名,収納数,ロットNo.及びテープの幅と送りピッチを記入する。
- 3. コネクタ寸法はSJ037738(IL-WX-*P*-HF-HD-S-*E)参照。
- 4. B寸法(テープ幅)が16,24の場合、パイロット穴は片側のみである。

↑ A B L E 1

<u> </u>							
PART NO.	А	В	С	D	E	CARRIER TAPE MATERIAL	
IL-WX- 6P*-HF-HD-S-*-E1000E	18	16	7.5	8.2			
IL-WX- 8P*-HF-HD-S-*-E1000E	18	16	7.5	9.0			
IL-WX-10P*-HF-HD-S-*-E1000E	18	16	7.5	9.8			
IL-WX-12P*-HF-HD-S-*-E1000E	18	16	7.5	10.6			
IL-WX-14P*-HF-HD-S-*-E1000E	26	2 4	11.5	11.4			
IL-WX-16P*-HF-HD-S-*-E1000E	26	2 4	11.5	12.2			
IL-WX-18P*-HF-HD-S-*-E1000E	26	2 4	11.5	13.0			
[L-WX-20P*-HF-HD-S-*-E1000E	26	2 4	11.5	13.8		3 4	
IL-WX-22P*-HF-HD-S-*-E1000E	26	2 4	11.5	14.6		POLYSTYRENE	
IL-WX-24P*-HF-HD-S-*-E1000E	26	2 4	11.5	15.4			
IL-WX-26P*-HF-HD-S-*-E1000E	26	2 4	11.5	16.2			
IL-WX-28P*-HF-HD-S-*-E1000E	26	2 4	11.5	17.0			
IL-WX-30P*-HF-HD-S-*-E1000E	26	2 4	11.5	17.8			
IL-WX-32P*-HF-HD-S-*-E1000E	26	2 4	11.5	18.6			
IL-WX-34P*-HF-HD-S-*-E1000E	3 4	3 2	14.2	19.4	28.4		
IL-WX-36P*-HF-HD-S-*-E1000E	3 4	3 2	14.2	20.2	28.4		

版 数 VER.	年月日 DATE	CN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	查 閲 APPD.	承 認 APPD.
2	30.May.2014	009317	ERROR CORRECTION ETC.	M.SAITOU	N.UCHIYAMA		T.KUDOU
3	30.Jun.2014	010228	CHANGE CARRIER TAPE MATERIAL, THICKNESS AND REEL DIAMETER		N.UCHIYAMA		T.KUDOU
			CHANGE CARRIER TAPE MATERIAL		N.UCHIYAMA		T.KUDOU

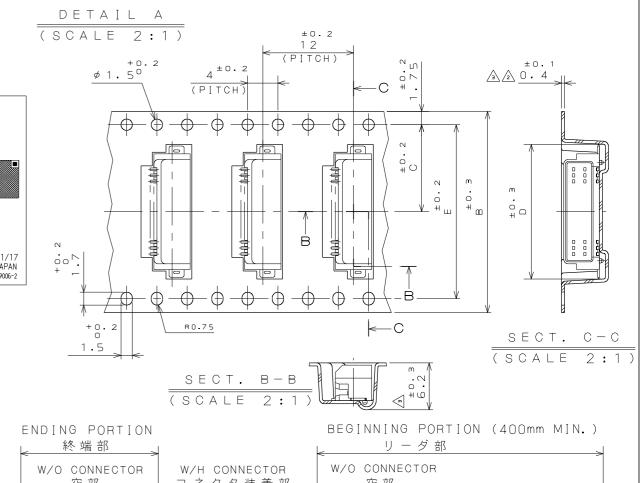

<u></u>	端部	── >		<u></u>	リーダ部	\rightarrow
<	CONNE 空部 nm MI	コネ	CONNECTOR クタ装着音 OO PCS.)		3	
		D I REC				
EEI		D A D E B				

				Л Ш // [6]			,	
4	PAPER	REEL		PAPER				
3	COVER	TAPE	_	PET.				
2	CARRI	ER TAPE	_	TABLE1 🕸				
1	CONNE	CTOR	1000				[L-WX-*P*-HF-HD-S-*E SJ037738(NOTE3)	
守 号 NO.		称 RIPTION	個数 QTY.	材 料 MATER[AL	IAF_	仕 FINISH	備 REMARKS	
上様書(SPECIFICATION)			第1版(ORIGINAL DATE) 3.Mar.2003 製図		尺度(SCALE) ————	シリーズ(SERIES)	日本航空電子工業株式会社	A 3
般公差((GENERAL TO	LERANCE)	DR. 担当 CHK.	H.SAKURADA T.MORITAKE	名称(TITLE)		JAPAN AVIATION ELECTRONICS	Z E
寸法(D ・	<u>IMENSION)</u> ± 0.8	角度 (ANGLES)	查閱 APPD.		IL-WX-*P* -HD-S-E	-HF 3-E1000E	INDUSTRY, LTD.	S
.×	± 0.4	X _o X . ∓	承認 APPD.	T.MORINO			図面番号(DRAWING NO.)	版数 (VER.)
·××		単位(UNIT):mm			質量(MASS) —————		\$J037739	4
Λ		•			ロブオ JAE CON	NECTOR DIV. PROPRIE	TARY.	

LEAD FREE この製品は鉛フリー品です

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT(C) 2003, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JAE Electronics:

IL-WX-12P-HF-HD-S-B-E1000E