


NOTE1. SUFFIX "-E1000E" OF THE PART NUMBER INDICATES THAT 1000 PCS. OF IL-WX-*P*-HF-HD-S-*E" CONNECTORS ARE ACCOMMODATED IN 1 REEL.

2 THE LABEL IN WHITCH PART NO NO OF CONNECTORS LOT NO TAPE WIF

- 2. THE LABEL, IN WHITCH PART NO., NO. OF CONNECTORS. LOT NO., TAPE WIDTH AND FEED PITCH ARE MARKED IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.
- 3. REFER TO THE DRAWING. SJ037738 (IL-WX-*P*-HF-HD-S-*E) FOR THE DIMENSIONS OF THE CONNECTOR.
- 4. IN CASE THAT DIMENSIONS B(TYPE WIDTH) IS 16mm, 24mm, THERE IS PILOT HOLES AT THE ONE SIDE ONLY.
- 注1. "IL-WX-*P*-HF-HD-S-*-E1000E"は収納数1000個入りのリールに収納された品名を表す。
- 2. 図示の位置に下記のシールを貼り、品名,収納数,ロットNo.及びテープの幅と送りピッチを記入する。
- 3. コネクタ寸法はSJ037738([L-WX-*P*-HF-HD-S-*E)参照。
- 4. B寸法(テープ幅)が16,24の場合、パイロット穴は片側のみである。

PART NO.	А	В	С	D	E	CARRIER TAPE MATERIAL
IL-WX- 6P*-HF-HD-S-*-E1000E	18	16	7.5	8.2		
IL-WX- 8P*-HF-HD-S-*-E1000E	18	16	7.5	9.0		
IL-WX-10P*-HF-HD-S-*-E1000E	18	16	7.5	9.8		
IL-WX-12P*-HF-HD-S-*-E1000E	18	16	7.5	10.6		
IL-WX-14P*-HF-HD-S-*-E1000E	26	2 4	11.5	11.4		
IL-WX-16P*-HF-HD-S-*-E1000E	26	2 4	11.5	12.2		
IL-WX-18P*-HF-HD-S-*-E1000E	26	2 4	11.5	13.0		
IL-WX-20P*-HF-HD-S-*-E1000E	26	2 4	11.5	13.8		3 4
IL-WX-22P*-HF-HD-S-*-E1000E	26	2 4	11.5	14.6		POLYSTYRENE
IL-WX-24P*-HF-HD-S-*-E1000E	26	2 4	11.5	15.4		
IL-WX-26P*-HF-HD-S-*-E1000E	26	2 4	11.5	16.2		
IL-WX-28P*-HF-HD-S-*-E1000E	26	2 4	11.5	17.0		
IL-WX-30P*-HF-HD-S-*-E1000E	26	2 4	11.5	17.8		
IL-WX-32P*-HF-HD-S-*-E1000E	26	2 4	11.5	18.6		
IL-WX-34P*-HF-HD-S-*-E1000E	3 4	3 2	14.2	19.4	28.4	
IL-WX-36P*-HF-HD-S-*-E1000E	3 4	3 2	14.2	20.2	28.4	

版 数 VER.	年月日 DATE	CN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	查 閱 APPD.	承 認 APPD.
2	30.May.2014	009317	ERROR CORRECTION ETC.	M.SAITOU	N.UCHIYAMA		T.KUDOU
3	30.Jun.2014	010228	CHANGE CARRIER TAPE MATERIAL, THICKNESS AND REEL DIAMETER		N.UCHIYAMA		T.KUDOU
			CHANGE CARRIER TAPE MATERIAL		N.UCHIYAMA		T.KUDOU

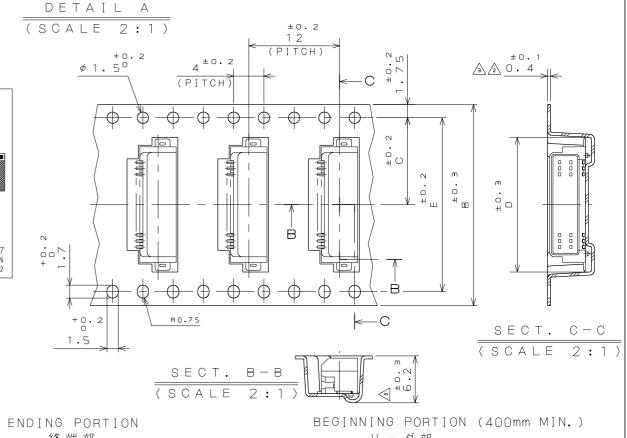

ENDING PORTION	BEGINNING PORTION (400mm MIN.)
終端部	<u>リーダ部</u>
W/O CONNECTOR W/H CONNECTOR	W/O CONNECTOR
空部 コネクタ装着部 (40mm MIN.) (1000 PCS.)	空部 (20mm MIN.)
(4011111 WITH.)	(2011111 141111.)
	7/
000000	0000000
DIRECTION ——	──
引出方向	

				51 伍 刀 四				
4	PAPER	REEL		PAPER				
3	COVER	TAPE		PET.				
2	CARRII	ER TAPE		TABLE1 🕸				
1	CONNE	CTOR	1000				IL-WX-*P*-HF-HD-S-*E SJ037738(NOTE3)	
符 号 NO.	名 DESC	称 RIPTION	個 数 QTY.	材 料 MATERIAL	IAF_	t <u>t</u> FINISH	備 REMARKS	
仕様書	(SPECIFIC	CATION)	第1版(C		度(SCALE)	シリーズ(SERIES)	O I OIL OOM	
				3.Mar.2003		Reference	日本航空電子工業株式会社	m
			製図 DR.	H.SAKURADA 2	 3称(TITLE)	kereren	JAPAN AVIATION	4
一般公差((BENERAL TO	LERANCE)	担当 CHK.	T.MORITAKE			ELECTRONICS	Z E
寸法 (D	IMENSION)	角度(ANGLES)	査閲		[L-WX-* P*	-HF	JAC INDUSTRY, LTD.	
١.	±0.8	X° ±	APPD.		-HD-S-B	-E1000E		S
.×	± 0.4	X _o X ,∓	承認 APPD.	T.MORINO	_	. 2 3 3 =	図面番号(DRAWING NO.)	版数 (VER.)
·××		単位(UNIT):mm		Ĭ	(量(MASS)	⊕ -E-]-	SJ037739	4

LEAD FREE この製品は鉛フリー品です

 $\star \times \times \times \pm$

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT(C) 2003, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JAE Electronics:

IL-WX-6P-HF-HD-S-B-E1000E