

NOTE1. SUFFIX "-E1000E" OF THE PART NUMBER INDICATES THAT 1000 PCS. OF IL-WX-\*P\*-HF-HD-S-\*E" CONNECTORS ARE ACCOMMODATED IN 1 REEL.


2. THE LABEL, IN WHITCH PART NO., NO. OF CONNECTORS. LOT NO., TAPE WIDTH

- AND FEED PITCH ARE MARKED IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.
- 3. REFER TO THE DRAWING. SJ037738 (IL-WX-\*P\*-HF-HD-S-\*E) FOR THE DIMENSIONS OF THE CONNECTOR.
- 4. IN CASE THAT DIMENSIONS B(TYPE WIDTH) IS 16mm, 24mm, THERE IS PILOT HOLES AT THE ONE SIDE ONLY.
- 注1. "IL-WX-\*P\*-HF-HD-S-\*-E1000E"は収納数1000個入りのリールに収納された品名を表す。
- 2. 図示の位置に下記のシールを貼り、品名,収納数,ロットNo.及びテープの幅と送りピッチを記入する。
- 3. コネクタ寸法はSJ037738(IL-WX-\*P\*-HF-HD-S-\*E)参照。
- 4. B寸法(テープ幅)が16,24の場合、パイロット穴は片側のみである。

## ↑ A B L E 1

<u> </u>							
PART NO.	А	В	С	D	E	CARRIER TAPE MATERIAL	
IL-WX- 6P*-HF-HD-S-*-E1000E	18	16	7.5	8.2			
IL-WX- 8P*-HF-HD-S-*-E1000E	18	16	7.5	9.0			
IL-WX-10P*-HF-HD-S-*-E1000E	18	16	7.5	9.8			
IL-WX-12P*-HF-HD-S-*-E1000E	18	16	7.5	10.6			
IL-WX-14P*-HF-HD-S-*-E1000E	26	2 4	11.5	11.4			
IL-WX-16P*-HF-HD-S-*-E1000E	26	2 4	11.5	12.2			
IL-WX-18P*-HF-HD-S-*-E1000E	26	2 4	11.5	13.0			
[L-WX-20P*-HF-HD-S-*-E1000E	26	2 4	11.5	13.8		3 4	
IL-WX-22P*-HF-HD-S-*-E1000E	26	2 4	11.5	14.6		POLYSTYRENE	
IL-WX-24P*-HF-HD-S-*-E1000E	26	2 4	11.5	15.4			
IL-WX-26P*-HF-HD-S-*-E1000E	26	2 4	11.5	16.2			
IL-WX-28P*-HF-HD-S-*-E1000E	26	2 4	11.5	17.0			
IL-WX-30P*-HF-HD-S-*-E1000E	26	2 4	11.5	17.8			
IL-WX-32P*-HF-HD-S-*-E1000E	26	2 4	11.5	18.6			
IL-WX-34P*-HF-HD-S-*-E1000E	3 4	3 2	14.2	19.4	28.4		
IL-WX-36P*-HF-HD-S-*-E1000E	3 4	3 2	14.2	20.2	28.4		

版 数 VER.	年月日 DATE	CN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	查 閲 APPD.	承 認 APPD.
2	30.May.2014	009317	ERROR CORRECTION ETC.	M.SAITOU	N.UCHIYAMA		T.KUDOU
3	30.Jun.2014	010228	CHANGE CARRIER TAPE MATERIAL, THICKNESS AND REEL DIAMETER		N.UCHIYAMA		T.KUDOU
			CHANGE CARRIER TAPE MATERIAL		N.UCHIYAMA		T.KUDOU

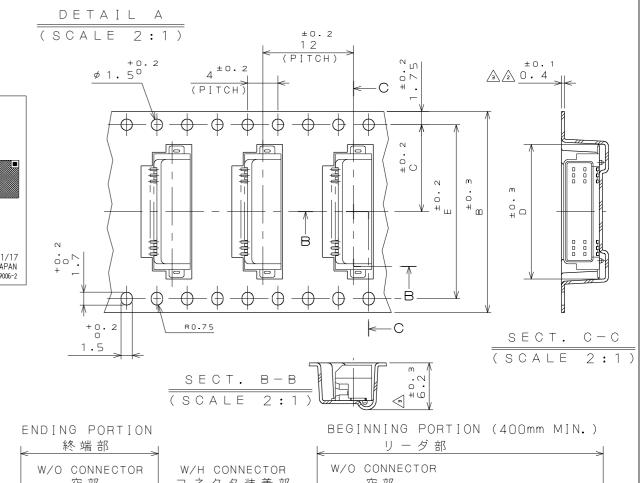

<u></u>	端部	<b>──</b> >		<u></u>	リーダ部	$\rightarrow$
<	CONNE 空部 nm MI	コネ	CONNECTOR クタ装着音 OO PCS.)		3	
		D I REC				
EEI		D A D E B				

				Л Ш // [6]			,	
4	PAPER	REEL		PAPER				
3	COVER	TAPE	_	PET.				
2	CARRI	ER TAPE	_	TABLE1 🕸				
1	CONNE	CTOR	1000				[L-WX-*P*-HF-HD-S-*E SJ037738(NOTE3)	
守 号 NO.		称 RIPTION	個数 QTY.	材 料 MATER[AL	IAF_	仕 FINISH	備 REMARKS	
上様書(SPECIFICATION)			第1版(ORIGINAL DATE) 3.Mar.2003 製図		尺度(SCALE) ————	シリーズ(SERIES)	日本航空電子工業株式会社	A 3
般公差((	GENERAL TO	LERANCE)	DR. 担当 CHK.	H.SAKURADA T.MORITAKE	名称(TITLE)		JAPAN AVIATION ELECTRONICS	Z E
寸法(D ・	<u>IMENSION)</u> ± 0.8	角度 (ANGLES)	查閱 APPD.		IL-WX-*P* -HD-S-E	-HF 3-E1000E	INDUSTRY, LTD.	S
.×	± 0.4	X <sub>o</sub> X . ∓	承認 APPD.	T.MORINO			図面番号(DRAWING NO.)	版数 (VER.)
·××		単位(UNIT):mm			質量(MASS) —————		\$J037739	4
$\Lambda$		•			ロブオ JAE CON	NECTOR DIV. PROPRIE	TARY.	

LEAD FREE この製品は鉛フリー品です

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT(C) 2003, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JAE Electronics:

IL-WX-6PB-HF-HD-S-B-E1000E