

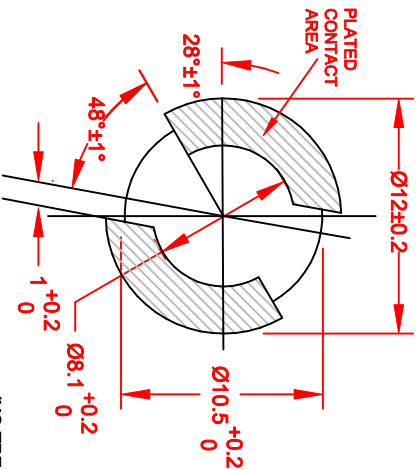


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	9/21/83
H	CHANGE TO METRIC	11/9/98
I	DRAWING CONVERTED TO	1/5/00
J	CAD- ADD LAMP EW87 LAMPS EW46, EW08, EW26, EW27, EW40, EW50, EW61, EW84, EW88	2/1/00

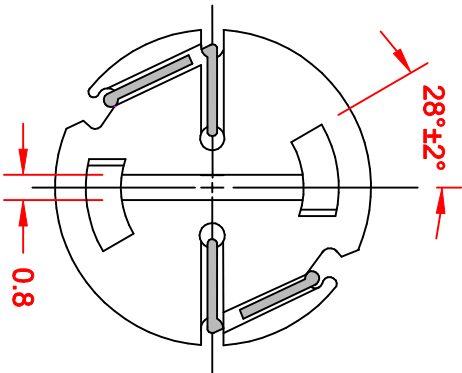

PC BOARD PUNCH PATTERN (NO TREATMENT SUCH AS APPLICATION OF FLUX, SHALL BE DONE.)

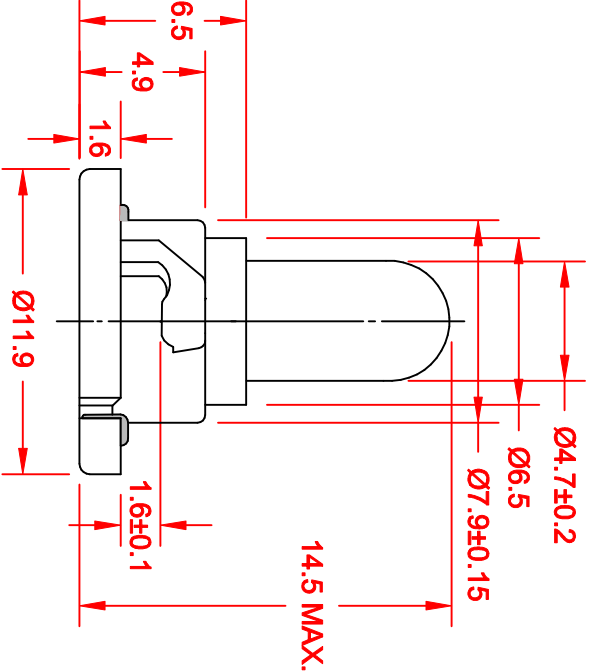

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	*MSCP ±25%	*LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
ENW1-EW44	12.0	.040	.090	1.13	10,000	C-2V
ENW1-EW48	14.0	.040	.150	1.89	16,000	C-2V
ENW1-EW07	14.0	.080	.300	3.77	15,000	C-2V
ENW1-EW10	14.0	.100	.500	6.29	10,000	C-2F
ENW1-EW33	14.0	.125	.700	9.00	10,000	C-2F
ENW1-EW87	14.0	.140	.950	12.00	7,000	C-2V

*LAMP RATED ONLY (NOT IN BASE)

METRIC	DIMENSIONS ARE IN MILLIMETERS	JKL COMPONENTS CORPORATION			
	TOLERANCE UNLESS OTHERWISE SPECIFIED	TITLE T-1 1/2 NEO-WEDGE BASE WITH MULTIPLE LAMP LISTING			
THIRD ANGLE PROJECTION	1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0	SIZE	FROM NO.	DRAWING NO.	REV.
DRAWN BY L. WENGSTROM	APPROVED BY LW	A	55335	ENW1-MULTI	J
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE	NONE	RELEASED DATE 9/21/83	REVISION DATE 2/1/00
				NO.	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JKL Components:](#)

[ENW1-EW07](#) [ENW1-EW87/GRA](#)