

a Knowles Precision Devices brand

13.75 GHz Surface Mount Bandpass Filter



www.knowlescapacitors.com

B138LA2S

DESCRIPTION

SPECIFICATIONS*


One of DLI's surface mountable catalog bandpass filters. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

FEATURES

- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Parameter	Frequency Range (GHz)	Min	Тур.	Max
Insertion Loss (dB)	13.5 - 14.0	-	2.75	3.25
Return Loss (dB)		12	15	-
Low Side Rejection (dB)	DC - 12.5	40	45	-
High Side Rejection (dB)	14.75– 22.0	40	45	
Input Power (W)				TBD
Size (L x W x H)	0.450x 0.180 x 0.098 in 11.43 x 4.57 x 2.5 mm			

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary up to ±0.5dB over

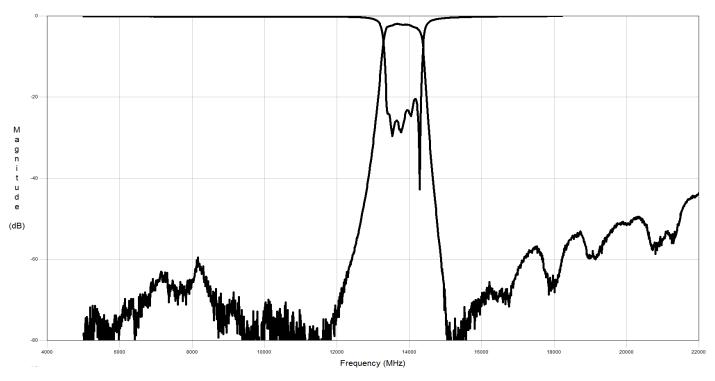

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com

Typical Measured Performance




13.75 GHz Surface Mount Bandpass Filter




B138LA2S

Physical Dimensions

Units = inches

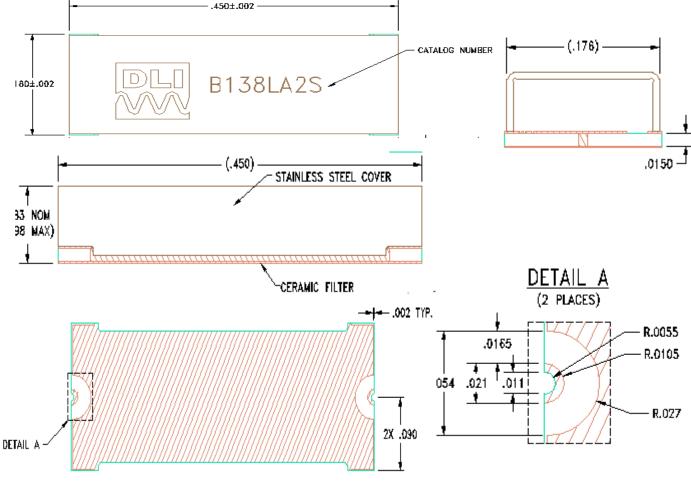

Recommended PCB Layout

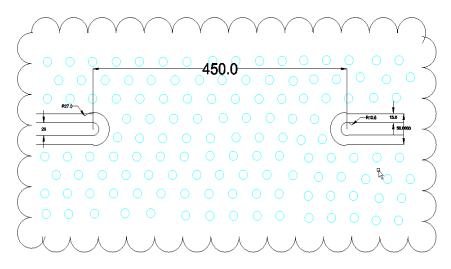

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.



2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles: B138LA2S