

16.0 GHz Surface Mount Bandpass Filter



B160KA1S

DESCRIPTION

One of DLI's surface mountable catalog bandpass filters. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

FEATURES


- Small Size
- · Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Parameter	Frequency Range (GHz)	Min	Тур.	Max
Insertion Loss (dB)	15.75 - 16.25	ı	2.75	3.0
Return Loss (dB)		12	15	ı
Low Side Rejection (dB)	DC - 14.25	40	45	1
High Side Rejection (dB)	17.75 – 20.5	40	45	
Input Power (W)				TBD
Size (L x W x H)	0.400 x 0.200 x 0.098 in 10.16 x 5.0 x 2.5 mm			

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary up to ±0.5dB over

Typical Measured Performance

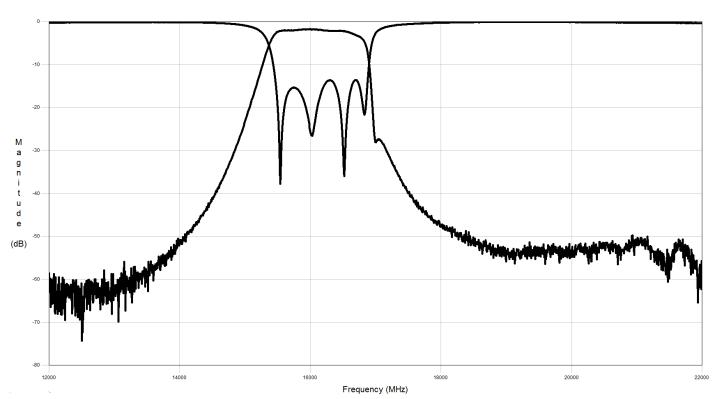

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com



16.0 GHz Surface Mount Bandpass Filter

COMPEX • DLI • JOHANSON MFG NOVACAP • SYFER • VOLTRONICS www.knowlescapacitors.com

B160KA1S

Physical Dimensions Units = inches (.196) CATALOG NUMBER B160KA1S-.200±.002 (.400)STAINLESS STEEL COVER .083 NOM (XAM 880.) CERANIC FILTER .002 TYP. R.0055 .0165 R.0105 054 .021 2X .100 DETAIL A R.027 **Recommended PCB Layout** 50Ω trace dimensions are application specific. Ensure adequate grounding beneath the part.

Lead Free

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

B161LA0S B160KA1S-T B160KA1S