

MECHANICAL

TEMPERATURE

PORT LOCATION: 12S SOLDER TYPE: SAC305

OPERATING: SENSITIVITY AT 500 Hz WILL NOT

-17°C TO 63°C.

STORAGE: -40°C TO 63°C.


VARY MORE THAN +1 / -3 dB FROM

WBFK-30000-000 SHEET 2.1

AN UNDAMPED MAGNETIC BALANCED ARMATURE RECEIVER WITH AN EXTENDED HIGH FREQUENCY RESPONSE INTENDED FOR USE IN CIC HEARING INSTRUMENTS.

NOTE: SPECIFICATIONS FOLLOWED BY AN ASTERISK (*) ARE 100% TESTED.



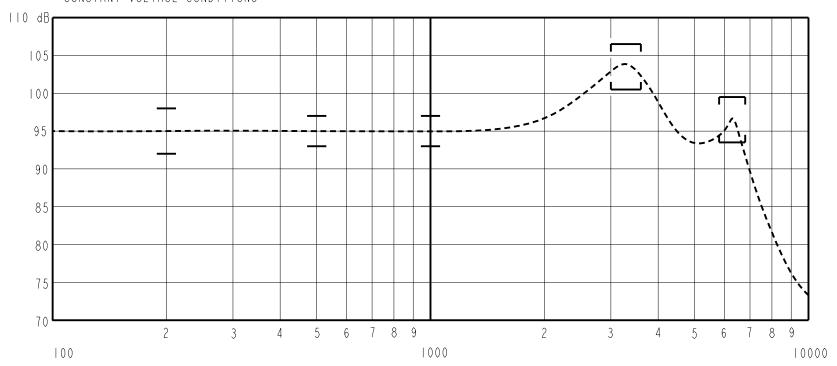

FREQUENCY IN HERTZ

ACOUSTICAL

SENSITIVITY*

FOR

20 µPa

0

DEVICE WILL PRODUCE THE SPL LISTED BELOW UNDER TEST CONDITION IN TABLE 3. NOMINAL SENSITIVITY AT IKHZ IS dB RELATIVE TO 20 μPα. ALL OTHER VALUES IN dB RELATIVE TO THE SENSITIVITY AT IKHZ.

FREQUENCY (Hz)	MINIMUM	NOMINAL	MAXIMUM
200	- 3 . 0	0.0	+3.0
500	-2.0	0.0	+2.0
1000	-2.0	95.0	+2.0
3000-3600	+5.5	+8.5	+11.5
5800-6800	-1.5	+1.5	+4.5

TABLE I

TOTAL HARMONIC DISTORTION*

DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS LISTED BELOW.

FREQUENCY (Hz)	AC DRIVE (V rms)	DC BIAS (mA)	LIMIT (%)
1058	0.211	0	5
1588	0.211	0	5
1588	0.595	0	10

TABLE 2

TEST CONDITIONS

NOMINAL SOURCE VOLTAGE	0.211 V rms, 0 mA DC BIAS
SOURCE IMPEDANCE	< I Ohm
TUBING	
COUPLER CAVITY	2 CM ³ , SIMULATED ANSI S3.7 TYPE HA-3 (IEC 60318-5)

TABLE 3

ELECTRICAL

DC RESISTANCE	100 Ohms ± 10%*
IMPEDANCE @ 500 Hz	Ohms ± 5%*
IMPEDANCE @ IkHz	124 Ohms ± 15%*

TABLE 4

ISOLATION: CASE WILL BE ELECTRICALLY ISOLATED FROM THE COIL CIRCUIT.*

V6 A 1 2 1 0 II	C.O. #	Thip remember 1 on Da	16	Active		REVISION
D	C10114032	11-8-12				D
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE 6 - 1 3 - 0 6		
					CK. BY	DATE
TITLE:	R F	CFIVER		WRFK-30000-000	GJP	6-23-06

SHT 2.1

PERFORMANCE SPECIFICATION

APP. BY

6-23-06

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

<u>WBFK-30042-000</u> <u>WBFK-30000-000</u> <u>WBFK-23990-000</u> <u>WBFK-30019-000</u> <u>WBFK-30095-000</u> <u>WBFK-33649-000</u> WBFK-30111-000 WBFK-31142-000 WBFK-33213-000 WBFK-33695-000