


features

- Fixed metal film resistor available (specify "SPRX")
- Flameproof silicone coating equivalent to (UL 94 V-0)
- High reliability
- Suitable for automatic machine insertion
- Products meet EU RoHS requirements
- Automatic mounting machine is applicable by surface mounted device style lead forming
- Small size power type resistors
- Various types of formings are available

Leaded resistors

dimensions and construction

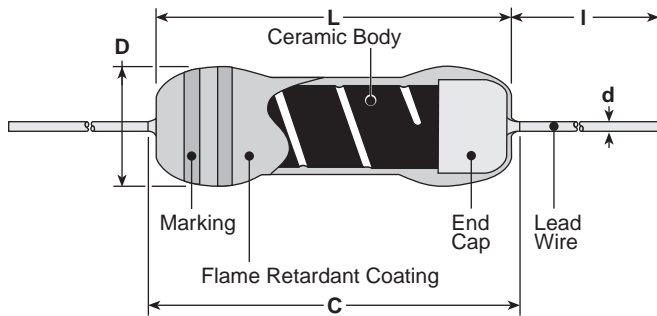

Type	Dimensions inches (mm)				
	L	C (max.)	D	d nominal	I*
SPR1/4 SPRX1/4	.13±.012 (3.3±0.3)	.138 (3.5)	.067±.012 (1.7±0.3)	.018 (0.45)	.787 Min. (20.0 Min.)
SPR1/2 SPRX1/2	.244±.02 (6.2±0.5)	.280 (7.1)	.098±.02 (2.5±0.5)	.024 (0.6)	.945 Min. (24.0 Min.)
SPR1 SPRX1	.354±.039 (9.0±1.0)	.437 (11.1)	.138±.02 (3.5±0.5)	.031 (0.8)	
SPR2 SPRX2	.472±.039 (12.0±1.0)	.591 (15.0)	.165±.031 (4.2±0.8)		
SPR3 SPRX3	.610±.039 (15.5±1.0)	.709 (18.0)	.236±.039 (6.0±1.0)		1.18±.118 (30.0±3.0)
SPR5 SPRX5	.965±.039 (24.5±1.0)	1.10 (28.0)	.354±.039 (9.0±1.0)		1.50±.118 (38.0±3.0)

* Lead length changes depending on taping and forming type.

ordering information

SPR	1/2	C	T52	R	103	J
Type	Power Rating	Termination Material	Taping and Forming	Packaging	Nominal Resistance	Tolerance
SPR SPRX	1/4: 0.25W 1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W	C: SnCu	Axial: T26, T52, T521, T631 Stand-off Axial: L52, L521, L631 Radial: VT, VTP, VTE, GT, VTF L, U, M, N Forming	A: Ammo R: Reel Nil: Box TEB: Embossed plastic (N forming)	±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω ±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	F: ±1% G: ±2% J: ±5%

Contact us when you have control request for environmental hazardous material other than the substance specified by EU RoHS.

For further information on packaging, please refer to Appendix C.


applications and ratings

Part Designation	Power Rating @ 70°C	Dielectric Withstanding Voltage	T.C.R. (ppm/°C)	Resistance Range			Maximum Working Voltage	Maximum Overload Voltage
				E-24* (F±1%, G±2%)	E-24* (G±2%)	E-24 (J±5%)		
SPR1/4	0.25W	300V	±350	—	—	2.2Ω - 10KΩ	$E = \sqrt{P \times R(V)}$	500V
SPR1/2	0.5W	500V		10Ω - 91KΩ	10Ω - 91KΩ	2.2Ω - 91KΩ		800V
SPR1	1W	700V						1000V
SPR2	2W	700V		10Ω - 100KΩ	10Ω - 100KΩ	2.2Ω - 110KΩ	500V	1200V
SPR3	3W						600V	
SPR5	5W	800V		—	—	0.1Ω - 2.0Ω	$E = \sqrt{P \times R(V)}$	E x 2.5(V)
SPRX1/4	0.25W	300V		1.0Ω - 2.0Ω	0.22Ω - 2.0Ω			
SPRX1/2	0.5W	500V						
SPRX1	1W	700V						
SPRX2	2W							
SPRX3	3W	800V	—	—				


* Please consult when there is a demand of the resistance besides the 1% and 2% range.
 Rated Ambient Temperature: +70°C Operating Temperature Range: -55°C to +200°C
 Rated voltage = $\sqrt{\text{Power Rating} \times \text{Resistance value}}$ or Max. working voltage, whichever is lower.

environmental applications


Derating Curve

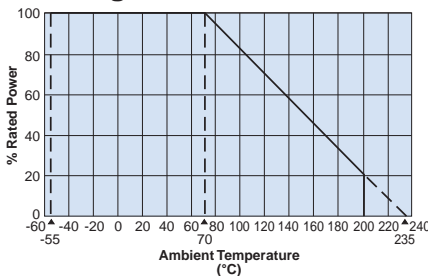

Surface Temperature Rise

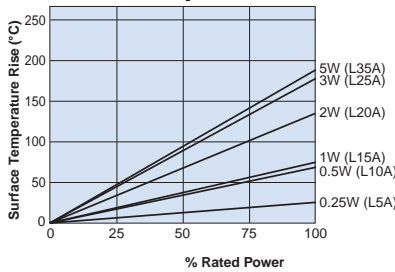

Load Life @ 70°C, 1000 Hr

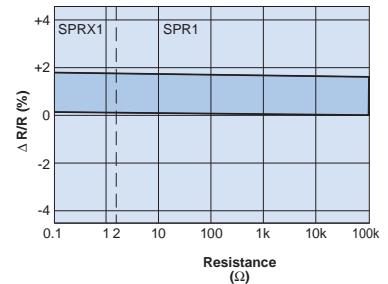

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\%)$		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	Measuring points are at 10mm ±1mm from the end cap.
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Overload (Short time)	±(1%+0.1Ω)	±0.5%	Rated voltage x 2.5 or max. overload voltage for 5 seconds, whichever is lower
Resistance to Solder Heat	±1%	±0.5%	260°C ± 5°C, 10s ± 1s, 350°C ± 10°C, 3.5s ± 0.5s
Terminal Strength	No lead-coming off and loose terminals	—	Twist 360°C, 5 times
Rapid Change of Temperature	±1%	±0.5%	-55°C (30 minutes) / +155°C (30 minutes), 5 cycles
Moisture Resistance	±(3%+0.1Ω):1/4W-2W ±(5%+0.1Ω):3W,5W	1.5: 1/4W-2W 2.5: 3W, 5W	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±(3%+0.1Ω):1/4W-2W ±(5%+0.1Ω):3W,5W	1.5: 1/4W-2W 2.5: 3W, 5W	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible	—	Ultrasonic washing with isopropyl alcohol for 2 minutes. Power: 0.3W/cm ³ , f: 28kHz, Temp: 35°C ±5°C
Flame Retardant	No evidence of flaming or self-flaming	—	Flame test: the test flame shall be applied and removed for each 15 seconds respectively to repeat the cycle 5 times. Overload flame retardant: power (AC) corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1 minute until disconnection occurs. However the applied voltage shall not exceed the value of 4 times of the maximum operating voltage

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/22/24

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[KOA Speer:](#)

[SPR2LT521R220J](#) [SPR1/2CT52R100J](#) [SPR1/2CT52R101J](#) [SPR1/2CVTPA244J](#) [SPR1C474J](#) [SPR1CT52A472J](#)
[SPR1CT52R101J](#) [SPR1CT52R102J](#) [SPR1CT52R221J](#) [SPR1CT52R271J](#) [SPR1CT52R820J](#) [SPR1CT52R823J](#)
[SPR1L912J](#) [SPR1LT52R100J](#) [SPR1LT52R121J](#) [SPR1LT52R182J](#) [SPR1LT52R220J](#) [SPR1LT52R221J](#)
[SPR1LT52R273J](#) [SPR1LT52R330J](#) [SPR1LT52R471J](#) [SPR1LT52R510J](#) [SPR1LT52R820J](#) [SPR1LT52R822J](#)
[SPR1LT52R823J](#) [SPR2CT521R101J](#) [SPR2CT521R104J](#) [SPR2CT521R105J](#) [SPR2CT521R303J](#) [SPR2CT521R332J](#)
[SPR2CT521R392J](#) [SPR2CT521R433J](#) [SPR2CT521R822J](#) [SPR2LT521R100J](#) [SPR2LT521R105J](#)
[SPR2LT521R182J](#) [SPR2LT521R204J](#) [SPR2LT521R223J](#) [SPR2LT521R303J](#) [SPR2LT521R331J](#) [SPR2LT521R392J](#)
[SPR2LT521R393J](#) [SPR2LT521R470J](#) [SPR2LT521R681J](#) [SPR3C220J](#) [SPR3CT631R153J](#) [SPR3CT631R823J](#)
[SPR3L220J](#) [SPR3LT631R104J](#) [SPR3LT631R200J](#) [SPR3LT631R473G](#) [SPR5L564J](#) [SPRX1/2CT52RR10J](#)
[SPR3LT631R470G](#) [SPR1CT52R220J](#) [SPR1LT52R151J](#) [SPR2CT521R362J](#) [SPR2CT521R7500F](#) [SPR1CT52R1002F](#)
[SPR2CT521R122J](#) [SPR2CT521R151J](#) [SPR2CT521R223J](#) [SPR2CT521R471J](#) [SPR3CT631R102J](#)
[SPR2CT521R473J](#) [SPR1CVTPA184J](#) [SPR1LT52R620J](#) [SPR2CT52R220J](#) [SPR2CT521R181J](#) [SPR2CT521R220J](#)
[SPR2LT521R224J](#) [SPR2CT521R100J](#) [SPR1C101J](#) [SPR1C391J](#) [SPR1CT52R100J](#) [SPR1CT52R103J](#)
[SPR1CT52R152J](#) [SPR1CT52R154J](#) [SPR1CT52R222J](#) [SPR1CT52R224J](#) [SPR1CT52R331J](#) [SPR1CT52R471J](#)
[SPR1CT52R4R7J](#) [SPR1CT52R561J](#) [SPR1CT52R681J](#) [SPR2C183J](#) [SPR2C474J](#) [SPR2C680J](#) [SPRX1CT52RR20J](#)
[SPR2CT521R390J](#) [SPR1CT52R332J](#) [SPR2CT521R681J](#) [SPR2CT521R391J](#) [SPR1CT52R361J](#) [SPR2CT521R683J](#)
[SPR1CT52R203J](#) [SPR2CT52R683J](#) [SPR1CT52R620J](#) [SPR2LT521R513J](#) [SPR1/2CT52R3301F](#)