


features

- Quickly fuses to the overload
- Circuit is completely isolated after fusing
- Lightning surge test (IEC61000-4-5) effective
- Can be used in high temperature environment

dimensions and construction

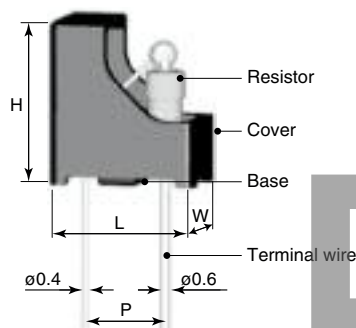

Type	Dimensions inches (mm)			
	L	W	H	P
TPR1	.354±.004 (9.0±0.1)	.197±.004 (5.0±0.1)	.394±.004 (10.0±0.1)	.197±.02 (5.0±0.5)

ordering information

New Part #	TPR	1	C	T	A	100	J
Type		Power Rating	Terminal Surface Material	Taping	Packaging	Nominal Resistance	Resistance Tolerance
		1: 1W	C: Sn-Cu	T: Taping Blank: Bulk	A: AMMO Blank: Bulk Contact factory for taping specifications	2 significant figures + 1 multiplier "R" indicates decimal on values <10Ω	J: ±5%


applications and ratings

Part Designation	Power Rating	Resistance Range	T.C.R. (x 10 ⁻⁶ /K)	Terminal Temperature Under Rated Load	Operating Temperature Range	Maximum Open-Circuit Voltage	Lightning Surge Test*	Maximum Working Voltage	Maximum Overload Voltage
		J: ±5% E24							
TPR1	1W	2Ω ~ 10kΩ	~51Ω: 200 56Ω~: 350	+125°C and less	-40°C ~ +150°C	320V a.c.	1.5kV	$E=\sqrt{(P \times R)}$	$E=\sqrt{(P \times R \times 2)}$

* Lightning surge test at 10Ω


environmental applications

Derating Curve

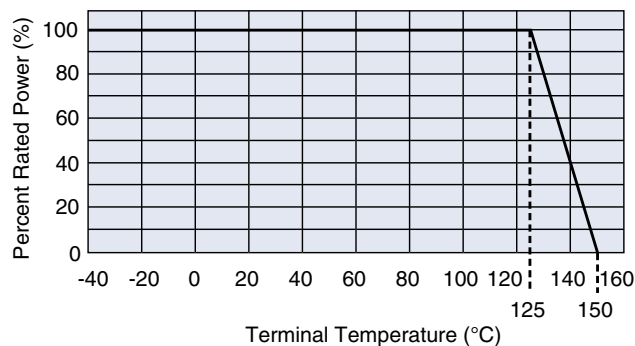


For resistors operated at a terminal temperature of 125°C or above, a power rating shall be derated in accordance with the above derating curve.

Fusing Characteristics

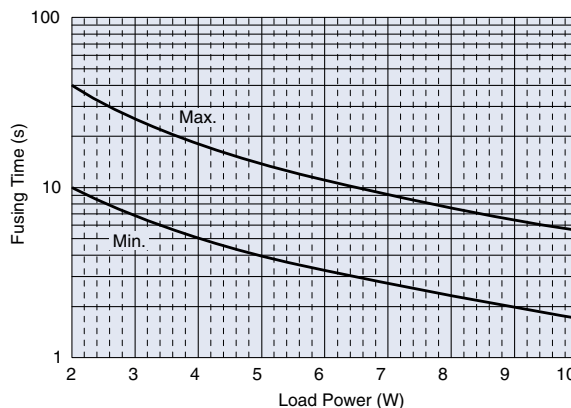

Life Estimation Curve

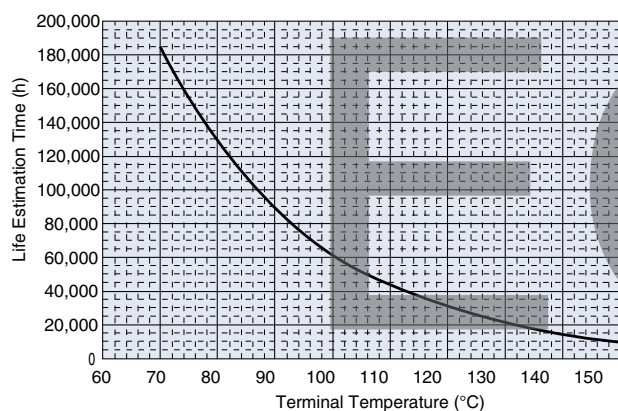

Performance Characteristics

Parameter	Requirement		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-40°C and +25°C/+125°C
Fusing Characteristics	Within 6 seconds	—	Rated power x 10
Rapid Change of Temperature	±(5%+0.05Ω)	2%	-40°C/0.5 hr, +125°C/0.5 hr, 1000 cycles
Overload (Short Time)	±(5%+0.05Ω)	2%	Rated power x 2 for 5 seconds
Resistance to Soldering Heat	±(1%+0.05Ω)	0.3%	260°C ± 5°C, 10 ± 1 second
Endurance at 125°C and Less of Terminal Temperature	±(5%+0.05Ω)	3%	Terminal temperature: 125°C, 1.5 hr ON, 0.5 hr OFF cycle, 1000 hours

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

<u>TPR1CTA110J</u>	<u>TPR1CTA390J</u>	<u>TPR1CTA820J</u>	<u>TPR1CTA331J</u>	<u>TPR1CTA3R6J</u>	<u>TPR1CTA6R2J</u>	<u>TPR1CTA471J</u>
<u>TPR1CTA621J</u>	<u>TPR1CTA2R7J</u>	<u>TPR1CTA6R8J</u>	<u>TPR1CTA121J</u>	<u>TPR1CTA431J</u>	<u>TPR1CTA120J</u>	<u>TPR1CTA3R0J</u>
<u>TPR1CTA300J</u>	<u>TPR1CTA201J</u>	<u>TPR1CTA511J</u>	<u>TPR1CTA911J</u>	<u>TPR1CTA3R3J</u>	<u>TPR1CTA220J</u>	<u>TPR1CTA131J</u>
<u>TPR1CTA181J</u>	<u>TPR1CTA561J</u>	<u>TPR1CTA8R2J</u>	<u>TPR1CTA200J</u>	<u>TPR1CTA360J</u>	<u>TPR1CTA5R1J</u>	<u>TPR1CTA9R1J</u>
<u>TPR1CTA160J</u>	<u>TPR1CTA240J</u>	<u>TPR1CTA470J</u>	<u>TPR1CTA620J</u>	<u>TPR1CTA151J</u>	<u>TPR1CTA301J</u>	<u>TPR1CTA510J</u>
<u>TPR1CTA910J</u>	<u>TPR1CTA111J</u>	<u>TPR1CTA5R6J</u>	<u>TPR1CTA100J</u>	<u>TPR1CTA330J</u>	<u>TPR1CTA751J</u>	<u>TPR1CTA271J</u>
<u>TPR1CTA391J</u>	<u>TPR1CTA821J</u>	<u>TPR1CTA750J</u>	<u>TPR1CTA2R2J</u>	<u>TPR1CTA7R5J</u>	<u>TPR1CTA221J</u>	<u>TPR1CTA150J</u>
<u>TPR1CTA361J</u>	<u>TPR1CTA680J</u>	<u>TPR1CTA161J</u>	<u>TPR1CTA430J</u>	<u>TPR1CTA2R0J</u>	<u>TPR1CTA4R7J</u>	<u>TPR1CTA681J</u>
<u>TPR1CTA4R3J</u>	<u>TPR1CTA270J</u>	<u>TPR1CTA101J</u>	<u>TPR1CTA2R4J</u>	<u>TPR1CTA3R9J</u>	<u>TPR1CTA130J</u>	<u>TPR1CTA180J</u>
<u>TPR1CTA560J</u>	<u>TPR1CTA241J</u>	<u>TPR1CTA162J</u>	<u>TPR1CTA622J</u>	<u>TPR1CTA752J</u>	<u>TPR1CTA822J</u>	<u>TPR1CTA102J</u>
<u>TPR1CTA272J</u>	<u>TPR1CTA432J</u>	<u>TPR1CTA912J</u>	<u>TPR1CTA562J</u>	<u>TPR1CTA202J</u>	<u>TPR1CTA112J</u>	<u>TPR1CTA132J</u>
<u>TPR1CTA103J</u>	<u>TPR1CTA472J</u>	<u>TPR1CTA222J</u>	<u>TPR1CTA302J</u>	<u>TPR1CTA392J</u>	<u>TPR1CTA182J</u>	<u>TPR1CTA512J</u>
<u>TPR1CTA152J</u>	<u>TPR1CTA332J</u>	<u>TPR1CTA362J</u>	<u>TPR1CTA242J</u>	<u>TPR1CTA682J</u>	<u>TPR1CTA122J</u>	