

5 POLE MINI PL SPEC Pak®

Sealed Power For Environmental Connections

Marine | Wind Power | Lighting | Transportation | Pumps | Ground Support
Machine Tool | Industrial Automation | Motor | Solar Power | Harsh Environments

5 Position Mini PL SPEC Pak® is a rugged and environmentally sealed (IP68) connector with a secure manual release latch. This compact connector leverages the proven PowerMod® pin and socket contact technology, delivering capabilities up to 23 amps at 600 volts while handling wires from 24 to 12 AWG (0.5 to 2.5 mm²). The 30μ gold plated pins are available in 3 lengths, enabling sequenced contact mating options. These contacts sit inside UV and flame resistant shells that are touch safe on both sides.

Features

Manual Release Latch

- Prevents accidental un-mating

Pin & Socket Contacts

- Gold plated for greater connectivity

3 Pin Lengths Available

- Offers sequencing capabilities

Touch Safe per UL 1977 Sec. 10.2

- Touch safe on both pin & socket sides

Rugged & Environmentally Sealed Shells

- F1 weatherability rating per UL 746C
- V0 flammability rating per UL 94
- IP68, exceeds industry standards



Mechanical

Environmental Seal

IEC	IP 68
UL	50E

Wire

Size	24 to 12 AWG 0.5 to 2.5 mm ²
------	--

Sealing Options

Sealing Gland

Operating Temperature

-20 to 105°C -4 to 221°F

Mating Cycles (no load)

500

Contact Retention Force

10 lbf 44 N

Mating Force (nominal)

3.5 lb 16 N

Touch Safe (UL 1977 Sec 10.2)

Pass

Latch Strength (nominal)

34 lb 155 N

Materials

Shell	PC
Latch	PC
Flammability	UL 94 V-0
Weatherability	UL 764C / 12mm F1
Sockets	
Socket Body	Copper Alloy, 200 μ inch Sn over Ni
Socket Contact	Copper Alloy, 30 μ inch Au over Ni
Pin	Copper Alloy, 30 μ inch Au over Ni

NOTE: Sn = tin Ni = nickel Au = Gold

Electrical


Current Rating (Amperes)	
UL 1977	23
CSA (30°C Rise)	16
Voltage Rating	
UL 1977 (AC/DC)	600
Dielectric Withstanding (AC)	2200
Contact Resistance (average)	3 Milliohms

UL File No. E26226

CSA Certified
File No. LR25154

| ORDERING INFORMATION |


SPEC Pak® Mini PL Series is a highly configurable environmentally sealed connector that can be purchased as components in bulk for volume production, or pre-packaged as a kit. Configuring a connector is an easy three step process.

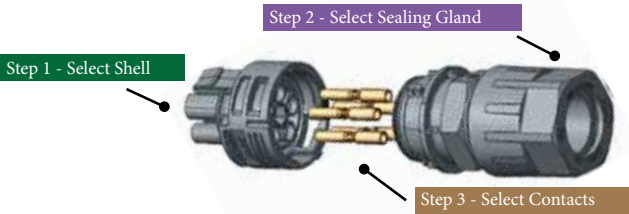

Step 1: Select Shell


SPEC Pak® Shell Kits (sealing glands & contacts sold separately)

Description	- Part Numbers -
Minimum Quantity	25
Male, Receptacle Shell	SK1-021M05
Female, Plug	SK6-021M05
Female, Jam Nut	SK7-021M05
Female, Cover	SK9F-021
Male, Cover	SK9M-021

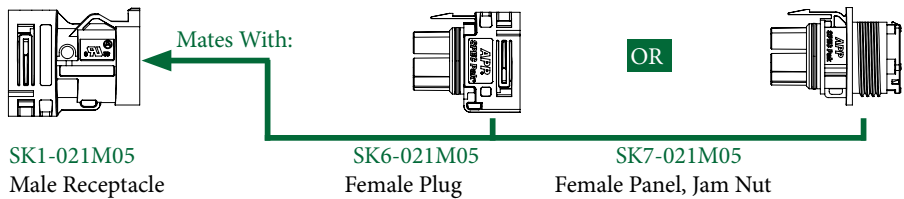

Step 2: Select Sealing Gland

- FAQ**
- Q: Do I need a sealing gland?
A: For IP68 rating, sealing glands are required with SK1-021M05 & SK6-021M05.
A: For splash resistance in the unmated condition, use optional wire sealing grommets with SK7-021M05. (See accessories on page 4).
- Q: How do I select the appropriate sealing gland?
A: Identify the number of wires that will be used. Number of wires: _____
Identify the outer diameter (OD) of those wire(s). OD of the wires: _____



Material	
Shell	PC
Sealing Grommet	EPDM
Flammability	UL94 V0
Color	Black

Torque Requirements
Hand tighten until snug, using a wrench tighten an additional 1/4 to 1/2 turn.
Wrench Size 24

Mechanical
Operating Temperature
-20° to 105°C
-4° to 221°F

Bundled Cable				
Number of Wires	Cable Range Wire Outer Diameter (OD) mm (in)	Part - Numbers -	Connector Kit Designation	
Minimum Quantity		25		
1	14.0 to 15.5 (0.55-0.61)	PS1T24-15X	PS	01
1	11.0 to 14.0 (0.43-0.55)	PS1T24-14X	PS	02
1	6.5 to 11.0 (0.26-0.43)	PS1T24-11X	PS	03
1	4.0 to 6.5 (0.16-0.26)	PS1T24-7X	PS	04
1	3.0 to 4.1 (0.12-0.16)	PS1T24-4X	PS	05
1	2.0 to 3.1 (0.08-0.12)	PS1T24-3X	PS	06
1	1.0 to 2.0 (0.04-0.08)	PS1T24-2X	PS	07

Discrete Wires				
Number of Wires	Cable Range Wire Outer Diameter (OD) mm (in)	Part - Numbers -	Connector Kit Designation	
Minimum Quantity		25		
3	3.5 to 4.5 (0.14-0.18)	PS3T24-5X	PM	31
3	2.6 to 3.6 (0.10-0.14)	PS3T24-4X	PM	32
3	2.0 to 2.8 (0.08-0.11)	PS3T24-3X	PM	33
3	1.0 to 2.0 (0.04-0.08)	PS3T24-2X	PM	34
4	3.5 to 4.5 (0.14-0.18)	PS4T24-5X	PM	41
4	2.6 to 3.6 (0.10-0.14)	PS4T24-4X	PM	42
4	2.0 to 2.8 (0.08-0.11)	PS4T24-3X	PM	43
4	1.0 to 2.0 (0.04-0.08)	PS4T24-2X	PM	44
5	3.5 to 4.5 (0.14-0.18)	PS5T24-5X	PM	51
5	2.6 to 3.6 (0.10-0.14)	PS5T24-4X	PM	52
5	2.0 to 2.8 (0.08-0.11)	PS5T24-3X	PM	53
5	1.0 to 2.0 (0.04-0.08)	PS5T24-2X	PM	54

Step 3: Select Contacts

FAQ

Q: What should I consider when selecting the contacts?

A: Determine the number of amps (continuous and peak). See temperature charts.


Amps (continuous) _____ at _____ volts & Peak Amps _____ for _____ seconds

Q: Which contacts are used in each shell?

A: Pins are used in SK1-021M05 (male receptacle).

Sockets are used in SK6-021M05 (female plug) & SK7-021M05 (female panel mount, jam nut)


Pin Contacts (PowerMod® Series) - (For pre-mate and post-mate contacts for sequencing, contact the factory)



Type	AWG	mm ²	Part Numbers		Connector Kit Designation
Minimum Quantity			500	50	
Standard Length 7.7					
Pin	24 to 20	0.25 to 0.50	PM16P2024S30	PM16P2024S30-50	P56
Pin	20 to 16	0.50 to 1.30	PM16P1620S30	PM16P1620S30-50	P55
Pin	16 to 14	1.30 to 2.10	PM16P1416S30	PM16P1416S30-50	P54
Pin	12	2.5	PM16P12S30	PM16P12S30-50	P57

Hand Tool	Pneumatic Tool			Insertion Tool	Extraction Tool
	Tool	Die	Locator		
PM1000G1	TM0001	N/A	TL0001	PM1002G1	PM1003G1

Socket Contacts (PowerMod® Series)





Type	AWG	mm ²	Part Numbers		Connector Kit Designation
Minimum Quantity			500	50	
Socket	24 to 20	0.25 to 0.50	PM16S2024S32	PM16S2024S32-50	S56
Socket	20 to 16	0.50 to 1.30	PM16S1620S32	PM16S1620S32-50	S55
Socket	16 to 14	1.30 to 2.10	PM16S1416S32	PM16S1416S32-50	S54
Socket	12	2.5	PM16S12S32	PM16S12S32-50	S57

Hand Tool	Pneumatic Tool			Insertion Tool	Extraction Tool
	Tool	Die	Locator		
PM1000G1	TM0001	N/A	TL0002	PM1002G1	PM1003G1

NOTE: APP tooling is required for UL & CSA compliance. Use of unapproved tools will void the connectors warranty.

| TEMPERATURE CHARTS |

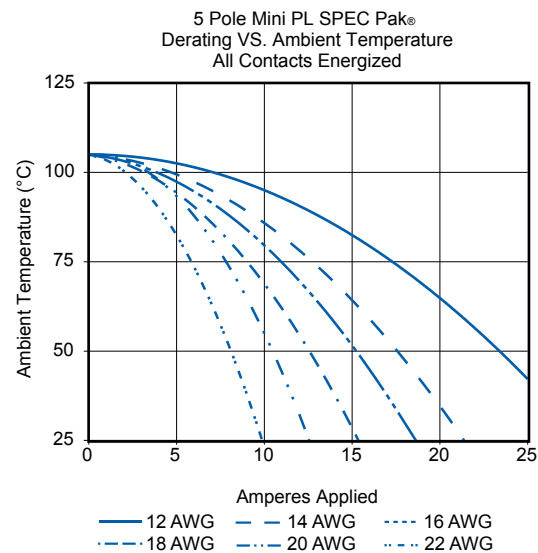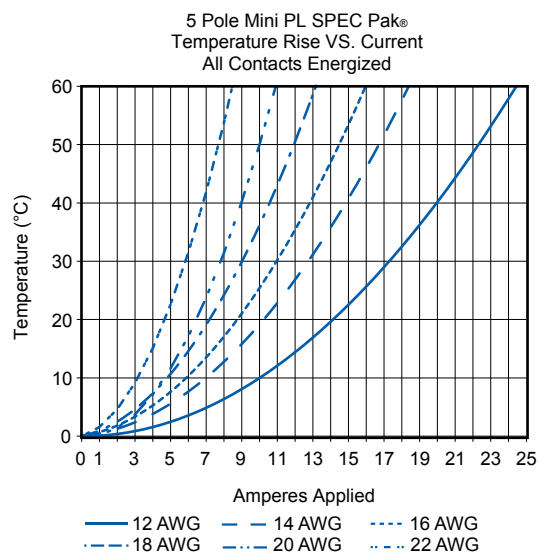

| CONNECTOR KIT - PART NUMBER CONFIGURATOR |

Step 1 Select Shell				Step 2 Select Sealing Gland		Step 3 Select contact	
Series	Color	Shell Style ¹	Shell Size	Insert Arrangement	Wire Protection ¹	Housing & Contacts Arrangement ²	
S	K	1	- 021	M05	PS	01	- P56
1 = Male, Receptacle (Pins) 6 = Female Plug (Sockets) 7 = Female Panel Mount Jam Nut (Sockets)						P56 = 20 - 24 AWG Pin P55 = 16 - 20 AWG Pin P54 = 14 -16 AWG Pin P57 = 12 AWG Pin	
021							
M05							
00 = No Wire Protection PS = Plastic Single Hole PM = Plastic Multi-Hole						S56 = 20 - 24 AWG Socket S55 = 16 - 20 AWG Socket S54 = 14 - 16 AWG Socket S57 = 12 AWG Socket	
00 = No Wire Protection 01 thru 99 = See page 3 for selection							

¹ See page 2 for more informaton | ² See page 3 for more information

| ACCESSORIES (optional) |

Wire Seal Accessories for use with SK7-021M05


Description	----- Part Numbers -----	
Minimum Quantity	1	50
Wire Seal Retainer	2-8775P1	-
Grommet, wire range 1.2 - 1.9mm (0.047" - 0.075") OD, Orange	114916P1	114916P1-50
Grommet, wire range 1.9 - 2.4mm (0.75" - 0.090") OD, Yellow	114916P2	114916P2-50
Grommet, wire range 2.5 - 3.2mm (0.100" - 0.130") OD, Tan	114916P3	114916P3-50
Sealing Plug, white	114916P1	114916P4-50

Covers


Description	- Part Numbers -
Minimum Quantity	25
Female Cover	SK9F-021
Male Cover	SK9M-021

| DIMENSIONS |


Male Receptacle
SK1-021M05




Female Plug
SK6-021M05

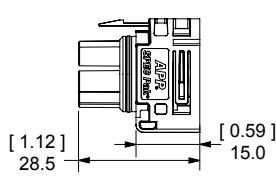


Female Panel Mount
SK7-021M05




SK1-021M05 & SK6-021M05 (mated)

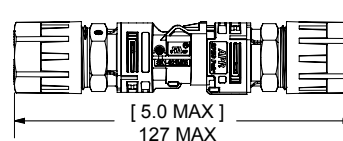


Male Cover
SK9M-021



Female Cover
SK9F-021



SK1-021M05 & SK7-021M05 (mated)



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Anderson Power Products:](#)

[SK9F-021](#) [SK7-021M05](#) [PS1T24-11X](#) [SK1-021M05](#) [PS1T24-14X](#) [SK9M-021](#) [SK6-021M05](#) [PS5T24-5X](#) [PS4T24-3X](#) [PS1T24-7X](#) [PS5T24-4X](#) [2-8775P1](#)