

# Open-Q™ 2500 System on Module

Based on the Qualcomm® Snapdragon™ Wear SDW2500 platform

Intrinsyc's Open-Q™ 2500 SOM combines critical elements for wearable device innovation and performance: high performance, small size, low power, integrated sensor support, and seamless connectivity. The SOM is designed to meet the needs across a range of Android based wearable devices including pet, children, and elderly trackers, high-end fitness trackers, smartwatches, connected headsets, smart eyewear, and more. An integrated, ultra-low power sensor hub supports rich algorithms with superior accuracy, and to help extend battery life for wearables, the Snapdragon Wear 2500 platform incorporates a new wearable PMIC, which supports reduced power consumption both on standby and when active.

## Key Features

- High Performance Quad-Core ARM Cortex A7
- DSP for low power sensor processing
- Qualcomm® Wi-Fi/BT 802.11b/g/n + BT 4.x
- Qualcomm® Gen 8C GNSS location system
- Camera 2-lane MIPI CSI up to 8MP
- Long battery life with new wearables specific PMIC
- USB Type-C to support Qualcomm Quick Charge

## Applications

- Connected wearables
- Pet, children, elderly trackers
- Fitness trackers
- Connected headsets
- Smart eyewear
- Ultra-compact embedded devices



## Hardware Specifications

<b>Processor</b>	Snapdragon™ Wear 2500 (APQ8009W) optimized for wearables Quad-Core ARM Cortex A7 (32-bit) at 1.094GHz Qualcomm® Adreno™ 304 GPU DSP for low power sensor core
<b>Memory/Storage</b>	PoP memory: 1GB LPDDR3 RAM, 8GB eMMC Flash
<b>Wireless</b>	Wi-Fi 802.11b/g/n (WCN3620) w/ U.FL ant. connector Bluetooth 4.x
<b>Location Services</b>	Gen 8C GNSS (WGR7640) with U.FL connector
<b>Display Interface</b>	4-lane MIPI DSI, up to 720p at 60fps optimized for wearables
<b>Camera Interface</b>	2-lane MIPI CSI supports up to 8MP camera
<b>Audio Interfaces</b>	2x I2S interfaces + DMIC input for digital audio peripherals
<b>Power/Battery Management</b>	Power management and battery charging on SOM with Quickcharge capability via USB Type-C (PMW3100 power management chip)
<b>USB Interface</b>	USB2 with Type-C interface for quick-charge capability
<b>General I/O</b>	GPIO, BLSP, Sensor I/O, SDIO
<b>Sensor Support</b>	Snapdragon sensor core DSP Interface
<b>Operating Environment</b>	Input voltage: 3.6V to 4.2V Operating Temperature: -25°C to +85°C Tc (based on component case temperature specifications)
<b>Form Factor</b>	Size: 31.5mm x 15mm with 2x 100 pin board to board connectors

## Software


<b>OS Support</b>	Android™ 8 for Wearables — Note that all hardware features may not be supported by all SW — see latest SW release notes for details
-------------------	---

## Purchasing Information

<b>Open-Q 2500 SOM</b>	Part number: QC-DB-J10004	<a href="#">Store Link</a>
------------------------	---------------------------	----------------------------

<b>Open-Q 2500 Dev Kit</b>	Part number: QC-DB-J10003	<a href="#">Store Link</a>
----------------------------	---------------------------	----------------------------

Alternate SOM configurations available by special order (minimum order quantities apply) - e.g. no GPS, different memory size, etc. Contact sales to discuss your specific needs today: [sales@intrinsyc.com](mailto:sales@intrinsyc.com)

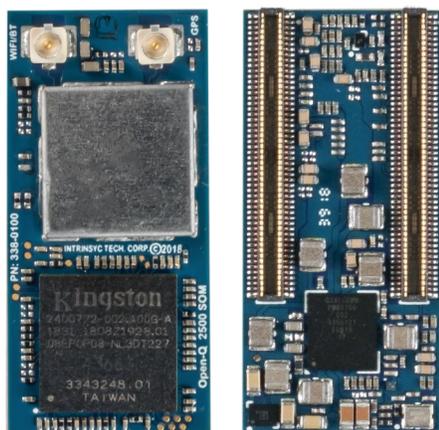

Specifications are subject to change without notice. Not all features listed may be supported in software. All brand or product names are trademarks or registered trademarks of their respective owners. Qualcomm Snapdragon, Qualcomm Kryo, Qualcomm Spectra, Qualcomm Adreno, Flunce and Qualcomm Hexagon are products of Qualcomm Technologies, Inc. Qualcomm IZat is a product of Qualcomm Atheros, Inc. Qualcomm, Snapdragon, Adreno, Flunce and Hexagon are trademarks of Qualcomm Incorporated, registered in the United States and other countries. Kryo, Spectra and IZat are trademarks of Qualcomm Incorporated. Used with permission. Cortex is a trademark of ARM Holding plc. Used with permission.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lantronix:](#)

[QC-DB-J10003](#) [QC-DB-J10004](#)