

# T3RC Current Probes Data Sheet

## Rogowski Current Probes

### Broad Measurement Range

**Current: 6000 Amps**

**Bandwidth LF: < 1Hz**

**Bandwidth HF: 30 MHz**



### Tools for Improved Debugging

- |   |   |
|---|---|
| • 7 Models to choose from.  | ✓ More choice for better application coverage.                                    |
| • Models with Frequency coverage from <1 Hz to 30 MHz.                | ✓ Excellent accuracy regardless of the waveform frequency and shape.              |
| • Models with Maximum current measurements from 60 Amps to 6000 Amps. | ✓ Coverage for a wide range of applications.                                      |
| • 4 different physical coil sizes.                                    | ✓ Probe everything from the leg of a TO220 device to a high power bus bar.        |
| • Near zero insertion impedance.                                      | ✓ Minimum effect on the circuit under test.                                       |
| • Simple to use with flexible probe coils.                            | ✓ Easy to insert into difficult to reach parts of the circuit.                    |
| • Use with batteries or plug in power adaptor (supplied).             | ✓ Use plug in power adaptor when on the bench or batteries when out in the field. |

### Key Characteristics

|             |           |                               |
|-------------|-----------|-------------------------------|
| T3RC0060-LF | 60 Amps   | Bandwidth: 11 Hz to 5 MHz     |
| T3RC0120-UM | 120 Amps  | Bandwidth : 34 Hz to 30 MHz   |
| T3RC0300-UM | 300 Amps  | Bandwidth: <10 Hz to 30 MHz   |
| T3RC0600-HF | 600 Amps  | Bandwidth : 12 Hz to 30 MHz   |
| T3RC3000-HF | 3000 Amps | Bandwidth: 3 Hz to 23 MHz     |
| T3RC3000-LF | 3000 Amps | Bandwidth: <0.2 Hz to 6.5 MHz |
| T3RC6000-LF | 6000 Amps | Bandwidth: <0.1 Hz to 6.5 MHz |

# PRODUCT OVERVIEW

Teledyne Test Tools Rogowski Current probes offer a broad range of products covering a wide frequency span and current measurement ranges for maximum application coverage whilst being easy to use in difficult to reach parts of the circuit.

The flexibility of the probe sense coil means that measurements can often be made without modification to the circuit under test, giving more accurate results, whilst remaining isolated, with very low insertion load of only a few pH.

The inclusion of both battery power and wall plug operation means that the Teledyne Test Tools Rogowski Current Probes are as happy working out in the field as they are working on the bench.

The T3RC0300-UM and T3RC0120-UM features our smallest cross section sense coil at only 1.7mm. This ideally lends itself to embedded power applications where it's necessary to probe around the leg of power components such as inductors, capacitors or small switching devices as small as a TO220 MOSFET.

The T3RC0600-HF and T3RC3000-HF are general purpose Rogowski probes covering applications up to 600 Amps and 3000 Amps respectively. With extended high frequency coverage, 5 kV peak insulation and wide operating temperature range from -40C to +125C, makes them ideally suited to both general purpose as well as wide temperature environments.

The T3RC3000-LF and T3RC6000-LF Rogowski probes offer an extended low frequency performance down to less than 1 Hz. The low frequency performance means that the maximum droop on low frequency pulses is typically 0.1% / ms or less, whilst offering our highest level of peak insulation of 10 kV and wide operating temperature range of -20C to +100C.

## Main Features

- 7 different probes covering a wide range of applications.
- Maximum current measurement coverage up to 6000 Amps.
- Maximum voltage insulation up to 10 kV peak.
- Connect to a wall plug or use with batteries.
- Low loading of the circuit under test.
- Wide coil operating temperature from -40 C to +125 C on UM and HF probes. -20 C to +100 C for LF probes.
- Use without modification to the DUT.

## Application Fields

- Component level design and development such as semiconductor switching waveforms in MOSFET or IGBT, also capacitor and inductor devices.
- System level development such as motor drives in hybrid and fully electric transportation systems (automotive, rail, sea, etc)
- Power converter design and development for wind farms and other renewable energy.
- Research and Development.
- Long term system monitoring and maintenance.

## Oscilloscope Compatibility

The Teledyne Test Tools Rogowski probes are compatible with all of the Teledyne Test Tools Oscilloscopes as well as the Teledyne LeCroy Oscilloscopes.

The Teledyne Test Tools Rogowski probes have a simple connection requirement of a BNC input with 1 MOhm impedance. These probes will therefore work with the majority of oscilloscopes in the market.

The probes can be made even more useful by using your Oscilloscope's Attenuation function to re-scale the Channel vertical range.



# SPECIFICATIONS

## Physical Specifications


| Model       | Coil Circumference | Cable Length (coil to electronics) | Peak Coil Insulation Voltage | Coil Thickness |
|-------------|--------------------|------------------------------------|------------------------------|----------------|
| T3RC0060-LF | 100 mm             | 1 m                                | 2 kV                         | 3.5 mm         |
| T3RC0120-UM | 80 mm              | 1 m                                | 1.2 kV                       | 1.7 mm         |
| T3RC0300-UM | 80 mm              | 1 m                                | 1.2 kV                       | 1.7 mm         |
| T3RC0600-HF | 100 mm             | 1 m                                | 5 kV                         | 4.5 mm         |
| T3RC3000-HF | 200 mm             | 4 m                                | 5 kV                         | 4.5 mm         |
| T3RC3000-LF | 300 mm             | 4 m                                | 10 kV                        | 8.5 mm         |
| T3RC6000-LF | 300 mm             | 4 m                                | 10 kV                        | 8.5 mm         |

## Electrical Specifications

| Model       | Sensitivity | Peak Current | Max Noise  | Droop (%/ms) | LF (-3dB) Bandwidth | HF (-3dB) Bandwidth | Peak di/dt | Attenuation Ratio |
|-------------|-------------|--------------|------------|--------------|---------------------|---------------------|------------|-------------------|
| T3RC0060-LF | 100 mV/A    | 60 A         | 2.6 mV rms | 11           | 11 Hz               | 5 MHz               | 14 kA/us   | 10                |
| T3RC0120-UM | 50 mV/A     | 120 A        | 2.5 mV rms | 35           | 34 Hz               | 30 MHz              | 8 kA/us    | 20                |
| T3RC0300-UM | 20 mV/A     | 300 A        | 2.5 mV rms | 9            | 9.2 Hz              | 30 MHz              | 20 kA/us   | 50                |
| T3RC0600-HF | 10 mV/A     | 600 A        | 1.7 mV rms | 11           | 12 Hz               | 30 MHz              | 40 kA/us   | 100               |
| T3RC3000-HF | 2 mV/A      | 3000 A       | 1.4 mV rms | 2.8          | 3 Hz                | 23 MHz              | 80 kA/us   | 500               |
| T3RC3000-LF | 2 mV/A      | 3000 A       | 2.5 mV rms | 0.1          | 0.11 Hz             | 6.5 MHz             | 11 kA/us   | 500               |
| T3RC6000-LF | 1 mV/A      | 6000 A       | 2.5 mV rms | 0.05         | 0.055 Hz            | 6.5 MHz             | 11 kA/us   | 1000              |

Notes: The Attenuation Ratio value above, can be used in your Oscilloscope's input channel settings to adjust the Oscilloscope's vertical scaling to accurately reflect the values of the measurement being made. The setting is sometimes referred to as 'Attenuation'. Some Oscilloscopes allow the vertical scale units to be changed. This should be set to A to reflect an Amps measurement.

| Attenuation          | Rescale            |
|----------------------|--------------------|
| Attenuation<br>+ 500 | Vertical Unit<br>A |

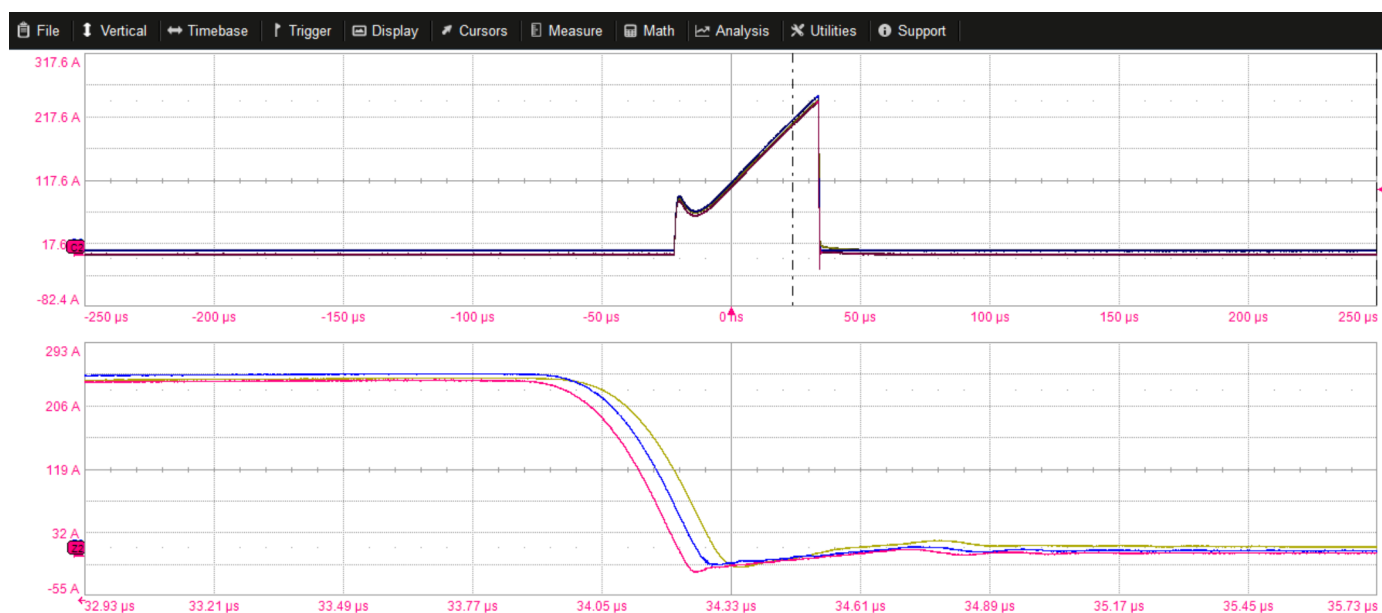

Comparison of three Teledyne Test Tools Rogowski probes. The probes have been offset to enable comparison.

# SPECIFICATIONS

## Electrical Specifications

| Model  | T3RC0060-LF   | T3RC0120-UM           | T3RC0300-UM           | T3RC0600-HF<br>T3RC3000-HF | T3RC3000-LF<br>T3RC6000-LF |
|--|---|-----------------------|-----------------------|----------------------------|----------------------------|
| Maximum di/dt ratings: peak<br>rms                         | 14 kA/us<br>0.85 kA/us  | 70 kA/us<br>1.0 kA/us | 70 kA/us<br>1.2 kA/us | 100 kA/us<br>1.2 kA/us     | 11 kA/us<br>0.8 kA/us      |
| Calibration  | Calibrated to $\pm 0.2\%$ reading with conductor central in the coil loop |                       |                       |                            |                            |
| Accuracy: Variation with<br>conductor position in the coil | $\pm 2\%$   | $\pm 2\%$             | $\pm 2\%$             | $\pm 2\%$                  | $\pm 1\%$                  |
| Accuracy: Linearity of current<br>magnitude                | 0.05% of<br>Reading   | 0.05% of<br>Reading   | 0.05% of<br>Reading   | 0.05% of<br>Reading        | 0.05% of<br>Reading        |
| Temperature: Coil and Cable                                | -20C to +100C   | -40C to +125C         | -40C to +125C         | -40C to +125C              | -20C to +100C              |
| Temperature: Integrator                                    | 0C to +40C  | 0C to +40C            | 0C to +40C            | 0C to +40C                 | 0C to +40C                 |

Probe Coil Size



80mm  
T3RC0120-UM  
T3RC0300-UM



T3RC0060-LF: 100mm  
T3RC0600-HF: 100mm  
T3RC3000-HF: 200mm



300mm  
T3RC3000-LF  
T3RC6000-LF

## Ordering Information

### Ordering Information

| Model Number | Measurement Current | Bandwidth           |
|--------------|---------------------|---------------------|
| T3RC0060-LF  | Up to 60 Amps       | 11 Hz to 5 MHz      |
| T3RC0120-UM  | Up to 120 Amps      | 34 Hz to 30 MHz     |
| T3RC0300-UM  | Up to 300 Amps      | 9.2 Hz to 30 MHz    |
| T3RC0600-HF  | Up to 600 Amps      | 12 Hz to 30 MHz     |
| T3RC3000-HF  | Up to 3000 Amps     | 3 Hz to 23 MHz      |
| T3RC3000-LF  | Up to 3000 Amps     | 0.11 Hz to 6.5 MHz  |
| T3RC6000-LF  | Up to 6000 Amps     | 0.055 Hz to 6.5 MHz |

All probes come complete with a set of batteries, a power line adapter, a BNC cable and a storage box.

The probe and it's parts are covered by a 1 year return to Teledyne LeCroy warranty.

# ABOUT TELEDYNE TEST TOOLS



## Company Profile

Teledyne LeCroy is a leading provider of oscilloscopes, protocol analyzers and related test and measurement solutions that enable companies across a wide range of industries to design and test electronic devices of all types. Since our founding in 1964, we have focused on creating products that improve productivity by helping engineers resolve design issues faster and more effectively. Oscilloscopes are tools used by designers and engineers to measure and analyze complex electronic signals in order to develop high-performance systems and to validate electronic designs in order to improve time to market.

The Teledyne Test Tools brand extends the Teledyne LeCroy product portfolio with a comprehensive range of test equipment solutions. This new range of products delivers a broad range of quality test solutions that enable engineers to rapidly validate product and design and reduce time-to-market. Designers, engineers and educators rely on Teledyne Test Tools solutions to meet their most challenging needs for testing, education and electronics validation.

## Location and Facilities

Headquartered in Chestnut Ridge, New York, Teledyne Test Tools and Teledyne LeCroy has sales, service and development subsidiaries in the US and throughout Europe and Asia. Teledyne Test Tools and Teledyne LeCroy products are employed across a wide variety of industries, including semiconductor, computer, consumer electronics, education, military/aerospace, automotive/industrial, and telecommunications.

Distributed by:

## Teledyne LeCroy (US Headquarters)

700 Chestnut Ridge Road  
Chestnut Ridge, NY. USA 10977-6499

Phone: 800-553-2769 or 845-425-2000  
Fax Sales: 845-578-5985  
Phone Support: 1-800-553-2769  
Email Sales: [contact.corp@teledynelecroy.com](mailto:contact.corp@teledynelecroy.com)  
Email Support: [support@teledynelecroy.com](mailto:support@teledynelecroy.com)  
Web Site: <http://teledynelecroy.com/>

## Teledyne LeCroy (European Headquarters)

Teledyne LeCroy GmbH  
Im Breitspiel 11c  
D-69126 Heidelberg, Germany

Phone: +49 6221 82700  
Fax: +49 6221 834655  
Phone Service: +49 6221 8270 85  
Phone Support: +49 6221 8270 28  
Email Sales: [contact.gmbh@teledynelecroy.com](mailto:contact.gmbh@teledynelecroy.com)  
Email Service: [service.gmbh@teledynelecroy.com](mailto:service.gmbh@teledynelecroy.com)  
Email Support: [tlc.t3.appsupport.eu@teledyne.com](mailto:tlc.t3.appsupport.eu@teledyne.com)  
Web Site: <http://teledynelecroy.com>

World Wide Sales and Support contacts can be found on our website at: <https://teledynelecroy.com/support/contact/>

[teledynelecroy.com](http://teledynelecroy.com)



© 2019 Teledyne Test Tools is a brand and trademark of Teledyne LeCroy Inc. All rights reserved. Specifications, prices, availability and delivery subject to change without notice. Product brand or brand names are trademarks or requested trademarks of their respective holders.

T3 stands for Teledyne Test Tools.

27 July 21

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Teledyne LeCroy:](#)

[T3RC0060-LF](#) [T3RC0120-UM](#)