

ORS Series

Features

- 105°C, 15,000 hours assured
- Ultra low ESR with large permissible ripple current
- RoHS Compliance




Marking color: Blue

Specifications

Items	Performance				
Category Temperature Range	-55℃ ~ +105℃				
Capacitance Tolerance	±20% (at 120 Hz, 20℃)				
Leakage Current (at 20℃)*	Rated voltage applied, after 2 minutes at 20℃. See Standard Ratings				
Tanδ (at120 Hz, 20℃)	See Standard Ratings				
ESR (at 100k ~ 300k Hz, 20℃)	See Standard Ratings				
Endurance	Test Time		15,000 Hrs		
	Capacitance Change		Within ±20% of initial value		
	Tanδ		Less than 150% of specified value		
	ESR		Less than 150% of specified value		
	Leakage Current		Within specified value		
	* The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for specified hours at 105℃.				
Moisture Resistance	Test Time		1,000 Hrs		
	Capacitance Change		Within ±20% of initial value		
	Tanδ		Less than 150% of specified value		
	ESR		Less than 150% of specified value		
	Leakage Current		Within specified value		
	* The above specifications shall be satisfied when the capacitors are restored to 20℃ after subjecting them at 60℃, 90 ~ 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.				
Resistance to Soldering Heat * (Please refer to page 11 for soldering conditions)	Capacitance Change		Within ±10% of initial value		
	Tanδ		Within specified value		
	ESR		Within specified value		
	Leakage Current		Within specified value		
Ripple Current and Frequency Multipliers	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k
	Multiplier	0.05	0.3	0.7	1.0

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.
Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105°C.


Diagram of Dimensions

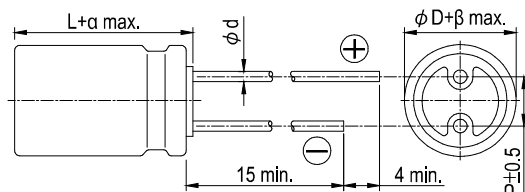

Lead Spacing and Diameter Unit: mm

φ D	8	10
L	11.5	12
P	3.5	5.0
φ d	0.6	
α	1.0	
β	0.5	

Marking

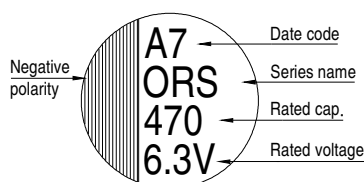

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μF)	Size φ D×L(mm)	Tanδ (120 Hz, 20℃)	L C (μA)	E S R (mΩ/at 100k ~ 300k Hz, 20℃ max.)	Rated R. C. (mA/rms at 100k Hz, 105℃)
2.5V(0E)	2.9	680	8 × 11.5	0.12	340	10	5,230
		820	8 × 11.5		410	10	5,230
		1,500	10 × 12		750	8	5,500
4V (0G)	4.6	560	8 × 11.5	0.12	448	10	5,230
		820	10 × 12		656	8	5,500
		1,000			800		
		1,200			960		
6.3V (0J)	7.2	390	8 × 11.5	0.12	491	12	4,770
		470	8 × 11.5		592	12	4,770
		680	10 × 12		857	10	5,500
		820			1,033		
		1,000			1,260		
10V (1A)	12.0	270	8 × 11.5	0.12	540	14	4,420
		330	8 × 11.5		660	14	4,420
		470	10 × 12		940	12	5,300
		560	10 × 12		1,360	12	5,300
16V (1C)	18.0	100	8 × 11.5	0.12	320	16	4,360
		180	8 × 11.5		576	16	4,360
		270	10 × 12		864	14	5,050
		330	10 × 12		1,056	14	5,050
20V (1D)	23.0	100	8 × 11.5	0.12	400	24	3,320
		150	10 × 12	0.12	600	20	4,320
25V (1E)	29.0	68	8 × 11.5	0.12	340	24	3,320
		100	10 × 12	0.12	500	20	4,320
35V (1V)	40.0	18	8 × 11.5	0.12	315	34	2,830
		33	10 × 12	0.12	578	30	3,270

Part Numbering System

ORS Series	470 μ F	$\pm 20\%$	6.3V	Bulk Package	Gas Type	8 $\phi \times 11.5L$	Pb-free and PET coating case
ORS	471	M	0J	BK	-	0811	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration and Package	Rubber Type	Case size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lelon:](#)

[ORS681M0EBK-0811](#) [ORS681M0JBK-1012](#) [ORS821M0EBK-0811](#) [ORS821M0GBK-1012](#) [ORS821M0JBK-1012](#)
[ORS391M0JBK-0811](#) [ORS471M0JBK-0811](#) [ORS471M1ABK-1012](#) [ORS561M0GBK-0811](#) [ORS561M1ABK-1012](#)
[ORS680M1EBK-0811](#) [ORS181M1CBK-0811](#) [ORS271M1ABK-0811](#) [ORS271M1CBK-1012](#) [ORS330M1VBK-1012](#)
[ORS331M1ABK-0811](#) [ORS331M1CBK-1012](#) [ORS102M0GBK-1012](#) [ORS102M0JBK-1012](#) [ORS122M0GBK-1012](#)
[ORS151M1DBK-1012](#) [ORS152M0EBK-1012](#) [ORS180M1VBK-0811](#) [ORS101M1CBK-0811](#) [ORS101M1DBK-0811](#)
[ORS101M1EBK-1012](#)