



#### www.lemo.com

## **SUMMARY**

#### # Wires

Low voltage 4



Image is for illustrative purpose only

Series 0B

**Termination type** Female print PCB

IP rating 50

AWG wire size 30.00 - 22.00

Cable Ø 0.00 - 0.00 mm

Status obsolete

Matching parts FGG.0B.304.CLAD22

### **Download**

Request a quote
PCB Eagle Pattern
PCB Altium Pattern
PCB KiCad Pattern

Catalog

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model EZ\*: Straight receptacle for printed circuit

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 6.39 g

### **Performance**

Configuration 0B.304 : 4 Low Voltage Insulator N: PBT (discontinued)

Rated Current 7 Amps

## **Specifications**

Contact Type: Print (straight) Contact Dia.: 0.7 mm (0.028in)

R (max): 6.1 mOhm

Vtest (contact-contact): 850 V (AC), 1200 V (DC) Vtest (contact-shell): 700 V (AC), 990 V (DC)

## Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

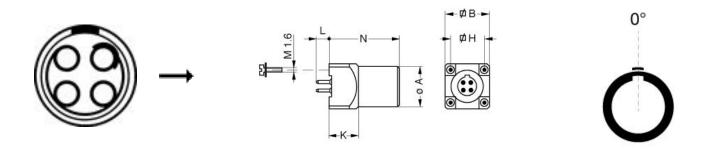

## **Dimensions**

	A	В	Н	К	L	N
mm.	9	10	7.62	8	3-4.5	15
in.	0,35	0,39	0,30	0,31	0,12	0,59

# **RECOMMENDED BY LEMO**

### **Tools**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

EZG.0B.304.CNN