



LI-AR0231-GMSL2-xxxH



Address:

910 Auburn Ct
Fremont, CA 94538
USA



Phone:

+1 (408)263-0988

Fax:

+1 (408)217-1960



Sales:

sales@leopardimaging.com

Support:

support@leopardimaging.com

INTRODUCTION

The LI-AR0231-GMSL2-xxxH is equipped with ON Semiconductor 1/2.7" 2.3MP RCCB CMOS image sensor AR0231 and Maxim GMSL2 serializer MAX9295A/B. This camera outputs RAW image data.

KEY FEATURES

Sensor	ON SEMI 2.3MP RCCB Sensor AR0231
Optical Format	1/2.7"
Maximum Resolution	1928 (H) x 1208 (V)
Pixel Size	3.0 x 3.0 μm
Data Format	10-bit / 12-bit / 14-bit / 16-bit / 20-bit RAW data
Color / Mono	Color sensor
Maximum Frame Rate	40 fps at 1928 x 1208 / 3-exposure 60 fps at 1928 x 1208 / 2-exposure and Linear
HDR (High Dynamic Range)	Supported
LFM (LED Flicker Mitigation)	Supported
Lens	FOV H 60° / 120° / 200°
Serializer	Maxim MAX9295A/B
Power Supply Range	9 ~ 19 VDC
Connector	FAKRA Z TYPE
IP Rating	060H / 120H: IP67 200H: TBD
Power Consumption	65 mA @ 12 VDC (1928 x 1208 @ 12 fps)
Part#	LI-AR0231-GMSL2-xxxH

APPLICATIONS

- Automotive ADAS
- 1080p30 Video Applications
- ADAS + Viewing Fusion

MECHANICAL & ENVIRONMENTAL


Dimensions	30.0 (L) x 30.0 (W) mm
Weight	~ 45 g
Operating Temp	-40°C ~ +85°C
Storage Temp	-40°C ~ +125°C

CABLE CONNECTOR

- Housing Connector: FAKRA Z Type
- Cable Length: 3 meters
- Cable Part#: FAK-SMZSMZ-3M



DIMENSIONS: LI-AR0231-GMSL2-060H

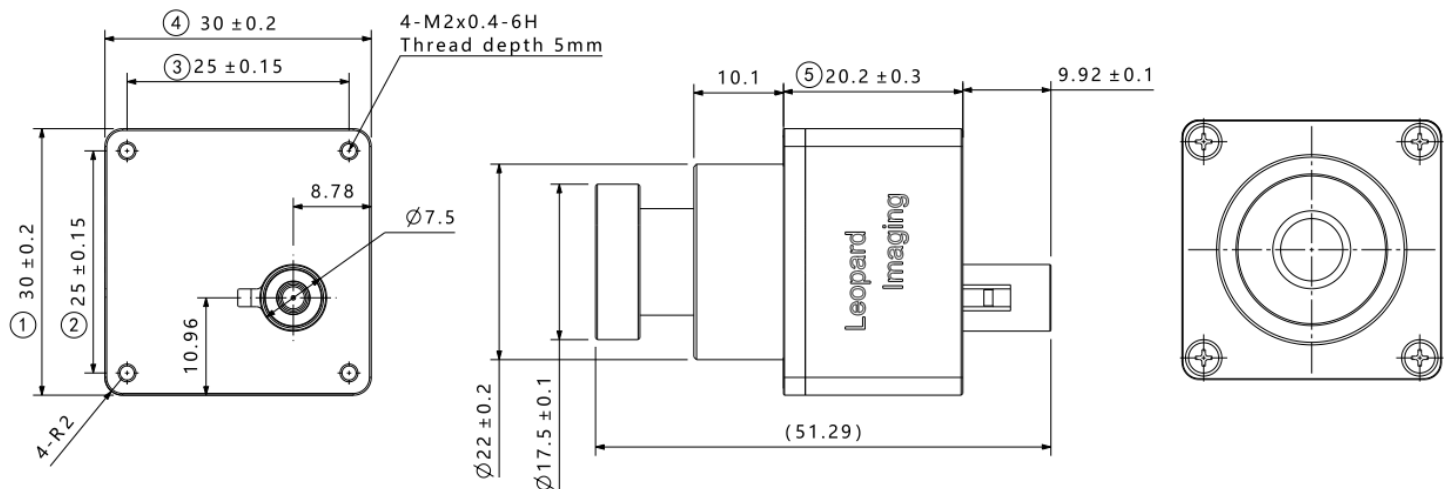


NOTE:

- ⊗ marked are important sizes.
- Tolerances for others unmarked are ± 0.3 mm.

Unit: mm

DIMENSIONS: LI-AR0231-GMSL2-120H

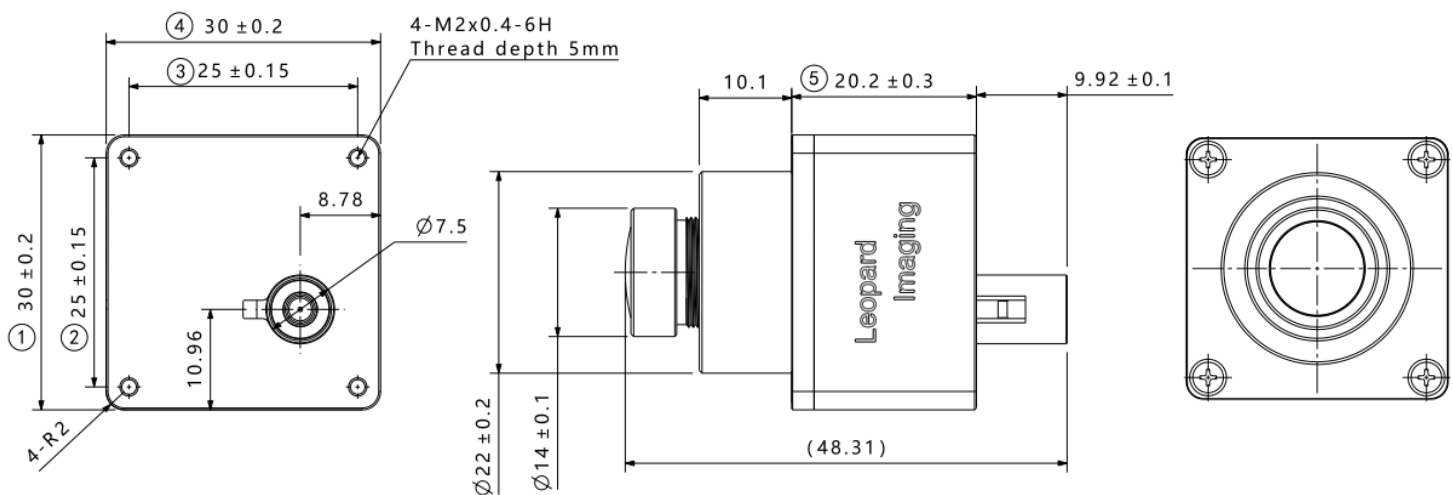


NOTE:

- ⊗ marked are important sizes.
- Tolerances for others unmarked are ± 0.3 mm.

Unit: mm

DIMENSIONS: LI-AR0231-GMSL2-200H

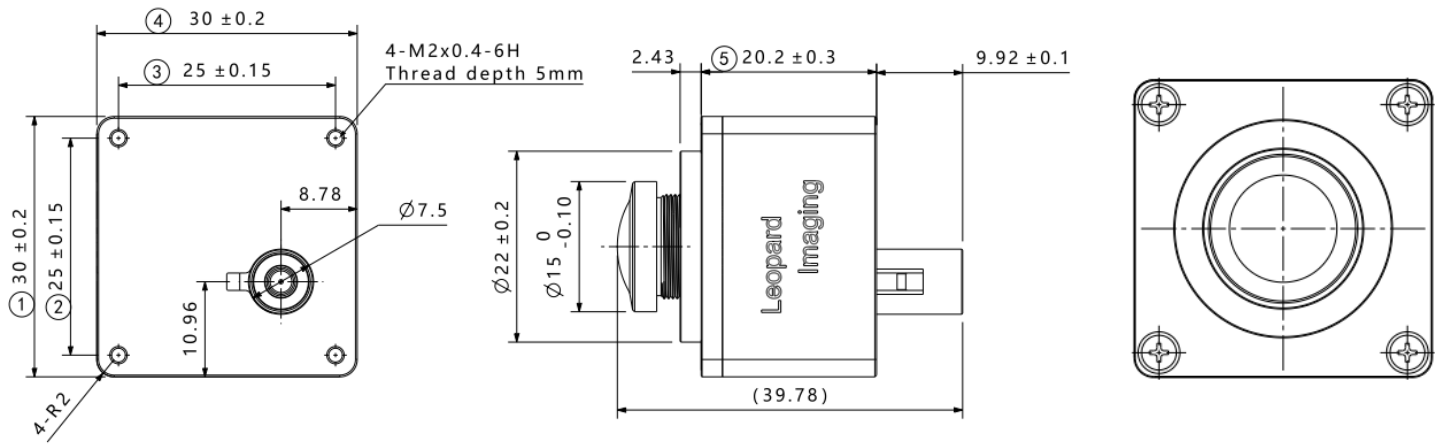

NOTE:

- ⊗ marked are important sizes.
- Tolerances for others unmarked are ± 0.3 mm.

Unit: mm


ORDERING INFORMATION

xxxH refers to 060H (FOV H 60°), 120H (FOV H 120°), 200H (FOV H 200°)

LI-AR0231-GMSL2-060H	
	
Lens EFL: 6.0 mm	
Aperture, F/#: 1.8	
Field of View (FOV): 74.5° (D) / 60.6° (H) / 36.1° (V)	
Mount: M12	

LI-AR0231-GMSL2-120H	LI-AR0231-GMSL2-200H
	
Lens EFL: 2.8 mm	Lens EFL: 0.95 mm $\pm$ 5%
Aperture, F/#: 2.0	Aperture, F/#: 2.0 $\pm$ 5%
Field of View (FOV): 148° (D) / 122° (H) / 74° (V)	Field of View (FOV): 200° (H)
Mount: M12	Mount: M12


PINOUT CONNECTIONS

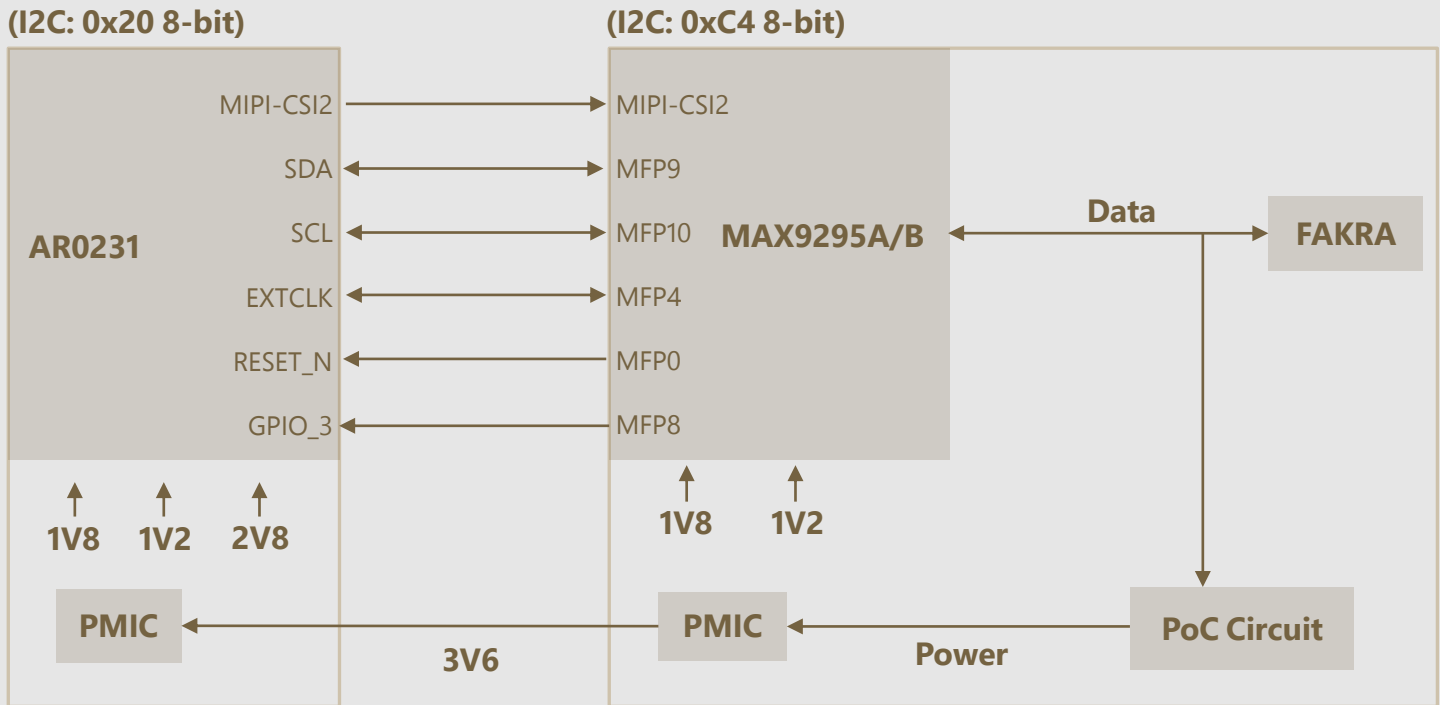

DEFAULT IMAGING DIRECTION

- The logo "Leopard Imaging" is on the TOP

TOP (Default Imaging Direction)

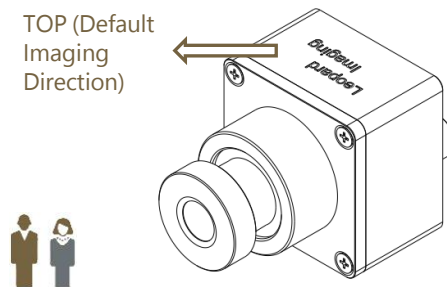

USB3.0 CAMERA KIT

LI-GMSL2-USB



Top View



Bottom View

LI-AR0231-GMSL2-xxxH can connect to LI-GMSL2-USB as a USB 3.0 camera.

Part#: **LI-USB30-AR0231-GMSL2-xxxH**

SPECIFICATIONS

- USB 3.0 Super Speed support
- RAW data output without compression
- UVC compliant
- Allows customization
- 12 VDC power supply for camera
- Weight: ~ 86 g
- Single Coax Cable transmits up to 12 meters PoC (Power over Cable)
- Resolution: 1928 x 1208 @ 12 fps
- Power consumption: 65 mA @ 12 VDC
- Compatible with Windows, Linux OS and other OS which have UVC drivers

BOM

#	Items	QTY
1	LI-AR0231-GMSL2-xxxH	1
2	LI-GMSL2-USB	1
3	3-Meter Fakra Cable	1
4	12 VDC Power Supply	1
5	USB3.0 Cable	1



SDK SUPPORTED

- Camera Tool Source Code in C#
- Capture & Display
- Register Access Function
- Save file as BMP & RAW format

● REVISION HISTORY

Revision	Description	Release Date
1.0	First release.	02 Aug 2017
1.1	Update spec information.	11 Jan 2018
1.2	Changed Part# without R7.	17 Jun 2018
1.3	Added power consumption.	30 Jul 2019
1.4	1. Changed 200H lens to E7393E-R8 and updated related product images and 2D dimensions. 2. Updated power consumption, USB30 frame rate and resolution. 3. Deleted IP information on the "Ordering Information" page.	27 Apr 2023

910 Auburn Ct, Fremont, CA 94538, USA

Phone: +1-408-263-0988

Fax: +1-408-217-1960

Email: sales@leopardimaging.com

Website: www.leopardimaging.com



Leopard Imaging Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Leopard Imaging:](#)

[LI-AR0231-GMSL2-120H](#) [LI-USB30-AR0231-GMSL2-CFM-057H-010](#) [LI-USB30-AR0231-GMSL2-CFM-200H-010](#)