

Product Brief



ANT-433-FPC-UFL-100

Flexible Embedded 433 MHz Antenna

The Linx 433-FPC antenna is a flexible embedded 433 MHz antenna for Sub-1 GHz and low-power, wide-area (LPWA) applications including LoRaWAN® and remote control applications. The 433-FPC also performs well in LTE cellular bands 87 and 88 at 410 MHz and 450 MHz, respectively.

The 433-FPC provides a ground plane independent dipole embedded antenna solution comparable in performance to an external antenna. The flexibility and adhesive backing makes the 433-FPC antenna easy to mount in unique and custom enclosures, while enabling an environmentally sealed enclosure and protection from tampering or accidental antenna damage.

Connection is made to the radio via a 100 mm (3.94 in) long, 1.13 mm coaxial cable terminated in a U.FL-type plug (female socket).



Features

- Performance at 433 MHz
 - VSWR: ≤ 2.5
 - Peak Gain: -6.0 dBi
 - Efficiency: 9%
- Ground plane independent dipole antenna
- Compact, low-profile
 - 47 mm x 17 mm x 0.2 mm
- U.FL-type plug (female socket) Compatible with MHF1, AMC, UMCC
- Adhesive backing permanently adheres to non-metal enclosures using 3M 467MP™/200MP adhesive
- Flexible to fit in challenging enclosures

Applications

- Low-power, wide-area (LPWA) applications
 - LoRaWAN®
- Internet of Things (IoT) devices
- Smart Home networking
- Remote control, monitoring and sensing
- 410 MHz LTE band 87 cellular
- 450 MHz LTE band 88 cellular

Ordering Information

Part Number	Description
ANT-433-FPC-UFL-100	433 MHz antenna with 100 mm of 1.13 mm coaxial cable and U.FL-type plug (female socket)

Available from Linx Technologies and select distributors and representatives.

Electrical Specifications

ANT-433-FPC-UFL	410 MHz	433 MHz	450 MHz
Frequency Range	410 MHz to 430 MHz	430 MHz to 435 MHz	450 MHz to 470 MHz
VSWR (max.)	4.1	2.5	3.4
Peak Gain (dBi)	-5.4	-6.0	-2.4
Average Gain (dBi)	-10.5	-10.8	-10.8
Efficiency (%)	10	9	15
Polarization	Linear		
Radiation	Omnidirectional		
Max Power	2 W		
Wavelength	1/2-wave		
Electrical Type	Dipole		
Impedance	50 Ω		
Connection	U.FL-type plug (female socket) on 100 mm (3.94 in) of 1.13 mm coaxial cable.		
Weight	0.6 g (0.02 oz)		
Dimensions	47.0 mm x 17.0 mm x 0.2 mm (1.85 in x 0.67 in x 0.01 in)		
Operating Temp. Range	-40 °C to +75 °C		

VSWR

Figure 1 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

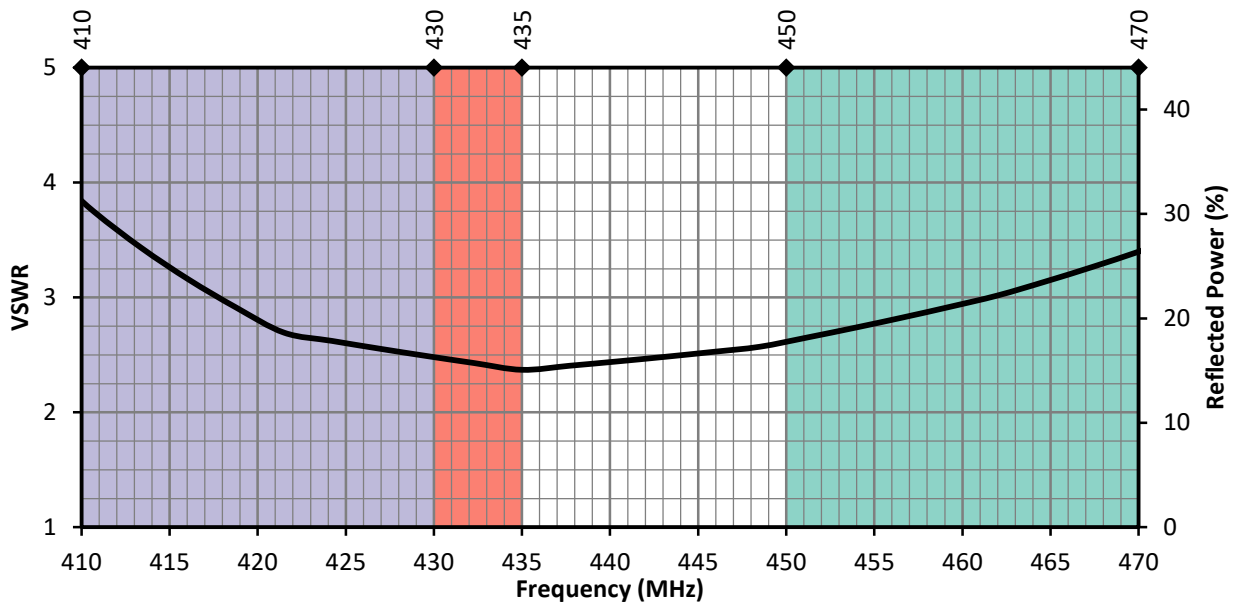


Figure 1. 433-FPC VSWR with Frequency Band Highlights

Website: <http://linxtechnologies.com> • Phone: +1 (541) 471-6256 • E-MAIL: info@linxtechnologies.com • Linx Offices: 159 Ort Lane, Merlin, OR, US 97532

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. LoRaWAN is a registered trademark of Semtech Corporation. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies. All Rights Reserved.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Linx Technologies:](#)

[ANT-433-FPC-UFL-100](#)